

Aluminum Capacitors Radial Very Low Impedance





Fig.1 Component outline



FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Radial leads, cylindrical aluminum case with pressure relief, insulated with a blue vinyl sleeve
- Charge and discharge proof
- Very long useful life: 4000 to 10 000 hours at 105 °C, very high reliability
- Very low impedance or ESR respectively,
- Excellent ripple current capability
- Lead (Pb)-free versions are RoHS compliant

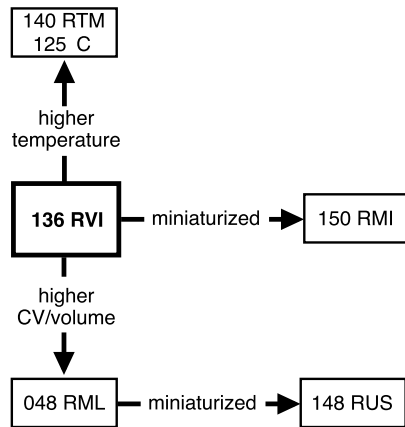

RoHS
COMPLIANT

APPLICATIONS

- Power supplies (SMPS, DC/DC converters) for general industrial, EDP, audio-video, automotive and telecommunications
- Smoothing, filtering, buffering

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance value (in μF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$)
- Rated voltage (in V)
- Date code, in accordance with IEC 60062
- Code indicating factory of origin
- Name of manufacturer
- Upper category temperature (105 °C)
- Negative terminal identification
- Series number (136)

| QUICK REFERENCE DATA | |
|---|---|
| DESCRIPTION | VALUE |
| Nominal case sizes (\varnothing D x L in mm) | 10 x 12 to 18 x 35 |
| Rated capacitance range, C_R | 22 to 10000 μF |
| Tolerance on C_R | $\pm 20\%$ |
| Rated voltage range, C_R | 10 to 100 V |
| Category temperature range | - 55 to + 105 °C |
| Endurance test at 105 °C | 3000 to 5000 hours (dependent on case size) |
| Useful life at 105 °C | 4000 to 10 000 hours (dependent on case size) |
| Useful life at 40 °C, 1.8 x I_R applied | 200 000 to 500 000 hours (dependent on case size) |
| Shelf life at 0 V, 105 °C | 1 000 hours |
| Based on sectional specification | IEC 60384-4/EN130300 |
| Climatic category IEC 60068 | 55/105/56 |



Aluminum Capacitors
Radial Very Low Impedance

Vishay BCcomponents

| SELECTION CHART FOR C _R , U _R AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm) | | | | | | | |
|---|--------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| C _R (µF) | U _R (V) | | | | | | |
| | 10 | 16 | 25 | 35 | 50 | 63 | 100 |
| 22 | - | - | - | - | - | - | 10 x 12 |
| 33 | - | - | - | - | - | - | 10 x 12 |
| 47 | - | - | - | - | - | 10 x 12 | 10 x 16 |
| 56 | - | - | - | - | - | 10 x 12 | - |
| 68 | - | - | - | - | - | 10 x 16 | 10 x 20 |
| 82 | - | - | - | - | 10 x 12 | - | - |
| 100 | - | - | - | - | 10 x 12 | 10 x 16 | 12.5 x 20 |
| 120 | - | - | - | 10 x 12 | 10 x 16 | 10 x 20 | - |
| | - | - | - | - | - | 12.5 x 16 | - |
| 150 | - | - | - | 10 x 12 | 10 x 20 | 10 x 25 | 16 x 20 |
| 180 | - | - | 10 x 12 | - | 10 x 20 | 10 x 30 | - |
| | - | - | - | - | 12.5 x 16 | - | - |
| 220 | - | - | 10 x 12 | 10 x 16 | 10 x 25 | 12.5 x 20 | 16 x 25 |
| 270 | - | 10 x 12 | - | - | - | 12.5 x 25 | - |
| 330 | - | 10 x 12 | 10 x 16 | 10 x 20 | 10 x 30 | 16 x 20 | 16 x 31 |
| | - | - | - | 12.5 x 16 | 12.5 x 20 | - | - |
| 390 | 10 x 12 | - | - | 10 x 25 | - | 12.5 x 31 | - |
| 470 | 10 x 12 | 10 x 16 | 10 x 20 | 12.5 x 20 | 12.5 x 25 | 16 x 25 | 16 x 35 |
| | - | - | 12.5 x 16 | - | - | - | 18 x 31 |
| 560 | - | - | 10 x 25 | 10 x 30 | 12.5 x 31 | - | - |
| | - | - | - | 12.5 x 20 | - | - | - |
| 680 | 10 x 16 | 10 x 20 | - | 12.5 x 25 | 16 x 20 | 16 x 31 | 18 x 35 |
| | - | 12.5 x 16 | - | - | - | 18 x 25 | - |
| 820 | - | 10 x 25 | 10 x 30 | - | 16 x 25 | 16 x 35 | - |
| | - | - | 12.5 x 20 | - | - | - | - |
| 1000 | 10 x 20 | 12.5 x 20 | 12.5 x 25 | 12.5 x 31 | 16 x 31 | 18 x 31 | - |
| | 12.5 x 16 | - | - | 16 x 20 | 18 x 20 | - | - |
| 1200 | 10 x 25 | 10 x 30 | - | 16 x 25 | 16 x 35 | - | - |
| | - | 12.5 x 20 | - | - | - | - | - |
| 1500 | 10 x 30 | 12.5 x 25 | 12.5 x 31 | 16 x 25 | 18 x 31 | 18 x 35 | - |
| | 12.5 x 20 | - | 16 x 20 | - | - | - | - |
| 1800 | 12.5 x 20 | - | 16 x 25 | 16 x 31 | - | - | - |
| 2200 | 12.5 x 25 | 12.5 x 31 | 16 x 31 | 16 x 35 | 18 x 35 | - | - |
| | - | 16 x 20 | 18 x 20 | 18 x 31 | - | - | - |
| 2700 | 12.5 x 31 | 16 x 25 | 16 x 31 | - | - | - | - |
| | 16 x 20 | 16 x 25 | 16 x 35 | 18 x 35 | - | - | - |
| 3300 | - | - | 18 x 31 | - | - | - | - |
| | 16 x 25 | 16 x 31 | - | - | - | - | - |
| 4700 | 16 x 31 | 16 x 35 | 18 x 35 | - | - | - | - |
| | - | 18 x 31 | - | - | - | - | - |
| 5600 | 16 x 31 | - | - | - | - | - | - |
| | 18 x 25 | - | - | - | - | - | - |
| 6800 | 16 x 35 | 18 x 35 | - | - | - | - | - |
| | 18 x 31 | - | - | - | - | - | - |
| 10 000 | 18 x 35 | - | - | - | - | - | - |

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

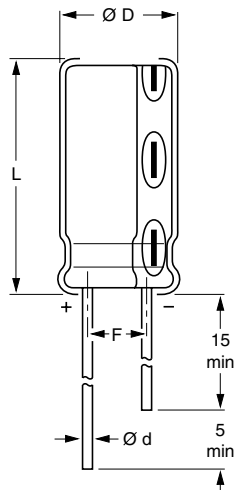


Fig.2 Form CA: Long leads

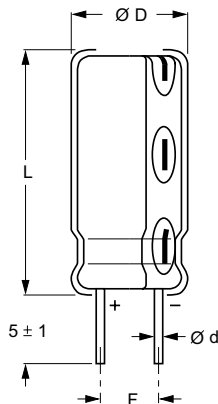


Fig.3 Form CB: Cut leads

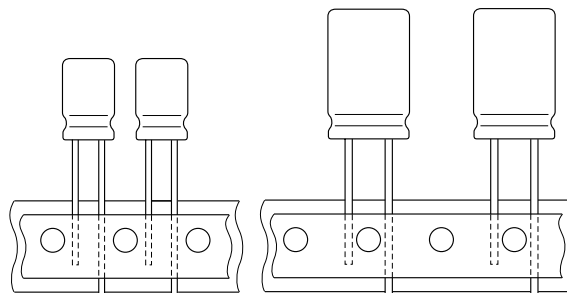


Fig.4 Form TFA: Taped in box (ammopack)

Table 1

| DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES | | | | | | | | | |
|--|-----------|-----|---------------------|-------------------|-----------|----------|----------------------|---------|----------|
| NOMINAL CASE SIZE Ø D x L | CASE CODE | Ø d | Ø D _{max.} | L _{max.} | F | MASS (g) | PACKAGING QUANTITIES | | |
| | | | | | | | FORM CA | FORM CB | FORM TFA |
| 10 x 12 | 14 | 0.6 | 10.5 | 13.5 | 5.0 ± 0.5 | ≈ 1.6 | 1000 | 500 | 800 |
| 10 x 16 | 15 | 0.6 | 10.5 | 17.5 | 5.0 ± 0.5 | ≈ 1.9 | 500 | 500 | 800 |
| 10 x 20 | 16 | 0.6 | 10.5 | 22.0 | 5.0 ± 0.5 | ≈ 2.2 | 500 | 500 | 800 |
| 10 x 25 | 16L | 0.6 | 10.5 | 27.0 | 5.0 ± 0.5 | ≈ 3.0 | 1000 | 1500 | 800 |
| 10 x 30 | 16LL | 0.6 | 10.5 | 32.0 | 5.0 ± 0.5 | ≈ 3.5 | 1000 | 750 | - |
| 12.5 x 16 | 17a | 0.6 | 13.0 | 17.5 | 5.0 ± 0.5 | ≈ 2.7 | 1000 | 1500 | 500 |
| 12.5 x 20 | 17 | 0.6 | 13.0 | 22.0 | 5.0 ± 0.5 | ≈ 4.0 | 500 | 500 | 500 |
| 12.5 x 25 | 18 | 0.6 | 13.0 | 27.0 | 5.0 ± 0.5 | ≈ 5.0 | 250 | 250 | 500 |
| 12.5 x 31 | 18L | 0.6 | 13.0 | 33.5 | 5.0 ± 0.5 | ≈ 5.5 | 1000 | 750 | - |
| 16 x 20 | 19a | 0.8 | 16.5 | 22.0 | 7.5 ± 0.5 | ≈ 6.0 | 250 | 250 | 250 |
| 16 x 25 | 19 | 0.8 | 16.5 | 27.0 | 7.5 ± 0.5 | ≈ 8.0 | 250 | 250 | 250 |
| 16 x 31 | 20 | 0.8 | 16.5 | 33.5 | 7.5 ± 0.5 | ≈ 9.0 | 100 | 100 | 250 |
| 16 x 35 | 21 | 0.8 | 16.5 | 37.5 | 7.5 ± 0.5 | ≈ 11.0 | 100 | 100 | - |
| 18 x 20 | 1820 | 0.8 | 18.5 | 22.0 | 7.5 ± 0.5 | ≈ 8.0 | 100 | 100 | - |
| 18 x 25 | 1825 | 0.8 | 18.5 | 27.0 | 7.5 ± 0.5 | ≈ 10.0 | 100 | 100 | - |
| 18 x 31 | 1831 | 0.8 | 18.5 | 33.5 | 7.5 ± 0.5 | ≈ 12.5 | 100 | 100 | - |
| 18 x 35 | 22 | 0.8 | 18.5 | 37.5 | 7.5 ± 0.5 | ≈ 14.5 | 100 | 100 | - |

Note

1. Detailed tape dimensions see section 'PACKAGING'.



Aluminum Capacitors
Radial Very Low Impedance

Vishay BCcomponents

| ELECTRICAL DATA | |
|-----------------|---|
| SYMBOL | DESCRIPTION |
| C_R | rated capacitance at 100 Hz, tolerance $\pm 20\%$ |
| I_R | rated RMS ripple current at 100 kHz, 105 °C |
| I_{L2} | max. leakage current after 2 minutes at U_R |
| $\tan \delta$ | max. dissipation factor at 100 Hz |
| Z | max. impedance at 100 kHz |

ORDERING EXAMPLE

Electrolytic capacitor 136 series
 1000 $\mu\text{F}/25\text{ V}; \pm 20\%$
 Nominal case size: $\varnothing 12.5 \times 25\text{ mm}$; Form TFA
 Ordering code: MAL213636102E3
 Former 12NC: 2222 136 36102

Note

Unless otherwise specified, all electrical values in Table 2 apply at
 $T_{\text{amb}} = 20\text{ °C}$, $P = 86\text{ to }106\text{ kPa}$, $\text{RH} = 45\text{ to }75\%$

Table 2

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | | |
|--|--------------------------------------|--|------------------------------------|--|-------------------------|---|---|-------------------------------|------------|-------------|
| U_R (V) | C_R 100 Hz (μF) | NOMINAL CASE SIZE $\varnothing D \times L$ (mm) | I_R 100 kHz 105 °C (mA) | I_{L2} 2 min (μA) | $\tan \delta$ 100 Hz | Z 100 kHz + 20 °C ($\text{m}\Omega$) | Z 100 kHz - 10 °C ($\text{m}\Omega$) | ORDERING CODE MAL2136..... | | |
| | | | | | | | | BULK PACKAGING | | TAPED |
| | | | | | | | | FORM CA | FORM CB | FORM TFA |
| 10 | 390 | 10 x 12 | 630 | 39 | 0.19 | 120 | 240 | 54391E3 | 64391E3 | 34391E3 |
| | 470 | 10 x 12 | 630 | 47 | 0.19 | 120 | 240 | 54471E3 | 64471E3 | 34471E3 |
| | 680 | 10 x 16 | 830 | 68 | 0.19 | 84 | 170 | 54681E3 | 64681E3 | 34681E3 |
| | 1000 | 10 x 20 | 1000 | 100 | 0.19 | 62 | 130 | 54102E3 | 64102E3 | 34102E3 |
| | 1000 | 12.5 x 16 | 940 | 100 | 0.19 | 76 | 160 | 94105E3 | 94106E3 | 94103E3 |
| | 1200 | 10 x 25 | 1300 | 120 | 0.19 | 52 | 110 | 54122E3 | 64122E3 | 34122E3 |
| | 1500 | 10 x 30 | 1400 | 150 | 0.19 | 44 | 88 | 94155E3 | 94156E3 | - |
| | 1500 | 12.5 x 20 | 1300 | 150 | 0.19 | 46 | 92 | 54152E3 | 64152E3 | 34152E3 |
| | 1800 | 12.5 x 20 | 1340 | 180 | 0.19 | 46 | 92 | 54182E3 | 64182E3 | 34182E3 |
| | 2200 | 12.5 x 25 | 1700 | 220 | 0.21 | 34 | 68 | 54222E3 | 64222E3 | 34222E3 |
| | 2700 | 12.5 x 31 | 2000 | 270 | 0.21 | 30 | 60 | 54272E3 | 64272E3 | - |
| | 3300 | 16 x 20 | 1600 | 330 | 0.23 | 38 | 76 | 54332E3 | 64332E3 | 34332E3 |
| | 3900 | 16 x 25 | 2100 | 390 | 0.23 | 28 | 56 | 54392E3 | 64392E3 | 34392E3 |
| | 4700 | 16 x 31 | 2400 | 470 | 0.25 | 25 | 50 | 54472E3 | 64472E3 | 34472E3 |
| | 5600 | 16 x 31 | 2400 | 560 | 0.27 | 25 | 50 | 54562E3 | 64562E3 | 34562E3 |
| | 5600 | 18 x 25 | 2270 | 560 | 0.27 | 25 | 50 | 94565E3 | 94566E3 | - |
| | 6800 | 16 x 35 | 2600 | 680 | 0.29 | 22 | 44 | 54682E3 | 64682E3 | - |
| 6800 | 18 x 31 | 2760 | 680 | 0.29 | 23 | 46 | 94685E3 | 94686E3 | - | |
| 10 000 | 18 x 35 | 3180 | 1000 | 0.31 | 21 | 42 | 54103E3 | 64103E3 | - | |
| 16 | 270 | 10 x 12 | 630 | 43 | 0.16 | 120 | 240 | 55271E3 | 65271E3 | 35271E3 |
| | 330 | 10 x 12 | 630 | 53 | 0.16 | 120 | 240 | 55331E3 | 65331E3 | 35331E3 |
| | 470 | 10 x 16 | 830 | 75 | 0.16 | 84 | 170 | 55471E3 | 65471E3 | 35471E3 |
| | 680 | 10 x 20 | 1000 | 110 | 0.16 | 62 | 130 | 55681E3 | 65681E3 | 35681E3 |
| | 680 | 12.5 x 16 | 940 | 110 | 0.16 | 76 | 160 | 95685E3 | 95686E3 | 95683E3 |
| | 820 | 10 x 25 | 1300 | 130 | 0.16 | 52 | 110 | 55821E3 | 65821E3 | 35821E3 |
| | 1000 | 12.5 x 20 | 1300 | 160 | 0.16 | 48 | 96 | 55102E3 | 65102E3 | 35102E3 |
| | 1200 | 10 x 30 | 1400 | 190 | 0.16 | 44 | 88 | 95125E3 | 95126E3 | - |
| | 1200 | 12.5 x 20 | 1300 | 190 | 0.16 | 46 | 92 | 55122E3 | 65122E3 | 35122E3 |
| | 1500 | 12.5 x 25 | 1700 | 240 | 0.16 | 34 | 68 | 55152E3 | 65152E3 | 35152E3 |
| | 2200 | 12.5 x 31 | 2000 | 350 | 0.18 | 30 | 60 | 95225E3 | 95226E3 | - |
| | 2200 | 16 x 20 | 1600 | 350 | 0.18 | 38 | 76 | 55222E3 | 65222E3 | 35222E3 |
| | 2700 | 16 x 25 | 2100 | 430 | 0.18 | 28 | 56 | 55272E3 | 65272E3 | 35272E3 |
| | 3300 | 16 x 25 | 2100 | 530 | 0.20 | 28 | 56 | 55332E3 | 65332E3 | 35332E3 |
| | 3900 | 16 x 31 | 2400 | 620 | 0.20 | 25 | 50 | 55392E3 | 65392E3 | 35392E3 |
| | 4700 | 16 x 35 | 2600 | 750 | 0.22 | 22 | 44 | 55472E3 | 65472E3 | - |
| | 4700 | 18 x 31 | 2560 | 750 | 0.22 | 23 | 46 | 95475E3 | 95476E3 | - |
| 6800 | 18 x 35 | 3000 | 1090 | 0.24 | 21 | 42 | 55682E3 | 65682E3 | - | |

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | | |
|--|----------------------------------|---|---|----------------------------------|-----------------|---------------------------------|---------------------------------|-------------------------------|------------|-------------|
| U _R (V) | C _R 100 Hz (μF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 kHz 105 °C (mA) | I _{L2} 2 min (μA) | tan δ 100 Hz | Z 100 kHz + 20 °C (mΩ) | Z 100 kHz - 10 °C (mΩ) | ORDERING CODE MAL2136..... | | |
| | | | | | | | | BULK PACKAGING | | TAPED |
| | | | | | | | | FORM CA | FORM CB | FORM TFA |
| 25 | 180 | 10 x 12 | 630 | 45 | 0.14 | 120 | 240 | 56181E3 | 66181E3 | 36181E3 |
| | 220 | 10 x 12 | 630 | 55 | 0.14 | 120 | 240 | 56221E3 | 66221E3 | 36221E3 |
| | 330 | 10 x 16 | 830 | 83 | 0.14 | 84 | 170 | 56331E3 | 66331E3 | 36331E3 |
| | 470 | 10 x 20 | 1000 | 120 | 0.14 | 62 | 130 | 56471E3 | 66471E3 | 36471E3 |
| | 470 | 12.5 x 16 | 940 | 120 | 0.14 | 76 | 160 | 96475E3 | 96476E3 | 96473E3 |
| | 560 | 10 x 25 | 1300 | 140 | 0.14 | 52 | 110 | 56561E3 | 66561E3 | 36561E3 |
| | 820 | 10 x 30 | 1400 | 210 | 0.14 | 44 | 88 | 96825E3 | 96826E3 | - |
| | 820 | 12.5 x 20 | 1300 | 210 | 0.14 | 46 | 92 | 56821E3 | 66821E3 | 36821E3 |
| | 1000 | 12.5 x 25 | 1700 | 250 | 0.14 | 34 | 68 | 56102E3 | 66102E3 | 36102E3 |
| | 1500 | 12.5 x 31 | 2000 | 380 | 0.14 | 30 | 60 | 96155E3 | 96156E3 | - |
| | 1500 | 16 x 20 | 1700 | 380 | 0.14 | 38 | 76 | 56152E3 | 66152E3 | 36152E3 |
| | 1800 | 16 x 25 | 2100 | 450 | 0.14 | 28 | 56 | 56182E3 | 66182E3 | 36182E3 |
| | 2200 | 16 x 31 | 2400 | 550 | 0.16 | 25 | 50 | 56222E3 | 66222E3 | 36222E3 |
| | 2200 | 18 x 20 | 1680 | 550 | 0.16 | 28 | 56 | 96225E3 | 96226E3 | - |
| | 2700 | 16 x 31 | 2400 | 680 | 0.16 | 25 | 50 | 56272E3 | 66272E3 | 36272E3 |
| | 3300 | 16 x 35 | 2600 | 830 | 0.18 | 22 | 44 | 56332E3 | 66332E3 | - |
| 3300 | 18 x 31 | 2490 | 830 | 0.18 | 27 | 54 | 96335E3 | 96336E3 | - | |
| 4700 | 18 x 35 | 3000 | 1180 | 0.20 | 21 | 42 | 56472E3 | 66472E3 | - | |
| 35 | 120 | 10 x 12 | 630 | 42 | 0.12 | 120 | 240 | 50121E3 | 60121E3 | 30121E3 |
| | 150 | 10 x 12 | 630 | 53 | 0.12 | 120 | 240 | 50151E3 | 60151E3 | 30151E3 |
| | 220 | 10 x 16 | 830 | 77 | 0.12 | 84 | 170 | 50221E3 | 60221E3 | 30221E3 |
| | 330 | 10 x 20 | 1000 | 120 | 0.12 | 62 | 130 | 50331E3 | 60331E3 | 30331E3 |
| | 330 | 12.5 x 16 | 940 | 120 | 0.12 | 76 | 160 | 90335E3 | 90336E3 | 90333E3 |
| | 390 | 10 x 25 | 1300 | 140 | 0.12 | 52 | 110 | 50391E3 | 60391E3 | 30391E3 |
| | 470 | 12.5 x 20 | 1300 | 170 | 0.12 | 48 | 96 | 50471E3 | 60471E3 | 30471E3 |
| | 560 | 10 x 30 | 1400 | 200 | 0.12 | 44 | 88 | 90565E3 | 90566E3 | - |
| | 560 | 12.5 x 20 | 1300 | 200 | 0.12 | 46 | 92 | 50561E3 | 60561E3 | 30561E3 |
| | 680 | 12.5 x 25 | 1700 | 240 | 0.12 | 34 | 68 | 50681E3 | 60681E3 | 30681E3 |
| | 1000 | 12.5 x 31 | 2000 | 350 | 0.12 | 30 | 60 | 90105E3 | 90106E3 | - |
| | 1000 | 16 x 20 | 1700 | 350 | 0.12 | 38 | 76 | 50102E3 | 60102E3 | 30102E3 |
| | 1200 | 16 x 25 | 2100 | 420 | 0.12 | 28 | 56 | 50122E3 | 60122E3 | 30122E3 |
| | 1500 | 16 x 25 | 2100 | 530 | 0.12 | 28 | 56 | 50152E3 | 60152E3 | 30152E3 |
| | 1800 | 16 x 31 | 2400 | 630 | 0.12 | 25 | 50 | 50182E3 | 60182E3 | 30182E3 |
| | 2200 | 16 x 35 | 2600 | 770 | 0.14 | 22 | 44 | 50222E3 | 60222E3 | - |
| 2200 | 18 x 31 | 2320 | 770 | 0.14 | 27 | 54 | 90225E3 | 90226E3 | - | |
| 3300 | 18 x 35 | 2890 | 1160 | 0.16 | 21 | 42 | 50332E3 | 60332E3 | - | |
| 50 | 82 | 10 x 12 | 480 | 41 | 0.10 | 200 | 400 | 51829E3 | 61829E3 | 31829E3 |
| | 100 | 10 x 12 | 480 | 50 | 0.10 | 200 | 400 | 51101E3 | 61101E3 | 31101E3 |
| | 120 | 10 x 16 | 760 | 60 | 0.10 | 100 | 200 | 51121E3 | 61121E3 | 31121E3 |
| | 150 | 10 x 20 | 850 | 75 | 0.10 | 90 | 180 | 51151E3 | 61151E3 | 31151E3 |
| | 180 | 10 x 20 | 950 | 90 | 0.10 | 75 | 150 | 51181E3 | 61181E3 | 31181E3 |
| | 180 | 12.5 x 16 | 780 | 90 | 0.10 | 59 | 120 | 91185E3 | 91186E3 | 91183E3 |
| | 220 | 10 x 25 | 1200 | 110 | 0.10 | 63 | 130 | 51221E3 | 61221E3 | 31221E3 |
| | 330 | 10 x 30 | 1300 | 170 | 0.10 | 54 | 110 | 91335E3 | 91336E3 | - |
| | 330 | 12.5 x 20 | 1200 | 170 | 0.10 | 59 | 120 | 51331E3 | 61331E3 | 31331E3 |
| | 470 | 12.5 x 25 | 1500 | 240 | 0.10 | 44 | 88 | 51471E3 | 61471E3 | 31471E3 |
| | 560 | 12.5 x 31 | 1700 | 280 | 0.10 | 39 | 78 | 51561E3 | 61561E3 | - |
| | 680 | 16 x 20 | 1400 | 340 | 0.10 | 50 | 100 | 51681E3 | 61681E3 | 31681E3 |
| | 820 | 16 x 25 | 1900 | 410 | 0.10 | 34 | 68 | 51821E3 | 61821E3 | 31821E3 |
| | 1000 | 16 x 31 | 2200 | 500 | 0.10 | 30 | 60 | 51102E3 | 61102E3 | 31102E3 |
| | 1000 | 18 x 20 | 1510 | 500 | 0.10 | 41 | 82 | 91105E3 | 91106E3 | - |
| | 1200 | 16 x 35 | 2300 | 600 | 0.10 | 27 | 54 | 51122E3 | 61122E3 | - |
| 1500 | 18 x 31 | 2200 | 750 | 0.10 | 31 | 62 | 51152E3 | 61152E3 | - | |
| 2200 | 18 x 35 | 2650 | 1100 | 0.12 | 27 | 54 | 51222E3 | 61222E3 | - | |



Aluminum Capacitors
Radial Very Low Impedance


Vishay BCcomponents

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | | |
|--|-----------------------------------|---|---|----------------------------------|-----------------|---------------------------------|---------------------------------|-------------------------------|------------|-------------|
| U _R (V) | C _R 100 kHz (μF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 kHz 105 °C (mA) | I _{L2} 2 min (μA) | tan δ 100 Hz | Z 100 kHz + 20 °C (mΩ) | Z 100 kHz - 10 °C (mΩ) | ORDERING CODE MAL2136..... | | |
| | | | | | | | | BULK PACKAGING | | TAPED |
| | | | | | | | | FORM CA | FORM CB | FORM TFA |
| 63 | 47 | 10 x 12 | 380 | 30 | 0.10 | 300 | 750 | 58479E3 | 68479E3 | 38479E3 |
| | 56 | 10 x 12 | 420 | 35 | 0.10 | 270 | 680 | 58569E3 | 68569E3 | 38569E3 |
| | 68 | 10 x 16 | 520 | 43 | 0.10 | 210 | 530 | 58689E3 | 68689E3 | 38689E3 |
| | 100 | 10 x 16 | 580 | 63 | 0.10 | 190 | 480 | 58101E3 | 68101E3 | 38101E3 |
| | 120 | 10 x 20 | 650 | 76 | 0.10 | 160 | 400 | 58121E3 | 68121E3 | 38121E3 |
| | 120 | 12.5 x 16 | 610 | 76 | 0.10 | 180 | 450 | 98125E3 | 98126E3 | 98123E3 |
| | 150 | 10 x 25 | 780 | 95 | 0.10 | 130 | 330 | 58151E3 | 68151E3 | 38151E3 |
| | 180 | 10 x 30 | 960 | 110 | 0.10 | 100 | 250 | 58181E3 | 68181E3 | - |
| | 220 | 12.5 x 20 | 870 | 140 | 0.10 | 110 | 280 | 58221E3 | 68221E3 | 38221E3 |
| | 270 | 12.5 x 25 | 1200 | 170 | 0.10 | 74 | 190 | 58271E3 | 68271E3 | 38271E3 |
| | 330 | 16 x 20 | 1100 | 210 | 0.10 | 85 | 220 | 58331E3 | 68331E3 | 38331E3 |
| | 390 | 12.5 x 31 | 1300 | 250 | 0.10 | 68 | 170 | 58391E3 | 68391E3 | - |
| | 470 | 16 x 25 | 1500 | 300 | 0.10 | 55 | 140 | 58471E3 | 68471E3 | 38471E3 |
| | 680 | 16 x 31 | 1700 | 430 | 0.10 | 46 | 120 | 58681E3 | 68681E3 | 38681E3 |
| | 680 | 18 x 25 | 1470 | 430 | 0.10 | 54 | 108 | 98685E3 | 98686E3 | - |
| | 820 | 16 x 35 | 1900 | 520 | 0.10 | 40 | 100 | 58821E3 | 68821E3 | - |
| 1000 | 18 x 31 | 1950 | 630 | 0.10 | 39 | 78 | 58102E3 | 68102E3 | - | |
| 1500 | 18 x 35 | 2350 | 950 | 0.10 | 33 | 66 | 58152E3 | 68152E3 | - | |
| 100 | 22 | 10 x 12 | 300 | 22 | 0.07 | 450 | 2300 | 59229E3 | 69229E3 | 39229E3 |
| | 33 | 10 x 12 | 320 | 33 | 0.07 | 390 | 2000 | 59339E3 | 69339E3 | 39339E3 |
| | 47 | 10 x 16 | 450 | 47 | 0.07 | 320 | 1600 | 59479E3 | 69479E3 | 39479E3 |
| | 68 | 10 x 20 | 520 | 68 | 0.07 | 240 | 1200 | 59689E3 | 69689E3 | 39689E3 |
| | 100 | 12.5 x 20 | 800 | 100 | 0.07 | 150 | 750 | 59101E3 | 69101E3 | 39101E3 |
| | 150 | 16 x 20 | 1000 | 150 | 0.07 | 110 | 550 | 59151E3 | 69151E3 | 39151E3 |
| | 220 | 16 x 25 | 1300 | 220 | 0.07 | 81 | 400 | 59221E3 | 69221E3 | 39221E3 |
| | 330 | 16 x 31 | 1600 | 330 | 0.07 | 58 | 290 | 59331E3 | 69331E3 | 39331E3 |
| | 470 | 16 x 35 | 1800 | 470 | 0.07 | 45 | 230 | 59471E3 | 69471E3 | - |
| | 470 | 18 x 31 | 1800 | 470 | 0.07 | 45 | 230 | 99475E3 | 99476E3 | - |
| | 680 | 18 x 35 | 2000 | 680 | 0.07 | 39 | 200 | 59681E3 | 69681E3 | - |

| ADDITIONAL ELECTRICAL DATA | | |
|------------------------------------|---|-----------------------------------|
| PARAMETER | CONDITIONS | VALUE |
| Voltage | | |
| Surge voltage | | $U_s \leq 1.15 \times U_R$ |
| Reverse voltage | | $U_{rev} \leq 1 \text{ V}$ |
| Current | | |
| Leakage current | After 2 minutes at U _R | $I_{L2} \leq 0.01 C_R \times U_R$ |
| Inductance | | |
| Equivalent series inductance (ESL) | Case Ø D = 10 mm | typ. 16 nH |
| | Case Ø D ≥ 12.5 mm | typ. 18 nH |
| Resistance | | |
| Equivalent series resistance (ESR) | Calculated from tan δ _{max} and C _R (see Table 2) | $ESR = \tan \delta / 2 \pi f C_R$ |




CAPACITANCE (C)

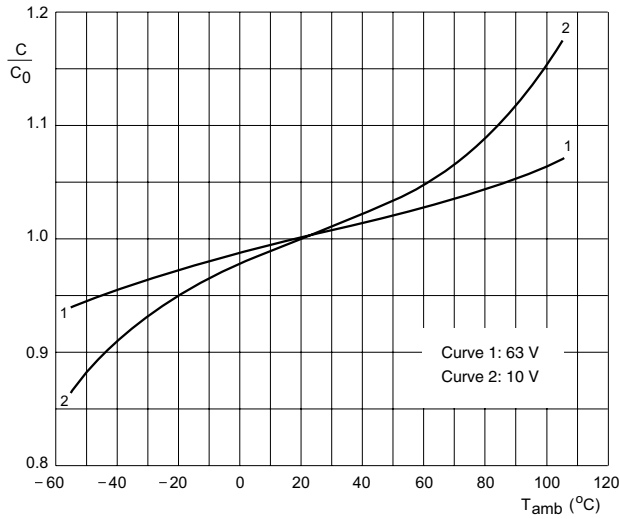

C_0 = typical capacitance at 20 °C, 100 Hz

Fig.5 Typical multiplier of capacitance as a function of ambient temperature

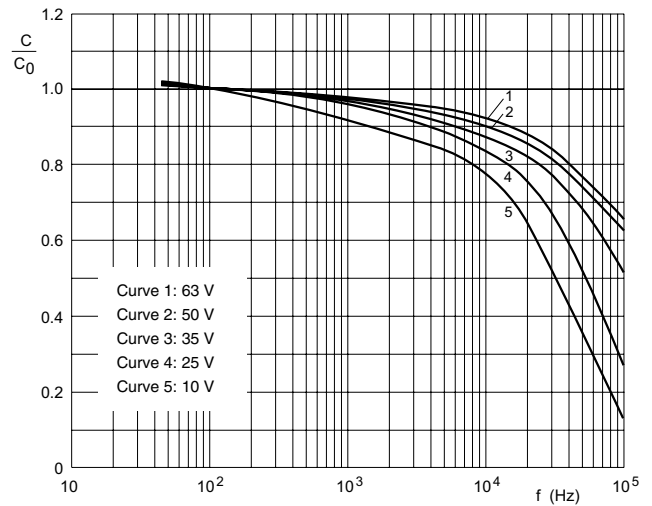


C_0 = typical capacitance at 20 °C, 100 Hz

T_{amb} = 20 °C


Fig.6 Typical multiplier of capacitance as a function of frequency

EQUIVALENT SERIES RESISTANCE (ESR)

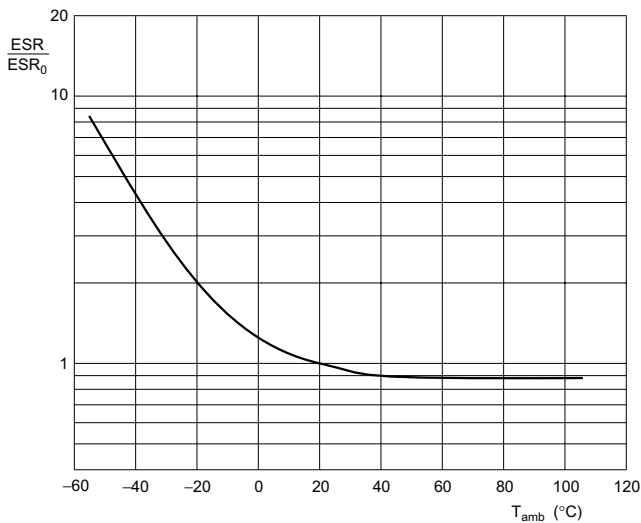

ESR_0 = typical ESR at 20 °C, 100 Hz

Fig.7 Typical multiplier of ESR as a function of ambient temperature

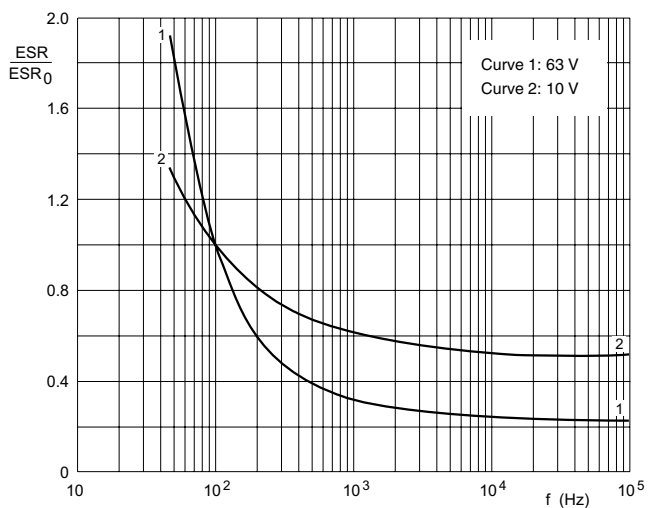


ESR_0 = typical ESR at 20 °C, 100 Hz

T_{amb} = 20 °C.


Fig.8 Typical multiplier of ESR as a function of frequency

IMPEDANCE (Z)

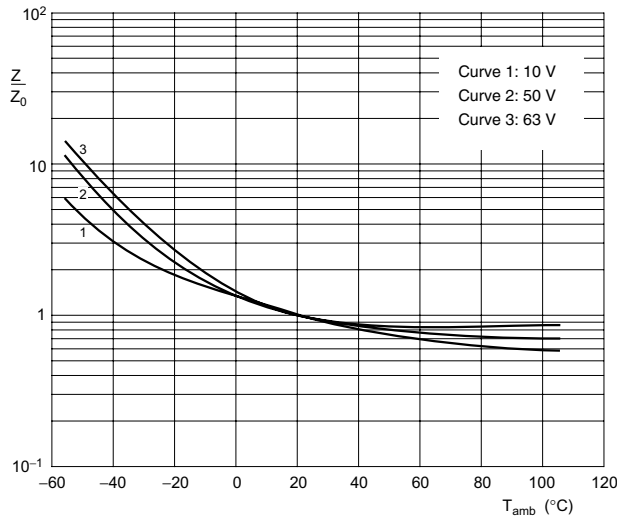


Z_0 = typical impedance at 20 °C, 100 kHz

Fig.9 Typical multiplier of impedance as a function of ambient temperature

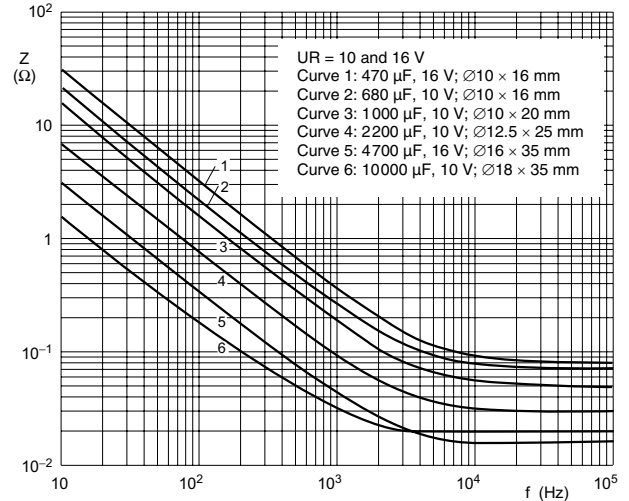


$T_{amb} = 20$ °C

Fig.10 Typical impedance as a function of frequency

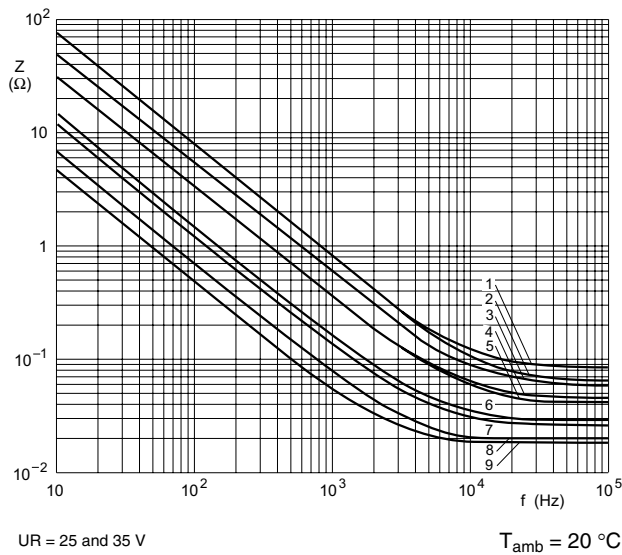


$T_{amb} = 20$ °C

Fig.11 Typical impedance as a function of frequency

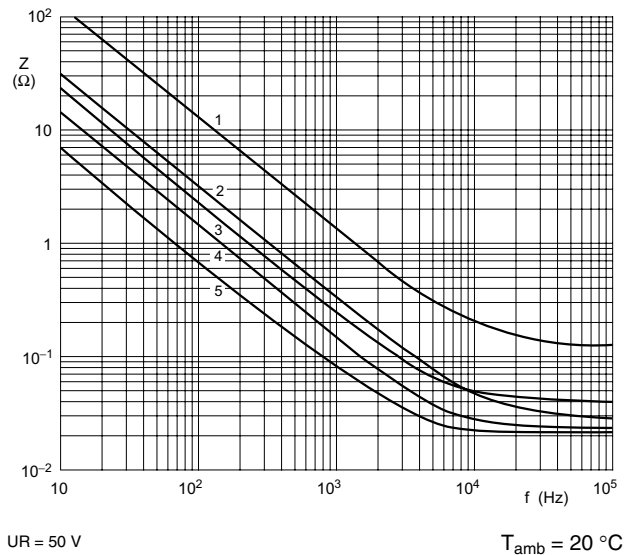

$T_{amb} = 20$ °C

Fig.12 Typical impedance as a function of frequency

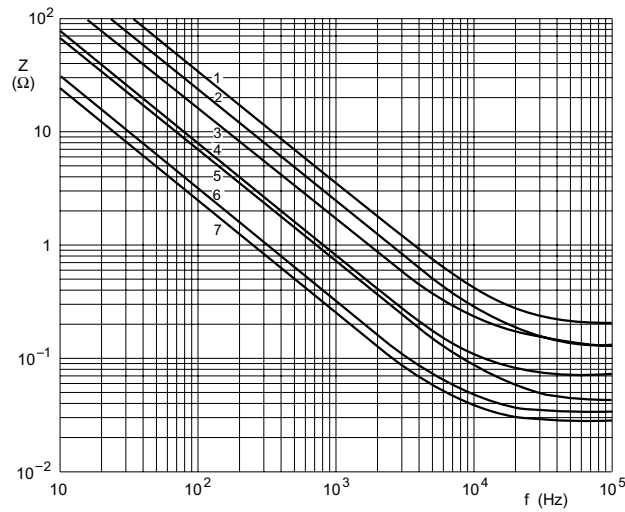

UR = 63 V
 Curve 1: 47 μF, 63 V; Ø 10 × 12 mm
 Curve 2: 68 μF, 63 V; Ø 10 × 16 mm
 Curve 3: 100 μF, 63 V; Ø 10 × 20 mm
 Curve 4: 220 μF, 63 V; Ø 12.5 × 20 mm
 Curve 5: 270 μF, 63 V; Ø 12.5 × 25 mm
 Curve 6: 470 μF, 63 V; Ø 16 × 25 mm
 Curve 7: 680 μF, 63 V; Ø 16 × 31 mm

T_{amb} = 20 °C

Fig.13 Typical impedance as a function of frequency

RIPPLE CURRENT AND USEFUL LIFE

Table 3

| ENDURANCE TEST AND USEFUL LIFE AS A FUNCTION OF CASE SIZE | | | |
|--|----------------------|---|--|
| NOMINAL CASE SIZE Ø D x L (mm) | CASE CODE | ENDURANCE TEST AT 105 °C (h) | USEFUL LIFE AT 105 °C (h) |
| 10 x 12 | 14 | 3000 | 4000 |
| 10 x 16 | 15 | 3000 | 6000 |
| 10 x 20 | 16 | 3000 | 6000 |
| 10 x 25 | 16L | 5000 | 7000 |
| 10 x 30 | 16LL | 5000 | 7000 |
| 12.5 x 16 | 17a | 3000 | 5000 |
| 12.5 x 20 | 17 | 3000 | 7000 |
| 12.5 x 25 | 18 | 5000 | 8000 |
| 12.5 x 31 | 18L | 5000 | 8000 |
| 16 x 20 | 19a | 3000 | 7000 |
| 16 x 25 | 19 | 5000 | 10 000 |
| 16 x 31 | 20 | 5000 | 10 000 |
| 16 x 35 | 21 | 5000 | 10 000 |
| 18 x 20 | 1820 | 3000 | 7000 |
| 18 x 25 | 1825 | 5000 | 10 000 |
| 18 x 31 | 1831 | 5000 | 10 000 |
| 18 x 35 | 22 | 5000 | 10 000 |

I_A = actual ripple current at 100 kHz
 I_R = rated ripple current at 100 kHz, 105 °C
 (1) Useful life at 105 °C and I_R applied; see Table 3

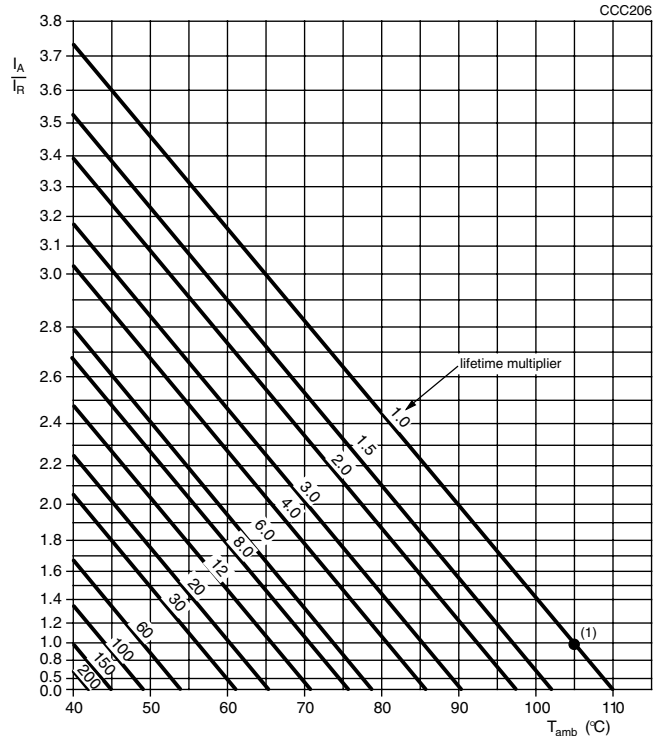


Fig.14 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 4

| MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY | | | | | | | | |
|---|-------------------------|-----------------------|-----------------------------------|-----------------------|-----------------------------------|-----------------------|------------------------------------|-----------------------|
| FREQUENCY (Hz) | I_R MULTIPLIER | | | | | | | |
| | $U_R = 10\text{ V}$ | | $U_R = 16\text{ and }25\text{ V}$ | | $U_R = 35\text{ and }50\text{ V}$ | | $U_R = 63\text{ and }100\text{ V}$ | |
| | $\varnothing \leq 12.5$ | $\varnothing \geq 16$ | $\varnothing \leq 12.5$ | $\varnothing \geq 16$ | $\varnothing \leq 12.5$ | $\varnothing \geq 16$ | $\varnothing \leq 12.5$ | $\varnothing \geq 16$ |
| 100 | 0.70 | 0.83 | 0.63 | 0.69 | 0.50 | 0.60 | 0.35 | 0.50 |
| 300 | 0.80 | 0.90 | 0.72 | 0.79 | 0.61 | 0.71 | 0.51 | 0.64 |
| 1000 | 0.88 | 0.95 | 0.80 | 0.87 | 0.72 | 0.80 | 0.66 | 0.74 |
| 3000 | 0.92 | 0.98 | 0.88 | 0.92 | 0.81 | 0.88 | 0.76 | 0.83 |
| 10 000 | 0.96 | 0.99 | 0.92 | 0.96 | 0.88 | 0.93 | 0.85 | 0.90 |
| 30 000 | 0.99 | 1.00 | 0.98 | 0.99 | 0.94 | 0.96 | 0.92 | 0.95 |
| 100 000 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 | 1.00 |

Table 5

| TEST PROCEDURES AND REQUIREMENTS | | | |
|--|--|---|--|
| TEST | | PROCEDURE (QUICK REFERENCE) | REQUIREMENTS |
| NAME OF TEST | REFERENCE | | |
| Endurance | IEC 60384-4/ EN130300 subclause 4.13 | $T_{amb} = 105\text{ °C}$; U_R applied; for test duration see Table 3 | $\Delta C/C: \pm 20\%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ |
| Useful life | CECC 30301 subclause 1.8.1 | $T_{amb} = 105\text{ °C}$; U_R and I_R applied; for test duration see Table 3 | $\Delta C/C: \pm 30\%$ $\tan \delta \leq 3 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ no short or open circuit total failure percentage: $\leq 1\%$ |
| Shelf life (storage at high temperature) | IEC 60384-4/ EN130300 subclause 4.17 | $T_{amb} = 105\text{ °C}$; no voltage applied; 1000 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement | $\Delta C/C: \pm 20\%$ $\tan \delta \leq 2 \times \text{spec. limit}$ $I_{L2} \leq \text{spec. limit}$ |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.