

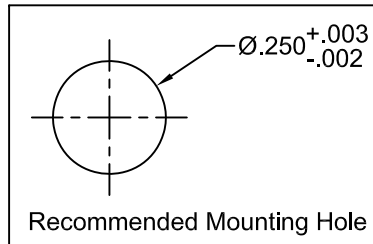

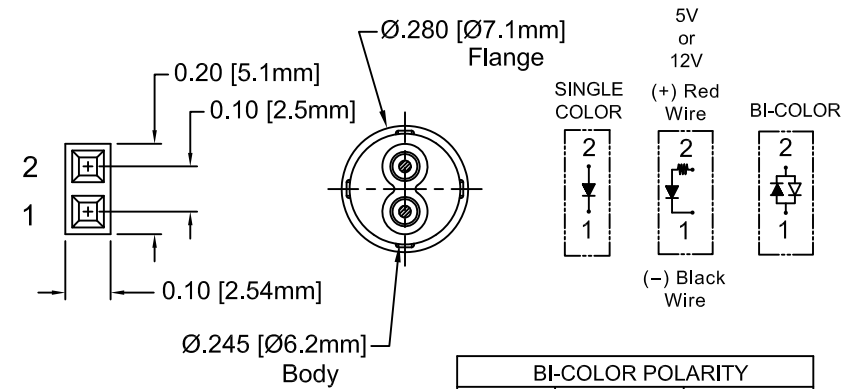


| ITEM | Q'TY | PART NUMBER   | PART DESCRIPTION                                                                                      |
|------|------|---------------|-------------------------------------------------------------------------------------------------------|
| 1    | 1    | PM5-XXX       | LED Holder, Panel Mount, Press Fit, (5mm)<br>PM5 (Standard LED), PM5-5V (5V LED), & PM5-12V (12V LED) |
| 2    | 1    | 5XXX          | T-1¾ (5mm) Non-Flange LED, See Page 2.                                                                |
| 3    | 1    | BWS24-1007-RD | 24AWG Wire Lead U.L. 1007, Red                                                                        |
| 4    | 1    | BWS24-1007-BK | 24AWG Wire Lead U.L. 1007, Black                                                                      |
| 5    | 1    | 2665S020000   | Leoco 2665 Series 2.54 (.100") Crimp Type Socket, 1x                                                  |
| 6    | 2    | 2653TPB0001   | Leoco Terminal# 2653TPB0001 (Reel), 2653TPB00A1 (Bulk)                                                |

| REV. | DESCRIPTION                                  | DATE     | APPROVED |
|------|----------------------------------------------|----------|----------|
| D    | Updated 5XXXL Specs                          | 06/26/09 | T. Y.    |
| E    | Added PM5BWCWX.X-CC Specs                    | 08/14/09 | T. Y.    |
| F    | Added PM5UGCWX.X-CC Specs                    | 08/19/09 | T. Y.    |
| G    | Added 5BC-Y/G Specs                          | 02/09/10 | T. Y.    |
| H    | LED Updates                                  | 01/19/11 | T. Y.    |
| J    | Updated BOM Item #1 and Updated LED offering | 11/13/12 | T. Y.    |

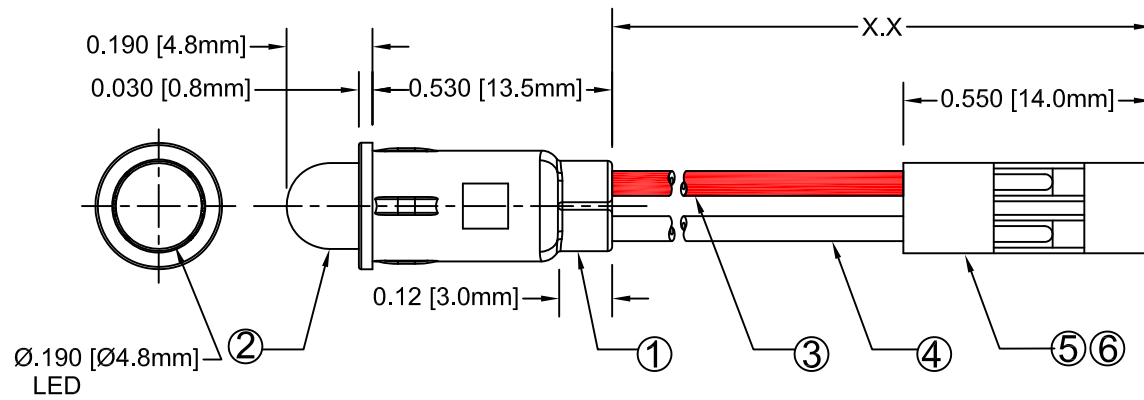

EXAMPLE:  
**PM5RDW6.5\*-CC**  
 Connector  
 Wire Length "X.X"  
 LED Color & Lens Appearance.  
 Series

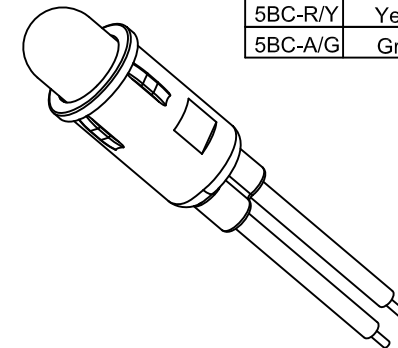

## ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

|                                              |                     |
|----------------------------------------------|---------------------|
| REVERSE VOLTAGE                              | 5V                  |
| REVERSE CURRENT ( VR=5V)                     | 100µA               |
| OPERATING TEMPERATURE RANGE                  | -25°C ~ 85°C        |
| STORAGE TEMPERATURE                          | -30°C ~ 100°C       |
| LEAD SOLDERING TEMPERATURE (1/16" FROM BODY) | 260°C for 5 Seconds |

|                                                      |                          |                                                                            |                       |
|------------------------------------------------------|--------------------------|----------------------------------------------------------------------------|-----------------------|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED ) |                          | <br>4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974 |                       |
| DECIMALS                                             | ANGULAR                  |                                                                            |                       |
| .X ± .1                                              | X° ± 1°                  |                                                                            |                       |
| .XX ± .02                                            |                          |                                                                            |                       |
| .XXX ± .010                                          |                          | <b>TITLE:</b><br>T-1¾ (5mm) PANEL MOUNT ASSEMBLY                           |                       |
| DESIGNED:<br><b>Dan Beckman</b>                      | DATE:<br><b>06/28/07</b> | <b>PART NO:</b><br><b>PM5XXWX.X-CC</b>                                     | REVISION:<br><b>J</b> |
| CHECKED:<br><b>T. Yin</b>                            | DATE:<br><b>06/28/07</b> | <b>CAGE CODE : 32559</b>                                                   | <b>SHEET # 1 OF 4</b> |
| CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.      |                          |                                                                            |                       |

|      |              |      |          |
|------|--------------|------|----------|
| REV. | DESCRIPTION  | DATE | APPROVED |
|      | SEE SHEET#1. |      |          |

| LED Assy.No.     | Chip      |                  |               | Lens Appearance | Electro-Optical Data @20mA |        |     |          | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N |
|------------------|-----------|------------------|---------------|-----------------|----------------------------|--------|-----|----------|-----------------------------------|---------|
|                  | Material  | Peak Wave Length | Emitted Color |                 | If (mA)                    | Vf (V) |     | Iv (mcd) |                                   |         |
|                  |           |                  |               |                 | MAX                        | TYP    | MAX | TYP      |                                   |         |
| PM5BWCWX.X-CC    | GaN/SiC   | 430              | BLUE          | WATER CLEAR     | 25                         | 4      | 4.5 | 25       | 20                                | 5BWC    |
| PM5BWDWX.X-CC    | GaN/SiC   | 430              | BLUE          | DIFFUSED        | 25                         | 4      | 4.5 | 15       | 45                                | 5BWD    |
| PM5BWTWX.X-CC    | GaN/SiC   | 430              | BLUE          | TINTED          | 25                         | 4      | 4.5 | 30       | 20                                | 5BWT    |
| PM5GCW.X.-CC     | GaP/GaP   | 568              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.8 | 40       | 35                                | 5GC     |
| PM5GDWX.X-CC     | GaP/GaP   | 568              | GREEN         | DIFFUSED        | 30                         | 2.1    | 2.8 | 25       | 45                                | 5GD     |
| PM5GTWX.X-CC     | GaP/GaP   | 568              | GREEN         | TINTED          | 30                         | 2.1    | 2.8 | 40       | 35                                | 5GT     |
| PM5PGCW.X-CC     | GaP/GaP   | 555              | PURE GREEN    | WATER CLEAR     | 30                         | 2.2    | 2.8 | 10       | 35                                | 5PGC    |
| PM5PGDWX.X-CC    | GaP/GaP   | 555              | PURE GREEN    | DIFFUSED        | 30                         | 2.2    | 2.8 | 10       | 45                                | 5PGD    |
| PM5PGTWX.X-CC    | GaP/GaP   | 555              | PURE GREEN    | TINTED          | 30                         | 2.2    | 2.8 | 10       | 35                                | 5PGT    |
| PM5YCWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.8 | 40       | 35                                | 5YC     |
| PM5YDWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | DIFFUSED        | 30                         | 2      | 2.8 | 25       | 45                                | 5YD     |
| PM5YTWX.X-CC     | GaAsp/GaP | 590              | YELLOW        | TINTED          | 30                         | 2      | 2.8 | 40       | 35                                | 5YT     |
| PM5ACWX.X-CC     | GaAsp/GaP | 605              | AMBER         | WATER CLEAR     | 30                         | 2      | 2.8 | 40       | 35                                | 5AC     |
| PM5ADWX.X-CC     | GaAsp/GaP | 605              | AMBER         | DIFFUSED        | 30                         | 2      | 2.8 | 25       | 45                                | 5AD     |
| PM5ATWX.X-CC     | GaAsp/GaP | 605              | AMBER         | TINTED          | 30                         | 2      | 2.8 | 40       | 35                                | 5AT     |
| PM5HCWX.X-CC     | GaAsp/GaP | 625              | HE RED        | WATER CLEAR     | 30                         | 2      | 2.8 | 40       | 35                                | 5HC     |
| PM5HDWX.X-CC     | GaAsp/GaP | 625              | HE RED        | DIFFUSED        | 30                         | 2      | 2.8 | 25       | 45                                | 5HD     |
| PM5HTWX.X-CC     | GaAsp/GaP | 625              | HE RED        | TINTED          | 30                         | 2      | 2.8 | 40       | 35                                | 5HT     |
| PM5RCWX.X-CC     | GaP/GaP   | 700              | RED           | WATER CLEAR     | 20                         | 2.1    | 2.8 | 2        | 35                                | 5RC     |
| PM5RDWX.X-CC     | GaP/GaP   | 700              | RED           | DIFFUSED        | 20                         | 2.1    | 2.8 | 2        | 45                                | 5RD     |
| PM5RTWX.X-CC     | GaP/GaP   | 700              | RED           | TINTED          | 20                         | 2.1    | 2.8 | 2        | 35                                | 5RT     |
| PM5BCWX.X-CC-A/G | GaAsp/GaP | 605              | AMBER         | WHITE DIFFUSED  | 30                         | 2      | 2.8 | 6        | 45                                | 5BC-A/G |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 6        |                                   |         |
| PM5BCWX.X-CC     | GaAsp/GaP | 625              | RED           | WHITE DIFFUSED  | 30                         | 2      | 2.8 | 6        | 45                                | 5BD     |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 8        |                                   |         |
| PM5BCWX.X-CC-R/Y | GaAsp/GaP | 625              | RED           | WHITE DIFFUSED  | 30                         | 2      | 2.8 | 6        | 45                                | 5BC-R/Y |
|                  | GaP/GaP   | 590              | YELLOW        |                 | 30                         | 2      | 2.8 | 5        |                                   |         |
| PM5BCWX.X-CC-Y/G | GaAsp/GaP | 590              | YELLOW        | WHITE DIFFUSED  | 30                         | 2      | 2.8 | 5        | 45                                | 5BC-Y/G |
|                  | GaP/GaP   | 568              | GREEN         |                 | 30                         | 2.1    | 2.8 | 8        |                                   |         |

|                                                                                |  |                                                                                       |  |                                                                                                             |  |
|--------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------|--|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u> |  | ANGULAR<br><br>X° ± 5°                                                                |  | <div>BIVAR®</div> <div>4 THOMAS, IRVINE, CA. 92618</div> <div>TEL: (949) 951-8808 FAX: (949) 951-3974</div> |  |
|                                                                                |  |  |  | TITLE:<br>T-1¼ (5mm) PANEL MOUNT ASSEMBLY                                                                   |  |
| DESIGNED:<br><b>Dan Beckman</b>                                                |  | DATE:<br><b>06/28/07</b>                                                              |  | PART NO:<br><b>PM5XXWX.X-CC</b>                                                                             |  |
| CHECKED:<br><b>T. Yin</b>                                                      |  | DATE:<br><b>06/28/07</b>                                                              |  | REVISION:<br><b>J</b>                                                                                       |  |
|                                                                                |  |                                                                                       |  | CAGE CODE : 32559                                                                                           |  |
|                                                                                |  |                                                                                       |  | SHEET # 2 OF 4                                                                                              |  |
| CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.                                |  |                                                                                       |  |                                                                                                             |  |

|      |              |      |          |
|------|--------------|------|----------|
| REV. | DESCRIPTION  | DATE | APPROVED |
|      | SEE SHEET#1. |      |          |

| LED Assy.No.   | Chip        |                  |               | Lens Appearance | Electro-Optical Data @20mA |        |     |          | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N   |
|----------------|-------------|------------------|---------------|-----------------|----------------------------|--------|-----|----------|-----------------------------------|-----------|
|                | Material    | Peak Wave Length | Emitted Color |                 | If (mA)                    | Vf (V) |     | Iv (mcd) |                                   |           |
|                |             |                  |               |                 |                            | MAX    | TYP |          |                                   |           |
| PM5UBWCWX.X-CC | InGaN/SiC   | 468              | BLUE          | WATER CLEAR     | 76                         | 3.7    | 4.5 | 2500     | 15                                | 5BWC2.515 |
| PM5SGCWX.X-CC  | GaP/GaP     | 568              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.8 | 60       | 35                                | 5SGC      |
| PM5SGDWX.X-CC  | GaP/GaP     | 568              | GREEN         | DIFFUSED        | 30                         | 2.1    | 2.8 | 50       | 40                                | 5SGD      |
| PM5SGTWX.X-CC  | GaP/GaP     | 568              | GREEN         | TINTED          | 30                         | 2.1    | 2.8 | 60       | 35                                | 5SGT      |
| PM5SYCWX.X-CC  | GaAsP/GaP   | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.8 | 600      | 35                                | 5SYC      |
| PM5SYDWX.X-CC  | GaAsP/GaP   | 590              | YELLOW        | DIFFUSED        | 30                         | 2      | 2.8 | 150      | 40                                | 5SYD      |
| PM5SYTWX.X-CC  | GaAsP/GaP   | 590              | YELLOW        | TINTED          | 30                         | 2      | 2.8 | 600      | 35                                | 5SYT      |
| PM5SRCWX.X-CC  | GaAlAs/GaAs | 645              | SUPER RED     | WATER CLEAR     | 30                         | 1.7    | 2.4 | 60       | 35                                | 5SRC      |
| PM5SRDWX.X-CC  | GaAlAs/GaAs | 645              | SUPER RED     | DIFFUSED        | 30                         | 1.7    | 2.4 | 40       | 40                                | 5SRD      |
| PM5SRTWX.X-CC  | GaAlAs/GaAs | 645              | SUPER RED     | TINTED          | 30                         | 1.7    | 2.4 | 60       | 35                                | 5SRT      |
| PM5UGCWX.X-CC  | AlGaInP     | 570              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.4 | 600      | 35                                | 5UGC      |
| PMTSUGCWX.X-CC | AlGaInP     | 570              | GREEN         | WATER CLEAR     | 30                         | 2.1    | 2.4 | 300      | 35                                | 5SUGC     |
| PM5UYCWX.X-CC  | AlGaInP     | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 1000     | 30                                | 5UYC      |
| PM5SUYCWX.X-CC | AlGaInP     | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 700      | 35                                | 5SUYC     |
| PM5UOCWX.X-CC  | AlGaInP     | 590              | YELLOW        | WATER CLEAR     | 30                         | 2      | 2.4 | 500      | 35                                | 5UUYC     |
| PM5UOCWX.X-CC  | AlGaInP     | 625              | ORANGE        | WATER CLEAR     | 30                         | 1.8    | 2.4 | 1400     | 35                                | 5UOC      |
| PM5SUOCWX.X-CC | AlGaInP     | 625              | ORANGE        | WATER CLEAR     | 30                         | 1.8    | 2.4 | 1300     | 35                                | 5SUOC     |
| PM5URCWX.X-CC  | GaAlAs/GaAs | 645              | RED           | WATER CLEAR     | 30                         | 1.7    | 2.4 | 400      | 30                                | 5URC      |
| PM5SURCWX.X-CC | AlGaInP     | 640              | RED           | WATER CLEAR     | 30                         | 1.8    | 2.4 | 500      | 35                                | 5SURC     |
| PM5UWCWX.X-CC  | InGaN/SiC   | 6500K            | WHITE         | WATER CLEAR     | 100                        | 3.5    | 4.2 | 2700     | 30                                | 5WC2.730  |

|                                                                                |                          |                                                                                                  |  |                                                                                                                                                                                     |                       |
|--------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u> |                          | ANGULAR<br><br>X° ± 5°                                                                           |  | <div></div> <div>4 THOMAS, IRVINE, CA. 92618<br/>TEL: (949) 951-8808 FAX: (949) 951-3974</div> |                       |
|                                                                                |                          | <div></div> |  | TITLE:<br>T-1¼ (5mm) PANEL MOUNT ASSEMBLY                                                                                                                                           |                       |
| DESIGNED:<br><b>Dan Beckman</b>                                                | DATE:<br><b>06/28/07</b> | PART NO:<br><b>PM5XXWX.X-CC</b>                                                                  |  |                                                                                                                                                                                     | REVISION:<br><b>J</b> |
| CHECKED:<br><b>T. Yin</b>                                                      | DATE:<br><b>06/28/07</b> | CAGE CODE : <b>32559</b>                                                                         |  | SHEET # <b>3</b> OF <b>4</b>                                                                                                                                                        |                       |
| CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.                                |                          |                                                                                                  |  |                                                                                                                                                                                     |                       |

|      |              |      |          |
|------|--------------|------|----------|
| REV. | DESCRIPTION  | DATE | APPROVED |
|      | SEE SHEET#1. |      |          |

| LED Assembly P/N | Peak Wave Length<br>$\lambda_p$ (nm) | Emitted Color | Lens Appearance | Electro-Optical Data |           |     |             | Viewing Angle<br>2 $\theta$ 1/2<br>(Deg) | LED P/N |
|------------------|--------------------------------------|---------------|-----------------|----------------------|-----------|-----|-------------|------------------------------------------|---------|
|                  |                                      |               |                 | If<br>(mA)           | Vf<br>(V) |     | Iv<br>(mcd) |                                          |         |
|                  |                                      |               |                 | MAX                  | TYP       | MAX | TYP         |                                          |         |
| PM5BWDLWX.X-CC   | 430                                  | BLUE          | DIFFUSED        | 7                    | 3.8       | 4.2 | 4           | 45                                       | 5BWDL   |
| PM5PGDL2X.X-CC   | 555                                  | PURE GREEN    | DIFFUSED        | 7                    | 2.1       | 2.6 | 1           | 45                                       | 5PGDL   |
| PM5GDLWX.X-CC    | 568                                  | GREEN         | DIFFUSED        | 7                    | 2.1       | 2.6 | 5           | 45                                       | 5GDL    |
| PM5YDLWX.X-CC    | 590                                  | YELLOW        | DIFFUSED        | 7                    | 2         | 2.6 | 4           | 45                                       | 5YDL    |
| PM5ADLWX.X-CC    | 605                                  | AMBER         | DIFFUSED        | 7                    | 2         | 2.6 | 4           | 45                                       | 5ADL    |
| PM5HDLWX.X-CC    | 625                                  | HE RED        | DIFFUSED        | 7                    | 2         | 2.6 | 5           | 45                                       | 5HDL    |
| PM5SRDLWX.X      | 645                                  | SUPER RED     | DIFFUSED        | 7                    | 1.7       | 2.3 | 6           | 45                                       | 5SRDL   |

| Assembly P/N    | Peak Wave Length<br>λp(nm) | Emitted Color | Lens Appearance | Electro-Optical Data |           |     |             | Viewing Angle<br>2 θ 1/2<br>(Deg) | LED P/N |
|-----------------|----------------------------|---------------|-----------------|----------------------|-----------|-----|-------------|-----------------------------------|---------|
|                 |                            |               |                 | If<br>(mA)           | Vf<br>(V) |     | Iv<br>(mcd) |                                   |         |
|                 |                            |               |                 | MAX                  | TYP       | MAX | TYP         |                                   |         |
| 5 Volt          |                            |               |                 | Data @ 5V            |           |     |             |                                   |         |
| PM5BWD5VWX.X-CC | 430                        | BLUE          | DIFFUSED        | -                    | -         | 5   | 15          | 40                                | 5BWD5V  |
| PM5GC5VWX.X-CC  | 568                        | GREEN         | WATER CLEAR     | -                    | -         | 5   | 40          | 40                                | 5GC5V   |
| PM5GD5VWX.X-CC  | 568                        | GREEN         | DIFFUSED        | -                    | -         | 5   | 25          | 40                                | 5GD5V   |
| PM5GT5VWX.X-CC  | 568                        | GREEN         | TINTED          | -                    | -         | 5   | 40          | 40                                | 5GT5V   |
| PM5AD5VWX.X-CC  | 605                        | AMBER         | DIFFUSED        | -                    | -         | 5   | 25          | 40                                | 5AD5V   |
| PM5HD5VWX.X-CC  | 625                        | HE RED        | DIFFUSED        | -                    | -         | 5   | 30          | 40                                | 5HD5V   |
| PM5RD5VWX.X-CC  | 700                        | RED           | DIFFUSED        |                      |           | 5   | 1.5         | 40                                | 5RD5V   |
| PM5YD5VWX.X-CC  | 590                        | YELLOW        | DIFFUSED        | -                    | -         | 5   | 25          | 40                                | 5YD5V   |
| 12 Volt         |                            |               |                 | Data @ 12V           |           |     |             |                                   |         |
| PM5GC12VWX.X    | 568                        | GREEN         | WATER CLEAR     | -                    | -         | 12  | 40          | 35                                | 5GC12V  |
| PM5GD12VWX.X-CC | 568                        | GREEN         | DIFFUSED        | -                    | -         | 12  | 25          | 40                                | 5GD12V  |
| PM5HC12VWX.X-CC | 625                        | HE RED        | WATER CLEAR     | -                    | -         | 12  | 50          | 35                                | 5HC12V  |
| PM5HD12VWX.X-CC | 625                        | HE RED        | DIFFUSED        | -                    | -         | 12  | 30          | 40                                | 5HD12V  |
| PM5RC12VWX.X-CC | 700                        | RED           | WATER CLEAR     | -                    | -         | 12  | 2           | 35                                | 5RC12V  |
| PM5RD12VWX.X-CC | 700                        | RED           | DIFFUSED        | -                    | -         | 12  | 1.5         | 40                                | 5RD12V  |
| PM5YC12VWX.X-CC | 590                        | YELLOW        | WATER CLEAR     | -                    | -         | 12  | 25          | 35                                | 5YC12V  |
| PM5YD12VWX.X-CC | 590                        | YELLOW        | DIFFUSED        | -                    | -         | 12  | 20          | 40                                | 5YD12V  |

|                                                                                |                   |                          |  |                                                                                          |                |
|--------------------------------------------------------------------------------|-------------------|--------------------------|--|------------------------------------------------------------------------------------------|----------------|
| STANDARD TOLERANCE<br>( UNLESS OTHERWISE SPECIFIED )<br><u>±10% ALL VALUES</u> |                   | ANGULAR<br>X° ± 5°       |  | <div>BIVAR®</div> 4 THOMAS, IRVINE, CA. 92618<br>TEL: (949) 951-8808 FAX: (949) 951-3974 |                |
|                                                                                |                   |                          |  | TITLE:<br>T-1¼ (5mm) PANEL MOUNT ASSEMBLY                                                |                |
| DESIGNED:<br>Dan Beckman                                                       | DATE:<br>06/28/07 | PART NO:<br>PM5XXWX.X-CC |  |                                                                                          | REVISION:<br>J |
| CHECKED:<br>T. Yin                                                             | DATE:<br>06/28/07 | CAGE CODE : 32559        |  | SHEET # 4 OF 4                                                                           |                |
| CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.                                |                   |                          |  |                                                                                          |                |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.