



60-MHz, 32-bit
microcontroller with
ARM7TDMI-S™ core
LPC213x

ARM7-based microcontrollers with two 10-bit ADCs and 10-bit DAC

These powerful yet cost-effective microcontrollers have up to 512 KB of ISP/IAP Flash and up to 32 KB of SRAM. Each has up to two 10-bit A/D converters, a 10-bit D/A converter, two I²C-bus interfaces, and Fast I/O.

Key features

- ▶ 60-MHz, 32-bit ARM7TDMI-S with AHB/APB interfaces
- ▶ Up to 512 KB ISP/IAP Flash
- ▶ Up to 32 KB SRAM
- ▶ Very fast Flash programming via on-chip boot loader software
- ▶ Up to two 10-bit A/D converters (with enhanced features on LPC213x/01 versions)
- ▶ 10-bit D/A converter
- ▶ Multiple serial interfaces: two I²C, two UART, one SPI, and one SSP
- ▶ Two 32-bit timers
- ▶ Real-time clock and Watchdog timer
- ▶ 7 Fast I/O pins (5-V tolerant) with up to 15-MHz switching (LPC213x/01 versions only)
- ▶ Single 3.3-V supply
- ▶ Packages:
 - LQFP64 (10 x 10 x 1.4 mm)
 - HVQFN64 (9 x 9 x 0.85 mm)

Applications

- ▶ Automotive entertainment
- ▶ Connectivity
- ▶ Display
- ▶ Communications gateways and protocol converters
- ▶ Software modems
- ▶ Voice recognition
- ▶ Low-end imaging

The NXP microcontroller family LPC213x uses a high-performance 32-bit ARM7 core that operates at up to 60 MHz. Each device has up to 512 KB of on-chip Flash and up to 32 KB of on-chip SRAM memory.

In-System Programming (ISP) and In-Application Programming (IAP) software minimize programming time – each 256-byte line takes only 1 ms to program,

and a single-sector or full-chip erase takes only 400 ms.

A 128-bit-wide memory interface and a patented memory accelerator enable 32-bit code execution from Flash with zero wait-states. For applications where code size is critical, an alternative 16-bit Thumb mode reduces code by more than 30% with minimal performance penalties.

Each device is equipped with up to two 10-bit A/D converters and a 10-bit D/A converter. The A/D converters have eight channels apiece and, on the LPC213x/01 versions, result registers for each channel.

Multiple serial communications interfaces increase design flexibility, provide larger buffer size, and deliver

higher processing power. There are two 16C550 UARTs, two Fast I²C-bus (400 kbps) interfaces, and two SPI interfaces (one with capabilities for buffering and variable data length).

LPC213x/01 UARTs feature a fractional baud-rate generator, modem control, and auto-bauding.


There are two 32-bit timers (each with four capture and compare channels), a PWM unit with six outputs, a real-time clock, and a Watchdog timer.

For debugging, each device supports real-time emulation and embedded trace support and has an integrated vectored interrupt controller (VIC). Also, for compatibility with existing tools, each device uses the standard ARM test/debug JTAG interface.

The LPC213/01 versions have seven Fast I/O pins (5-V tolerant) with switching up to 15 MHz. For all the devices, the operating temperature range is -40 to 85 °C.

Third-Party Development Tools

Through third-party suppliers, we offer a range of development tools for our microcontrollers. For the most current listing, please visit www.nxp.com/microcontrollers.

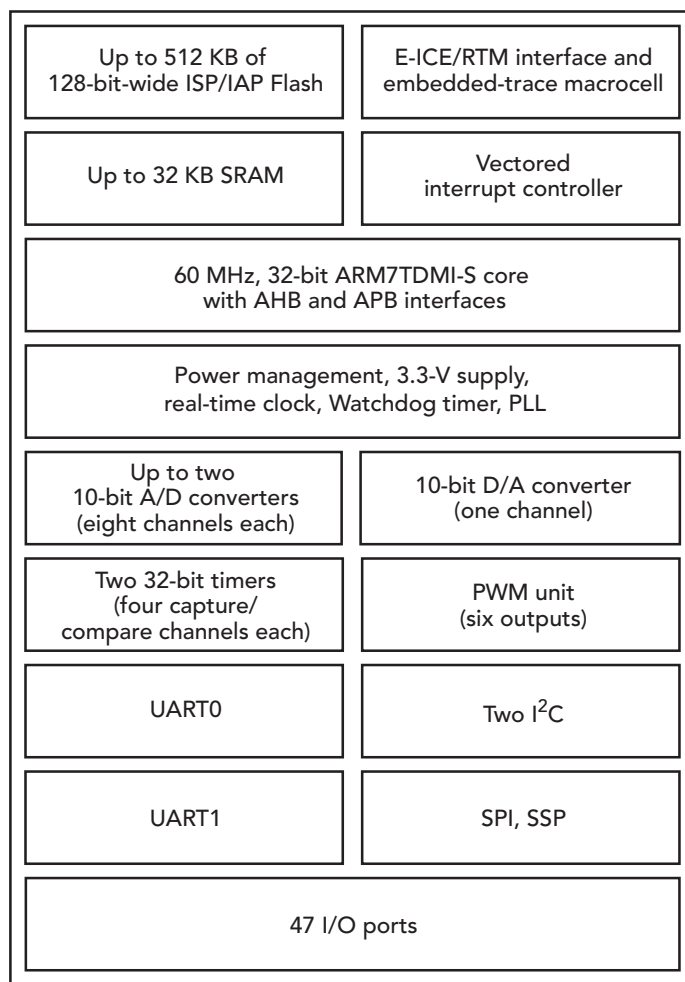

LPC213x block diagram

LPC213x selection guide

Type	Memory		Serial interfaces			ADC/DAC options		Enhanced UARTs, ADC, Fast I/Os, and BOD	Packages
	Flash (KB)	SRAM (KB)	I ² C	UART	SPI and SSP	ADC channels (10-bit)	DAC channels (10-bit)		
LPC2131	32	8	2	2	1	8			LQFP64
LPC2131/01	32	8	2	2	1	8		•	LQFP64
LPC2132	64	16	2	2	1	8	1		LQFP64, HVQFN64
LPC2132/01	64	16	2	2	1	8	1	•	LQFP64, HVQFN64
LPC2134	128	16	2	2	1	16	1		LQFP64
LPC2134/01	128	16	2	2	1	16	1	•	LQFP64
LPC2136	256	32	2	2	1	16	1		LQFP64
LPC2136/01	256	32	2	2	1	16	1	•	LQFP64
LPC2138	512	32	2	2	1	16	1		LQFP64, HVQFN64
LPC2138/01	512	32	2	2	1	16	1	•	LQFP64, HVQFN64

www.nxp.com



© 2007 NXP N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: January 2007

Document order number: 9397 750 15815

Printed in the USA



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.