


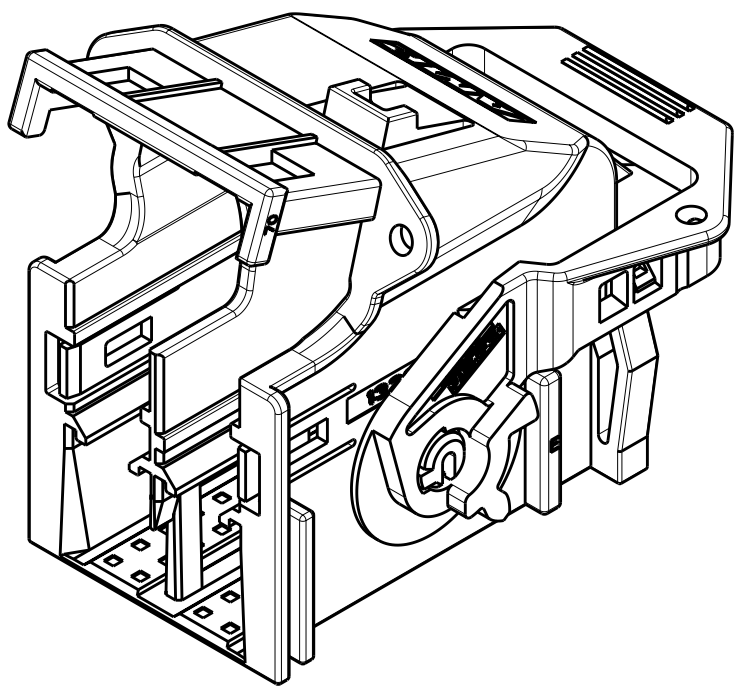
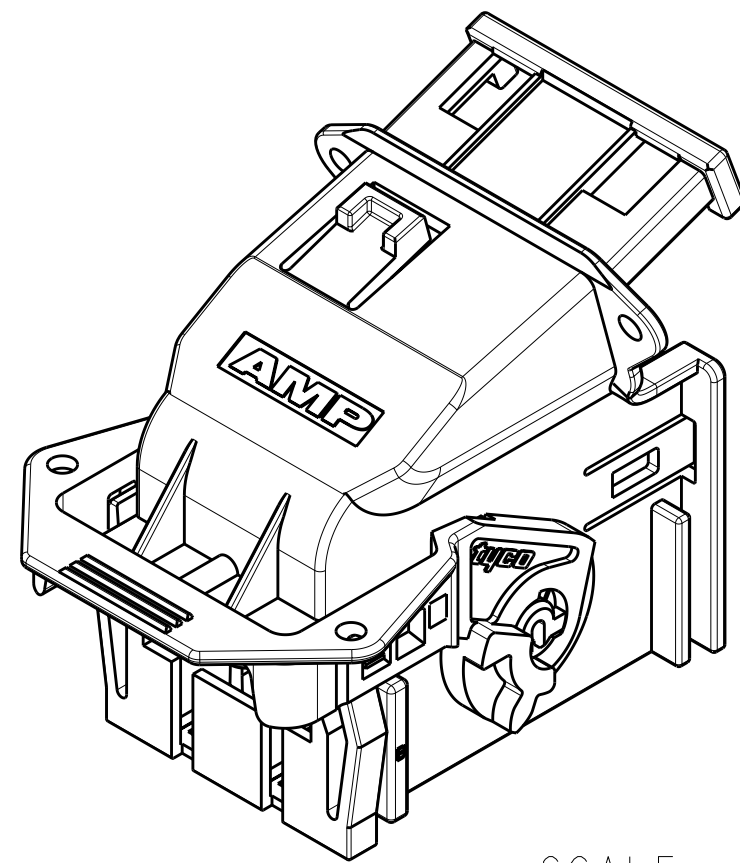
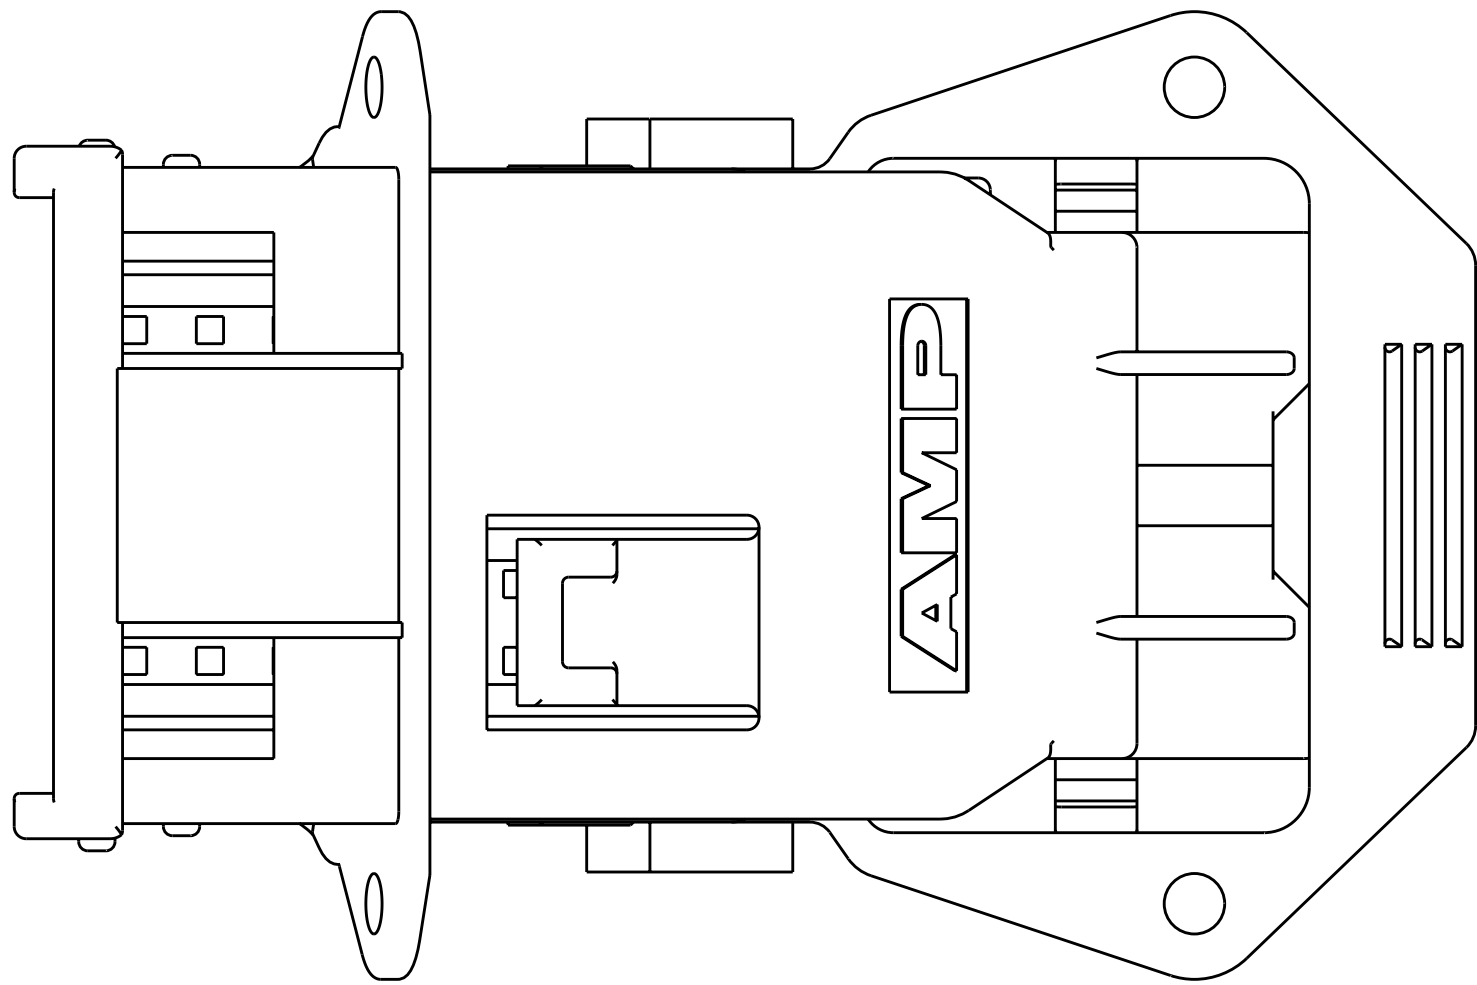


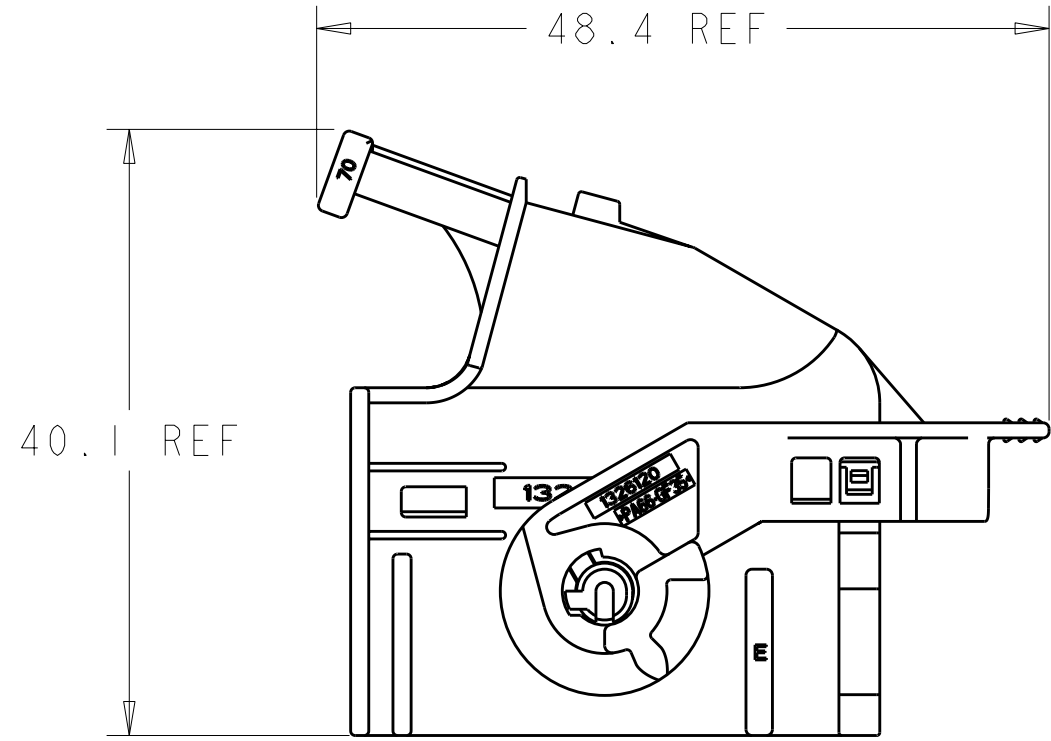


SCALE 2:1

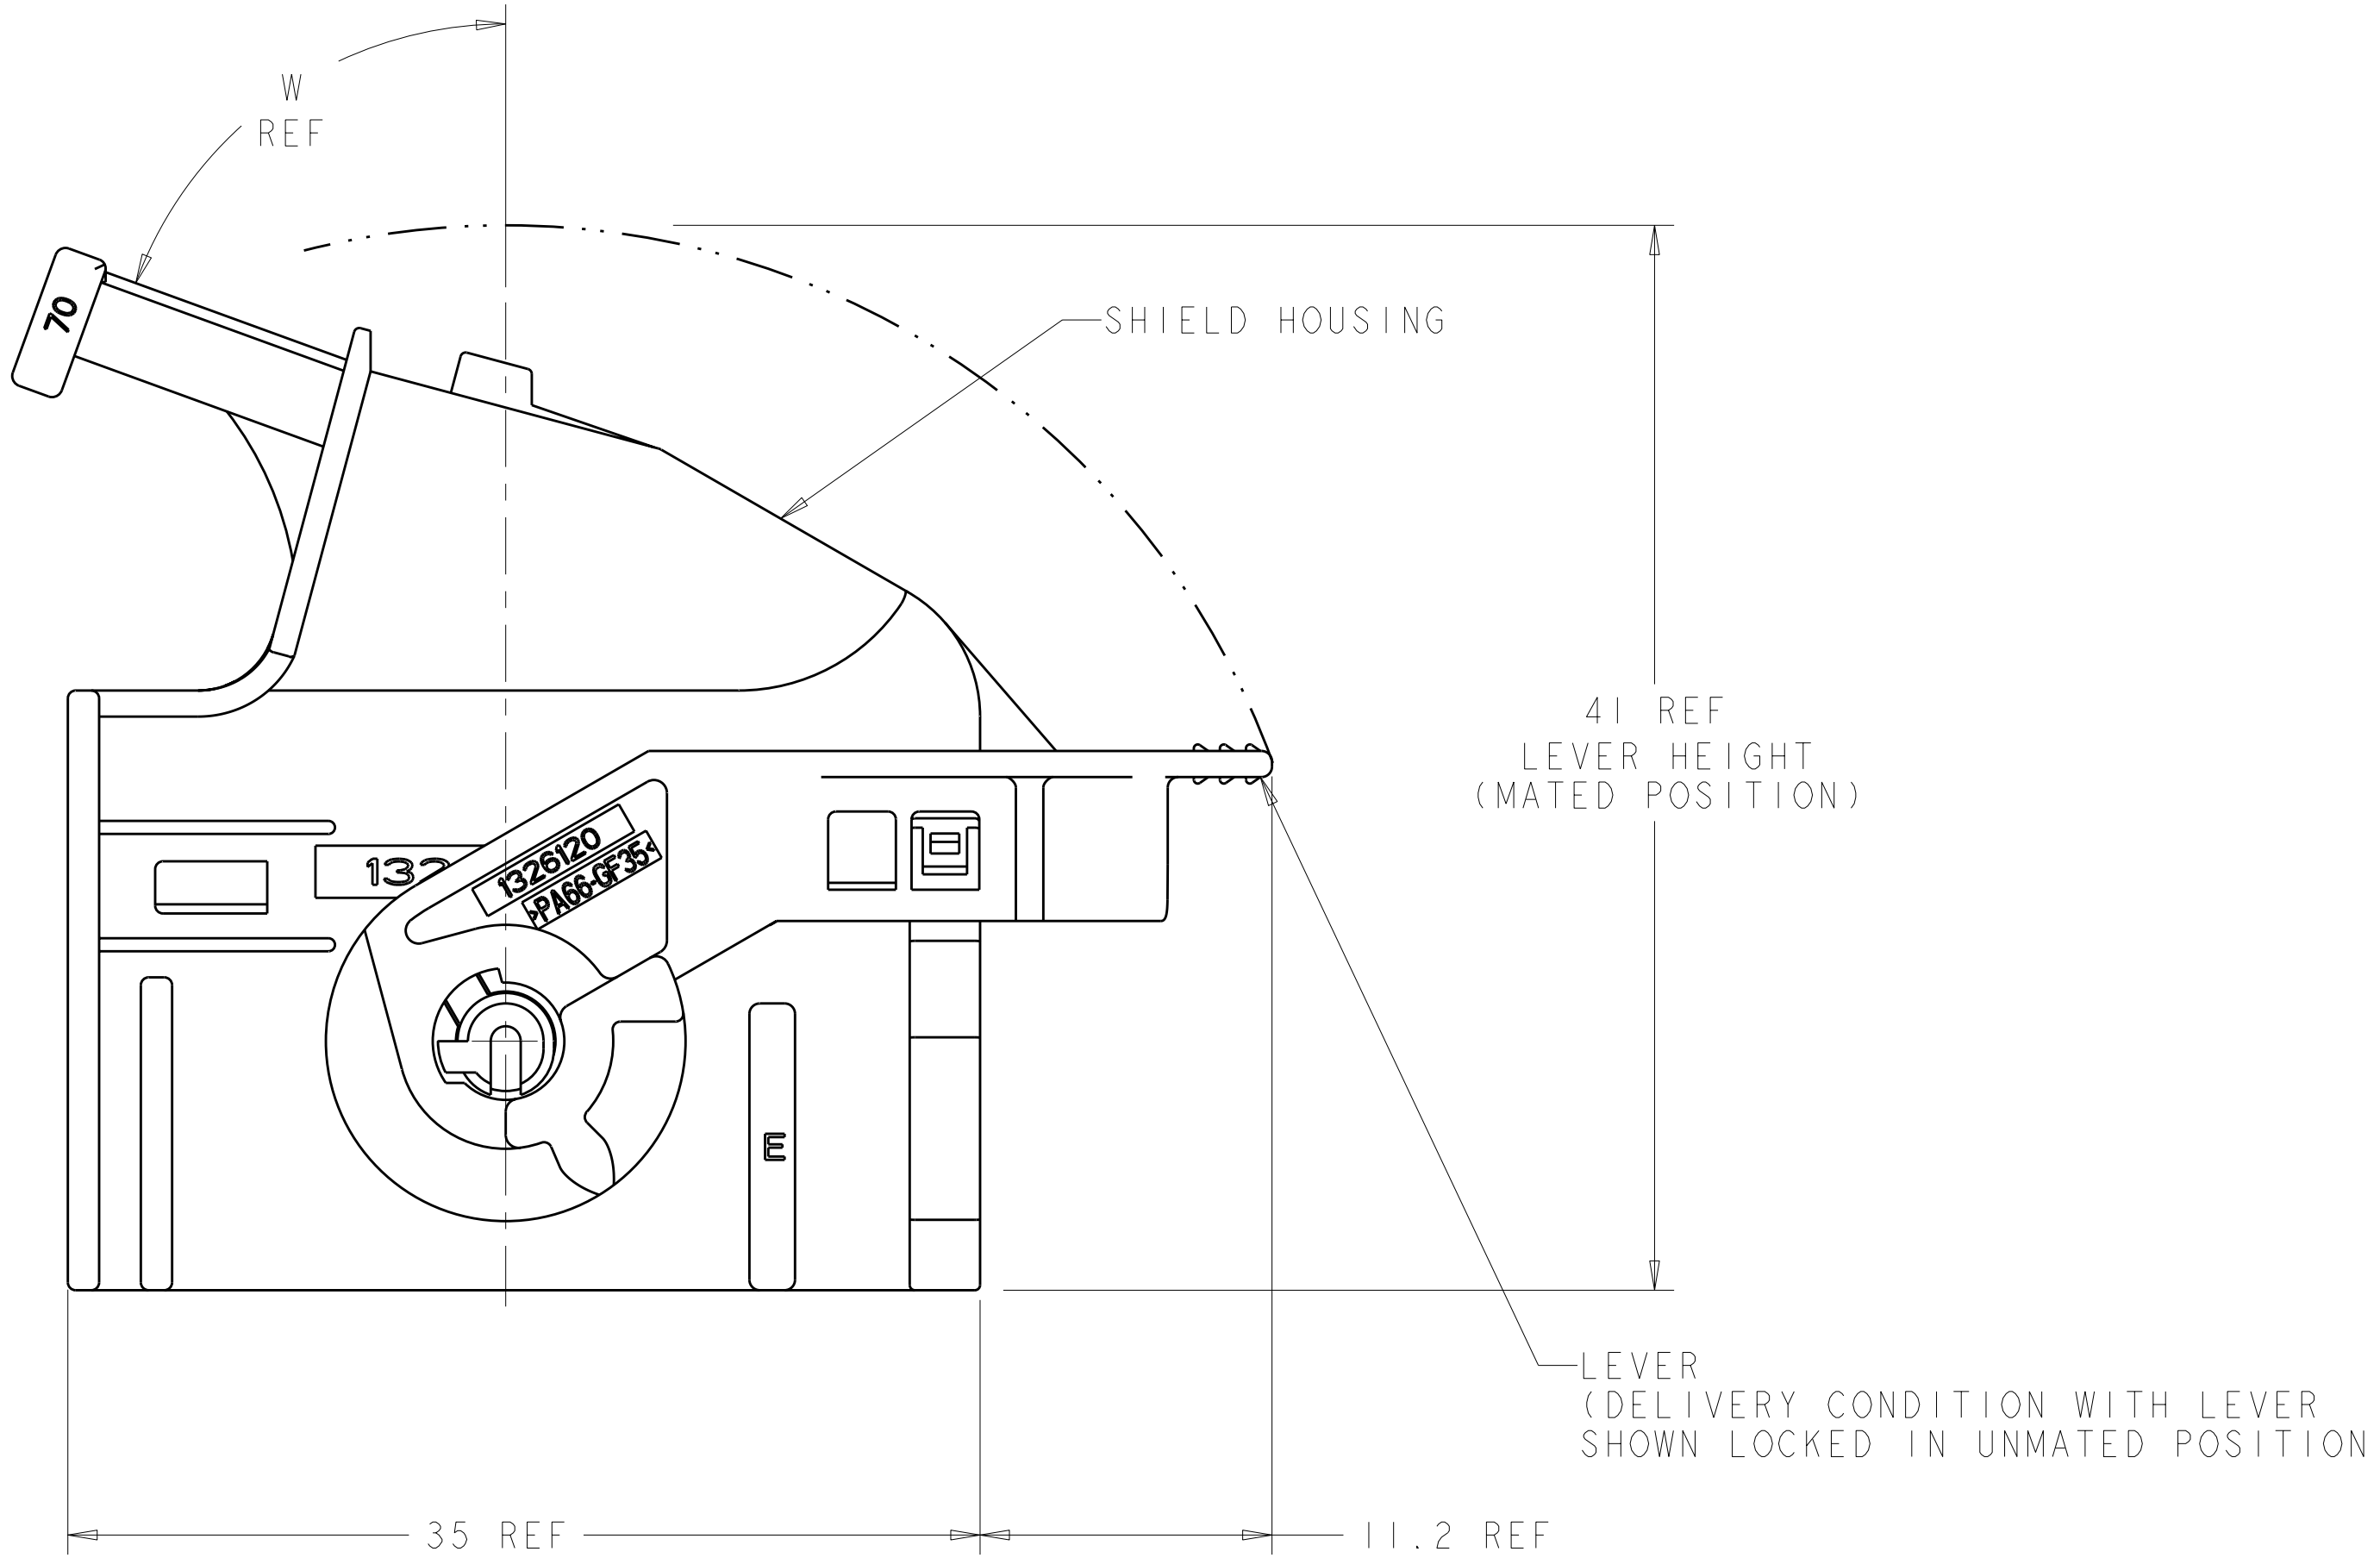


SCALE 2:1

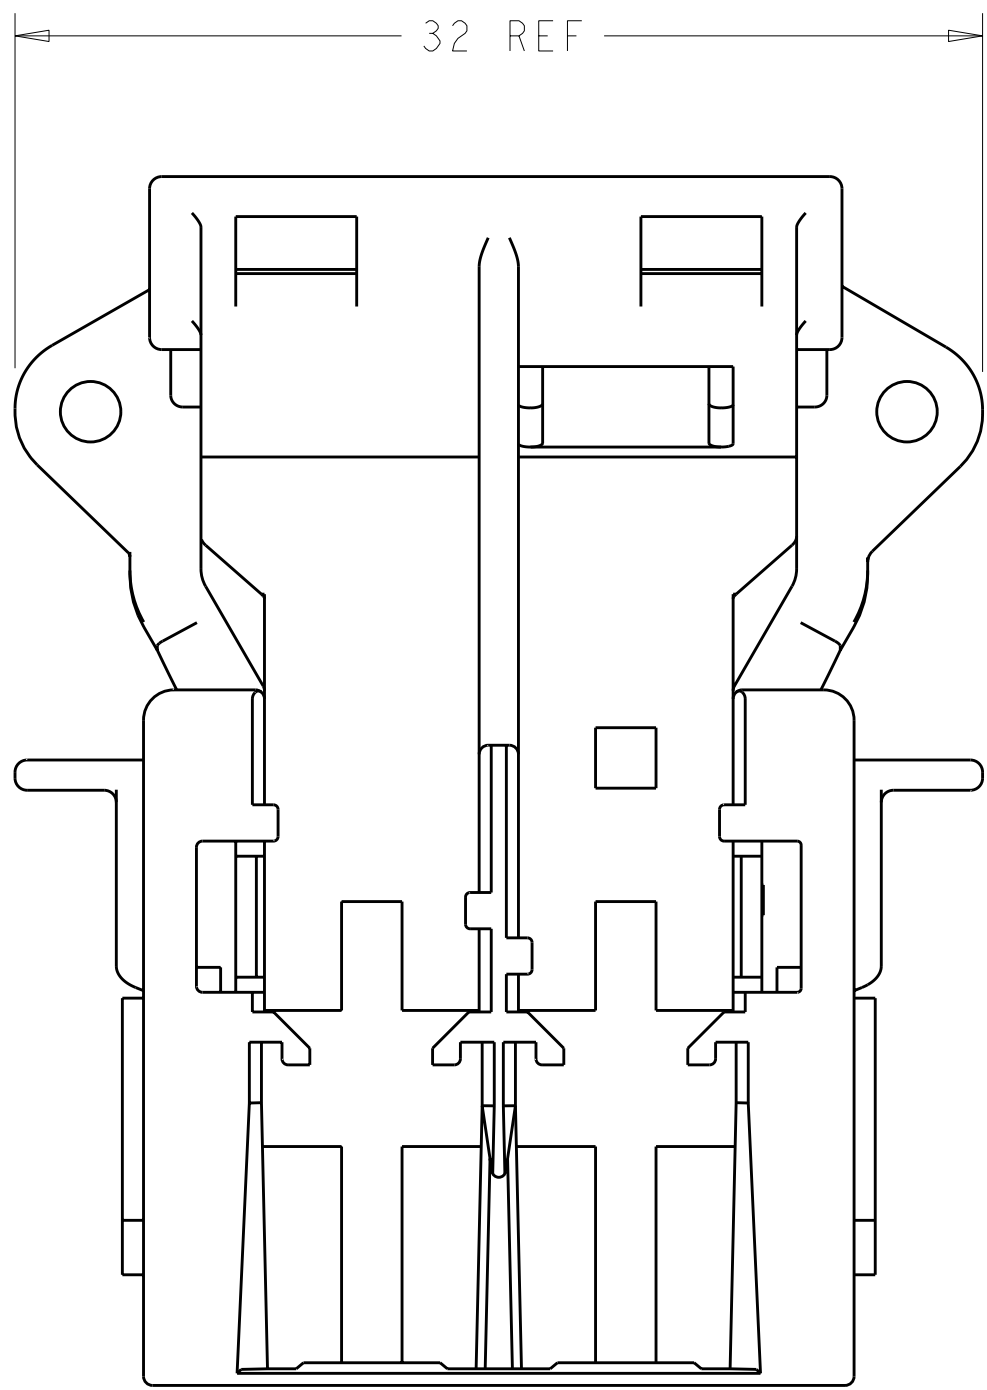


70° WIRE EXIT
SCALE 2:1

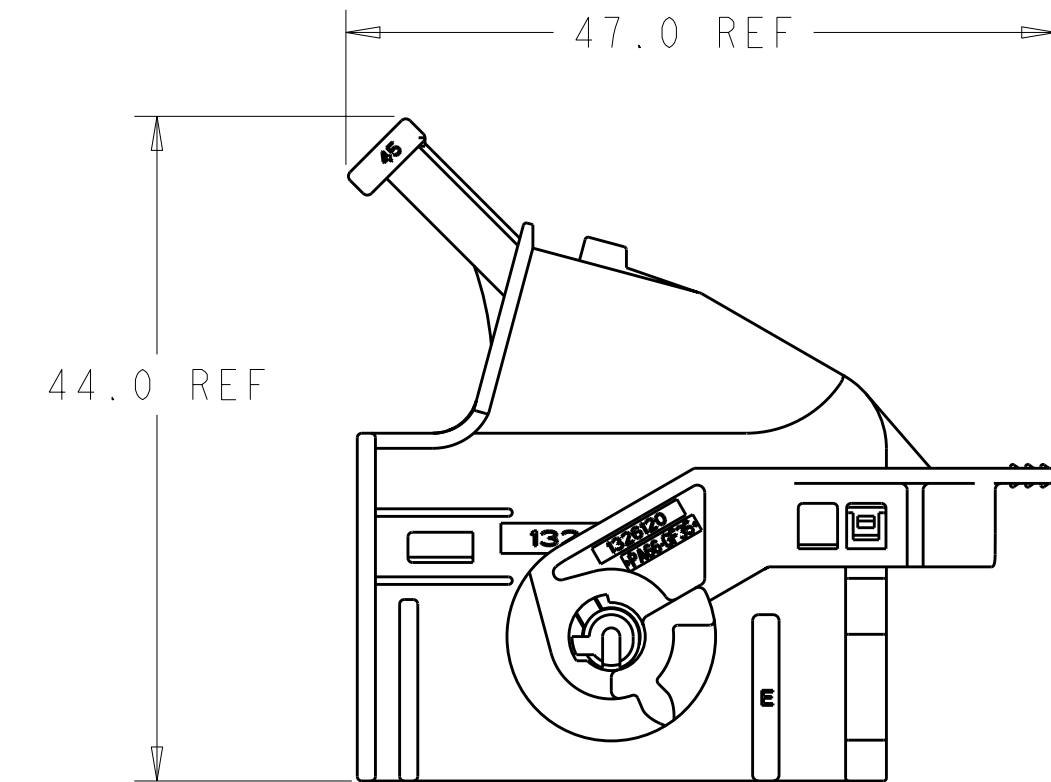


45° WIRE EXIT
SCALE 2:1

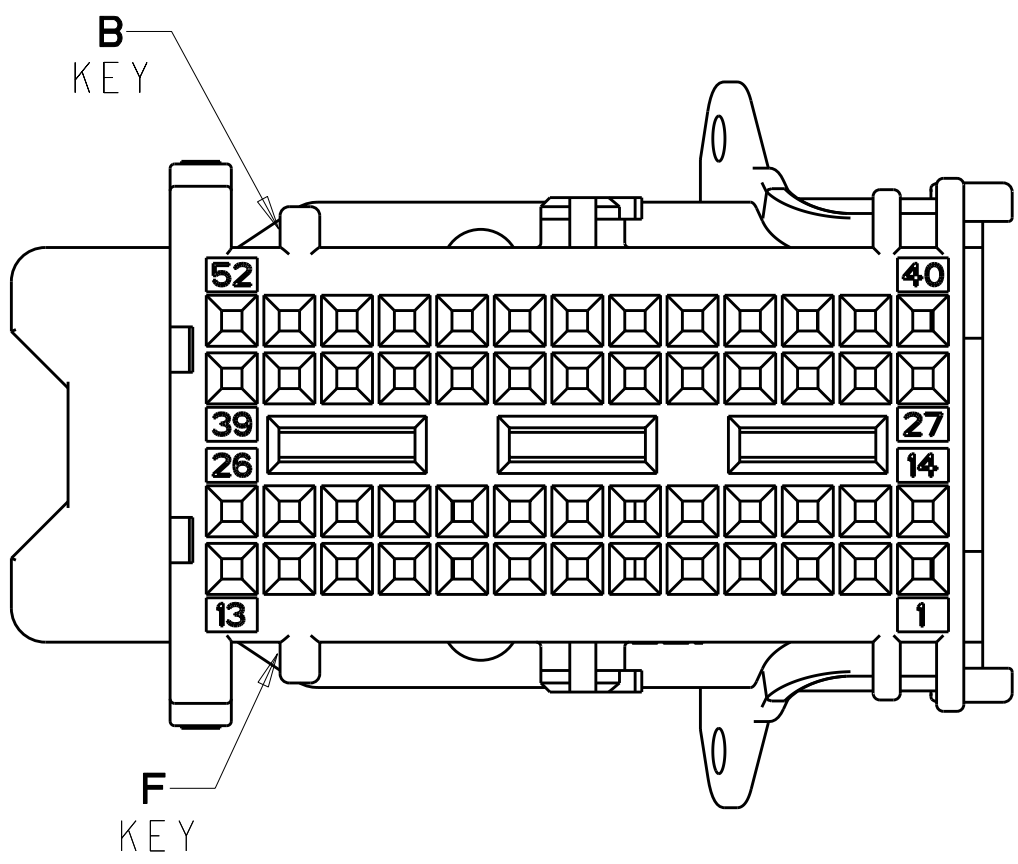

KEY B-F SHOWN FOR
ASSEMBLY 1326122-3
& 1326122-6

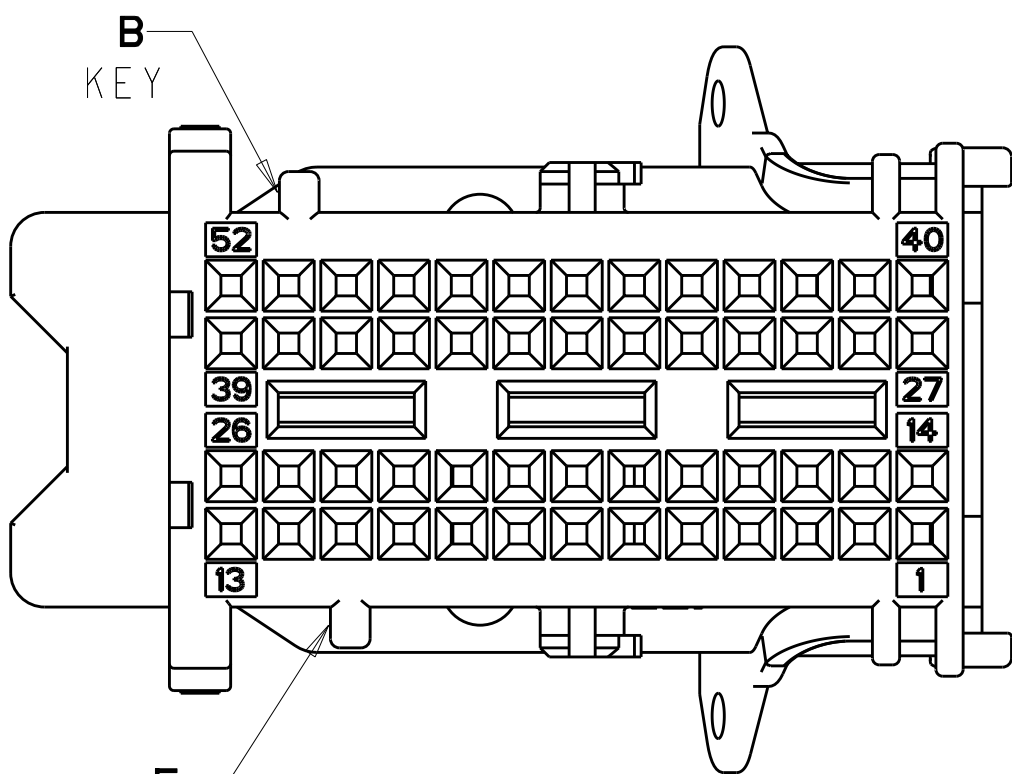

KEY B-E SHOWN FOR
ASSEMBLY 1326122-2
& 1326122-5

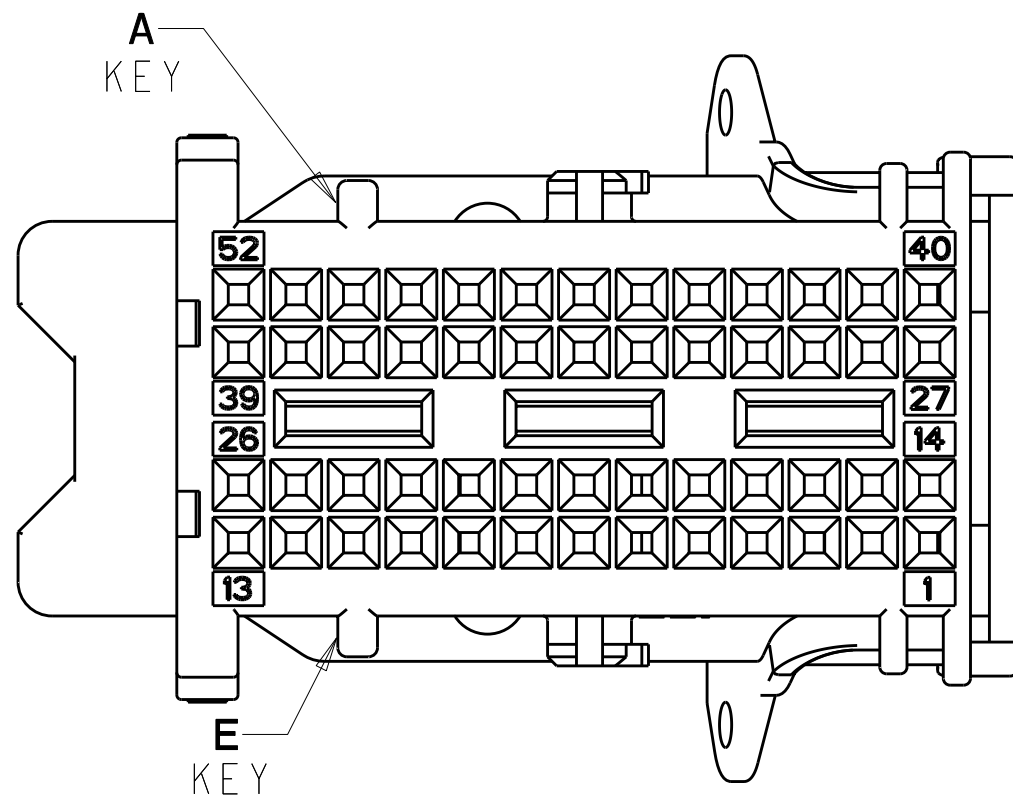



KEY A-E SHOWN FOR
ASSEMBLY 1326122-1
& 1326122-4

- 1 MATERIAL: SHIELD - 35% GLASS REINFORCED NYLON.
SEE TABLE BELOW FOR COLOR.
LEVER - 35% GLASS REINFORCED NYLON.
COLOR: DARK GREY.
- 2 ANTI-SCOOPING FEATURE OPTIONAL CONSTRUCTION.
3. REFERENCE: RECEPTACLE HOUSING, 1326042-1 & 1326042-2,
USED WITH THIS ASSEMBLY.
4. REFERENCE: INTERFACE DETAIL PER DRAWING NO.
AUAUTO1000-2962-0010 AND TE DRAWING NO. 1438985-GEN.
5. REFER TO INSTRUCTION SHEET 408-8662 FOR PRODUCT ASSEMBLY
AND DISASSEMBLY PROCEDURES.
6. REFER TO USCAR-2 REV 3 APRIL 2001 FOR PRODUCT SPECIFICATIONS.

LOC		DIST		REVISIONS			
FX	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECO-10-010364	27SEP2010	DLD	CJS
		B1		REVISED PER ECO-11-005947	22MAR2011	DLD	CJS



DIM W	COLOR	KEYING OPT.	PART NUMBER
45°	BLUE	B-F	1326122-6
45°	GRAY	B-E	1326122-5
45°	BLACK	A-E	1326122-4
70°	BLUE	B-F	1326122-3
70°	GRAY	B-E	1326122-2
70°	BLACK	A-E	1326122-1

TYCO ELECTRONICS CORPORATION 1326122-1 TO 1326122-6 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.		DWN T. WOOTEN 07JUL2000 CHK C. MARTIN 07JUL2000 APVD D. KLEIN 07JUL2000		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±.2 1 PLC ±0.2 3 PLC ±0.05 5 PLC ±.1 4 PLC ±.1 ANGLES ±1° FINISH		NAME SHIELD ASSEMBLY, 52 POSITION, LEVER ASSISTED CONNECTOR	
MATERIAL - -		WEIGHT -		SIZE A1	
CUSTOMER DRAWING		APPLICATION SPEC		CAGE CODE 00779	
SCALE 4:1		DRAWING NO. C=1326122		RESTRICTED TO -	
				SHEET 1 OF 2	
				REV B1	

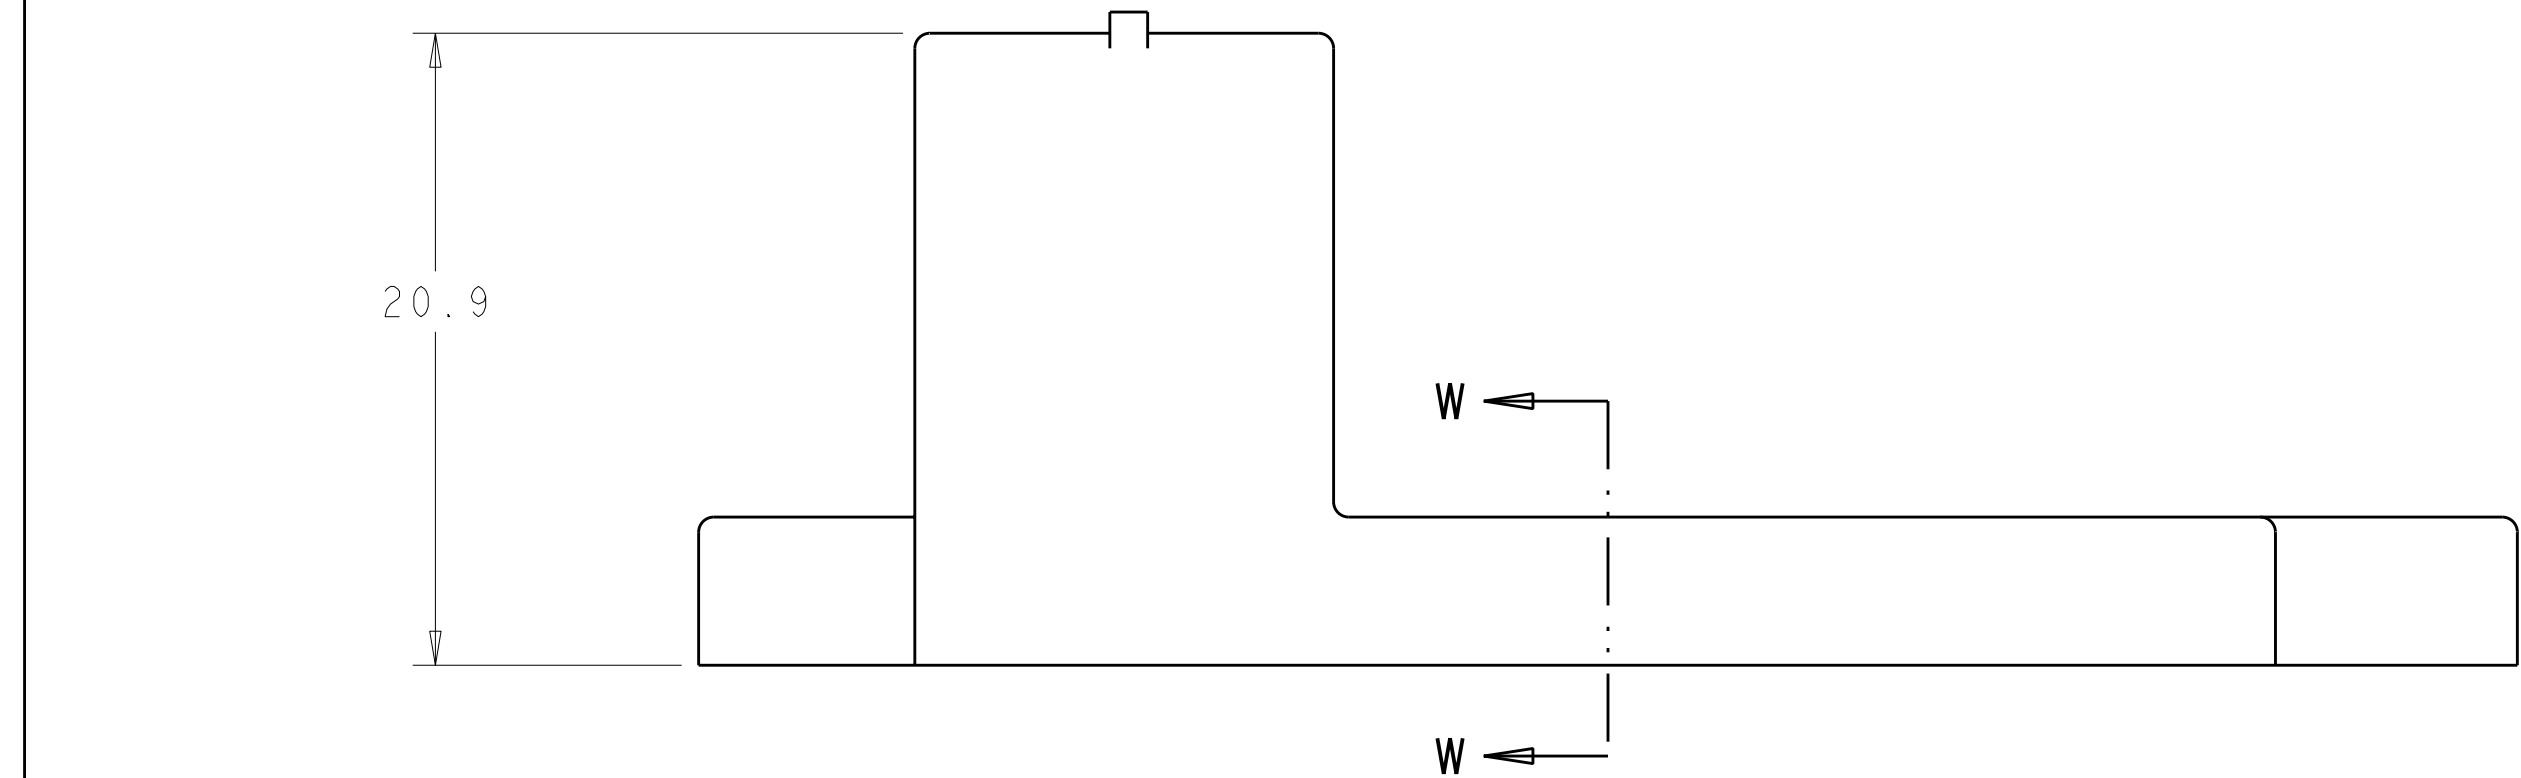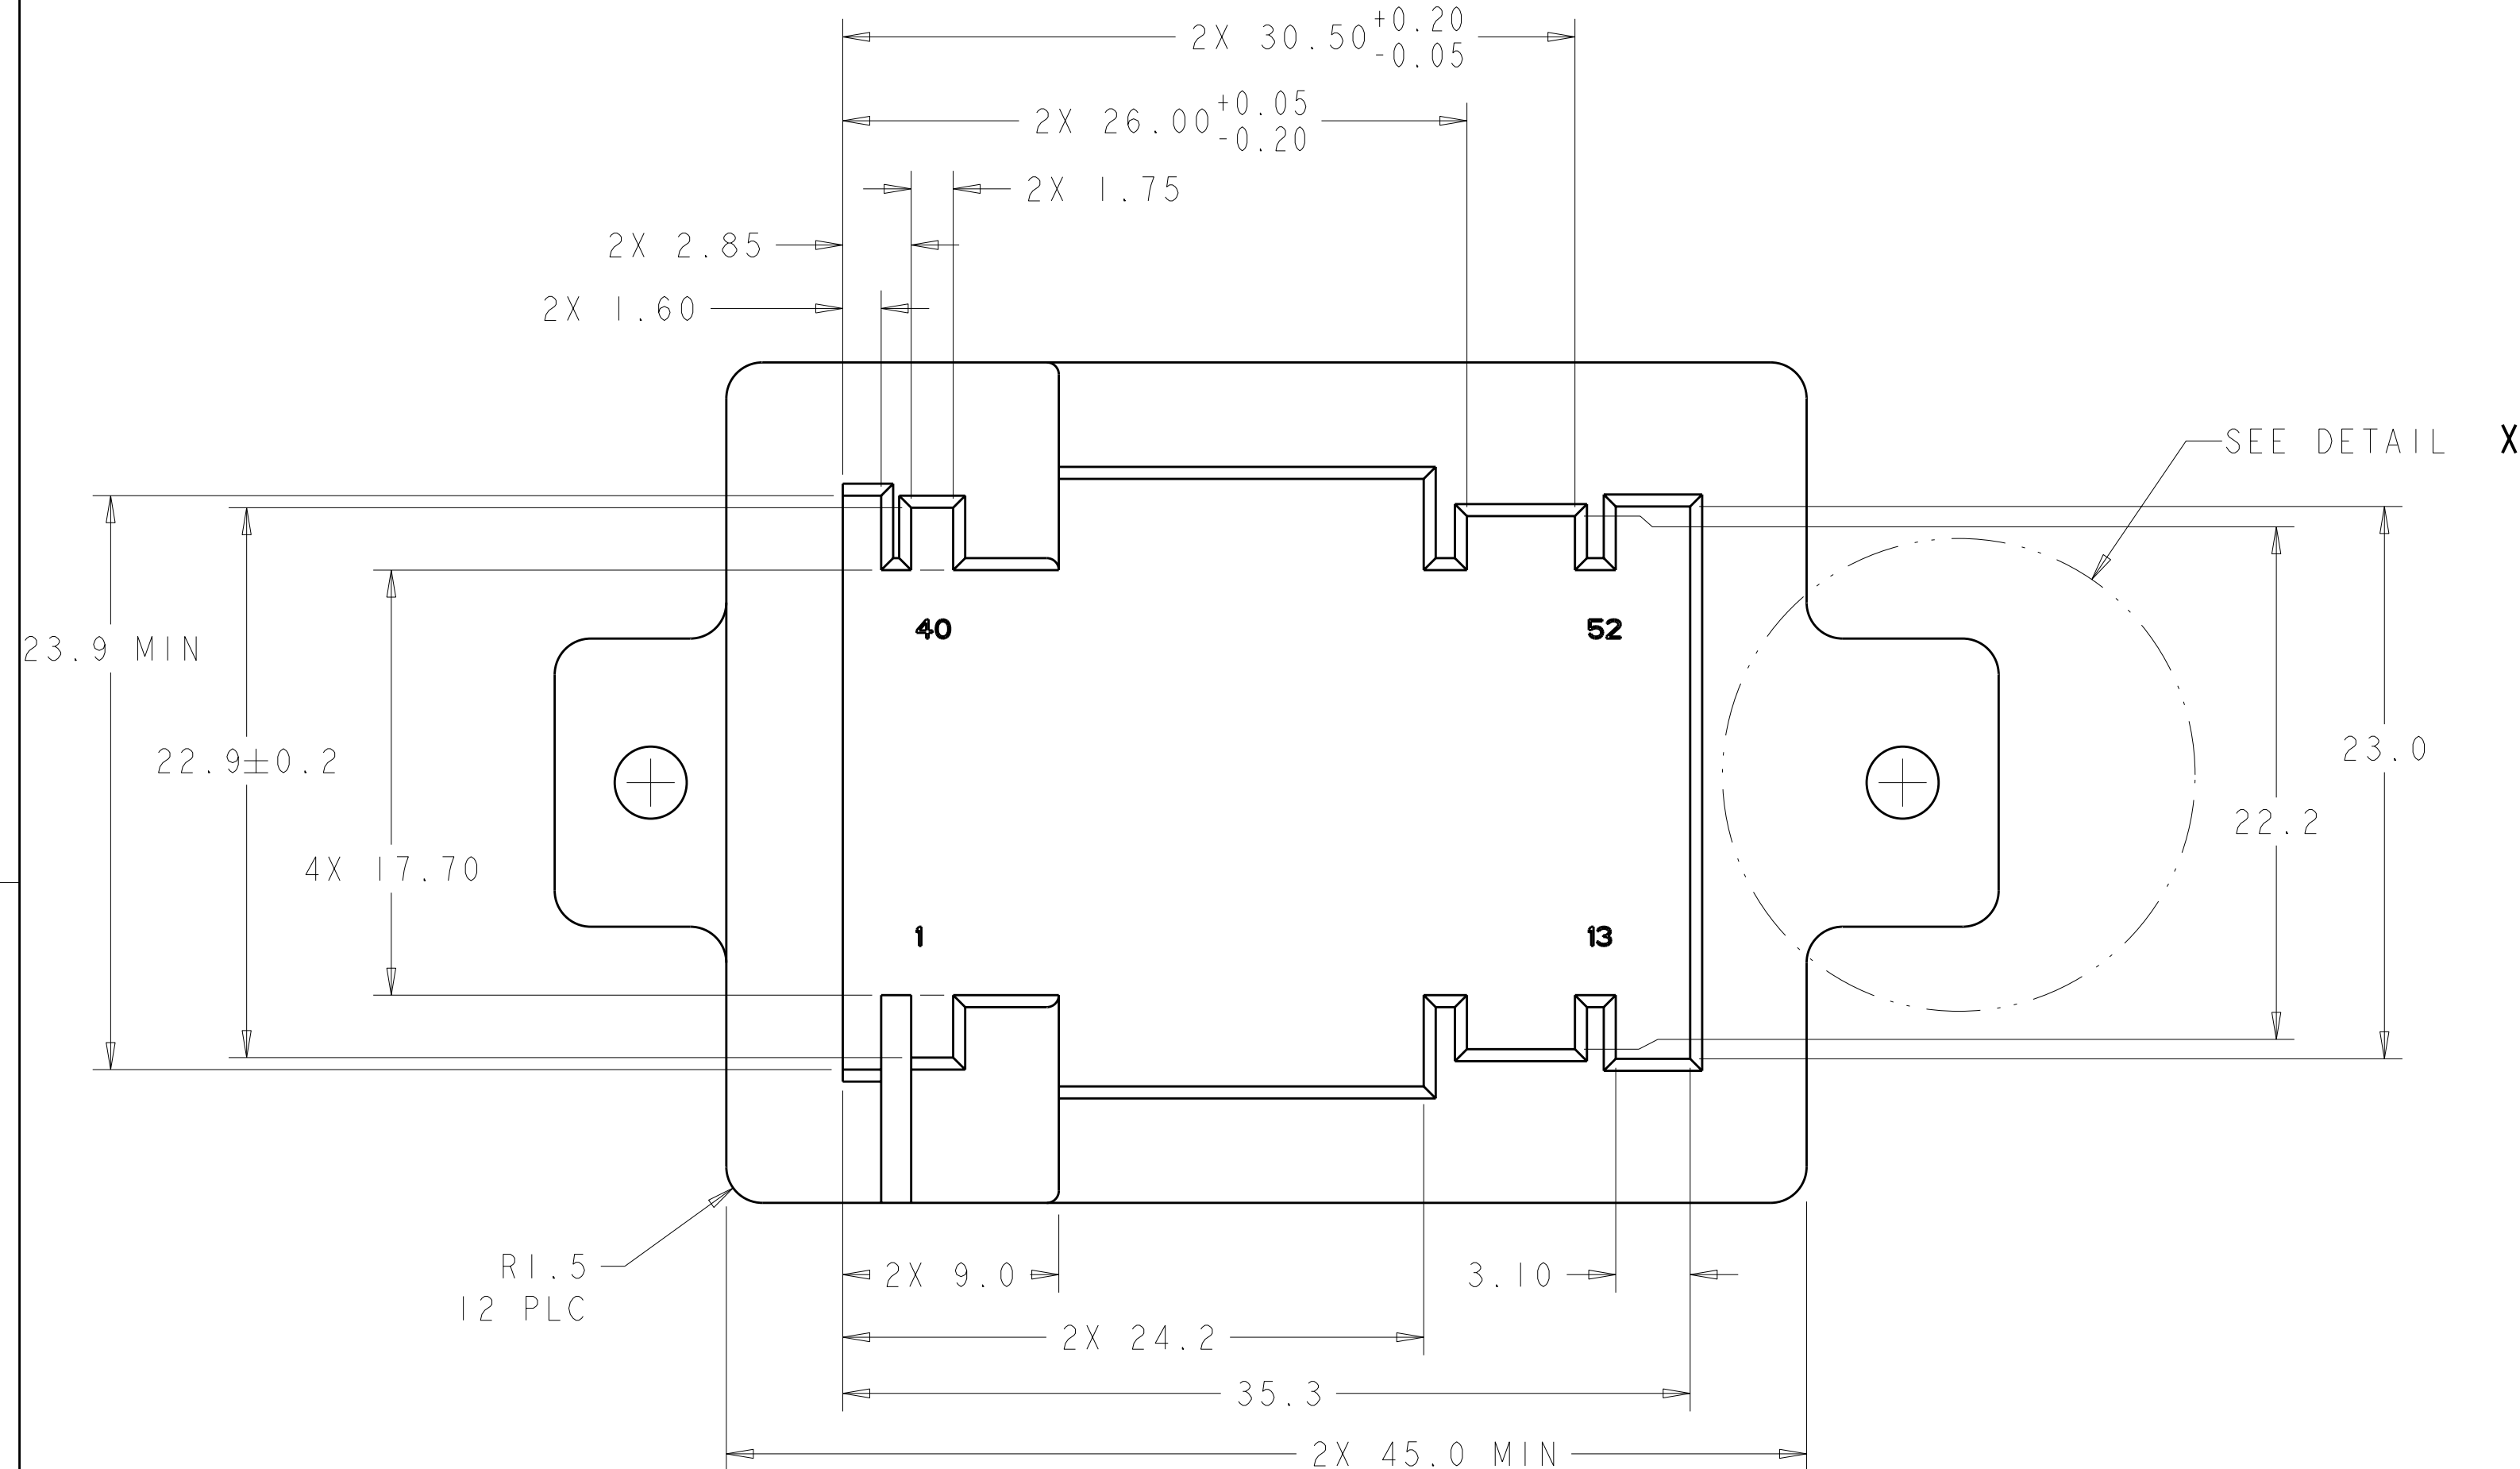


52 POSITION CONNECTOR FIXTURE
(SHOWN WITH CLEARANCE FOR ALL KEY OPTIONS)

- CONNECTOR FIXTURE SHOULD BE USED TO VERIFY THE RECEPTACLE CARRIER IS PROPERLY SEATED AND LOCKED INTO THE SHIELD ASSEMBLY. THE CONNECTOR WILL NOT FULLY MATE TO THE FIXTURE IF THE RECEPTACLE CARRIER IS OUT OF POSITION.
- RECOMMEND USING A SENSING DEVICE FOR VERIFYING FULLY MATED CONNECTORS. SUCH A DEVICE IS AT THE CUSTOMERS DISCUSSION.
- RECOMMENDED MATERIAL: HARDENED STEEL
- NO RADII OR CHAMFER PERMITTED IN SPECIFIED AREA. MUST MAINTAIN 90° EDGE.
- RADII TO BE 0.5 UNLESS OTHERWISE SPECIFIED.
- OPTIONAL CONSTRAINT FEATURE.


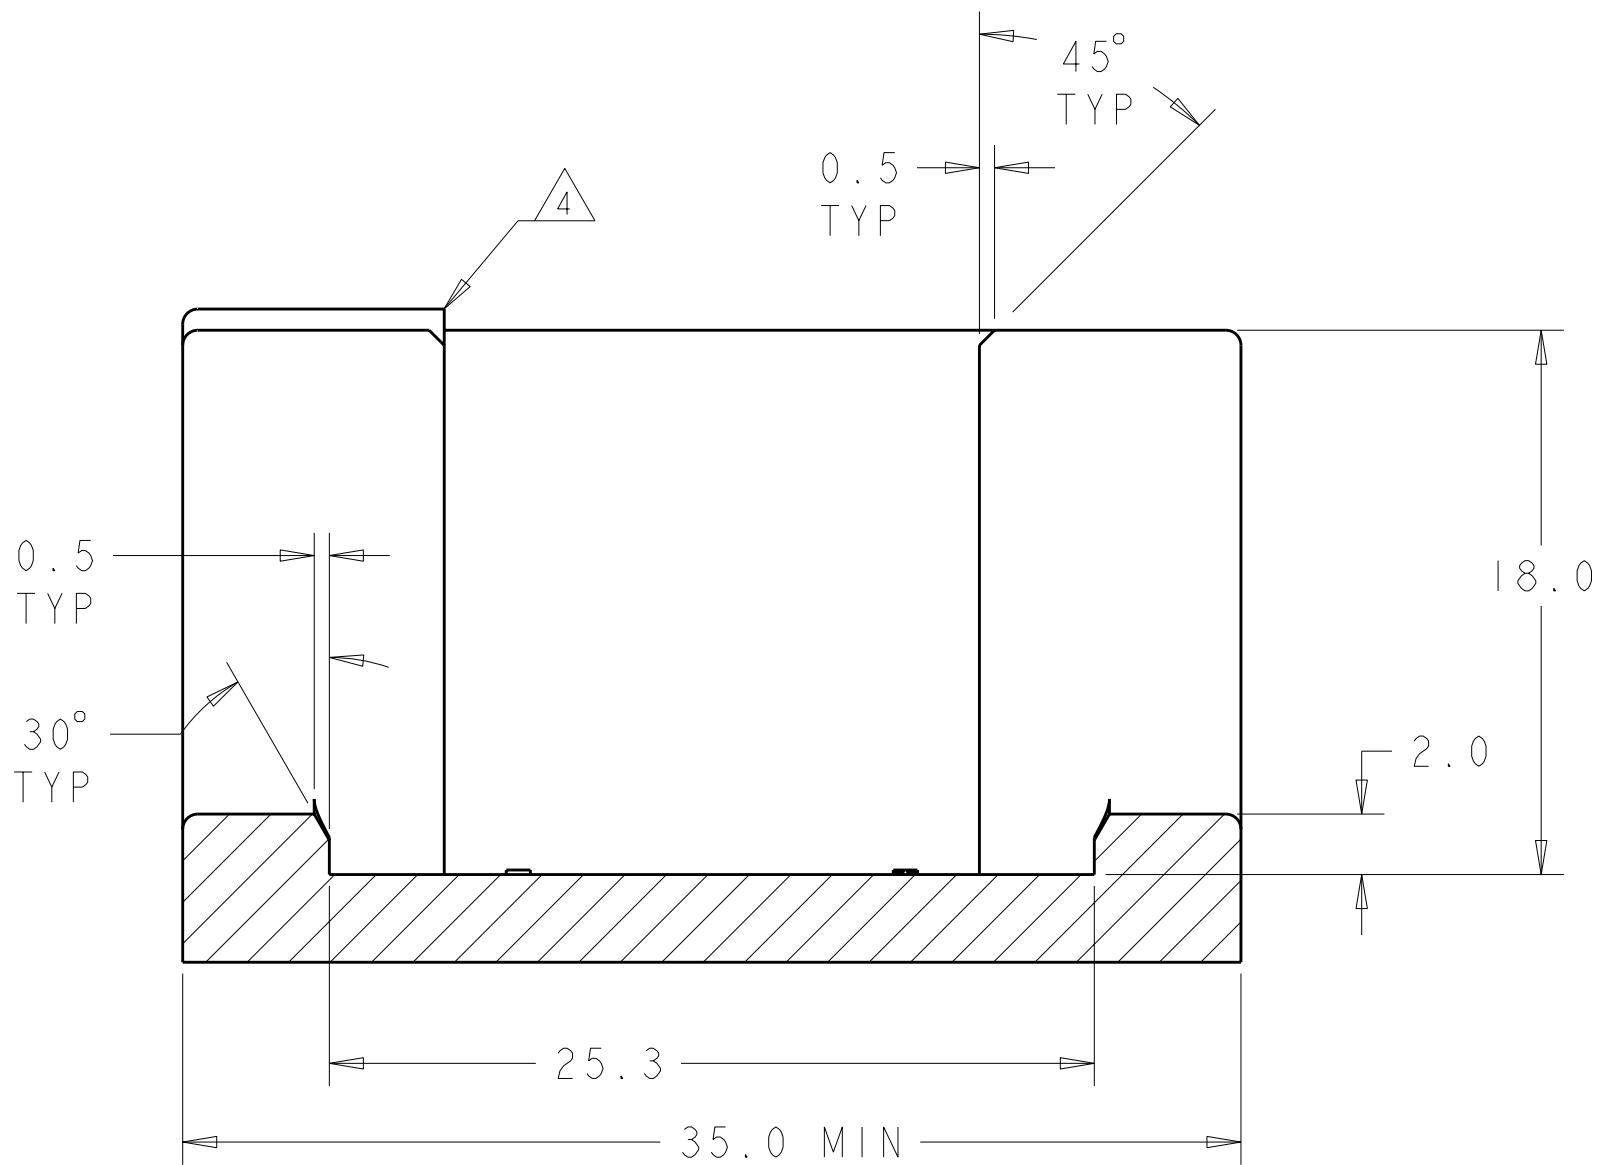
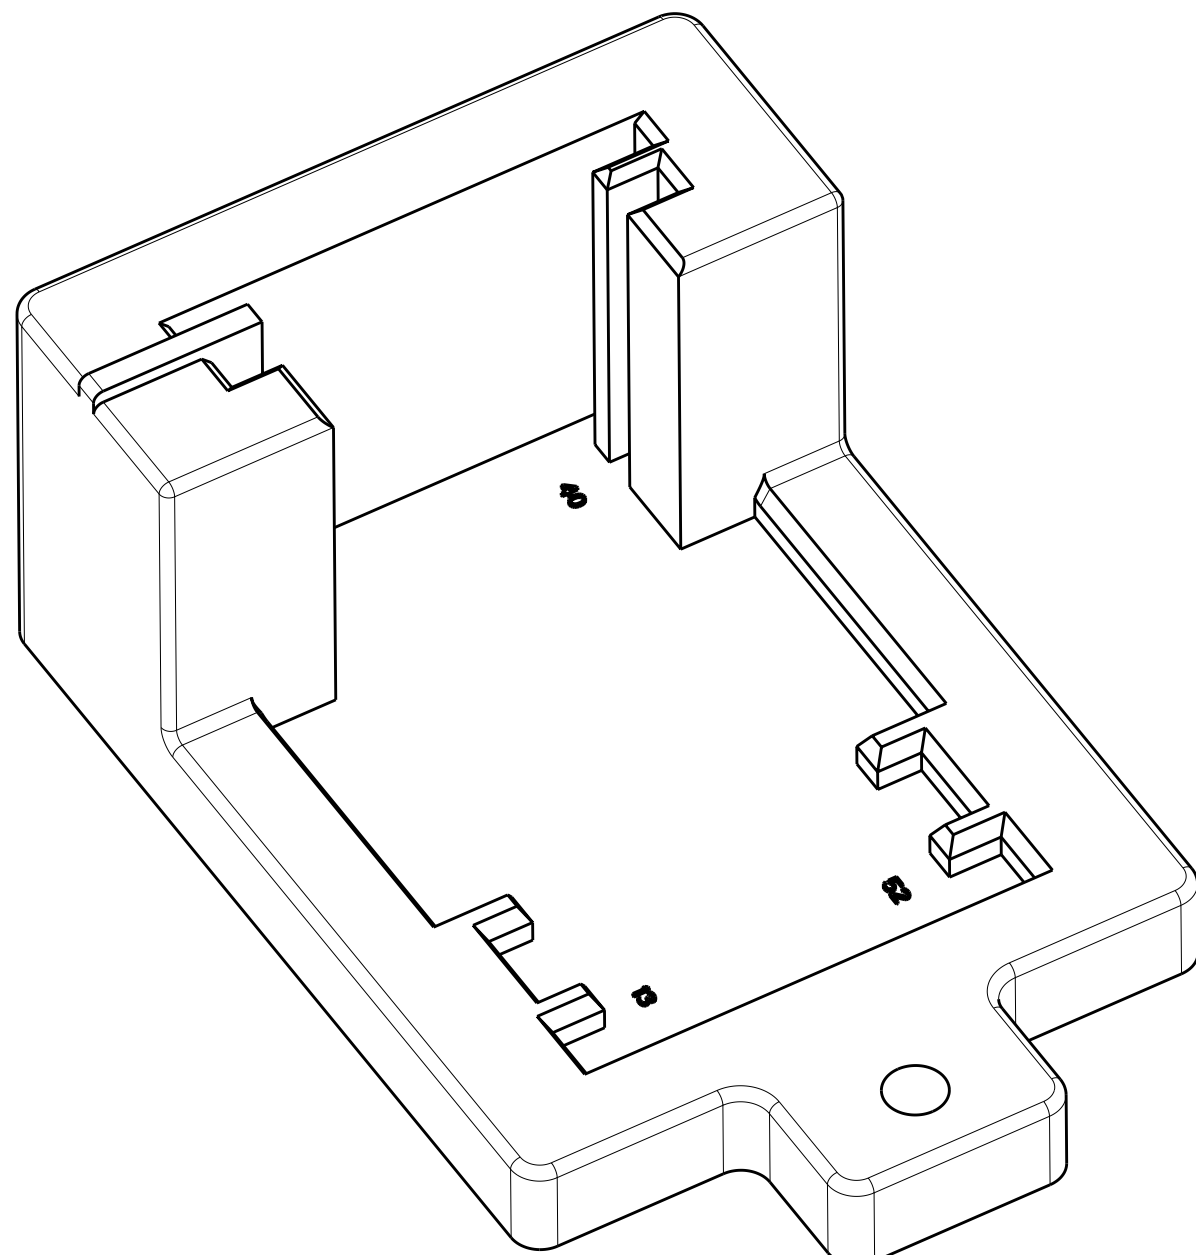


SECTION W-W

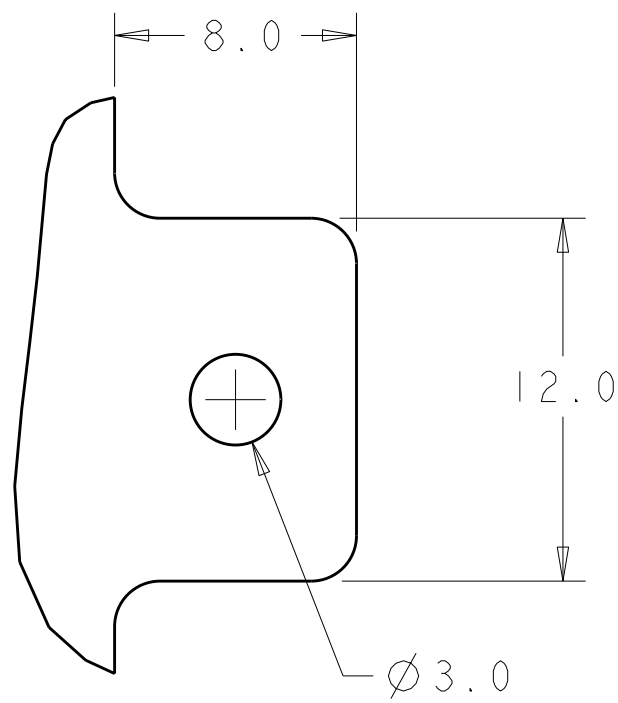

DETAIL X
SCALE 4:1

LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

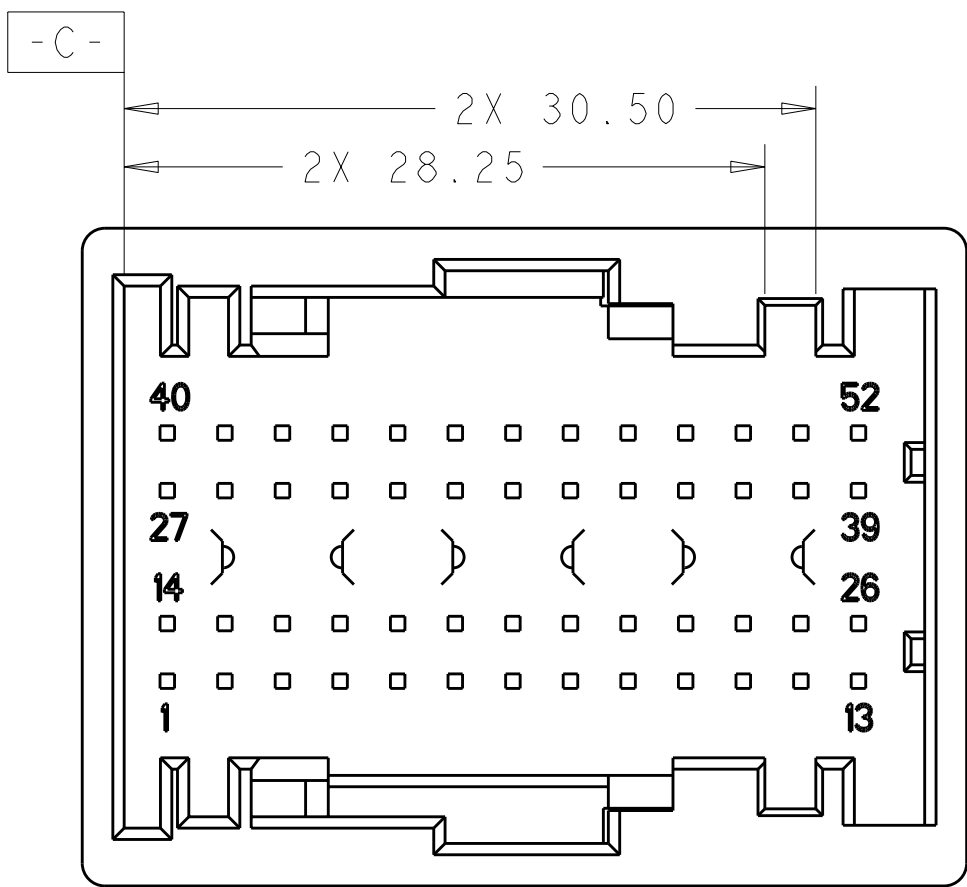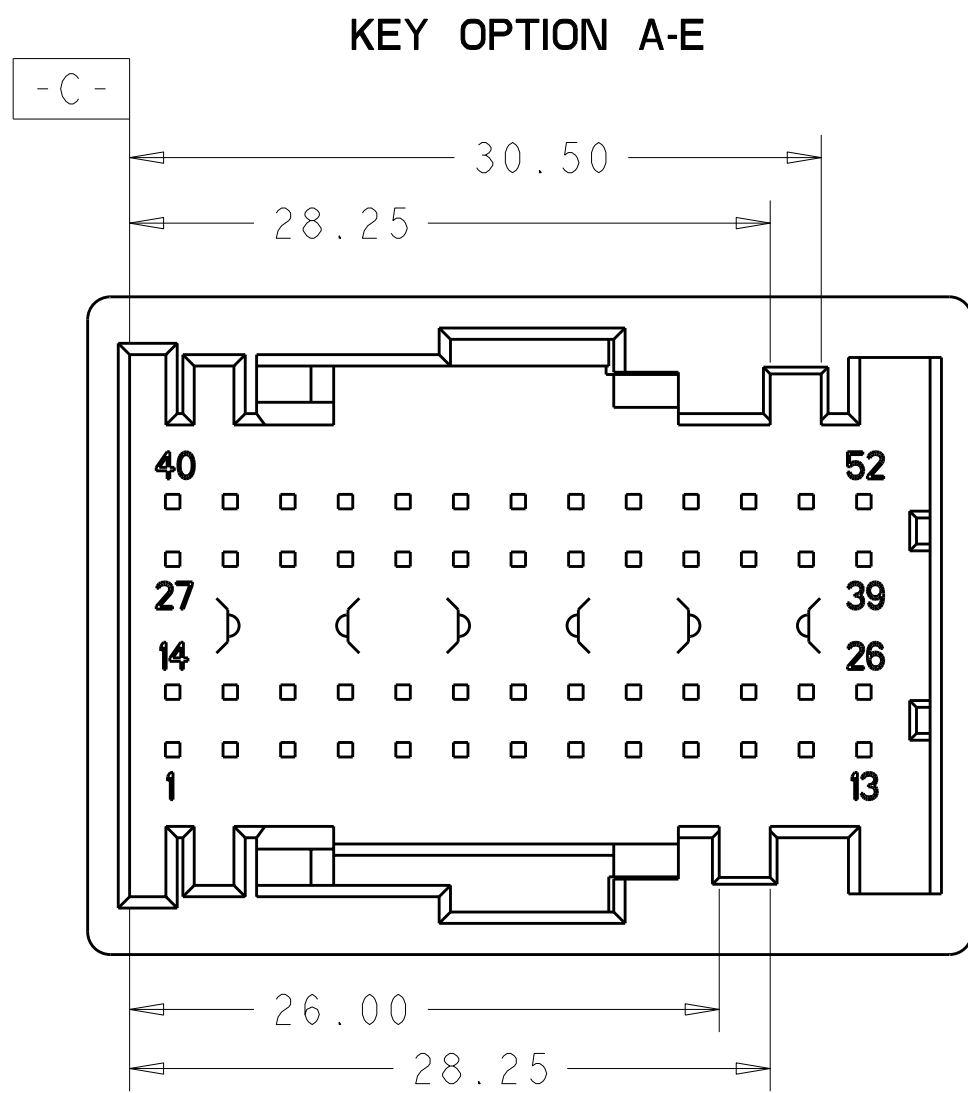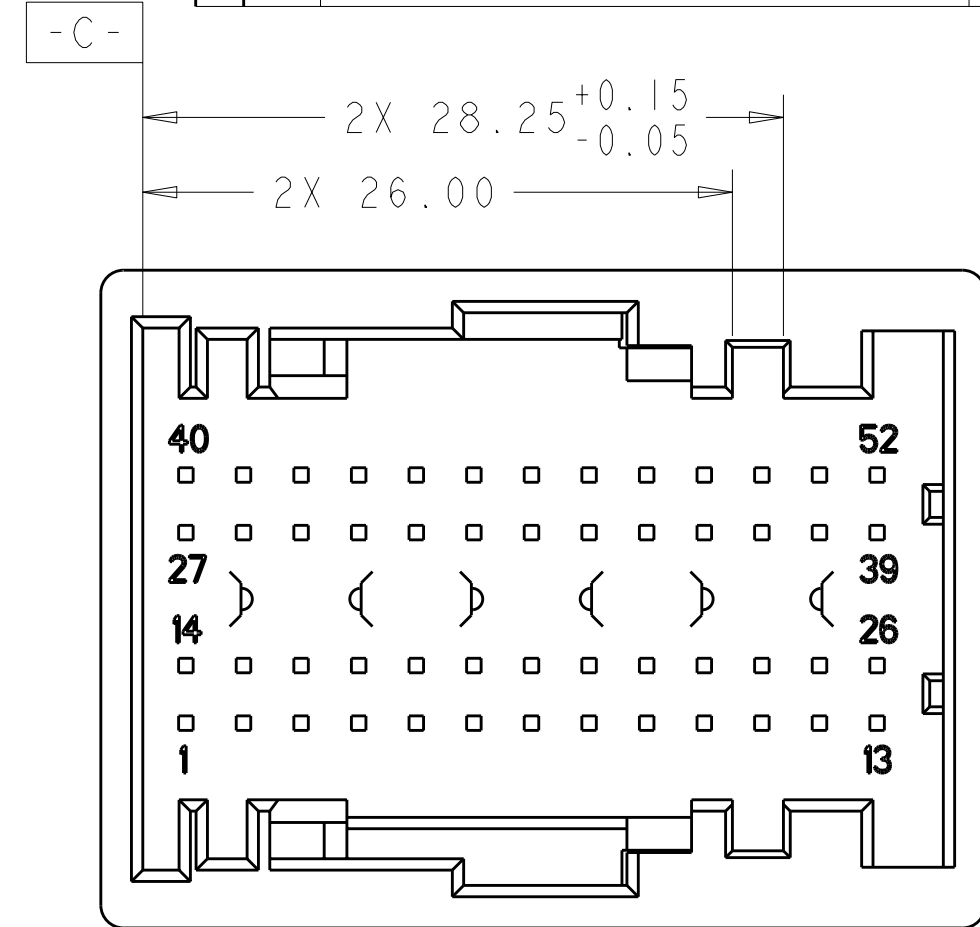

KEY OPTION B-F

KEYING OPTIONS

THIS DRAWING IS UNPUBLISHED. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE DRAWING. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION, NO PART OF THIS DRAWING MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.				DWN	T. WOOTEN	07JUL2000	Tyco Electronics Harrisburg, PA 17105-3608	
				CHK	C. MARTIN	07JUL2000		
				APVD	D. KLEIN	07JUL2000	NAME	
				PRODUCT SPEC			SHIELD ASSEMBLY, 52 POSITION, LEVER ASSISTED CONNECTOR	
				APPLICATION SPEC			SIZE	
				WEIGHT			A1 00779 C=1326122	
				CUSTOMER DRAWING			SCALE 4:1 SHEET 2 OF 2 REV B1	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.