

DIGITAL SIGNATURE TRANSPONDER WITH INTEGRATED DST80 AUTHENTICATION, EEPROM, AND LF IMMOBILIZER

Check for Samples: [TMS37145](#)

FEATURES

- **Low-Frequency (LF) Immobilizer Interface**
 - 75-Byte EEPROM
 - 80-Bit DST80 Security Authentication Coprocessor
 - Integrated Batteryless Immobilizer Interface
 - Half Duplex (HDX) Immobilizer Communication Achieves up to 4-in (10-cm) Read Range
 - Special Selective Addressing Mode Allows Reliable Learn-In Sequence
 - 80-Bit Authentication Key Length
 - Up to 8-kbit/s Uplink Data Rate
 - 5-/3-Byte Challenge/Response Algorithm
 - Fast Authentication Within 42 ms
- **Fast Mutual Authentication Within 65 ms**
- **75-Byte EEPROM**
 - 48-Byte Available EEPROM User Memory
 - 32-Bit Unique Serial Number
 - High EEPROM Security and Flexibility
 - Write-Only Authentication Keys
 - Pages Are Irreversibly Lockable and Protectable
 - Protected Pages Programmable Only Through Mutual Authentication
- **Each User Page is Lockable**
- **Resonant Frequency: 134.2 kHz**

DESCRIPTION

This new generation of security RFID transponder provides the highest level of security with its integrated 80-bit encryption algorithm. The 5-byte challenge and 3-byte response algorithm is backward compatible with existing TI products and provides, together with the burst length coding, short encryption telegram times.

The DST80 offers 65 bytes of free programmable user data stored in nine pages, each of them lockable for programming. Each of the two 80-bit encryption keys with can be programmed with a single telegram.

The DST80 comes in two versions, preprogrammed with either PWM or PPM communication formats, eliminating the need for the user to change this field.

Ordering Information⁽¹⁾

T _A	PACKAGE ⁽²⁾	COMMUNICATION FORMAT	ORDERABLE PART NUMBER
-40°C to 85°C	Wedge	PWM	TMS37145TEAIE
		PPM	TMS37145TEAIEG

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

(2) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

WEDGE PACKAGE



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2012, Texas Instruments Incorporated

Operating Characteristics


Part Number		TMS37145TEAIE, TMS37145TEAIEG	
Features		Immobilizer plus microcontroller with integrated power management	
DST80 authentication logic		80-bit key length, 4-byte or 5-byte challenge, 3-byte signature	
DST80 encryption time		Mutual authentication: 65 ms Fast authentication: 42 ms	
Transponder			
Transmission principle		HDX (half duplex telegram protocol)	
Operating frequency		134.2 kHz Integrated resonant frequency trimming capability via LF or test interface	
Security		Challenge/response, mutual authentication	
Downlink		100% AM, PPM bit coding with 2 kbit/s (typ)	
Uplink		FSK modulation with 7.9 kbit/s (typ)	
Read time for an encryption		PPM: 60 ms (typ) (including 20-ms charge time)	
Read time for mutual authentication		PPM: 85 ms (typ) (including 20-ms charge time)	
Protocol transmission security		16-bit block check character	
Activation field strength		141.5 dBμA/m	
Minimum required operation Q-factor		30	
EEPROM memory	75 bytes	48-byte free available EEPROM user memory	
		32-bit unique serial number	
		Two 80-bit security keys	
EEPROM endurance		200 000 (min) write-erase cycles (T _A = 25°C)	
Key learn-in		Special selective addressing to provide secure learn-in procedure	
Storage temperature		-40°C to 100°C (175°C for 5 minutes)	
Operating temperature		-40°C to 85°C	
Case material		Plastic	
Protection class		IP 68	
EMC		Programmed code is not affected by natural electromagnetic interference or X-rays	
Mechanical shock		IEC 68-2-27, Test Ea; 200 g, half sine, 3 ms, 6 shocks per axis	
Vibration		IEC 68-2-6, Test Fc; 10 to 500 Hz, 1.65 mm peak to peak, 10 g, 4 hours per axis	
Dimensions		12.0 mm ± 0.2 mm x 6.0 mm ± 0.2 mm x 3.0 mm ± 0.05 mm	
Weight		0.4 g	
Packaging		Bulk (2000 units per box)	

MECHANICAL DATA

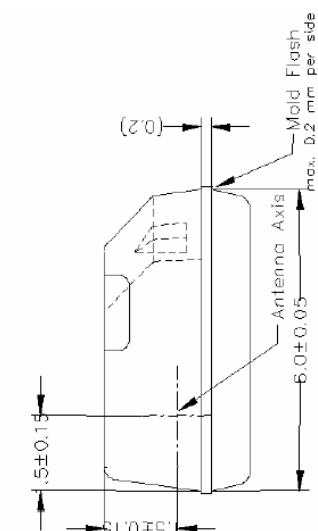

Application Note: The mold flash can occur at both sides of the package. The flash does not extend 0.2 mm max on both package sides at the same time.

The typical overall dimension does not exceed 6.25 mm for width and 12.5 mm for length. The flash area should be excluded from use for guides or other type of mechanical fixturing.

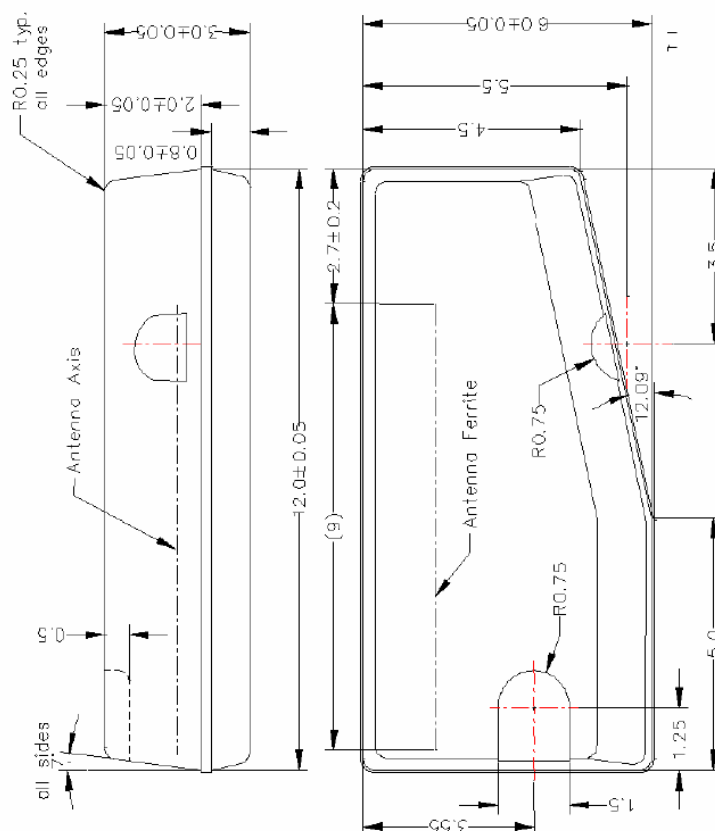

If not otherwise noted tolerance according DIN 2768:
 Nominal dimension below 3 mm ± 0.1 mm
 Nominal dimension above 3 mm ± 0.2 mm
 Nominal angle: $\pm 1^\circ$

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/ Ball Finish	MSL Peak Temp ⁽³⁾	Samples (Requires Login)
TMS37145TEAIE	ACTIVE	RFIDP	TEA	0		Pb-Free (RoHS)	Call TI	N / A for Pkg Type	

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.