

XV Supercapacitor

Cylindrical snap-in



Features and benefits

- Over 10-year operating life at room temperature
- Ultra low ESR for high power density
- Large capacitance for high energy density
- Long cycle life
- UL Recognized

Applications

- Hybrid battery or fuel cell systems
- High pulse current applications
- UPS / hold up power

Description

Eaton supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to specific applications that range from a few microamps for several days to several amps for milliseconds.

Specifications

Capacitance	300 F to 600 F
Working voltage	2.7 V
Surge voltage	2.85 V
Capacitance tolerance	-5% to +10%
Operating temperature range	-40 °C to +65 °C
Extended operating temperature range	-40 °C to +85 °C (with voltage derating to 2.3 V @ +85 °C)

Standard Product¹

Capacitance (F)	Part Number	Max. initial DC ESR (mΩ) (Equivalent Series Resistance)	Max continuous current ² (A)	Peak current ³ (A)	Max leakage current ⁴ (mA)	Max power ⁵ (W)	Stored energy ⁶ (Wh)	Typical mass (g)
300	XV3550-2R7307-R	4.5	20	160	0.60	410	0.30	62
400	XV3560-2R7407-R	3.2	26	220	0.85	570	0.41	72
600	XV3585-2R7607-R	2.6	33	320	1.30	790	0.60	108

1. Capacitance, ESR and Leakage current are all measured according to IEC 62391-1 at +20 °C

2. 15 °C Temperature Rise

3. Peak Current is for 1 second = $1/2 \text{ Working Voltage} \times \text{Capacitance} / (1 + \text{DC ESR} \times \text{Capacitance})$

4. Leakage current measured after 72 hours, +20 °C

5. Max. Power = $\text{Working Voltage}^2 / 4 / \text{DC ESR}$


6. Stored energy = $1/2 \text{ Capacitance} \times \text{Working Voltage}^2 / 3600$

Performance

Parameter		Capacitance Change (% of initial value)	ESR (% of max. initial value)
Life			
@ Max. operating voltage and temp)	1500 hours	≤ 20%	≤ 200%
Charge/discharge cycling ¹	500,000	≤ 20%	≤ 200%
Storage Life- uncharged			
-40 °C to +65 °C	1500 hours	≤ 20%	≤ 200%
≤ 30 °C	3 years	≤ 5%	≤ 10%

1. Cycling between max operating and 50% of max operating voltage at room temperature

Dimensions (mm)

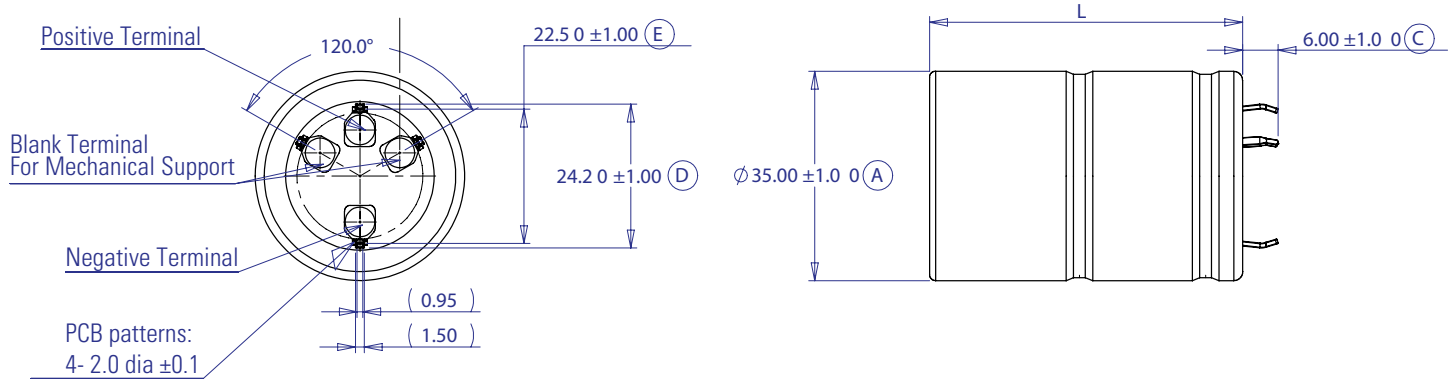

Part Number	L ± 1.0
XV3550-2R7307-R	53
XV3560-2R7407-R	63
XV3585-2R7607-R	87.5

Part Numbering System

XV	3560	-	2R7	40	7	-R
Family Code	Size reference- mm Diameter Length		Voltage (V) R = Decimal	Capacitance (µF)		Standard product
				Value	Multiplier	
XV = Family Code	35 60		2R7= 2.7 V	Example: 407= 40 x 10 ⁷ µF or 400 F		


Packaging Information

- Standard packaging: 20 pieces per box

Part Marking

- Manufacturer
- Capacitance (F)
- Max operating voltage (V)
- Series code (or part number)
- Polarity

Wave solder profile

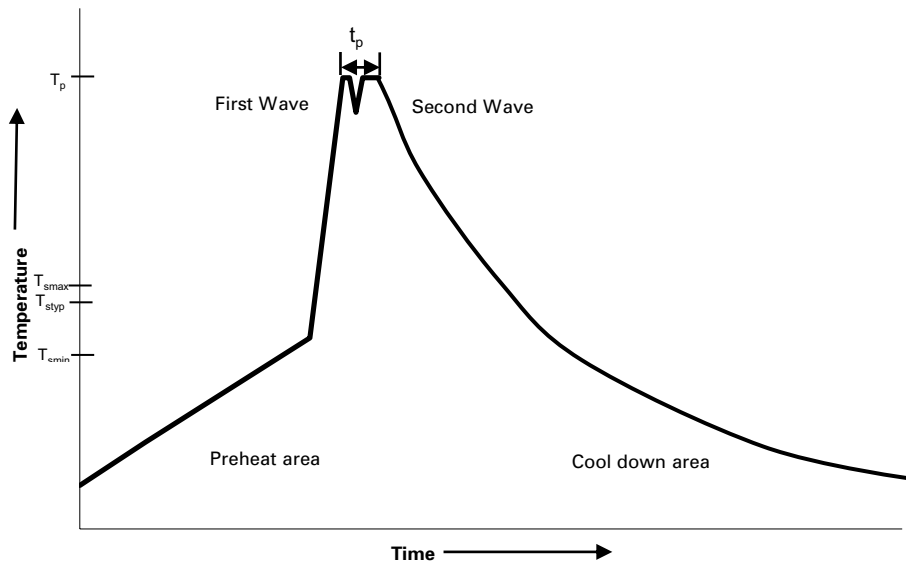

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and soak	<ul style="list-style-type: none"> • Temperature max. (T_{smax}) • Time max. 	<ul style="list-style-type: none"> • Temperature max. (T_{smax}) • Time max.
Δ preheat to max Temperature	160 °C max.	160 °C max.
Peak temperature (T_p)*	220 °C – 260 °C	250 °C – 260 °C
Time at peak temperature (t_p)	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

Manual solder

+350 °C, 4-5 seconds. (by soldering iron), generally manual, hand soldering is not recommended.

Cleaning/Washing

Avoid cleaning of circuit boards, however if the circuit board must be cleaned use static or ultrasonic immersion in a standard circuit board cleaning fluid for no more than 5 minutes and a maximum temperature of +60 °C. Afterwards thoroughly rinse and dry the circuit boards. In general, treat supercapacitors in the same manner you would an aluminum electrolytic capacitor.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 4424 BU-SB15053
December 2017



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.