



# TL431 family

## Adjustable precision shunt regulator

Rev. 5 — 01 September 2015

Product data sheet

## 1. Product profile

### 1.1 General description

Three-terminal shunt regulator family with an output voltage range between  $V_{ref}$  and 36 V, to be set by two external resistors.

- The TL431xDBZR types feature an enhanced stability area with a very low load capacity requirement.
- The TL431xFDT types offer an enhanced stability area and a higher ElectroMagnetic Interference (EMI) ruggedness, for example, for Switch Mode Power Supply (SMPS) applications.
- The TL431xSDT types are designed for standard requirements and linear applications.

**Table 1. Product overview**

| Reference voltage tolerance ( $V_{ref}$ ) | Temperature range ( $T_{amb}$ ) |                 |                  | Pinning configuration (see <a href="#">Table 3</a> ) |
|-------------------------------------------|---------------------------------|-----------------|------------------|------------------------------------------------------|
|                                           | 0 °C to 70 °C                   | −40 °C to 85 °C | −40 °C to 125 °C |                                                      |
| 2 %                                       | TL431CDBZR                      | TL431IDBZR      | TL431QDBZR       | normal pinning                                       |
|                                           |                                 |                 | TL431FDT         | normal pinning                                       |
|                                           |                                 |                 | TL431MFDT        | mirrored pinning                                     |
|                                           |                                 |                 | TL431SDT         | normal pinning                                       |
|                                           |                                 |                 | TL431MSDT        | mirrored pinning                                     |
| 1 %                                       | TL431ACDBZR                     | TL431AIDBZR     | TL431AQDBZR      | normal pinning                                       |
|                                           |                                 |                 | TL431AFDT        | normal pinning                                       |
|                                           |                                 |                 | TL431AMFDT       | mirrored pinning                                     |
|                                           |                                 |                 | TL431ASDT        | normal pinning                                       |
|                                           |                                 |                 | TL431AMSDT       | mirrored pinning                                     |
| 0.5 %                                     | TL431BCDBZR                     | TL431BIDBZR     | TL431BQDBZR      | normal pinning                                       |
|                                           |                                 |                 | TL431BFDT        | normal pinning                                       |
|                                           |                                 |                 | TL431BMFDT       | mirrored pinning                                     |
|                                           |                                 |                 | TL431BSDT        | normal pinning                                       |
|                                           |                                 |                 | TL431BMSDT       | mirrored pinning                                     |



## 1.2 Features and benefits

- Programmable output voltage up to 36 V
- Three different reference voltage tolerances:
  - ◆ Standard grade: 2 %
  - ◆ A-Grade: 1 %
  - ◆ B-Grade: 0.5 %
- Typical temperature drift: 6 mV (in a range of 0 °C up to 70 °C)
- Low output noise
- Typical output impedance: 0.2  $\Omega$
- Sink current capability: 1 mA to 100 mA
- AEC-Q100 qualified (grade 1)

## 1.3 Applications

- Shunt regulator
- Precision current limiter
- Precision constant current sink
- Isolated feedback loop for Switch Mode Power Supply (SMPS)





## 1.4 Quick reference data

Table 2. Quick reference data

| Symbol    | Parameter             | Conditions                                                                   | Min       | Typ  | Max  | Unit |
|-----------|-----------------------|------------------------------------------------------------------------------|-----------|------|------|------|
| $V_{KA}$  | cathode-anode voltage |                                                                              | $V_{ref}$ | -    | 36   | V    |
| $I_K$     | cathode current       |                                                                              | 1         | -    | 100  | mA   |
| $V_{ref}$ | reference voltage     | $V_{KA} = V_{ref}$ ;<br>$I_K = 10 \text{ mA}$ ;<br>$T_{amb} = 25 \text{ °C}$ |           |      |      |      |
|           | Standard-Grade (2 %)  |                                                                              | 2440      | 2495 | 2550 | mV   |
|           | A-Grade (1 %)         |                                                                              | 2470      | 2495 | 2520 | mV   |
|           | B-Grade (0.5 %)       |                                                                              | 2483      | 2495 | 2507 | mV   |

## 2. Pinning information

Table 3. Pinning

| Pin                                                    | Symbol | Description | Simplified outline                                                                  | Graphic symbol                                                                                          |
|--------------------------------------------------------|--------|-------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Normal pinning: All types without MFDT and MSDT ending |        |             |                                                                                     |                                                                                                         |
| 1                                                      | k      | cathode     |  | <br><i>006aab355</i> |
| 2                                                      | REF    | reference   |                                                                                     |                                                                                                         |
| 3                                                      | a      | anode       |                                                                                     |                                                                                                         |
| Mirrored pinning: All types with MFDT and MSDT ending  |        |             |                                                                                     |                                                                                                         |
| 1                                                      | REF    | reference   |  | <br><i>006aab355</i> |
| 2                                                      | k      | cathode     |                                                                                     |                                                                                                         |
| 3                                                      | a      | anode       |                                                                                     |                                                                                                         |

### 3. Ordering information

Table 4. Ordering information

| Type number | Package |                                          |         |
|-------------|---------|------------------------------------------|---------|
|             | Name    | Description                              | Version |
| TL431CDBZR  | -       | plastic surface-mounted package; 3 leads | SOT23   |
| TL431IDBZR  |         |                                          |         |
| TL431QDBZR  |         |                                          |         |
| TL431FDT    |         |                                          |         |
| TL431MFDT   |         |                                          |         |
| TL431SDT    |         |                                          |         |
| TL431MSDT   |         |                                          |         |
| TL431ACDBZR |         |                                          |         |
| TL431AIDBZR |         |                                          |         |
| TL431AQDBZR |         |                                          |         |
| TL431AFDT   |         |                                          |         |
| TL431AMFDT  |         |                                          |         |
| TL431ASDT   |         |                                          |         |
| TL431AMSDT  |         |                                          |         |
| TL431BCDBZR |         |                                          |         |
| TL431BIDBZR |         |                                          |         |
| TL431BQDBZR |         |                                          |         |
| TL431BFDT   |         |                                          |         |
| TL431BMFDT  |         |                                          |         |
| TL431BSDT   |         |                                          |         |
| TL431BMSDT  |         |                                          |         |

## 4. Marking

Table 5. Marking codes

| Type number | Marking code <sup>[1]</sup> | Type number | Marking code <sup>[1]</sup> |
|-------------|-----------------------------|-------------|-----------------------------|
| TL431CDBZR  | CA*                         | TL431ASDT   | RL*                         |
| TL431IDBZR  | CB*                         | TL431AMSDT  | LQ*                         |
| TL431QDBZR  | CC*                         | TL431BCDBZR | CG*                         |
| TL431FDT    | AR*                         | TL431BIDBZR | CH*                         |
| TL431MFDT   | AU*                         | TL431BQDBZR | CJ*                         |
| TL431SDT    | RM*                         | TL431BFDT   | AT*                         |
| TL431MSDT   | LR*                         | TL431BMFDT  | AW*                         |
| TL431ACDBZR | CD*                         | TL431BSDT   | MA*                         |
| TL431AIDBZR | CE*                         | TL431BMSDT  | MB*                         |
| TL431AQDBZR | CF*                         | -           | -                           |
| TL431AFDT   | AS*                         | -           | -                           |
| TL431AMFDT  | AV*                         | -           | -                           |

[1] \* = placeholder for manufacturing site code.

## 5. Functional diagram

The TL431 family comprises a range of 3-terminal adjustable shunt regulators, with specified thermal stability over applicable automotive and commercial temperature ranges. The output voltage may be set to any value between  $V_{ref}$  (approximately 2.5 V) and 36 V with two external resistors (see [Figure 8](#)). These devices have a typical output impedance of 0.2  $\Omega$ . Active output circuitry provides a very sharp turn-on characteristic, making these devices excellent replacements for Zener diodes in many applications like on-board regulation, adjustable power supplies and switching power supplies.

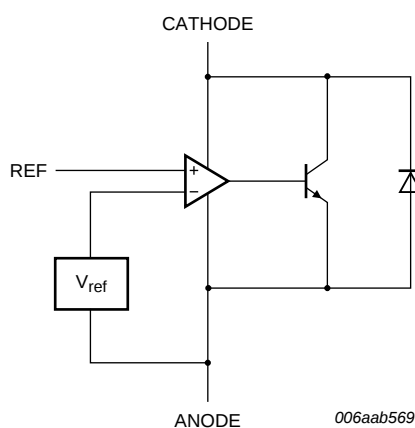


Fig 1. Functional diagram

## 6. Limiting values

**Table 6. Limiting values**


*In accordance with the Absolute Maximum Rating System (IEC 60134).*

| Symbol    | Parameter                             | Conditions                  | Min   | Max  | Unit |
|-----------|---------------------------------------|-----------------------------|-------|------|------|
| $V_{KA}$  | cathode-anode voltage                 |                             | -     | 37   | V    |
| $I_K$     | cathode current                       |                             | -100  | 150  | mA   |
| $I_{ref}$ | reference current                     |                             | -0.05 | 10   | mA   |
| $P_{tot}$ | total power dissipation               | $T_{amb} \leq 25\text{ °C}$ | [1]   | 350  | mW   |
|           |                                       |                             | [2]   | 580  | mW   |
|           |                                       |                             | [3]   | 950  | mW   |
| $T_j$     | junction temperature                  |                             | -     | 150  | °C   |
| $T_{amb}$ | ambient temperature                   |                             |       |      |      |
|           | TL431XCDBZR                           |                             | 0     | +70  | °C   |
|           | TL431XIDBZR                           |                             | -40   | +85  | °C   |
|           | TL431XQDBZR<br>TL431XFDT<br>TL431XSDT |                             | -40   | +125 | °C   |
| $T_{stg}$ | storage temperature                   |                             | -65   | +150 | °C   |

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode 1 cm<sup>2</sup>.

[3] Device mounted on a ceramic PCB, Al<sub>2</sub>O<sub>3</sub>, standard footprint.

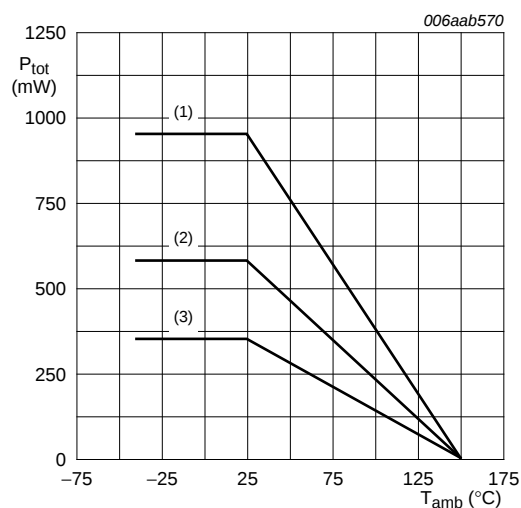

(1) Ceramic PCB, Al<sub>2</sub>O<sub>3</sub>, standard footprint

(2) FR4 PCB, mounting pad for anode 1 cm<sup>2</sup>

(3) FR4 PCB, standard footprint

**Fig 2. Power derating curves**

Table 7. ESD maximum ratings

 $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

| Symbol    | Parameter                       | Conditions                        | Min | Max | Unit |
|-----------|---------------------------------|-----------------------------------|-----|-----|------|
| $V_{ESD}$ | electrostatic discharge voltage | MIL-STD-883<br>(human body model) | -   | 4   | kV   |

## 7. Recommended operating conditions

Table 8. Operating conditions

| Symbol   | Parameter             | Conditions | Min       | Max | Unit |
|----------|-----------------------|------------|-----------|-----|------|
| $V_{KA}$ | cathode-anode voltage |            | $V_{ref}$ | 36  | V    |
| $I_K$    | cathode current       |            | 1         | 100 | mA   |

## 8. Thermal characteristics

Table 9. Thermal characteristics

| Symbol         | Parameter                                        | Conditions  | Min | Typ | Max | Unit |
|----------------|--------------------------------------------------|-------------|-----|-----|-----|------|
| $R_{th(j-a)}$  | thermal resistance from junction to ambient      | in free air | [1] | -   | 360 | K/W  |
|                |                                                  |             | [2] | -   | 216 | K/W  |
|                |                                                  |             | [3] | -   | 132 | K/W  |
| $R_{th(j-sp)}$ | thermal resistance from junction to solder point |             | [4] | -   | 50  | K/W  |

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode 1 cm<sup>2</sup>.[3] Device mounted on a ceramic PCB, Al<sub>2</sub>O<sub>3</sub>, standard footprint.

[4] Soldering point of anode.

## 9. Characteristics

**Table 10. Characteristics**
 $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.


| Symbol                                                                                                              | Parameter                                                            | Conditions                                                                     | Min  | Typ  | Max  | Unit          |
|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------|------|------|------|---------------|
| <b>Standard-Grade (2 %):</b><br><b>TL431CDBZR; TL431IDBZR; TL431QDBZR; TL431FDT; TL431MFDT; TL431SDT; TL431MSDT</b> |                                                                      |                                                                                |      |      |      |               |
| $V_{ref}$                                                                                                           | reference voltage                                                    | $V_{KA} = V_{ref}; I_K = 10\text{ mA}$                                         | 2440 | 2495 | 2550 | mV            |
| $\Delta V_{ref}$                                                                                                    | reference voltage variation                                          | $V_{KA} = V_{ref}; I_K = 10\text{ mA}$                                         |      |      |      |               |
|                                                                                                                     | TL431CDBZR                                                           | $T_{amb} = 0\text{ }^{\circ}\text{C to } 70\text{ }^{\circ}\text{C}$           | -    | 6    | 16   | mV            |
|                                                                                                                     | TL431IDBZR                                                           | $T_{amb} = -40\text{ }^{\circ}\text{C to } 85\text{ }^{\circ}\text{C}$         | -    | 14   | 34   | mV            |
|                                                                                                                     | TL431QDBZR<br>TL431FDT<br>TL431MFDT<br>TL431SDT<br>TL431MSDT         | $T_{amb} = -40\text{ }^{\circ}\text{C to } 125\text{ }^{\circ}\text{C}$        |      |      |      |               |
| $\Delta V_{ref}/\Delta V_{KA}$                                                                                      | reference voltage variation to cathode-anode voltage variation ratio | $I_K = 10\text{ mA}$                                                           |      |      |      |               |
|                                                                                                                     |                                                                      | $\Delta V_{KA} = 10\text{ V to } V_{ref}$                                      | -    | -1.4 | -2.7 | mV/V          |
|                                                                                                                     |                                                                      | $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$                                  | -    | -1   | -2   | mV/V          |
| $I_{ref}$                                                                                                           | reference current                                                    | $I_K = 10\text{ mA};$<br>$R1 = 10\text{ k}\Omega; R2 = \text{open}$            | -    | 2    | 4    | $\mu\text{A}$ |
| $\Delta I_{ref}$                                                                                                    | reference current variation                                          | $I_K = 10\text{ mA};$<br>$R1 = 10\text{ k}\Omega; R2 = \text{open}$            |      |      |      |               |
|                                                                                                                     | TL431CDBZR                                                           | $T_{amb} = 0\text{ }^{\circ}\text{C to } 70\text{ }^{\circ}\text{C}$           | -    | 0.4  | 1.2  | $\mu\text{A}$ |
|                                                                                                                     | TL431IDBZR                                                           | $T_{amb} = -40\text{ }^{\circ}\text{C to } 85\text{ }^{\circ}\text{C}$         | -    | 0.8  | 2.5  | $\mu\text{A}$ |
|                                                                                                                     | TL431QDBZR<br>TL431FDT<br>TL431MFDT<br>TL431SDT<br>TL431MSDT         | $T_{amb} = -40\text{ }^{\circ}\text{C to } 125\text{ }^{\circ}\text{C}$        |      |      |      |               |
| $I_{K(min)}$                                                                                                        | minimum cathode current                                              | $V_{KA} = V_{ref}$                                                             | -    | 0.4  | 1    | mA            |
| $I_{off}$                                                                                                           | off-state current                                                    | $V_{KA} = 36\text{ V}; V_{ref} = 0$                                            | -    | 0.1  | 1    | $\mu\text{A}$ |
| $Z_{KA}$                                                                                                            | dynamic cathode-anode impedance                                      | $I_K = 1\text{ mA to } 100\text{ mA};$<br>$V_{KA} = V_{ref}; f < 1\text{ kHz}$ | -    | 0.2  | 0.5  | $\Omega$      |
| <b>A-Grade (1 %):</b><br><b>TL431ACDBZR; TL431AIDBZR; TL431AQDBZR; TL431AFDT; TL431AMFDT; TL431ASDT; TL431AMSDT</b> |                                                                      |                                                                                |      |      |      |               |
| $V_{ref}$                                                                                                           | reference voltage                                                    | $V_{KA} = V_{ref}; I_K = 10\text{ mA}$                                         | 2470 | 2495 | 2520 | mV            |
| $\Delta V_{ref}$                                                                                                    | reference voltage variation                                          | $V_{KA} = V_{ref}; I_K = 10\text{ mA}$                                         |      |      |      |               |
|                                                                                                                     | TL431ACDBZR                                                          | $T_{amb} = 0\text{ }^{\circ}\text{C to } 70\text{ }^{\circ}\text{C}$           | -    | 6    | 16   | mV            |
|                                                                                                                     | TL431AIDBZR                                                          | $T_{amb} = -40\text{ }^{\circ}\text{C to } 85\text{ }^{\circ}\text{C}$         | -    | 14   | 34   | mV            |
|                                                                                                                     | TL431AQDBZR<br>TL431AFDT<br>TL431AMFDT<br>TL431ASDT<br>TL431AMSDT    | $T_{amb} = -40\text{ }^{\circ}\text{C to } 125\text{ }^{\circ}\text{C}$        |      |      |      |               |
| $\Delta V_{ref}/\Delta V_{KA}$                                                                                      | reference voltage variation to cathode-anode voltage variation ratio | $I_K = 10\text{ mA}$                                                           |      |      |      |               |
|                                                                                                                     |                                                                      | $\Delta V_{KA} = 10\text{ V to } V_{ref}$                                      | -    | -1.4 | -2.7 | mV/V          |
|                                                                                                                     |                                                                      | $\Delta V_{KA} = 36\text{ V to } 10\text{ V}$                                  | -    | -1   | -2   | mV/V          |

**Table 10. Characteristics ...continued** $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

| Symbol                                                                                                                | Parameter                                                            | Conditions                                                                          | Min  | Typ  | Max  | Unit          |
|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $I_{ref}$                                                                                                             | reference current                                                    | $I_K = 10\text{ mA}$ ;<br>$R1 = 10\text{ k}\Omega$ ; $R2 = \text{open}$             | -    | 2    | 4    | $\mu\text{A}$ |
| $\Delta I_{ref}$                                                                                                      | reference current variation                                          | $I_K = 10\text{ mA}$ ;<br>$R1 = 10\text{ k}\Omega$ ; $R2 = \text{open}$             |      |      |      |               |
|                                                                                                                       | TL431ACDBZR                                                          | $T_{amb} = 0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$               | -    | 0.4  | 1.2  | $\mu\text{A}$ |
|                                                                                                                       | TL431AIDBZR                                                          | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$             | -    | 0.8  | 2.5  | $\mu\text{A}$ |
|                                                                                                                       | TL431AQDBZR<br>TL431AFDT<br>TL431AMFDT<br>TL431ASDT<br>TL431AMSDT    | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$            |      |      |      |               |
|                                                                                                                       |                                                                      |                                                                                     |      |      |      |               |
| $I_{K(min)}$                                                                                                          | minimum cathode current                                              | $V_{KA} = V_{ref}$                                                                  |      |      |      |               |
|                                                                                                                       | TL431ACDBZR                                                          | $T_{amb} = 0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$               | -    | 0.4  | 0.6  | $\text{mA}$   |
|                                                                                                                       | TL431AIDBZR                                                          | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$             |      |      |      |               |
|                                                                                                                       | TL431AQDBZR<br>TL431AFDT<br>TL431AMFDT<br>TL431ASDT<br>TL431AMSDT    | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$            |      |      |      |               |
| $I_{off}$                                                                                                             | off-state current                                                    | $V_{KA} = 36\text{ V}$ ; $V_{ref} = 0$                                              | -    | 0.1  | 0.5  | $\mu\text{A}$ |
| $Z_{KA}$                                                                                                              | dynamic cathode-anode impedance                                      | $I_K = 1\text{ mA}$ to $100\text{ mA}$ ;<br>$V_{KA} = V_{ref}$ ; $f < 1\text{ kHz}$ | -    | 0.2  | 0.5  | $\Omega$      |
| <b>B-Grade (0.5 %):</b><br><b>TL431BCDBZR; TL431BIDBZR; TL431BQDBZR; TL431BFDT; TL431BMFDT; TL431BSDT; TL431BMSDT</b> |                                                                      |                                                                                     |      |      |      |               |
| $V_{ref}$                                                                                                             | reference voltage                                                    | $V_{KA} = V_{ref}$ ; $I_K = 10\text{ mA}$                                           | 2483 | 2495 | 2507 | $\text{mV}$   |
| $\Delta V_{ref}$                                                                                                      | reference voltage variation                                          | $V_{KA} = V_{ref}$ ; $I_K = 10\text{ mA}$                                           |      |      |      |               |
|                                                                                                                       | TL431BCDBZR                                                          | $T_{amb} = 0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$               | -    | 6    | 16   | $\text{mV}$   |
|                                                                                                                       | TL431BIDBZR                                                          | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$             | -    | 14   | 34   | $\text{mV}$   |
|                                                                                                                       | TL431BQDBZR<br>TL431BFDT<br>TL431BMFDT<br>TL431BSDT<br>TL431BMSDT    | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$            |      |      |      |               |
| $\Delta V_{ref}/\Delta V_{KA}$                                                                                        | reference voltage variation to cathode-anode voltage variation ratio | $I_K = 10\text{ mA}$                                                                |      |      |      |               |
|                                                                                                                       |                                                                      | $\Delta V_{KA} = 10\text{ V}$ to $V_{ref}$                                          | -    | -1.4 | -2.7 | $\text{mV/V}$ |
|                                                                                                                       |                                                                      | $\Delta V_{KA} = 36\text{ V}$ to $10\text{ V}$                                      | -    | -1   | -2   | $\text{mV/V}$ |
| $I_{ref}$                                                                                                             | reference current                                                    | $I_K = 10\text{ mA}$ ;<br>$R1 = 10\text{ k}\Omega$ ; $R2 = \text{open}$             | -    | 2    | 4    | $\mu\text{A}$ |


**Table 10. Characteristics ...continued** $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified.

| Symbol           | Parameter                                                         | Conditions                                                                          | Min | Typ | Max | Unit          |
|------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| $\Delta I_{ref}$ | reference current variation                                       | $I_K = 10\text{ mA}$ ;<br>$R1 = 10\text{ k}\Omega$ ; $R2 = \text{open}$             |     |     |     |               |
|                  | TL431BCDBZR                                                       | $T_{amb} = 0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$               | -   | 0.4 | 1.2 | $\mu\text{A}$ |
|                  | TL431BIDBZR                                                       | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$             | -   | 0.8 | 2.5 | $\mu\text{A}$ |
|                  | TL431BQDBZR<br>TL431BFDT<br>TL431BMFDT<br>TL431BSDT<br>TL431BMSDT | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$            |     |     |     |               |
| $I_{K(min)}$     | minimum cathode current                                           | $V_{KA} = V_{ref}$                                                                  |     |     |     |               |
|                  | TL431BCDBZR                                                       | $T_{amb} = 0\text{ }^{\circ}\text{C}$ to $70\text{ }^{\circ}\text{C}$               | -   | 0.4 | 0.6 | $\text{mA}$   |
|                  | TL431BIDBZR                                                       | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $85\text{ }^{\circ}\text{C}$             |     |     |     |               |
|                  | TL431BQDBZR<br>TL431BFDT<br>TL431BMFDT<br>TL431BSDT<br>TL431BMSDT | $T_{amb} = -40\text{ }^{\circ}\text{C}$ to $125\text{ }^{\circ}\text{C}$            |     |     |     |               |
| $I_{off}$        | off-state current                                                 | $V_{KA} = 36\text{ V}$ ; $V_{ref} = 0$                                              | -   | 0.1 | 0.5 | $\mu\text{A}$ |
| $Z_{KA}$         | dynamic cathode-anode impedance                                   | $I_K = 1\text{ mA}$ to $100\text{ mA}$ ;<br>$V_{KA} = V_{ref}$ ; $f < 1\text{ kHz}$ | -   | 0.2 | 0.5 | $\Omega$      |

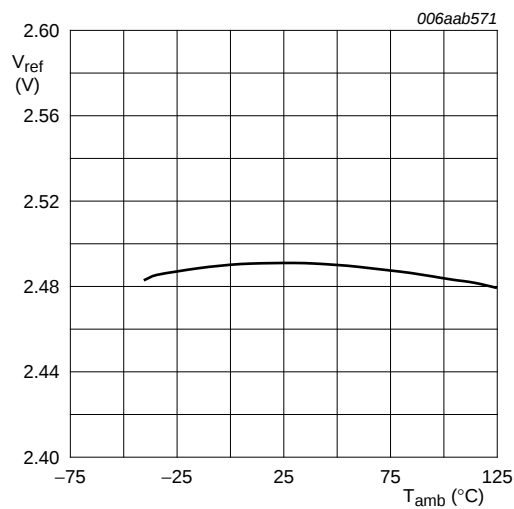


$I_K = 10\text{ mA}$ ;  $V_{KA} = V_{ref}$

Fig 3. Reference voltage as a function of ambient temperature; typical values

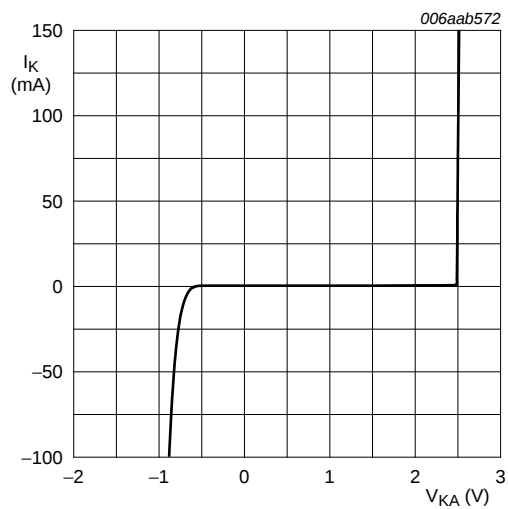

$V_{KA} = V_{ref}$ ;  $T_{amb} = 25\text{ °C}$


Fig 4. Cathode current as a function of cathode-anode voltage; typical values

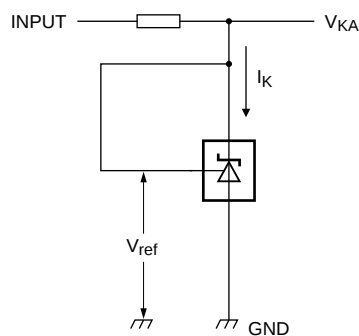

006aab573


$I_K = 10\text{ mA}$ ;  $V_{KA} = V_{ref}$

Fig 5. Test circuit to [Figure 3](#) and [Figure 4](#)

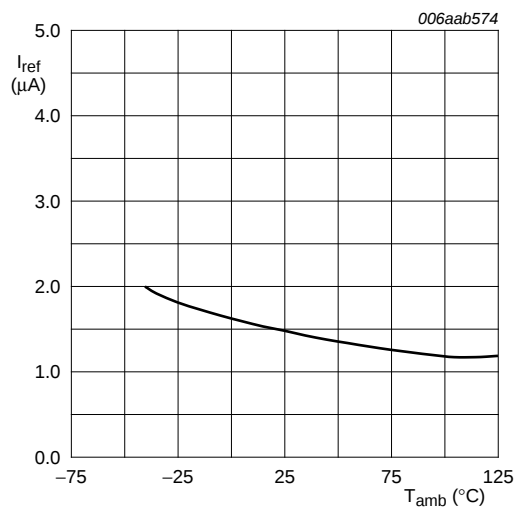


$I_K = 10\text{ mA}$ ;  $R1 = 10\text{ k}\Omega$ ;  $R2 = \text{open}$

Fig 6. Reference current as a function of ambient temperature; typical values

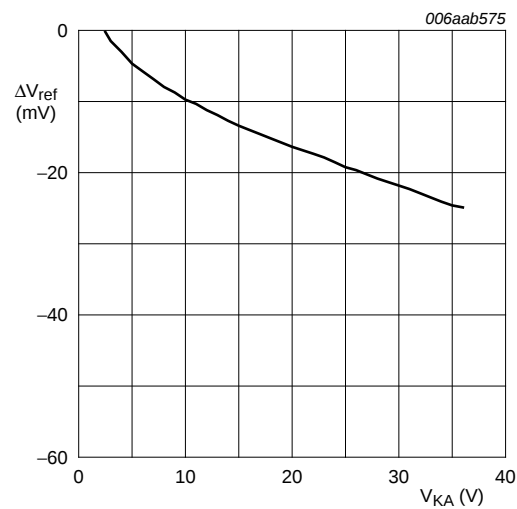

$I_K = 10\text{ mA}$ ;  $T_{amb} = 25^{\circ}C$


Fig 7. Reference voltage variation as a function of cathode-anode voltage; typical values

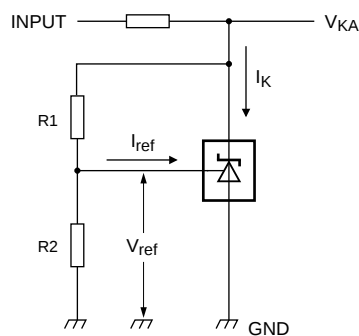

006aab576


$$V_{KA} = V_{ref} \times \left(1 + \frac{R1}{R2}\right) + I_{ref} \times R1$$

Fig 8. Test circuit to [Figure 6](#) and [Figure 7](#)

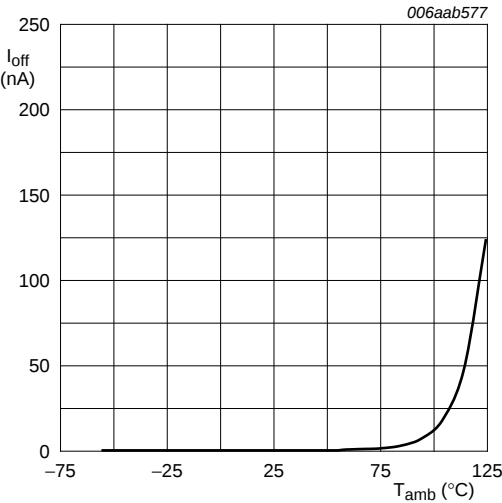


$V_{KA} = 36\text{ V}$ ;  $V_{ref} = 0\text{ V}$

Fig 9. Off-state current as a function of ambient temperature; typical values

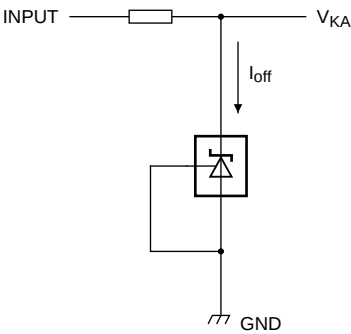


$V_{KA} = 36\text{ V}$ ;  $V_{ref} = 0\text{ V}$

Fig 10. Off-state current as a function of ambient temperature; test circuit

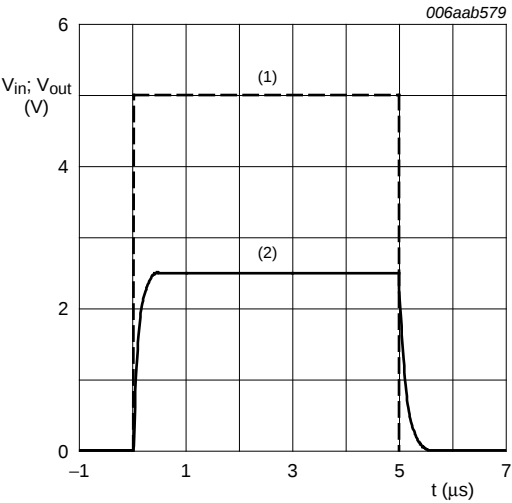


$T_{amb} = 25\text{ }^{\circ}\text{C}$   
(1) Input  
(2) Output

Fig 11. All types except TL431XFDT and TL431XSDT: Input voltage and output voltage as a function of time; typical values

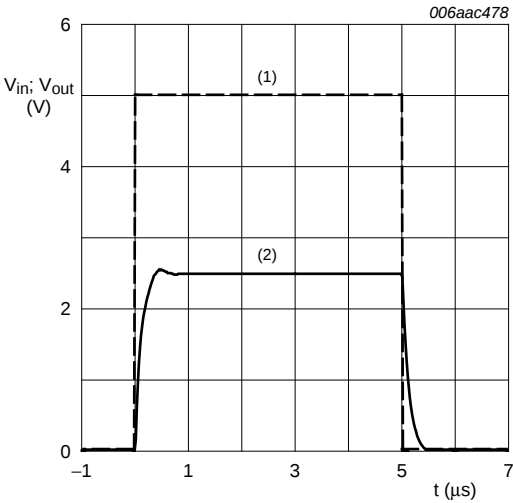


$T_{amb} = 25\text{ }^{\circ}\text{C}$   
(1) Input  
(2) Output

Fig 12. TL431XFDT: Input voltage and output voltage as a function of time; typical values

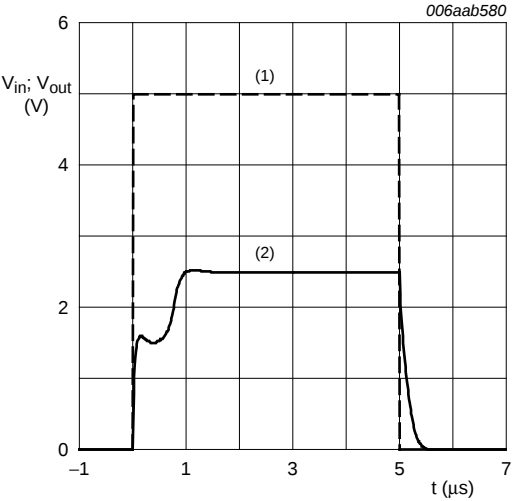


$T_{amb} = 25\text{ }^{\circ}\text{C}$   
(1) Input  
(2) Output

Fig 13. TL431XSDT: Input voltage and output voltage as a function of time; typical values

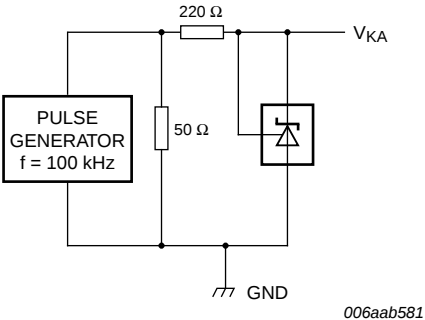


$T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 14. Test circuit to [Figure 11](#), [Figure 12](#) and [Figure 13](#)

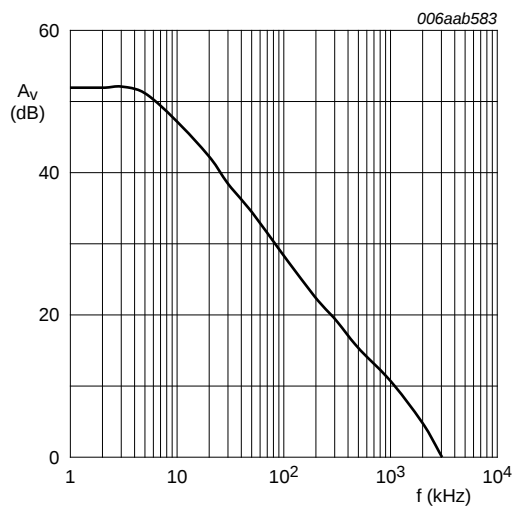


$I_K = 10\text{ mA}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 15. All types except TL431XFDT and TL431XSDT: Voltage amplification as a function of frequency; typical values

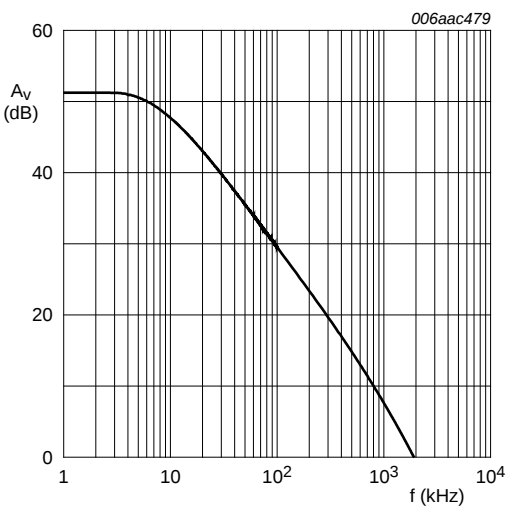


$I_K = 10\text{ mA}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 16. TL431XFDT: Voltage amplification as a function of frequency; typical values

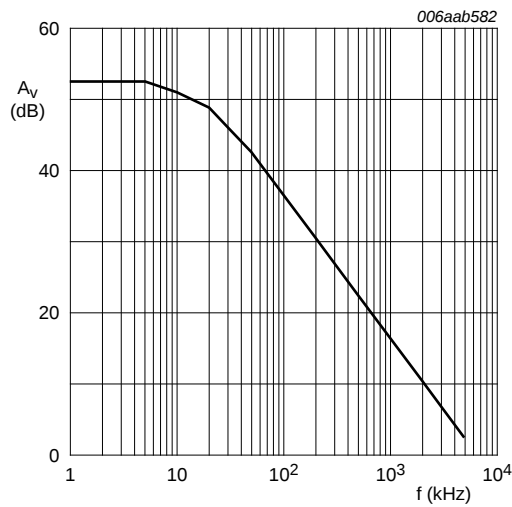


$I_K = 10\text{ mA}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 17. TL431XSDT: Voltage amplification as a function of frequency; typical values

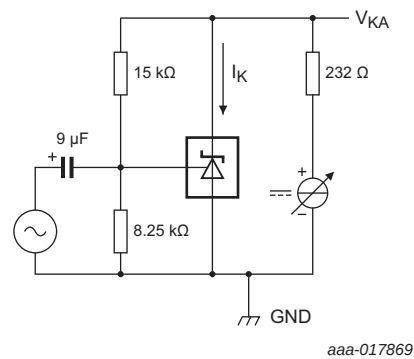


$I_K = 10\text{ mA}$ ;  $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 18. Test circuit to [Figure 15](#), [Figure 16](#) and [Figure 17](#)

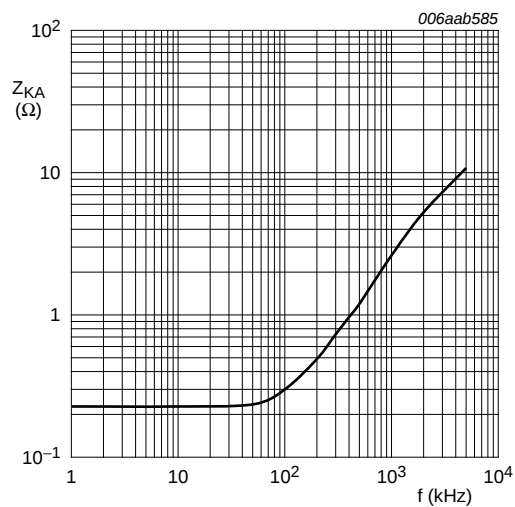


I<sub>K</sub> = 10 mA; T<sub>amb</sub> = 25 °C

Fig 19. All types except TL431XFDT and TL431XSDT: Dynamic cathode-anode impedance as a function of frequency; typical values

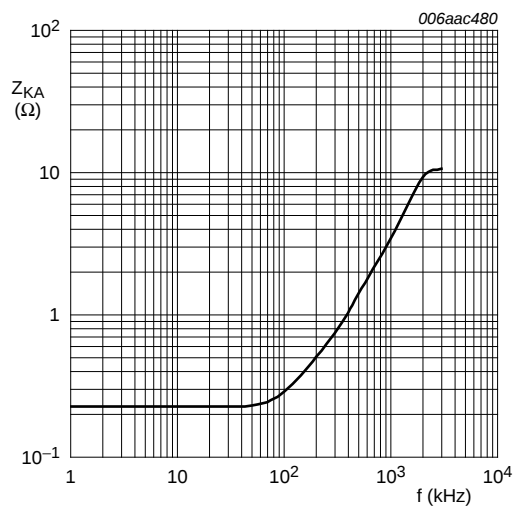


I<sub>K</sub> = 10 mA; T<sub>amb</sub> = 25 °C

Fig 20. TL431XFDT: Dynamic cathode-anode impedance as a function of frequency; typical values

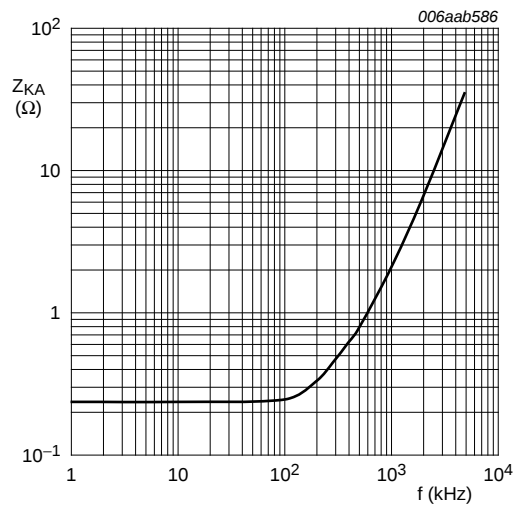

I<sub>K</sub> = 10 mA; T<sub>amb</sub> = 25 °C

Fig 21. TL431XSDT: Dynamic cathode-anode impedance as a function of frequency; typical values

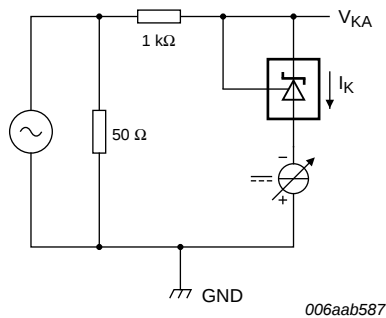

I<sub>K</sub> = 10 mA; T<sub>amb</sub> = 25 °C

Fig 22. Test circuit to [Figure 19](#), [Figure 20](#) and [Figure 21](#)



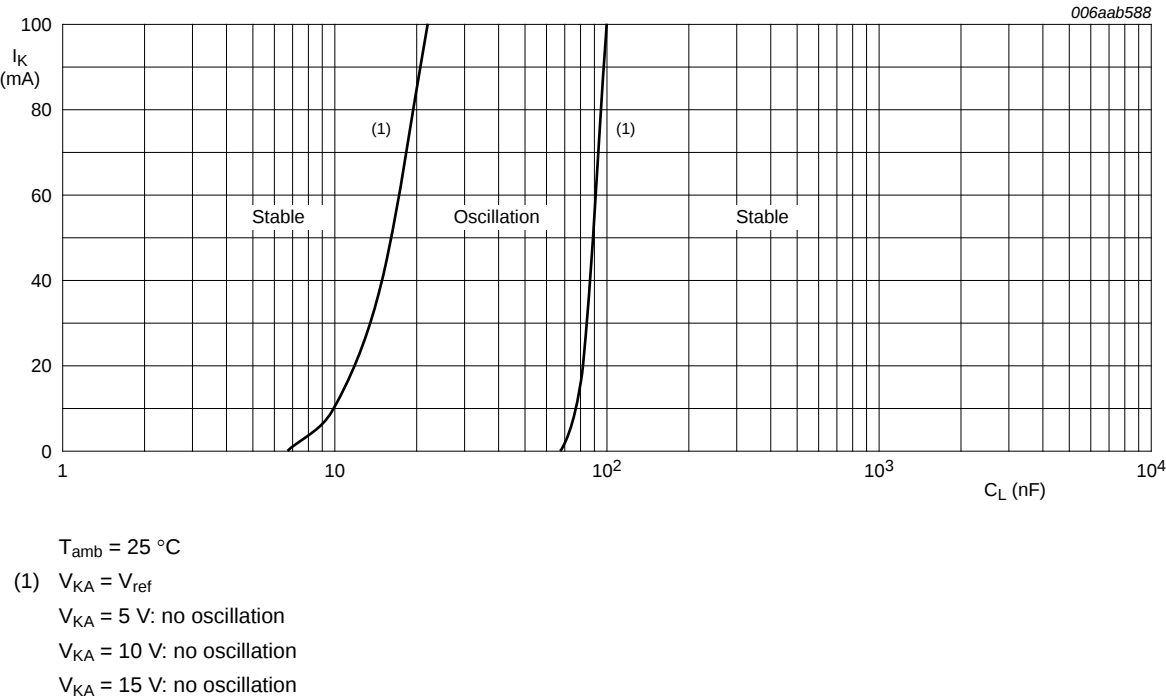


Fig 23. All types except TL431XFDT and TL431XSDT:  
Cathode current as a function of load capacitance; typical values

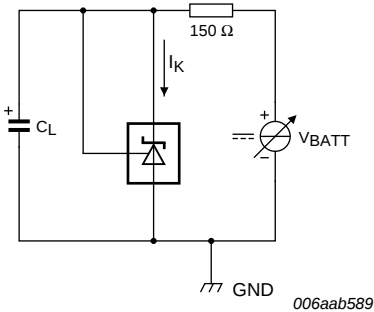


$V_{KA} = V_{ref}$   
 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 24. Test circuit (1) to [Figure 23](#)

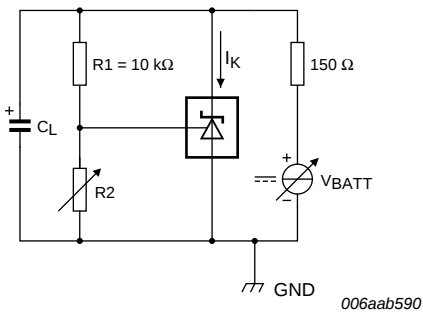


$V_{KA} > 5\text{ V}$ : stable operation  
 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 25. Test circuit (2) to [Figure 23](#)

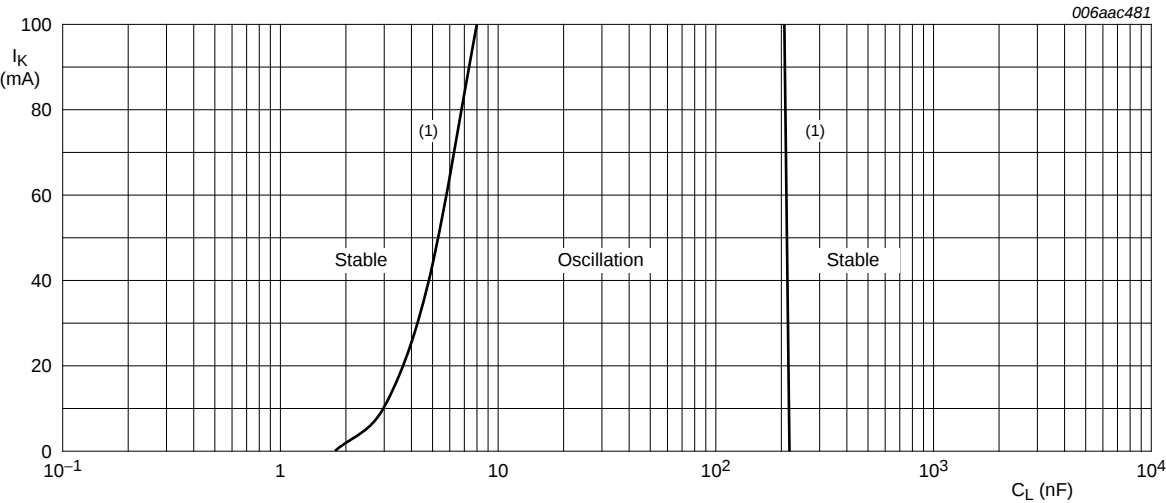


$T_{amb} = 25\text{ }^{\circ}\text{C}$   
(1)  $V_{KA} = V_{ref}$   
 $V_{KA} = 5\text{ V}$ : no oscillation  
 $V_{KA} = 10\text{ V}$ : no oscillation  
 $V_{KA} = 15\text{ V}$ : no oscillation

Fig 26. TL431XFDT: Cathode current as a function of load capacitance; typical values

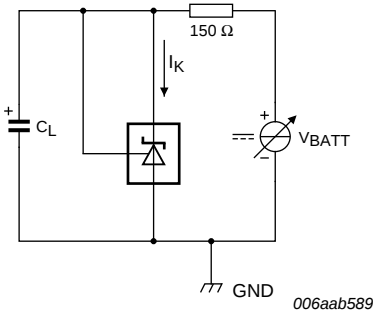

$V_{KA} = V_{ref}$   
 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 27. Test circuit (1) to [Figure 26](#)

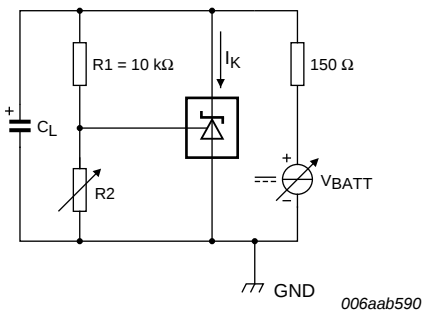

$V_{KA} > 5\text{ V}$ : stable operation  
 $T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 28. Test circuit (2) to [Figure 26](#)


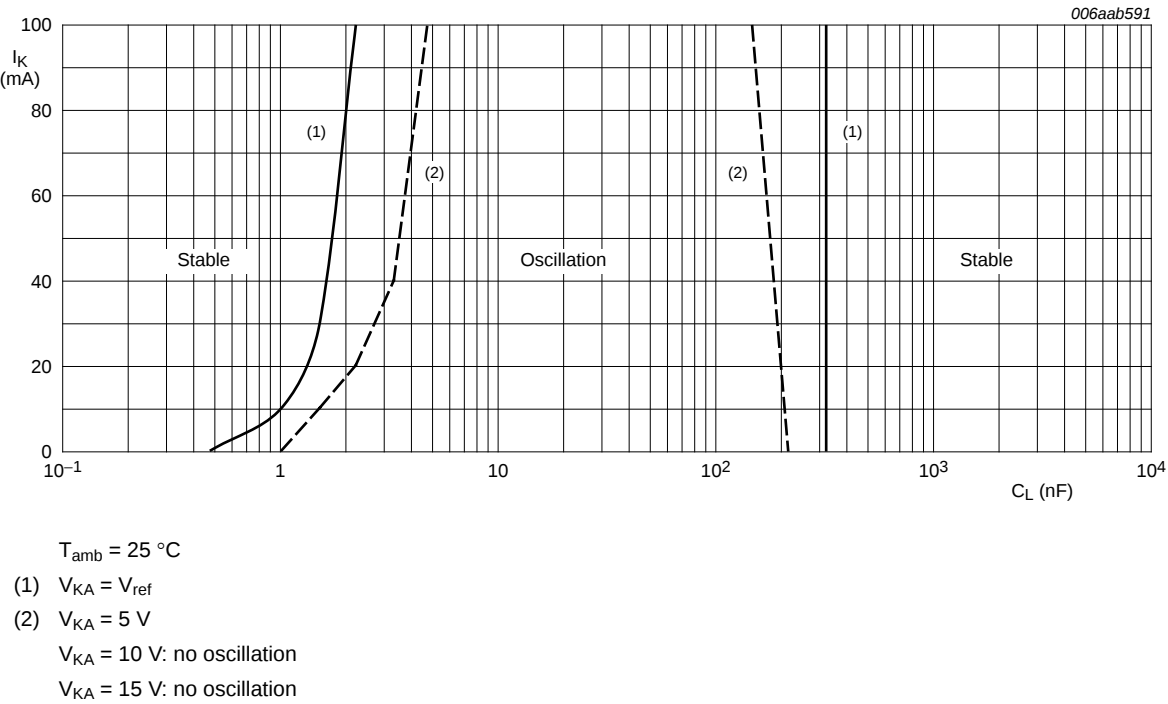



Fig 29. TL431XSDT: Cathode current as a function of load capacitance; typical values

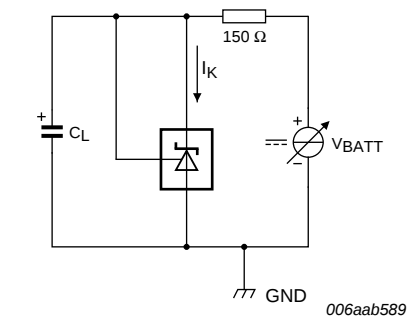

$V_{KA} = V_{ref}$

$T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 30. Test circuit (1) to Figure 29

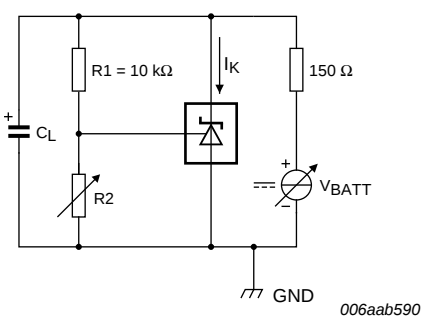


$V_{KA} = 5\text{ V}$

$V_{KA} > 10\text{ V}$ : stable operation

$T_{amb} = 25\text{ }^{\circ}\text{C}$


Fig 31. Test circuit (2) to Figure 29

## 10. Application information

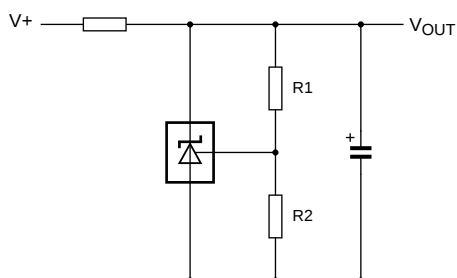

006aab592


$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) \times V_{ref}$$

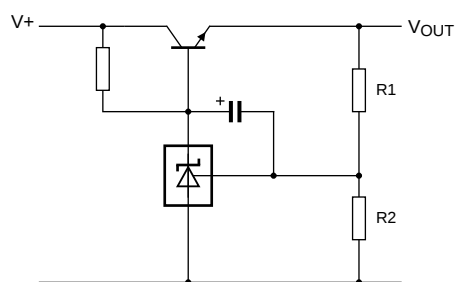**Fig 32. Shunt regulator**


006aab593

$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) \times V_{ref}$$

$$V_{OUT(min)} = V_{ref} + V_{be}$$

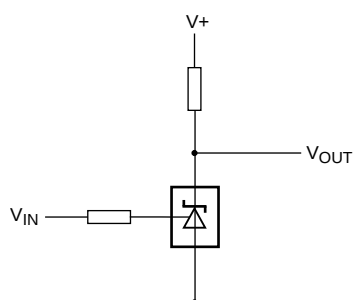**Fig 33. Series pass regulator**


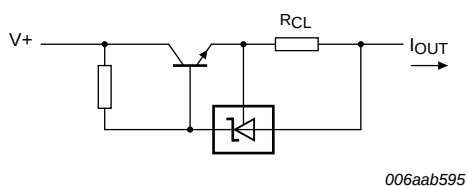
006aab594

$$V_{th} = V_{ref}$$

$$V_{IN} < V_{ref} \Rightarrow V_{OUT} > 0$$


$$V_{IN} > V_{ref} \Rightarrow V_{OUT} \approx 2V$$

**Fig 34. Single-supply comparator with temperature-compensated threshold**




$$I_{OUT} = \frac{V_{ref}}{R_{CL}}$$

Fig 35. Constant current source

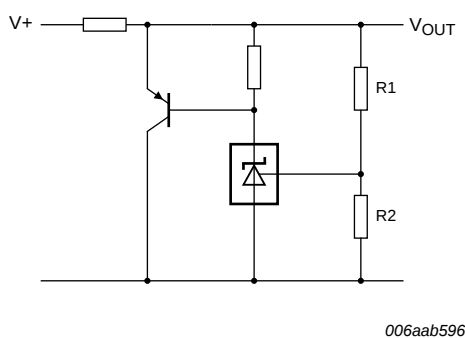


$$V_{OUT} = \left(1 + \frac{R1}{R2}\right) \times V_{ref}$$

Fig 36. High-current shunt regulator



$$I_{SINK} = \frac{V_{ref}}{R_S}$$

Fig 37. Constant current sink

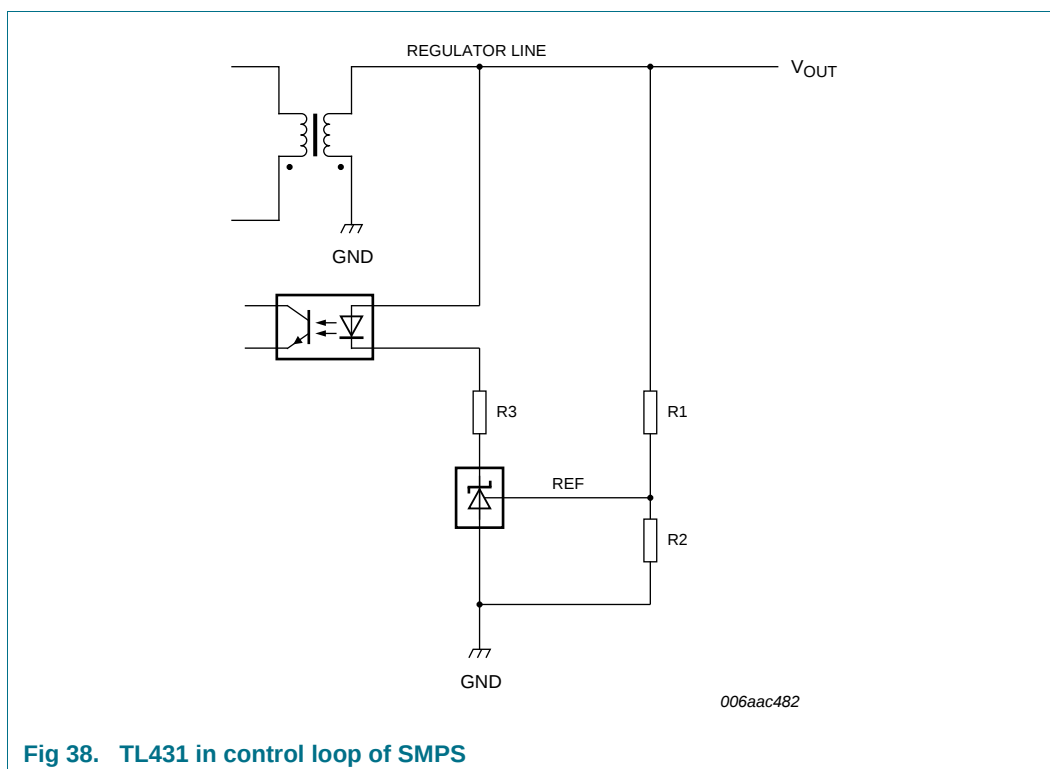


## 11. Test information


### 11.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q100 - Failure mechanism based stress test qualification for integrated circuits*, and is suitable for use in automotive applications.


## 12. Package outline

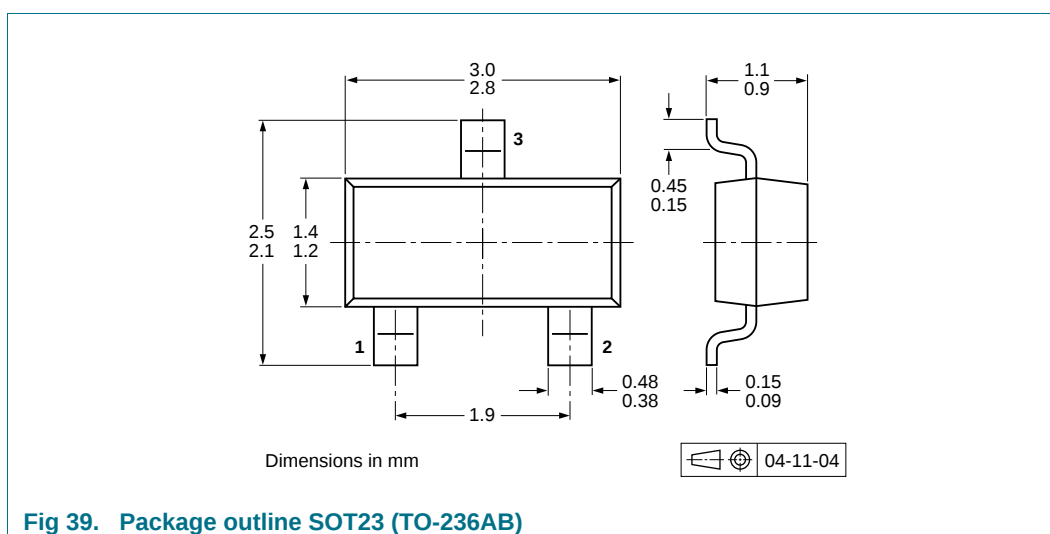

## 13. Soldering

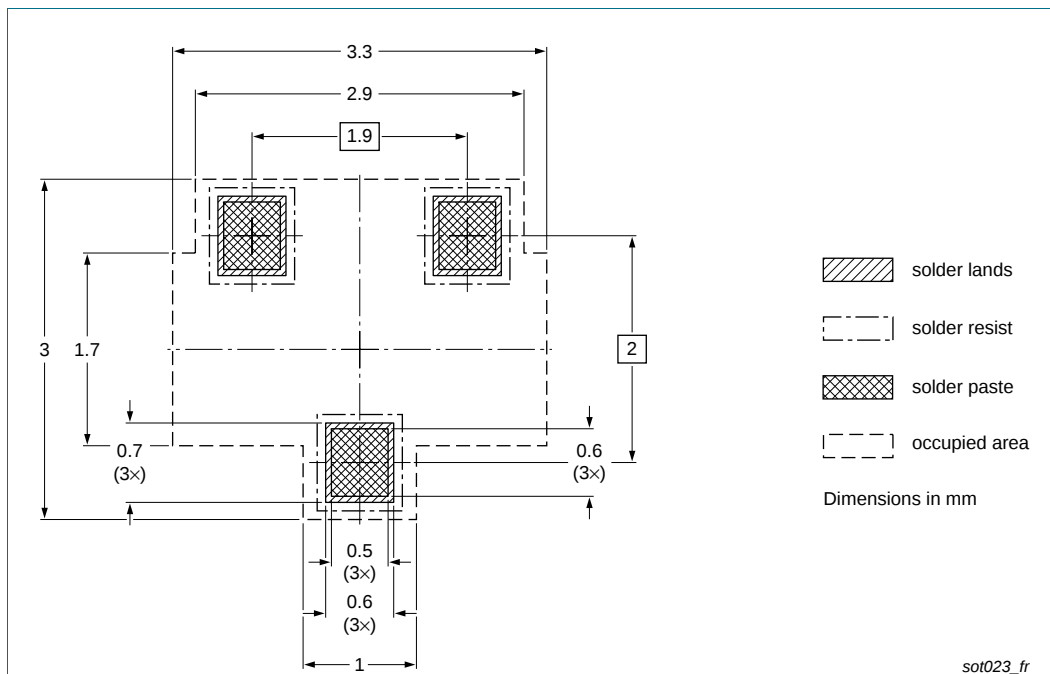

**Fig 40. Reflow soldering footprint SOT23 (TO-236AB)**

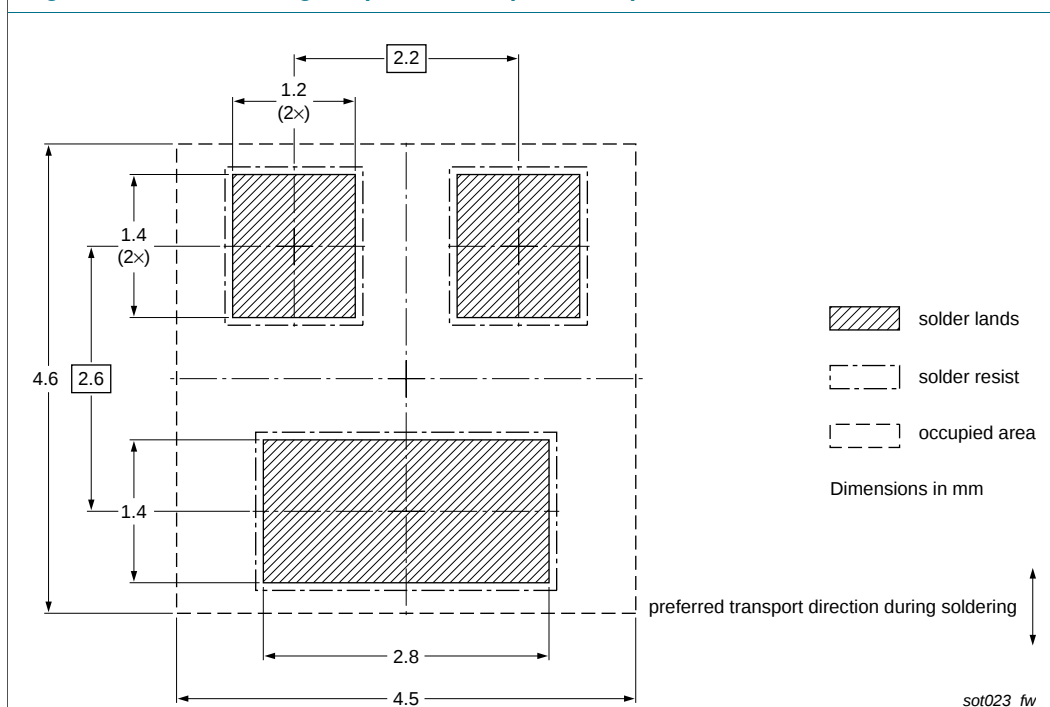

**Fig 41. Wave soldering footprint SOT23 (TO-236AB)**

## 14. Revision history

Table 11. Revision history

| Document ID    | Release date                                                                                         | Data sheet status  | Change notice | Supersedes    |
|----------------|------------------------------------------------------------------------------------------------------|--------------------|---------------|---------------|
| TL431_FAM v.5  | 20150901                                                                                             | Product data sheet | -             | TL431_FAM v.4 |
| Modifications: | <ul style="list-style-type: none"><li><a href="#">Figure 18</a>: Capacitor value corrected</li></ul> |                    |               |               |
| TL431_FAM v.4  | 20110630                                                                                             | Product data sheet | -             | TL431_FAM v.3 |
| TL431_FAM v.3  | 20101105                                                                                             | Product data sheet | -             | TL431_FAM v.2 |
| TL431_FAM v.2  | 20100120                                                                                             | Product data sheet | -             | TL431_FAM v.1 |
| TL431_FAM v.1  | 20090806                                                                                             | Product data sheet | -             | -             |

## 15. Legal information

### 15.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 15.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 15.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 16. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 17. Contents

---

|           |                                                   |           |
|-----------|---------------------------------------------------|-----------|
| <b>1</b>  | <b>Product profile</b> . . . . .                  | <b>1</b>  |
| 1.1       | General description . . . . .                     | 1         |
| 1.2       | Features and benefits . . . . .                   | 2         |
| 1.3       | Applications . . . . .                            | 2         |
| 1.4       | Quick reference data . . . . .                    | 2         |
| <b>2</b>  | <b>Pinning information</b> . . . . .              | <b>3</b>  |
| <b>3</b>  | <b>Ordering information</b> . . . . .             | <b>4</b>  |
| <b>4</b>  | <b>Marking</b> . . . . .                          | <b>5</b>  |
| <b>5</b>  | <b>Functional diagram</b> . . . . .               | <b>5</b>  |
| <b>6</b>  | <b>Limiting values</b> . . . . .                  | <b>6</b>  |
| <b>7</b>  | <b>Recommended operating conditions</b> . . . . . | <b>7</b>  |
| <b>8</b>  | <b>Thermal characteristics</b> . . . . .          | <b>7</b>  |
| <b>9</b>  | <b>Characteristics</b> . . . . .                  | <b>8</b>  |
| <b>10</b> | <b>Application information</b> . . . . .          | <b>20</b> |
| <b>11</b> | <b>Test information</b> . . . . .                 | <b>22</b> |
| 11.1      | Quality information . . . . .                     | 22        |
| <b>12</b> | <b>Package outline</b> . . . . .                  | <b>22</b> |
| <b>13</b> | <b>Soldering</b> . . . . .                        | <b>23</b> |
| <b>14</b> | <b>Revision history</b> . . . . .                 | <b>24</b> |
| <b>15</b> | <b>Legal information</b> . . . . .                | <b>25</b> |
| 15.1      | Data sheet status . . . . .                       | 25        |
| 15.2      | Definitions . . . . .                             | 25        |
| 15.3      | Disclaimers . . . . .                             | 25        |
| 15.4      | Trademarks . . . . .                              | 26        |
| <b>16</b> | <b>Contact information</b> . . . . .              | <b>26</b> |
| <b>17</b> | <b>Contents</b> . . . . .                         | <b>27</b> |

---

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

---

© NXP Semiconductors N.V. 2015.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 01 September 2015

Document identifier: TL431 family



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.