


C-Series (ROCB)

Remote Operating Module

The Carling Technologies Remote Operated Circuit Breaker (ROCB) combines the convenience of remote ON, OFF and Reset capabilities, with the safety and accuracy of a standard magnetic current sensing device, thus allowing operation of the breaker from various locations in a system, facility or site (while not sacrificing the ability to manually operate the breaker if required). The ROCB, service, diagnostics, load shedding and power distribution control functions can now be performed in areas that were previously unattended, inaccessible or unsafe. The ROCB module allows remote operation of the C-Series panel mount breaker (up to 3 poles) through hard wiring with a single pole, double throw switch connected to a standard power source, or more sophisticated relay and modem networks.

The ROCB module can be mounted to either side of the host breaker, while occupying only the width of a standard C-Series pole. Several interface methods are available. Remote physical actuation of the host circuit breaker is achieved by connecting the ROCB module's handle with the breakers. Being based on the C-Series breaker, the ROCB allows easy adaptation into existing panel designs. In addition, its compact size allows efficient use of space for new design applications.

With the ROCB, Carling has designed a versatile, compact and reliable solution -- in a hydraulic/magnetic circuit breaker or switch only device that can be operated both manually and remotely.

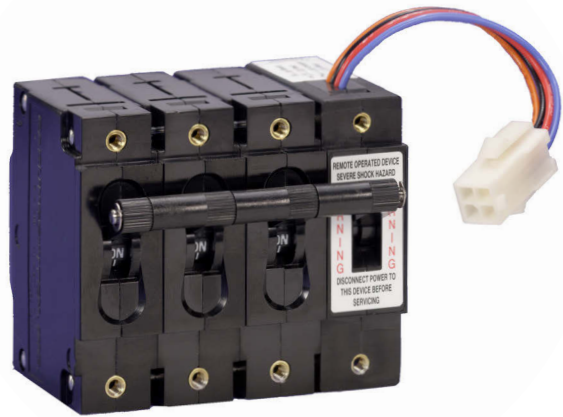

Features:

- ♦ ON-OFF and trip indication
- ♦ Load shedding
- ♦ Energy management
- ♦ Compact size
- ♦ Automatic reset capable
- ♦ Choice of interface styles
- ♦ Panel mounting
- ♦ Manual Operation Override
- ♦ Fits into industry standard cut-out

ROCB Motor Specifications:

- ♦ Voltage input: 12 VDC to 80 VDC
- ♦ Start current: < 1 amp
- ♦ Switching time: < 2 seconds
- ♦ Operating Temperature: -25°C to 80°C




Carling Technologies™

Innovative Designs. Powerful Solutions.

To order a remote operated circuit breaker, add / plus the remote module part number to the end of the C-Series circuit breaker catalog number. ex.CA1BO24620121C/RB1110BU1C

Match color & mounting inserts of breaker.

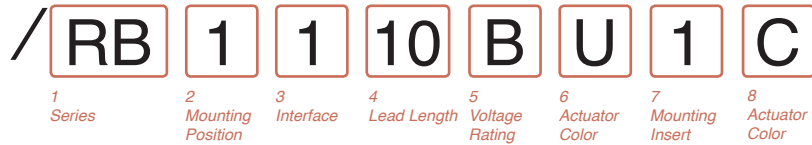

1 SERIES
RB

2 MOUNTING POSITION
As viewed from back of breaker, line side up, pole 1 left.
1 Left Side
2 Right Side

3 INTERFACE
1 Flying Leads
2 Integral Connector
3 Flying Leads w/ 4 pin dual row connector (female)
4 Flying Leads w/ 4 pin dual row connector (male)

4 LEAD LENGTH

00	No Lead	10	10"	21	21"
01	1"	11	11"	22	22"
02	2"	12	12"	23	23"
03	3"	13	13"	24	24"
04	4"	14	14"	25	25"
05	5"	15	15"	26	26"
06	6"	16	16"	27	27"
07	7"	17	17"	28	28"
08	8"	18	18"	29	29"
09	9"	19	19"	30	30"

5 VOLTAGE RATING
A 12 VDC
B 20-40 VDC
C 41-80 VDC


6 ACTUATOR COLOR
T White
U Black
V Red
W Yellow

7 MOUNTING INSERT
1 6-32 x 0.195"
2 ISO M3 x 5mm


8 AGENCY APPROVAL
C UL Recognized & CSA Accepted
E TUV Certified, UL Recognized & CSA Accepted
G UL 489 Listed & CSA Certified
I UL 1500 Ignition Protected, UL Recognized & CSA Accepted
J UL 489 Listed, CSA Certified & TUV Certified

Notes:
Integral and 4-pin dual row connectors not available with agency approval J or G: UL 489.


**CATALOG INTERFACE OPTION 1 (FLYING LEADS)
WIRING INSTRUCTIONS**

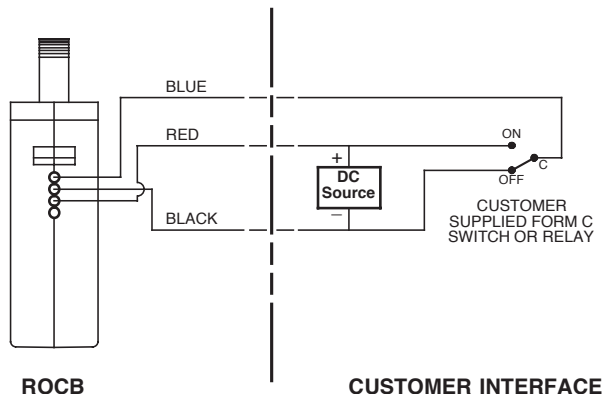


**CATALOG INTERFACE OPTION 2 (INTEGRAL CONNECTOR)
WIRING INSTRUCTIONS**

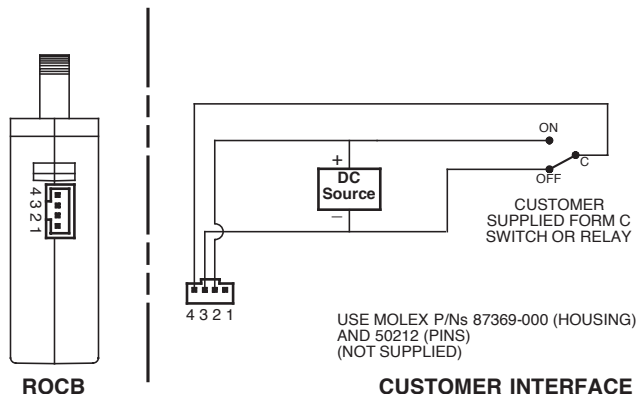


**CATALOG INTERFACE OPTION 3
(FLYING LEADS WITH 4 PIN DUAL ROW CONNECTOR)
WIRING INSTRUCTIONS**

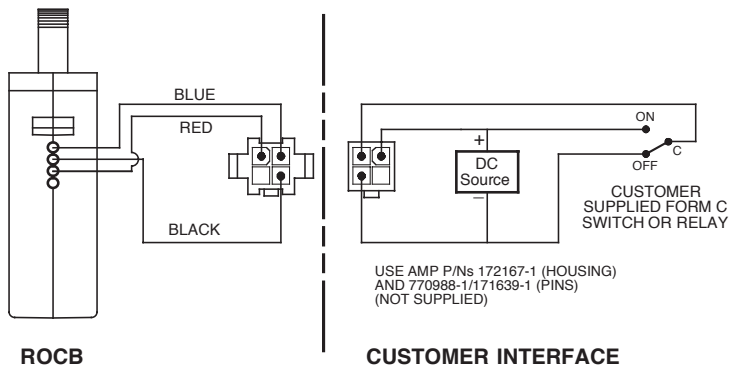


**CATALOG INTERFACE OPTION 1 (FLYING LEADS)
WIRING INSTRUCTIONS**

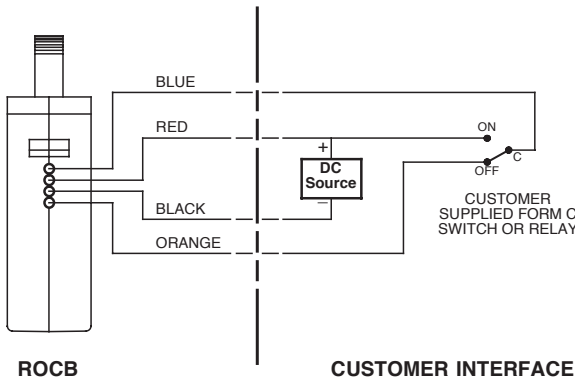


**CATALOG INTERFACE OPTION 2 (INTEGRAL CONNECTOR)
WIRING INSTRUCTIONS**

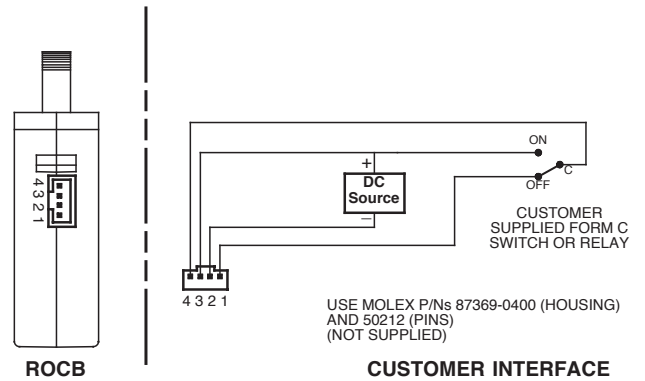


**CATALOG INTERFACE OPTION 3
(FLYING LEADS WITH FEMALE 4 PIN DUAL ROW CONNECTOR)
WIRING INSTRUCTIONS**

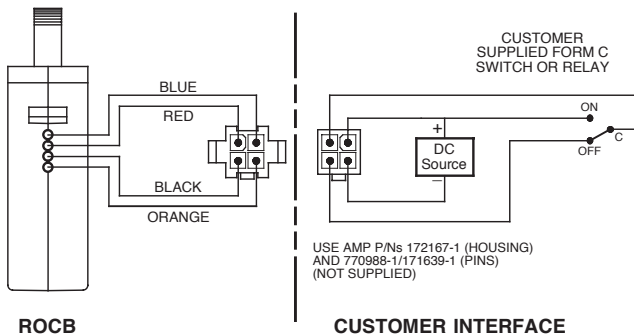


**CATALOG INTERFACE OPTION 4
(FLYING LEADS WITH MALE 4 PIN DUAL ROW CONNECTOR)
WIRING INSTRUCTIONS**

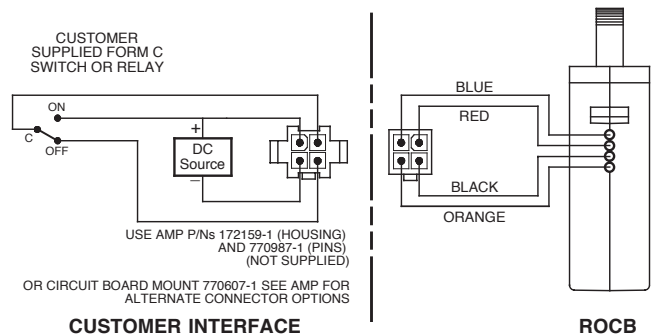

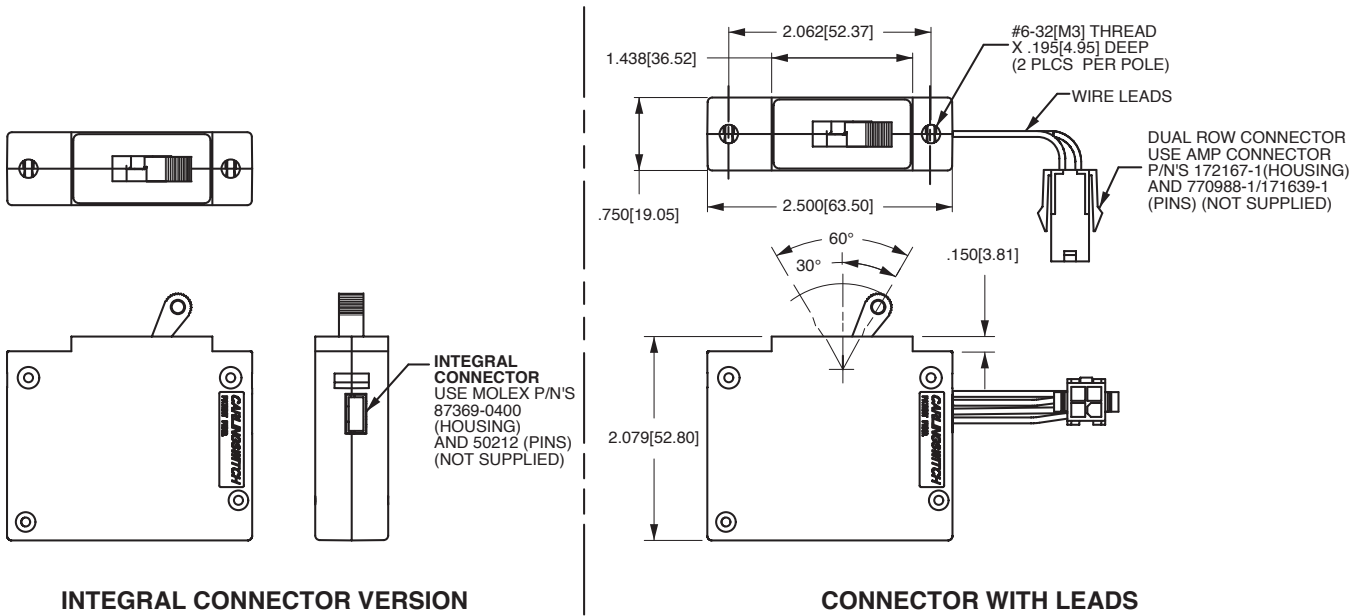

PANEL CUTOUT DETAIL

TOLERANCES ±.005 [.12]

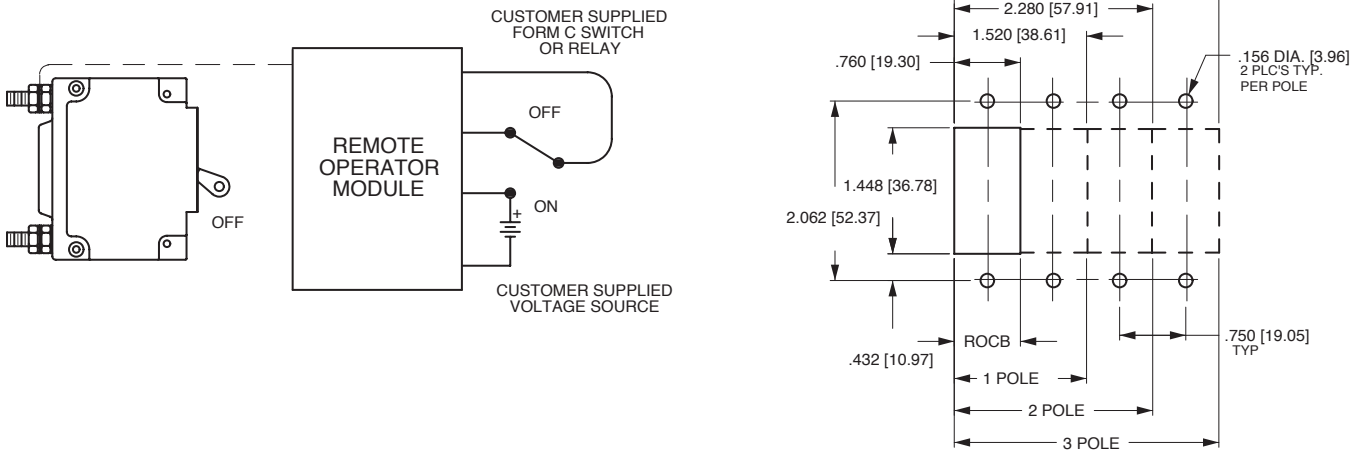

REV_CB_C-ROCB_01_2014



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.