

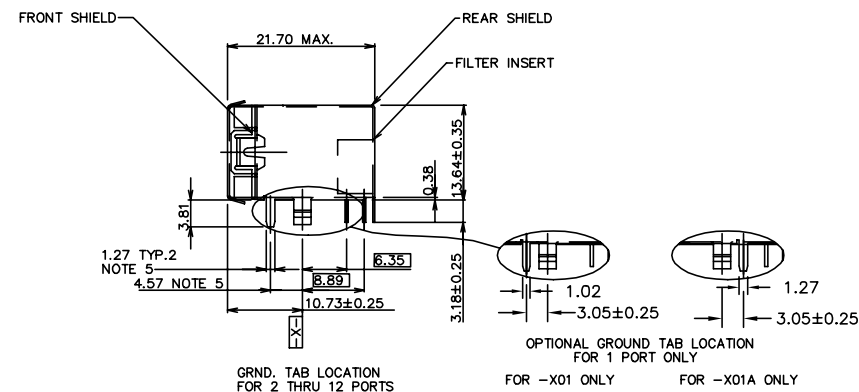
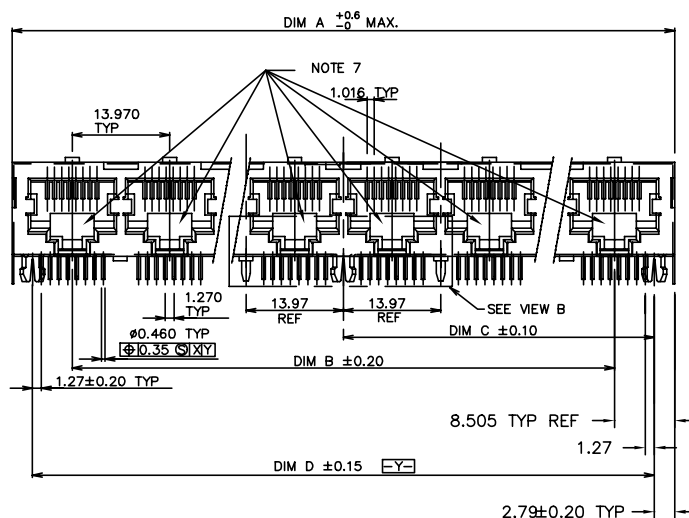




NOTE 1:
A DESIGN IS SHOW WITH AN INNER CONDUCT FRONTPANEL
(FOR GROUNDING), AND A COSMETIC OUTER PANEL,
THE INNER PANEL IS RECOMMENDED TO BE SN PLATED ON THE CUTOUT EDGES.

mat'l. code				surface		tolerance		projection		product family			
				ISO 1302 ✓		ISO 406 ISO 1101				MOD JACK			
l t r e c n n o d r		date		tolerances unless otherwise specified						title			
H	M04-0189	MHT	10/11/04	angle	line	0.X±0.3			R/A GANG JACK FILTER ASSY				
J	M05-0074	MHT	4/23/05			0.XX±0.13			8 POS SHIELDED SNAP PER				
K	N08-0273	SH	12/25/08			0.XXX±0.051			scale 1.0				
L	N09-0302	SH	9/3/09	dr	L. POTTIEGER	3/15/95			dwg no		sheet 1 of 8	size	
M	EX-N-007903	SH	2011-11-17	eng'd	P. BELOPOLSKY	3/15/95			95672		A4		
N	EX-N-011006	SH	03/27/12	chr'd	P. BELOPOLSKY	3/15/95							
				app'd	P. BELOPOLSKY	3/15/95			type Product Customer Drawing				
sheet		revision		N	N	N	N	N	N	N	N	N	N
index		sheet		1	2	3	4	5	6	7	8		

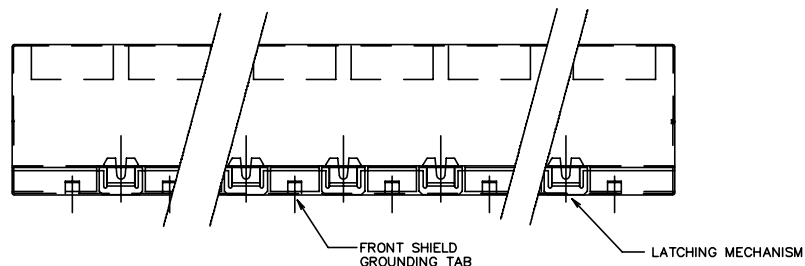

1		2					
PRODUCT No.	NOTE 8	PORTS No	DIM A ± 0.60 -0.00	DIM B	DIM C ± 0.10	DIM D ± 0.15	GROUND LEG NUMBER ON THE BACK (VIEW B) SEE DIAGRAM ON SHT. 3
95672-X01		1	15.74	-	5.715	11.43	
95672-X01A		1	15.74	-	5.715	11.43	
95672-X02-YZ		2	30.98	13.97	12.700	25.40	
95672-X03-YZ		3	44.95	27.94	19.685	39.37	
95672-X04-YZ		4	58.92	41.91	26.670	53.34	
95672-X05-YZ		5	72.89	55.88	33.655	67.31	NO TOOL
95672-X06-YZ		6	86.86	69.85	40.640	81.28	NO TOOL
95672-X07-YZ		7	100.83	83.82	47.625	95.25	NO TOOL
95672-X08-YZ		8	114.80	97.79	54.610	109.22	
95672-X09-YZ		9	128.77	111.76	61.595	123.19	NO TOOL
95672-X10-YZ		10	142.74	125.73	68.580	137.16	NO TOOL
95672-X11-YZ		11	156.71	139.70	75.565	151.13	NO TOOL
95672-X12-YZ		12	170.68	153.67	82.550	165.10	NO TOOL

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: HIGH TEMP RESIN
3. CONTACTS:PHOS BRONZE ALLOY UNS-C51000, $\varnothing$ 0.460 ROUND WIRE,PLATING SEE TABLE.
4. SHIELDING MATERIAL: BRASS ALLOY 0.25 MM THICK
SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT TIN LEAD 100u" MIN
LEAD FREE OPTION
SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT PURE TIN 100u" MIN
- (5) SEE SNGL. PORT GROUND LEG OPTIONS, SIDE VIEW PG.1 FOR DETAILS.
6. ALL DIMENSIONS IN MILLIMETERS.
- (7) COMPANY LOGO LOCATED IN THIS AREA.
- (8) ADD LF SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION.
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mmMINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- (11) PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
12. PRODUCT SPECIFICATION GS-12-083
PRODUCT PACKAGING SPECIFICATION GS-14-361

FRONT SHIELD CODE Y

0 = STANDARD GRND. TABS
1 = NO GRND. TABS

REAR SHIELD CODE Z

0 = STANDARD GRND. LEGS
1 = 1 STANDARD GRND. LEG
2 = ALL GRND. LEGS
3 = NO GRND. LEGS


PLATING CODE X	PLATING (11)
0	30u" G.X.T.
1	15u" GOLD.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code		surface ☒ tolerance		projection		product family	
ISO 1302		ISO 406 ISO 1101				MOD JACK	
tolerances unless otherwise specified						title	
N		angle		MM		R/A GANG JACK FILTER ASSY	
		0.X $\pm$ 0.3				8 POS SHIELDED SNAP PER	
		0.XX $\pm$ 0.13		scale 1.0			
		0.XXX $\pm$ 0.051					
		dr L. POTTIEGER		3/15/95		dwg no	
		eng. R. BELOPOLSKY		3/15/95		sheet 2 of 8	
		chr. Y. BELOPOLSKY		3/15/95		95672	
		app. Y. BELOPOLSKY		3/15/95		A4	
sheet		revision				type Product Customer Drawing	
index		sheet					




REAR SHIELD (VIEWED FROM PLUG ENTRY SIDE)
GROUND SOLDER TAIL CONFIGURATION

CODE "Z" = 0

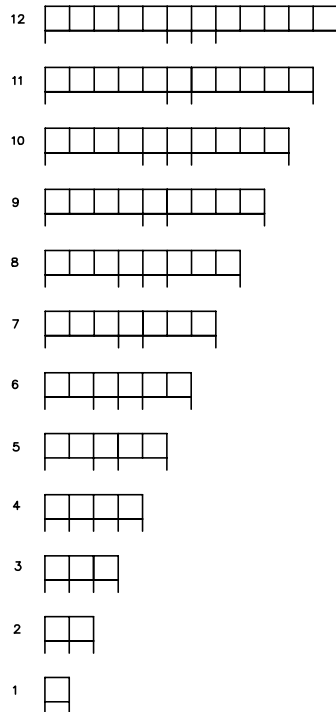


PCB LAYOUT SHEET 4

CODE "Z" = 1

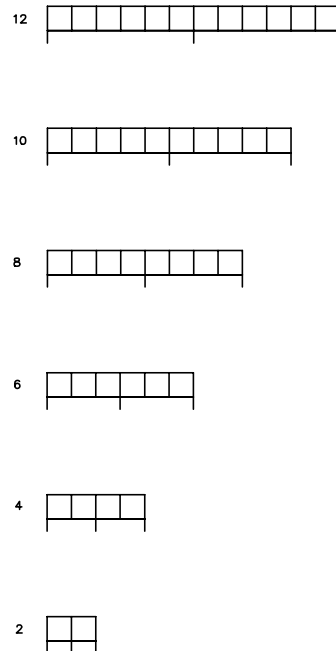


PCB LAYOUT SHEET 5

CODE "Z" = 2

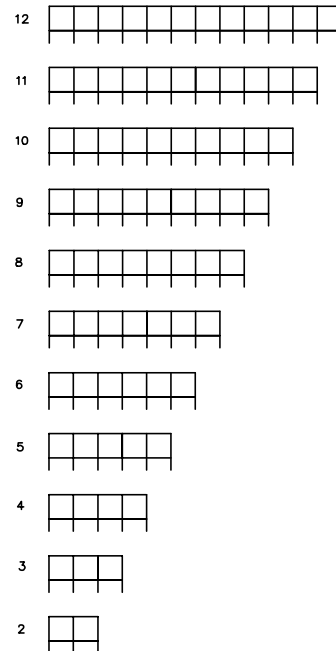







PCB LAYOUT SHEET 6

CODE "Z" = 3

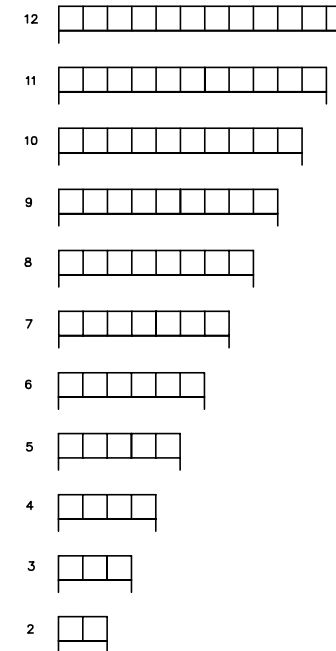


PCB LAYOUT SHEET 7

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101		MOD JACK
l	tr	ec	n	o	d
date		tolerances unless otherwise specified		title	
N		angle	0.X±0.3	MM	R/A GANG JACK FILTER ASSY
		0°±2'	0.XX±0.13	scale 1.0	8 POS SHIELDED SNAP PER
			0.XXX±0.051		
dr	L. POTTIEGER	3/15/95			dwg no
eng	Y. BELOPOLSKY	3/15/95			sheet 3 of 8
chr	Y. BELOPOLSKY	3/15/95			size
app	Y. BELOPOLSKY	3/15/95			A4
sheet	revision				type
index	sheet				Product Customer Drawing

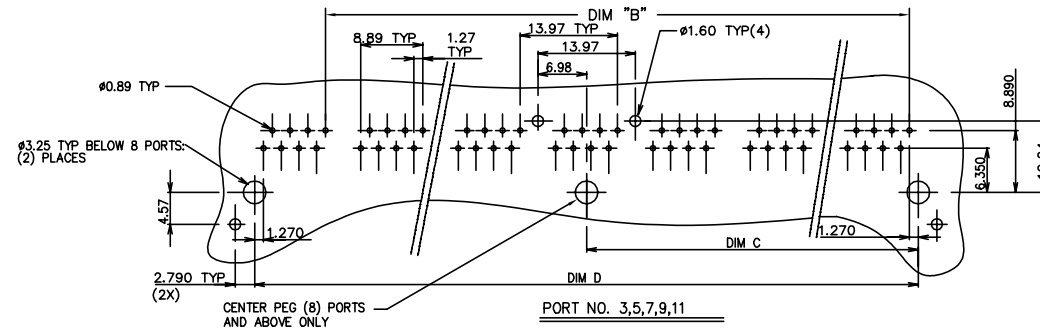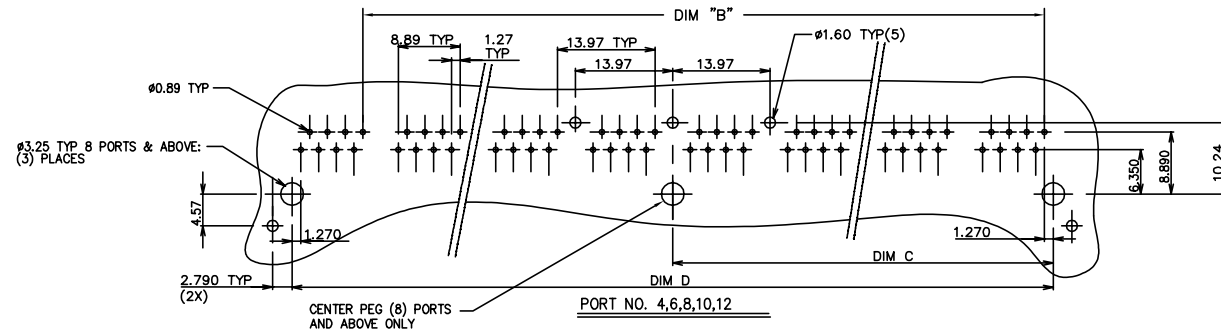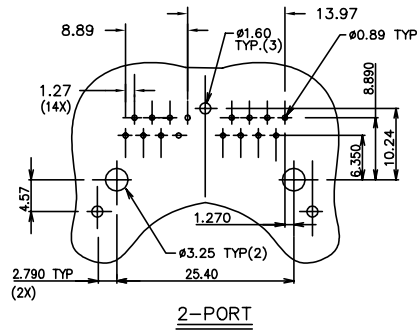



mat'l. code	surface	tolerance	projection	product family
	ISO 1302	ISO 406 ISO 1101		MOD JACK
ltr ecn nodr date	tolerances unless otherwise specified			
N	angle	0.X±0.3	MM	R/A GANG JACK FILTER ASSY
	0°±2'	0.XX±0.13	scale 1.0	8 POS SHIELDED SNAP PER
	0°±2'	0.XXX±0.051		
dr L. POTTIEGER 3/15/95	eng. Y. BELOPOLSKY 3/15/95			dwg no sheet 4 of 8 size
chr Y. BELOPOLSKY 3/15/95	app. Y. BELOPOLSKY 3/15/95			95672 A4
sheet index	revision sheet			type Product Customer Drawing

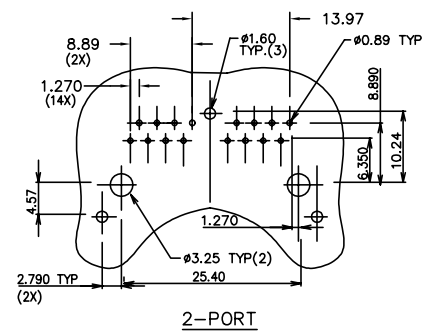


CODE "Z" = 1 (1 GROUND LEG)


mat'l. code				surface		tolerance		projection		product family			
				ISO 1302 ✓		ISO406 ISO1101				MOD JACK			
ltr ecn nodr date				tolerances unless other		wise specified		title					
N				angle		0.x±0.3				R/A GANG JACK FILTER ASSY			
				linear		0.xx±0.13		scale 1.0		8 POS SHIELDED SNAP PER			
				0°±2'		0.xxx±0.051							
				dr		L. POTTIEGER		3/15/95		dwg no		sheet 5 of 8	size
				engr		R. BELOPOLSKY		3/15/95				95672	A4
				chnr		Y. BELOPOLSKY		3/15/95					
				app'd		R. BELOPOLSKY		3/15/95		type		Product Customer Drawing	
sheet index		revision sheet											

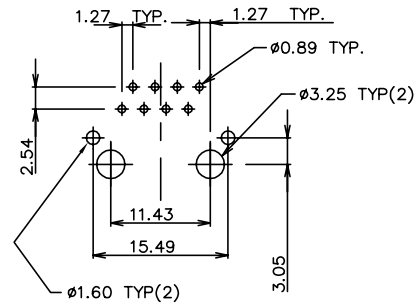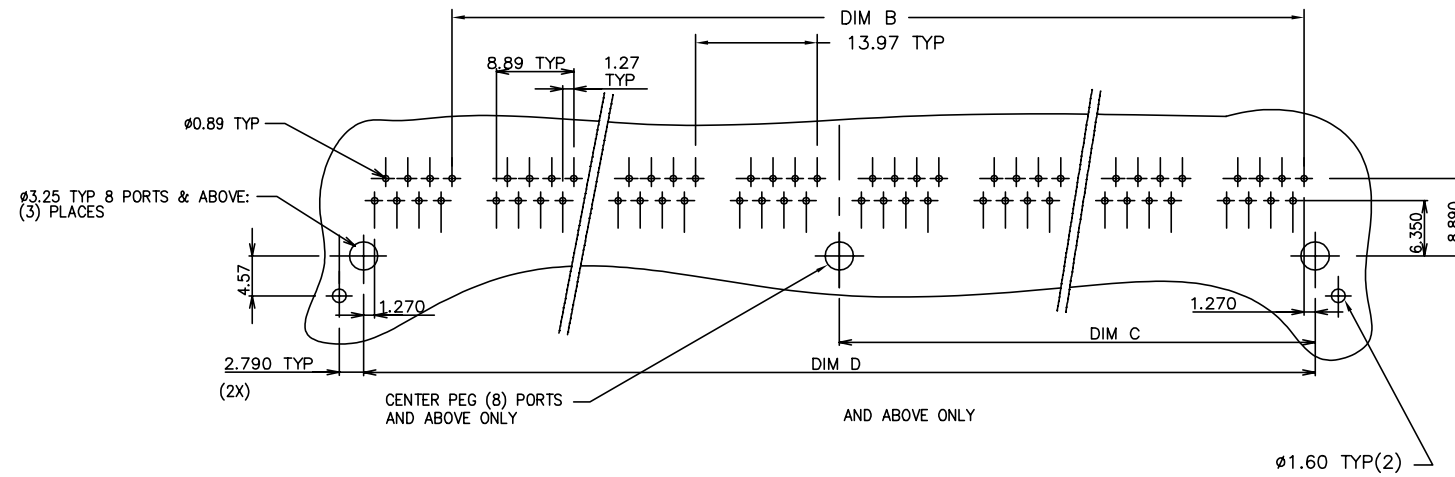

FOR 1-PORT, -X01A, -X01ALF
SAME AS STD CODE "Z"=0

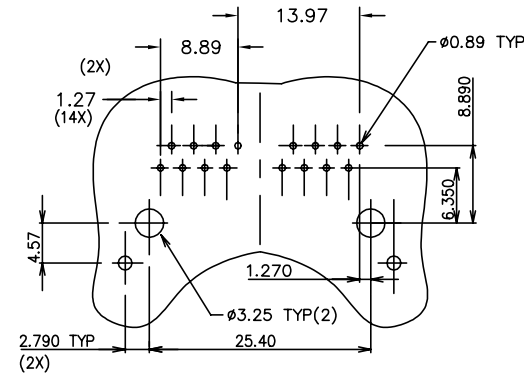

2-PORT

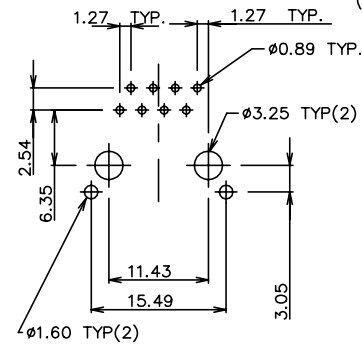

FOR 1-PORT, -X01, -X01LF
SAME AS STD CODE "Z"=0

RECOMMENDED P.C.B LAYOUT

CODE "Z" = 3 (NO GROUND LEGS)

mat'l. code	surface	tolerance	projection	product family
ISO 1302	ISO 406	ISO 1101	MOD JACK	
l'tecn nodr date	tolerances unless otherwise specified			
N	angle	0.x±0.3	MM	R/A GANG JACK FILTER ASSY
	0°±2'	0.xx±0.13	scale 1.0	8 POS SHIELDED SNAP PER
		0.xxx±0.051		
dr L. POTTIEGER	3/15/95			dwg no sheet 7 of 8 size
eng Y. BELOPOLSKY	3/15/95			95672 A4
chr Y. BELOPOLSKY	3/15/95			type Product Customer Drawing
app Y. BELOPOLSKY	3/15/95			
sheet index	revision sheet			

PRODUCT No. NOTE 8	PORTS No	DIM A ± 0.60 -0.00	DIM B	DIM C ± 0.10	DIM D ± 0.15	GROUND LEG NUMBER ON THE BACK (VIEW B) SEE DIAGRAM ON SHT. 3	COMMENT
95672-X01H	1	15.74	-	5.715	11.43		NOTE 5
95672-X01AH	1	15.74	-	5.715	11.43		NOTE 5
95672-X02H -YZ	2	30.98	13.97	12.700	25.40		NO TOOL
95672-X03H -YZ	3	44.95	27.94	19.685	39.37		NO TOOL
95672-X04H -YZ	4	58.92	41.91	26.670	53.34		
95672-X05H -YZ	5	72.89	55.88	33.655	67.31		NO TOOL
95672-X06H -YZ	6	86.86	69.85	40.640	81.28		NO TOOL
95672-X07H -YZ	7	100.83	83.82	47.625	95.25		NO TOOL
95672-X08H -YZ	8	114.80	97.79	54.610	109.22		
95672-X09H -YZ	9	128.77	111.76	61.595	123.19		NO TOOL
95672-X10H -YZ	10	142.74	125.73	68.580	137.16		NO TOOL
95672-X11H -YZ	11	156.71	139.70	75.565	151.13		NO TOOL
95672-X12H -YZ	12	170.68	153.67	82.550	165.10		NO TOOL

MEETS PIP PROCESS PRODUCT NO.

FRONT SHIELD CODE Y

0 = STANDARD GRND. TABS

1 = NO GRND. TABS

REAR SHIELD CODE Z

0 = STANDARD GRND. LEGS

1 = 1 STANDARD GRND. LEG

2 = ALL GRND. LEGS

3 = NO GRND. LEGS

PLATING CODE X	PLATING ⑪
0	30u" G.X.T.
1	15u" GOLD.
3	5u" Au + high performance lubricant
5	50u" GXT.

NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE.

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: HIGH TEMP RESIN
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000,
Ø 0.460 ROUND WIRE, PLATING SEE TABLE.

SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT TIN LEAD 100u" MIN

LEAD FREE OPTION

SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT PURE TIN 100u" MIN

- ⑤ SEE SNGL. PORT GROUND LEG OPTIONS,
SIDE VIEW PG.1 FOR DETAILS.

6. ALL DIMENSIONS IN MILLIMETERS.

- ⑦ COMPANY LOGO LOCATED IN THIS AREA.

- ⑧ ADD LF SUFFIX AT THE END OF PART NUMBER
FOR LEAD FREE OPTION.

9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE
SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK
CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.

10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATION AS DESCRIBED
IN GS-22-008.

- ⑪ PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT
MANUFACTURER'S OPTION.

12. PRODUCT SPECIFICATION GS-12-083
PRODUCT PACKAGING SPECIFICATION GS-14-361

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101		MOD JACK
l	tr	ec	n	dr	date
N		angle	0.x±0.3	MM	R/A GANG JACK FILTER ASSY
		0°±2'	0.xx±0.13	scale 1.0	8 POS SHIELDED SNAP PER
		dr	L. POTTIEGER	3/15/95	dwg no
		eng	Y. BELOPOLSKY	3/15/95	sheet 8 of 8
		chr	Y. BELOPOLSKY	3/15/95	size
		app	Y. BELOPOLSKY	3/15/95	A4
sheet	revision	type Product Customer Drawing			
index	sheet				



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.