



**24 Port Gigabit Power over Ethernet Midspan  
POE370U for 10/100/1000 Base-T Networks**



**Features**

- IEEE 802.3af Detection, Disconnect and Overload Protection
- NIC Interface (Optional)
- SSL Option with SNMPv3
- 10/100/1000 base T Compatible
- 1-year Warranty<sup>1</sup>
- Full Power of 370W--15.4W per Port No Power Management required
- Full Protection OTP, OCP, OVP
- 48V RPS Input (Optional)
- Cisco Legacy Detection
- 1U Rack Mounting Kit Ships with Unit

**Applications**

- VoIP Phones
- Access Point
- Security Systems
- Lighting Systems with Single UPS

**Safety Approvals**

- cUL/UL
- CE
- SAA
- C-Tick

**Mechanical Characteristics**

- Length: 438mm (17.25in)
- Width: 228mm (8.98in)
- Height: 44.5 mm (1.75in)
- Weight: 3.8Kg (8.5lbs)

**Output Specifications**

Model	Number of Ports	Maximum Output Power
POE370U-480-24-N-R <sup>2</sup>	24	370W

Notes:

1. Effective January 1, 2019, warranty is valid for one year from purchase date. Optional extended warranties available-please consult factory for more information
2. Consult Factory for availability. "N" includes SNMP, Simple Network Management Protocol

Reference Files:

1. [Multiport Midspan Installation Manual.pdf](#)
2. [19in Rack Mounting Kit Datasheet.pdf](#)
3. [SNMPv2c User Manual-Rev1.7.pdf](#)
4. [SNMPv2c Firmware-Rev1.7.zip](#)
5. [SNMPv2c MIB 10 30 2009.zip](#)

Phihong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at [www.phihong.com](http://www.phihong.com) for the most up-to-date specifications and contact information.

**INPUT:****AC Input Voltage Range**

90 to 264VAC

**AC Input Voltage Rating**

100 to 240VAC

**AC Input Current**

5.5A (RMS) maximum for 90VAC

2.75A (RMS) maximum for 240VAC

**Leakage Current**

3.5mA maximum @ 254VAC 60Hz

**AC Input Frequency**

47-63Hz

**AC Inrush Current**

30A (RMS) maximum for 115VAC

60A (RMS) maximum for 230VAC

**OUTPUT:****Total Output Power**

15.4W per port

**Ripple and Regulation**

100mV maximum

**Efficiency**

75% (typical) at maximum load, and

120VAC 60Hz

**Hold-up Time**

16mS min. 120VAC at maximum load

**Transient O/P Voltage Protection**

60V maximum at switch on and off at any

AC line Phase

**Turn-On Delay Time**

3 sec maximum at maximum load, and

120VAC 60Hz, 25Hz

**ENVIRONMENTAL:****Temperature**

Operation 0 to +40°C

Non-operation -25 to +65°C

Humidity 5 to 90%

**EMC**

Complies with FCC Class B

Complies with EN55032 Class B

**Isolation Test**

Primary to Secondary: 4242VDC for 1 minute

Primary to Ground: 2121VDC for 1 minute

Secondary to Ground: 2121VDC for 1 minute

**Immunity EN50082-1**

ESD: EN61000-4-2. Level 3

RS: EN61000-4-3. Level 2

EFT: EN61000-4-4. Level 2

Surge: EN61000-4-5. Level 3

CS: EN61000-4-6. Level 2

Voltage Dips EN61000-4-11

Harmonic: EN61000-3-2 Class A

**IEEE 802.3af Interoperability**

UNH Interoperability report available on request

**FEATURES:****Cisco Legacy detection**

No extern parts required for Legacy devices:

VoIP Phones:

7910, 7912, 7940, 7960

Access Points:

350, 1100, 1200

**Over Voltage/Current, Short Circuit Protection**

The output can be shorted permanently without damage

**Over Temperature Protection**

Automatic shutdown without damage

**Indicators**

Green LED: Power detected “ON”

Yellow LED: Fault detected

**USB Diagnostics Port**

USB “B” port for diagnostics and manual port control

Windows GUI

**Input Connector**

AC

IEC320 inlet 3 pin


DC for RPS option

Molex Minifit

Shell 39-01-20-65

Pins 39-00-0077

**POE370U-480-24-N-R Dimension Diagram Unit: mm**

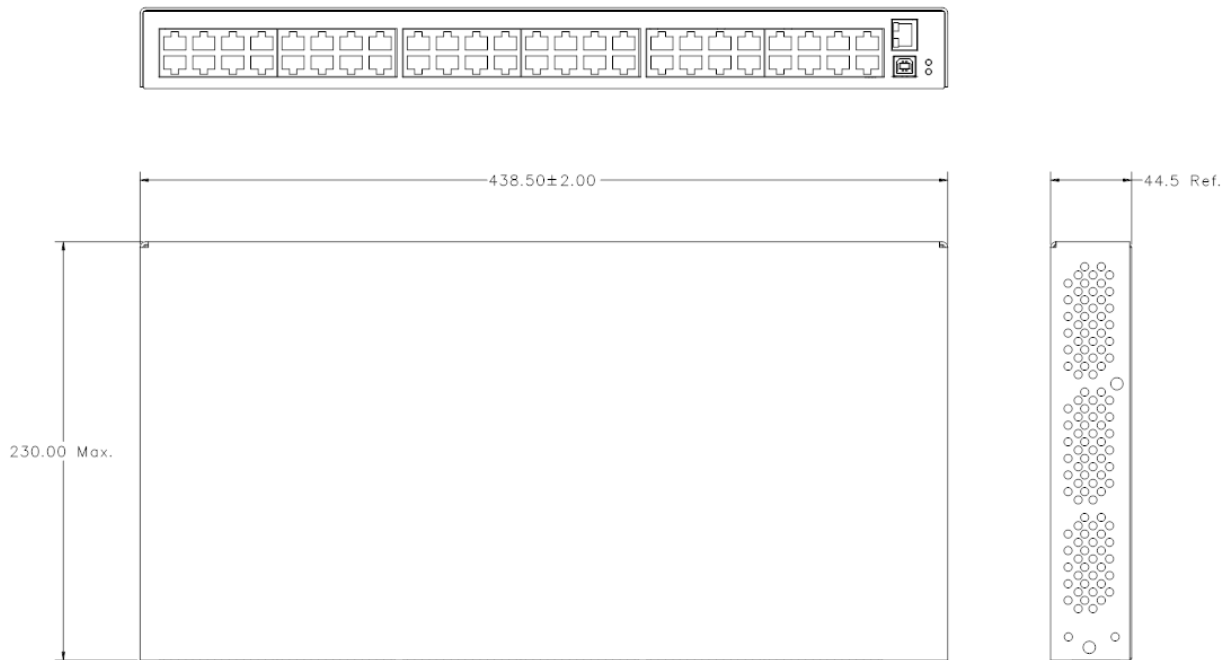

**Supplier's Declaration of Conformity**  
**47 CFR § 2.1077 Compliance Information**

Phihong USA Corporation  
47800 Fremont Boulevard  
Fremont, CA 94538  
Telephone: (510) 445-0100  
[www.phihong.com](http://www.phihong.com)

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.