

## FEATURES

- RoHS compliant
- Maxim MAX253 compatible
- 3.3V and 5V versions
- Isolation to 4kV<sub>DC</sub>
- Frequency range to 500kHz
- Toroidal construction
- Industry-standard pinout
- UL 94 V-0 package materials
- Fully encapsulated
- Low profile
- Surface mount option
- Industrial temperature range

## DESCRIPTION

The 78253 series of converter transformers are specifically designed for use with the MAX253 chip set to provide isolated power supplies. The 5V version can supply 1W and the 3.3V version can supply 500mW. A centre tapped secondary winding allows for full bridge, half bridge or voltage doubling.

## Surface-mount parts

The surface-mount (M suffix) products are not recommended for new designs. For existing designs, however, Murata Power Solutions will continue to manufacture and fully support these parts.

For recommended alternatives please refer to the 78253J Series datasheet.



# 78253 Series

MAX253 Compatible Converter Transformers

## SELECTION GUIDE

| Order Code         | Input Voltage | Output Voltage | Max. Output Current | Isolation Voltage | Turns Ratio | Package Style |
|--------------------|---------------|----------------|---------------------|-------------------|-------------|---------------|
|                    | V             | V              | mA                  | V <sub>DC</sub>   |             |               |
| <b>78253/35C</b>   | 3.3           | 5.0            | 100                 | 1500              | 1:2.27      | DIL           |
| <b>78253/35MC</b>  |               |                |                     |                   |             | SM            |
| <b>78253/55C</b>   | 5.0           | 5.0            | 200                 | 1500              | 1:1.31      | DIL           |
| <b>78253/55MC</b>  |               |                |                     |                   |             | SM            |
| <b>78253/35VC</b>  | 3.3           | 5.0            | 100                 | 4000              | 1:2.14      | DIL           |
| <b>78253/35MVC</b> |               |                |                     |                   |             | SM            |
| <b>78253/55VC</b>  | 5.0           | 5.0            | 200                 | 4000              | 1:1.33      | DIL           |
| <b>78253/55MVC</b> |               |                |                     |                   |             | SM            |

## ORDER CODE DETAILS

| Order Code          | Package Type | Packaging Type | Quantity |
|---------------------|--------------|----------------|----------|
| <b>78253/XXC</b>    | 6 Pin DIL    | Tube           | 50       |
| <b>78253/XXMC</b>   | 6 Pin SM     | Tube           | 50       |
| <b>78253/XXMC-R</b> | 6 Pin SM     | Tape & Reel    | 500      |

## 78253/35(M)C CHARACTERISTICS

| Parameter                                 | Conditions      | Min. | Typ. | Max. | Units |
|-------------------------------------------|-----------------|------|------|------|-------|
| Primary Inductance, L <sub>p</sub>        | 100kHz, 250mV   | 0.30 | 0.38 | 0.46 | mH    |
| Secondary Inductance, L <sub>s</sub>      | 100kHz, 250mV   | 1.60 | 2.00 | 2.40 | mH    |
| Leakage Inductance, L <sub>l</sub>        | 100kHz, 250mV   |      | 0.30 | 1.00 | μH    |
| Interwinding Capacitance, C <sub>ww</sub> | 100kHz, 250mV   |      | 30   | 50   | pF    |
| Primary D.C. Resistance, R <sub>DC</sub>  | >0.1VDC         |      | 0.40 | 1.00 | Ω     |
| Volt-time Product, Et                     | Pins 1/2 or 2/3 | 30   | 35   |      | Vμs   |

## 78253/55(M)C CHARACTERISTICS

| Parameter                                 | Conditions      | Min. | Typ. | Max. | Units |
|-------------------------------------------|-----------------|------|------|------|-------|
| Primary Inductance, L <sub>p</sub>        | 100kHz, 250mV   | 0.60 | 0.83 | 1.10 | mH    |
| Secondary Inductance, L <sub>s</sub>      | 100kHz, 250mV   | 1.10 | 1.40 | 1.70 | mH    |
| Leakage Inductance, L <sub>l</sub>        | 100kHz, 250mV   |      | 0.35 | 1.00 | μH    |
| Interwinding Capacitance, C <sub>ww</sub> | 100kHz, 250mV   |      | 30   | 50   | pF    |
| Primary D.C. Resistance, R <sub>DC</sub>  | >0.1VDC         |      | 0.70 | 1.50 | Ω     |
| Volt-time Product, Et                     | Pins 1/2 or 2/3 | 40   | 50   |      | Vμs   |

## 78253/35(M)VC CHARACTERISTICS

| Parameter                                 | Conditions      | Min. | Typ. | Max. | Units |
|-------------------------------------------|-----------------|------|------|------|-------|
| Primary Inductance, L <sub>p</sub>        | 100kHz, 20mV    | 110  | 142  | 185  | μH    |
| Secondary Inductance, L <sub>s</sub>      | 100kHz, 20mV    | 550  | 710  | 850  | μH    |
| Leakage Inductance, L <sub>l</sub>        | 100kHz, 250mV   |      | 3.00 | 5.00 | μH    |
| Interwinding Capacitance, C <sub>ww</sub> | 100kHz, 250mV   |      | 4.20 | 8.00 | pF    |
| Primary D.C. Resistance, R <sub>DC</sub>  | >0.1VDC         |      | 0.30 | 0.50 | Ω     |
| Volt-time Product, Et                     | Pins 1/2 or 2/3 | 18   | 22   |      | Vμs   |

## 78253/55(M)VC CHARACTERISTICS

| Parameter                                 | Conditions      | Min. | Typ. | Max. | Units |
|-------------------------------------------|-----------------|------|------|------|-------|
| Primary Inductance, L <sub>p</sub>        | 100kHz, 20mV    | 190  | 240  | 310  | μH    |
| Secondary Inductance, L <sub>s</sub>      | 100kHz, 20mV    | 350  | 444  | 540  | μH    |
| Leakage Inductance, L <sub>l</sub>        | 100kHz, 250mV   |      | 5.20 | 8.00 | μH    |
| Interwinding Capacitance, C <sub>ww</sub> | 100kHz, 250mV   |      | 4.20 | 8.00 | pF    |
| Primary D.C. Resistance, R <sub>DC</sub>  | >0.1VDC         |      | 0.40 | 0.60 | Ω     |
| Volt-time Product, Et                     | Pins 1/2 or 2/3 | 25   | 28   |      | Vμs   |

All specifications typical at T<sub>A</sub>=25°C


## ABSOLUTE MAXIMUM RATINGS

|                                                             |                |
|-------------------------------------------------------------|----------------|
| Operating free air temperature range                        | -40°C to 85°C  |
| Storage temperature range                                   | -50°C to 125°C |
| Lead Temperature 1.5mm from case for 10 seconds             | 300°C          |
| Peak current $I_{PK}$                                       | 400mA          |
| Isolation voltage 78253/XX(M)C (flash tested for 1 second)  | 1500Vdc        |
| Isolation voltage 78253/XX(M)VC (flash tested for 1 second) | 4000Vdc        |


## PACKAGE SPECIFICATIONS

### MECHANICAL DIMENSIONS

#### 6 Pin DIL

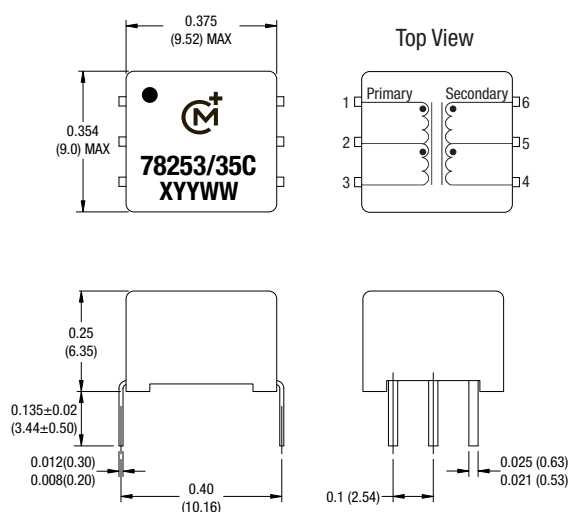


#### 6 Pin SM

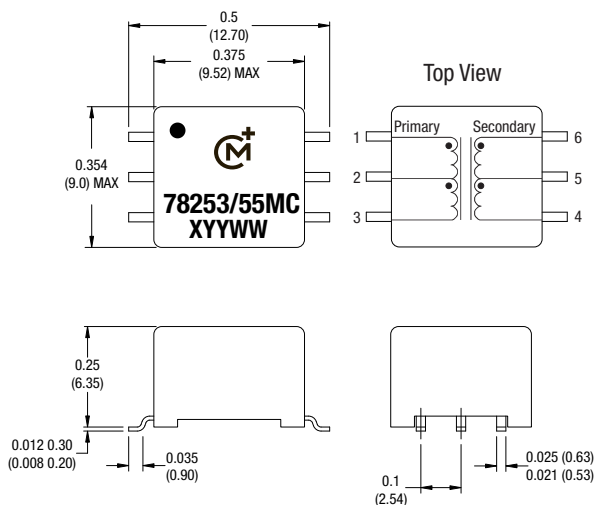


Unless otherwise stated all dimensions in inches (mm)  $\pm 0.01$  (0.25).  
All pins on a 0.1 (2.54) pitch and within  $\pm 0.01$  (0.25) of true position.  
Package weight 1.0g Typ.

### RECOMMENDED FOOTPRINT DETAILS

#### 6 Pin DIL

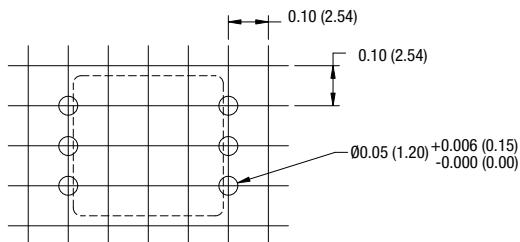





#### 6 Pin SM

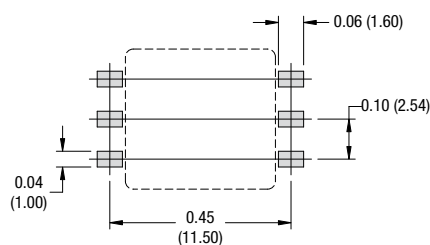





Unless otherwise stated all dimensions in inches (mm)  $\pm 0.01$  (0.25).  
All pins on a 0.1 (2.54) pitch and within  $\pm 0.01$  (0.25) of true position.

## TYPICAL CHARACTERISTICS (VOLTAGE CURVES)

### VOLTAGE CURVES

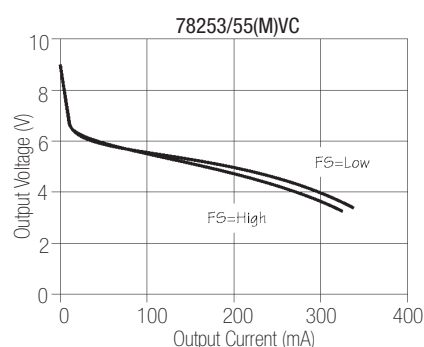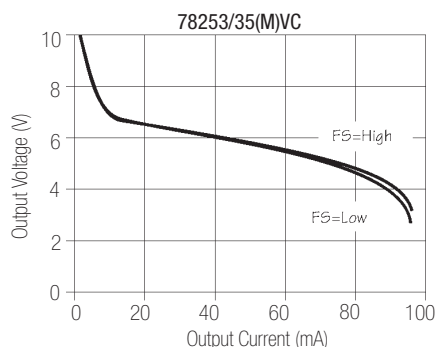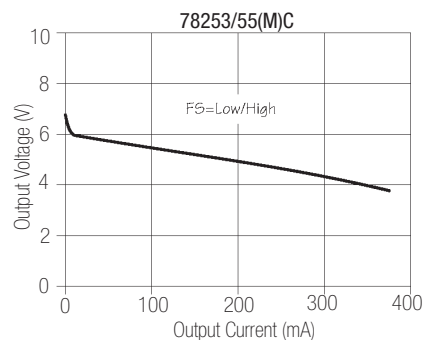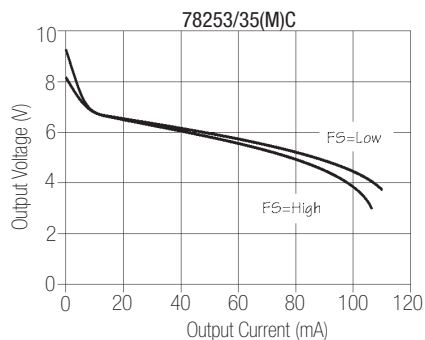


### EFFICIENCY CURVES

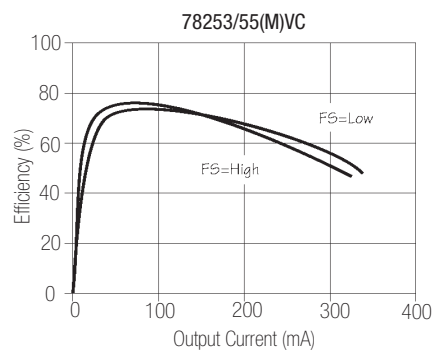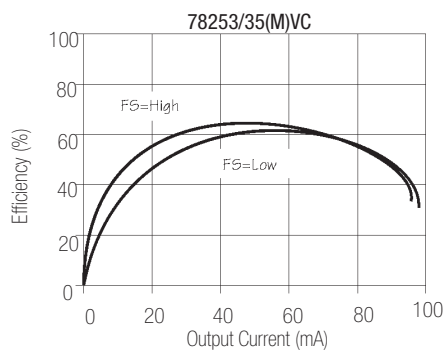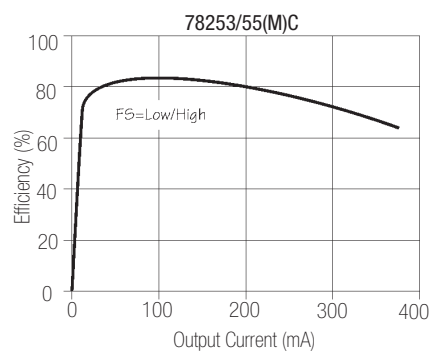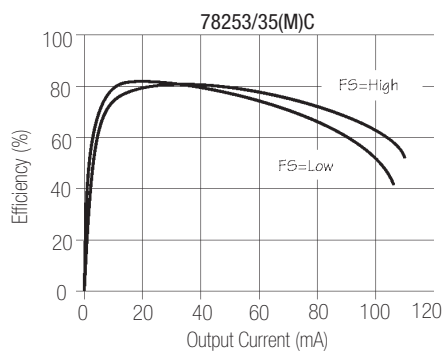

All curves are derived from testing with the Maxim MAX235 IC using the circuit shown in application note MPAN-03 (download at <http://www.murata-ps.com/data/apnotes/mpan-03.pdf>).

**TYPICAL CHARACTERISTICS (VOLTAGE CURVES) continued**

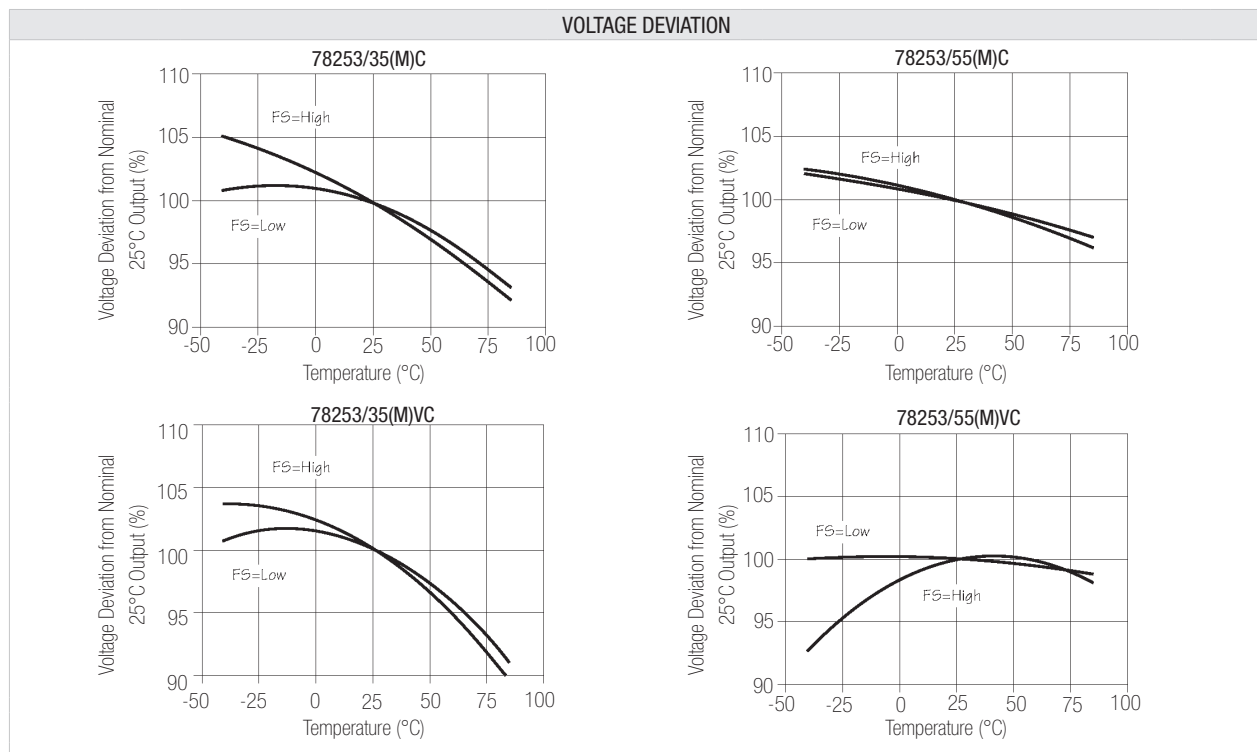

**TECHNICAL NOTES**

**ISOLATION VOLTAGE**

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

All products in this series are 100% production tested at their stated isolation voltage.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

For a part holding no specific agency approvals both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

**REPEATED HIGH-VOLTAGE ISOLATION TESTING**


It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. This series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

**SOLDERING INFORMATION<sup>1</sup>**

|                              |                      |
|------------------------------|----------------------|
| Pin finish                   | Matte tin            |
| Peak wave solder temperature | 300°C for 10 seconds |
| Peak reflow temperature      | 220°C <sup>2</sup>   |

**TUBE OUTLINE DIMENSIONS**

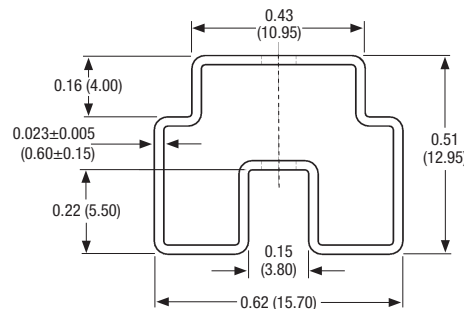

Tube length: 18.3±0.08 (465±2). Tube quantity: 50.  
 Tube material: Antistatic coated clear pvc.


Unless otherwise stated all dimensions in inches(mm) ±0.01 (0.25).

All specifications typical at  $T_A=25^{\circ}\text{C}$


- For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)
- For high temperature reflow parts see 78253J series.

## TAPE & REEL SPECIFICATIONS

## REEL OUTLINE DIMENSIONS

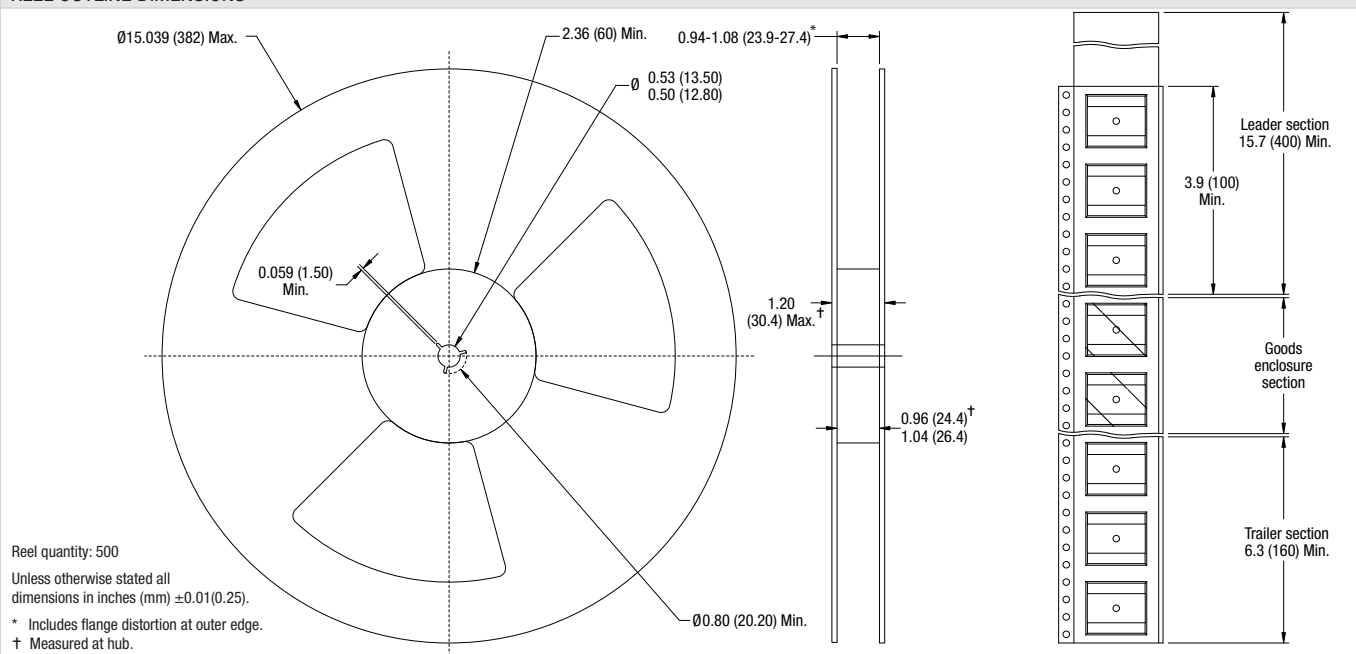

## TAPE OUTLINE DIMENSIONS

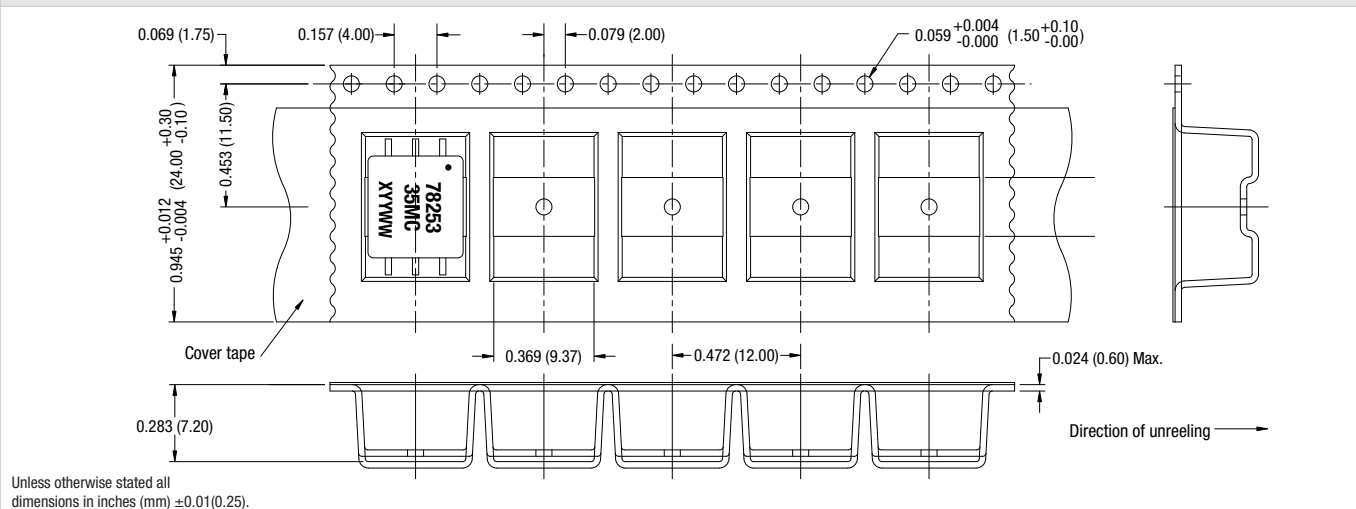

**Murata Power Solutions, Inc.**  
**11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.**  
**ISO 9001 and 14001 REGISTERED**

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.