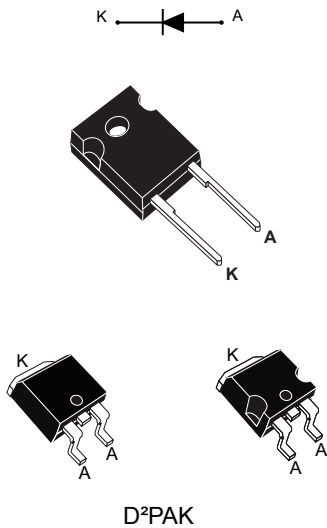


**600 V ultrafast rectifier**

**Features**

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces switching and conduction losses

**Applications**

- Telecom power supply
- OBC
- Industrial equipments
- Switching diode

**Description**

The **STTH30L06**, which is using ST Turbo 2 600 V technology, is specially suited for use in switching power supplies, and industrial applications, as rectification and discontinuous mode PFC boost diode.

| Product status  |        |
|-----------------|--------|
| STTH30L06       |        |
| Product summary |        |
| $I_{F(AV)}$     | 30 A   |
| $V_{RRM}$       | 600 V  |
| $T_j(max.)$     | 175 °C |
| $V_F(typ.)$     | 1.00 V |
| $t_{rr(max.)}$  | 65 ns  |

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

| Symbol       | Parameter  | Value                                  | Unit |
|--------------|--|--|------|
| $V_{RRM}$    | Repetitive peak reverse voltage                      | 600                                    | V    |
| $I_{F(RMS)}$ | Forward rms current                                  | 50                                     | A    |
| $I_{F(AV)}$  | Average forward current $\delta = 0.5$ , square wave | $T_C = 120\text{ °C}$<br>30            | A    |
| $I_{FSM}$    | Surge non repetitive forward current                 | $t_p = 10\text{ ms}$ sinusoidal<br>300 | A    |
| $T_{stg}$    | Storage temperature range                            | -65 to +175                            | °C   |
| $T_j$        | Maximum operating junction temperature               | 175                                    | °C   |

**Table 2. Thermal resistance parameter**

| Symbol        | Parameter        | Value | Unit |
|---------------|------------------|-------|------|
| $R_{th(j-c)}$ | Junction to case | 1.1   | °C/W |

For more information, please refer to the following application note:

- AN5088: Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       | Min.                | Typ. | Max. | Unit |               |
|-------------|-------------------------|-----------------------|---------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  | $V_R = V_{RRM}$     | -    |      | 25   | $\mu\text{A}$ |
|             |                         | $T_j = 150\text{ °C}$ |                     | -    | 80   | 800  |               |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A}$ | -    |      | 1.55 | V             |
|             |                         | $T_j = 150\text{ °C}$ |                     | -    | 1.00 | 1.25 |               |

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:  $P = 0.95 \times I_{F(AV)} + 0.010 \times I_F^2 (RMS)$

For more information, please refer to the following application notes related to the power losses:


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses in a power diode

**Table 4. Dynamic characteristics**


| Symbol   | Parameter                | Test conditions       | Min.  | Typ. | Max. | Unit |    |
|----------|--------------------------|-----------------------|---|------|------|------|----|
| $t_{rr}$ | Reverse recovery time    | $T_j = 25\text{ °C}$  | $I_F = 0.5\text{ A}$ , $I_{rr} = 0.25\text{ A}$ , $I_R = 1\text{ A}$                        | -    |      | 65   | ns |
|          |                          |                       |   | -    | 65   | 90   |    |
| $t_{fr}$ | Forward recovery time    | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A}$ , $V_{FR} = 1.1 \times V_{Fmax}$ , $dI_F/dt = 100\text{ A}/\mu\text{s}$ | -    |      | 500  | ns |
| $V_{FP}$ | Peak forward voltage     | $T_j = 25\text{ °C}$  | $I_F = 30\text{ A}$ , $V_{FR} = 1.1 \times V_{Fmax}$ , $dI_F/dt = 100\text{ A}/\mu\text{s}$ | -    | 2.5  |      | V  |
| $I_{RM}$ | Reverse recovery current | $T_j = 125\text{ °C}$ | $I_F = 30\text{ A}$ , $V_R = 400\text{ V}$ , $dI_F/dt = 100\text{ A}/\mu\text{s}$           | -    | 11.5 | 16   | A  |

## 1.1 Characteristics (curves)


**Figure 1. Conduction losses versus average forward current**

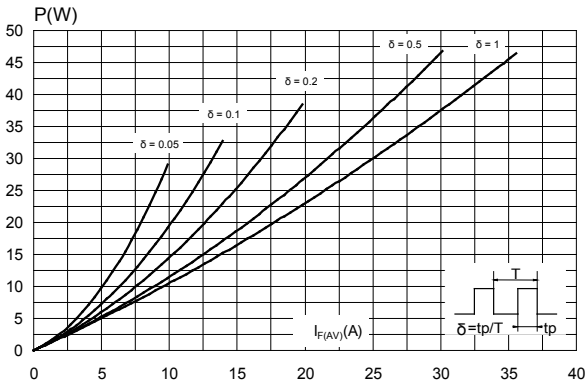

**Figure 2. Forward voltage drop versus forward current**

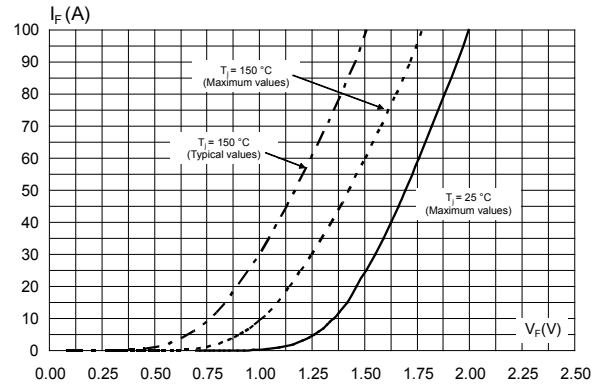

**Figure 3. Relative variation of thermal impedance junction to case versus pulse duration**

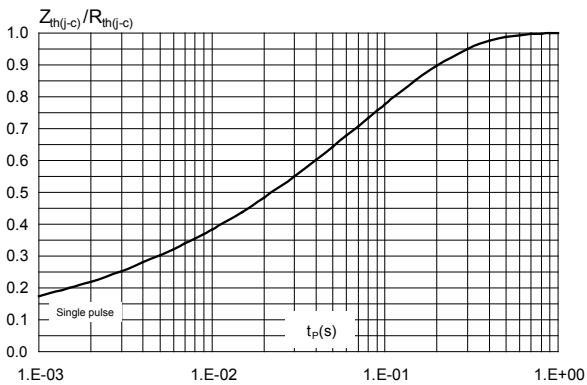

**Figure 4. Peak reverse recovery current versus  $di_F/dt$  (typical values)**

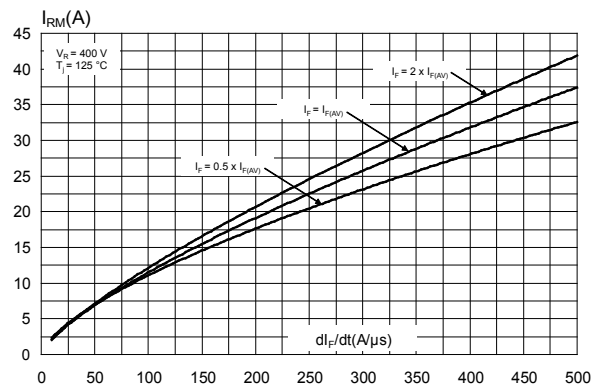


Figure 5. Reverse recovery time versus  $di_F/dt$  (typical values)

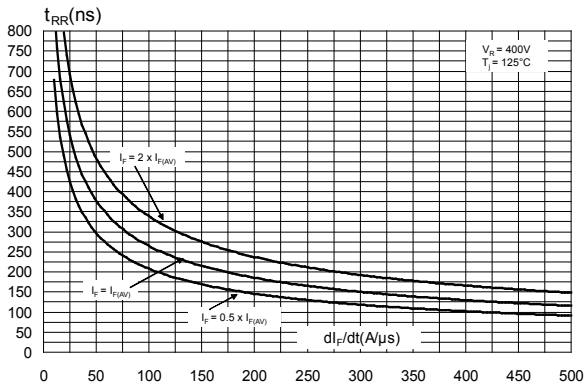


Figure 6. Reverse recovery charges versus  $di_F/dt$  (typical values)

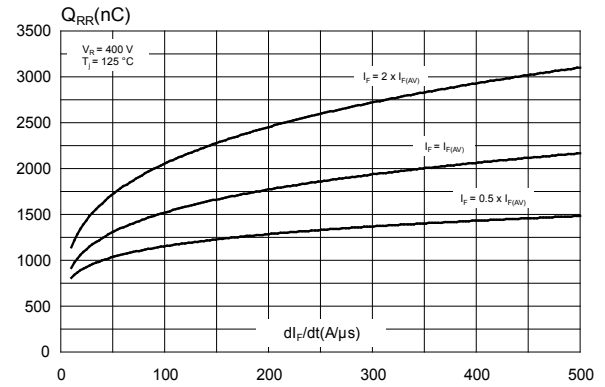


Figure 7. Reverse recovery softness factor versus  $di_F/dt$  (typical values)

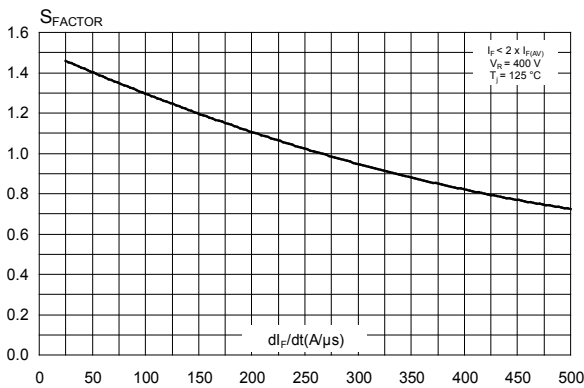


Figure 8. Relative variations of dynamic parameters versus junction temperature

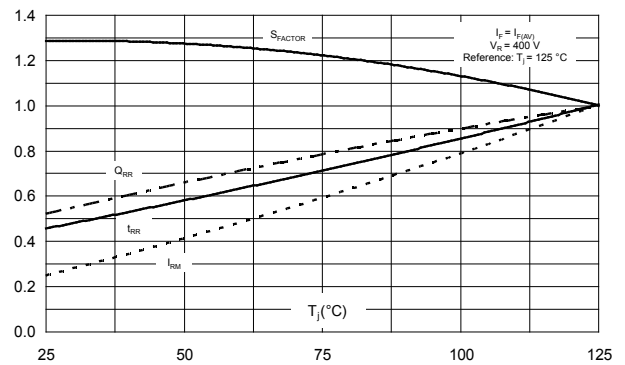


Figure 9. Transient peak forward voltage versus  $di_F/dt$  (typical values)



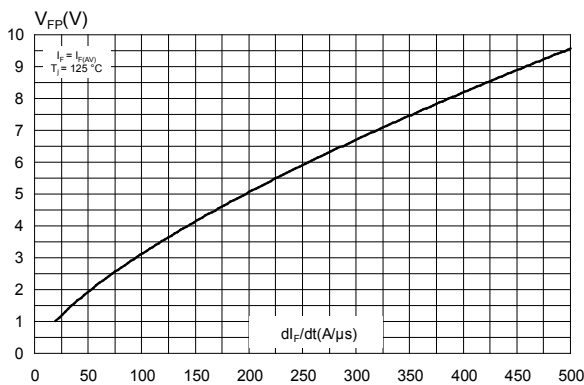


Figure 10. Junction capacitance versus reverse voltage applied (typical values)

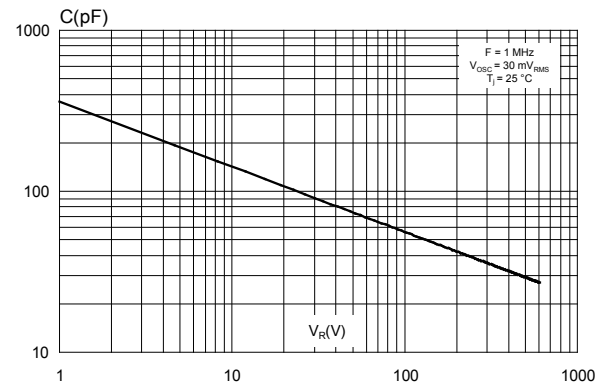

**Figure 11. Thermal resistance, junction to ambient, versus copper surface under tab**

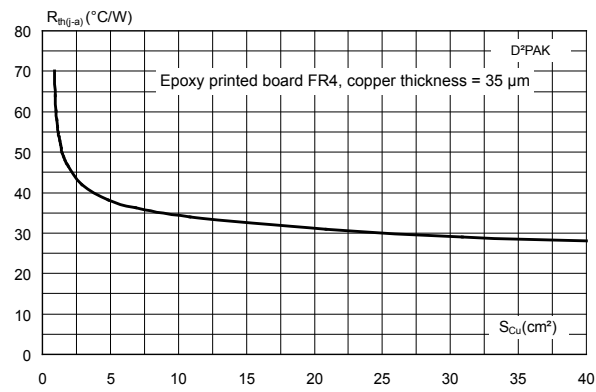


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 D<sup>2</sup>PAK package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)


Figure 12. D<sup>2</sup>PAK package outline

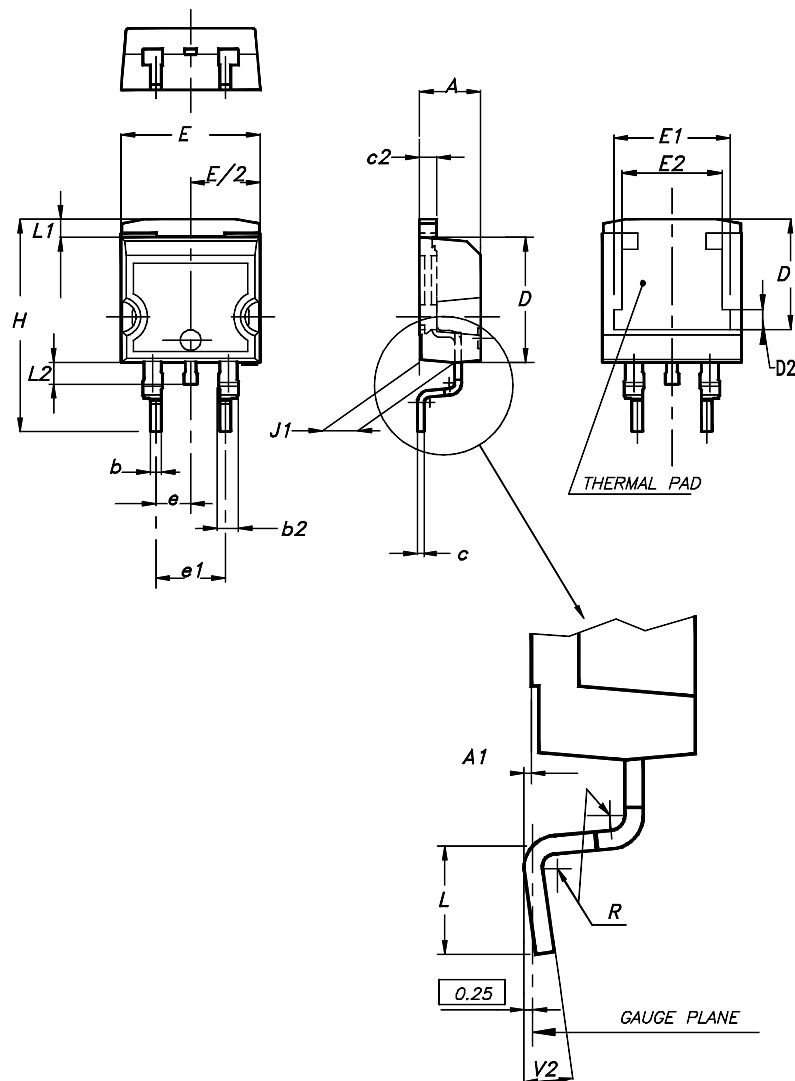

**Note:** This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

**Table 5. D<sup>2</sup>PAK package mechanical data**


| Ref. | Dimensions  |       |                             |       |
|------|-------------|-------|-----------------------------|-------|
|      | Millimeters |       | Inches (for reference only) |       |
|      | Min.        | Max.  | Min.                        | Max.  |
| A    | 4.36        | 4.60  | 0.172                       | 0.181 |
| A1   | 0.00        | 0.25  | 0.000                       | 0.010 |
| b    | 0.70        | 0.93  | 0.028                       | 0.037 |
| b2   | 1.14        | 1.70  | 0.045                       | 0.067 |
| c    | 0.38        | 0.69  | 0.015                       | 0.027 |
| c2   | 1.19        | 1.36  | 0.047                       | 0.053 |
| D    | 8.60        | 9.35  | 0.339                       | 0.368 |
| D1   | 6.90        | 8.00  | 0.272                       | 0.311 |
| D2   | 1.10        | 1.50  | 0.043                       | 0.060 |
| E    | 10.00       | 10.55 | 0.394                       | 0.415 |
| E1   | 8.10        | 8.90  | 0.319                       | 0.346 |
| E2   | 6.85        | 7.25  | 0.266                       | 0.282 |
| e    | 2.54 typ.   |       | 0.100                       |       |
| e1   | 4.88        | 5.28  | 0.190                       | 0.205 |
| H    | 15.00       | 15.85 | 0.591                       | 0.624 |
| J1   | 2.49        | 2.90  | 0.097                       | 0.112 |
| L    | 1.90        | 2.79  | 0.075                       | 0.110 |
| L1   | 1.27        | 1.65  | 0.049                       | 0.065 |
| L2   | 1.30        | 1.78  | 0.050                       | 0.070 |
| R    | 0.4 typ.    |       | 0.015                       |       |
| V2   | 0°          | 8°    | 0°                          | 8°    |

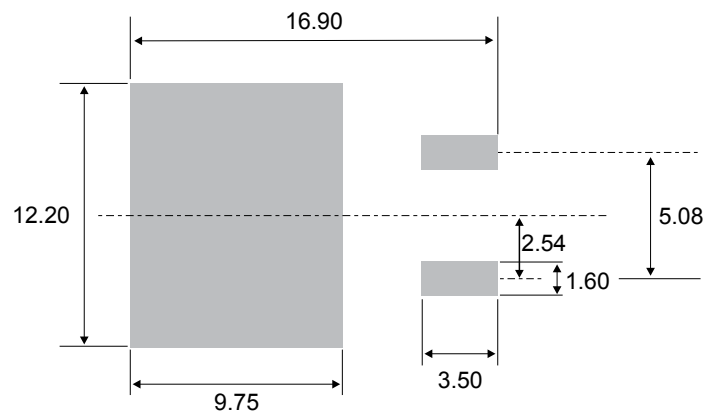**Figure 13. D<sup>2</sup>PAK recommended footprint (dimensions in mm)**


## 2.2 DO-247 package information

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 N·m
- Maximum torque value: 1.0 N·m

Figure 14. DO-247 package outline

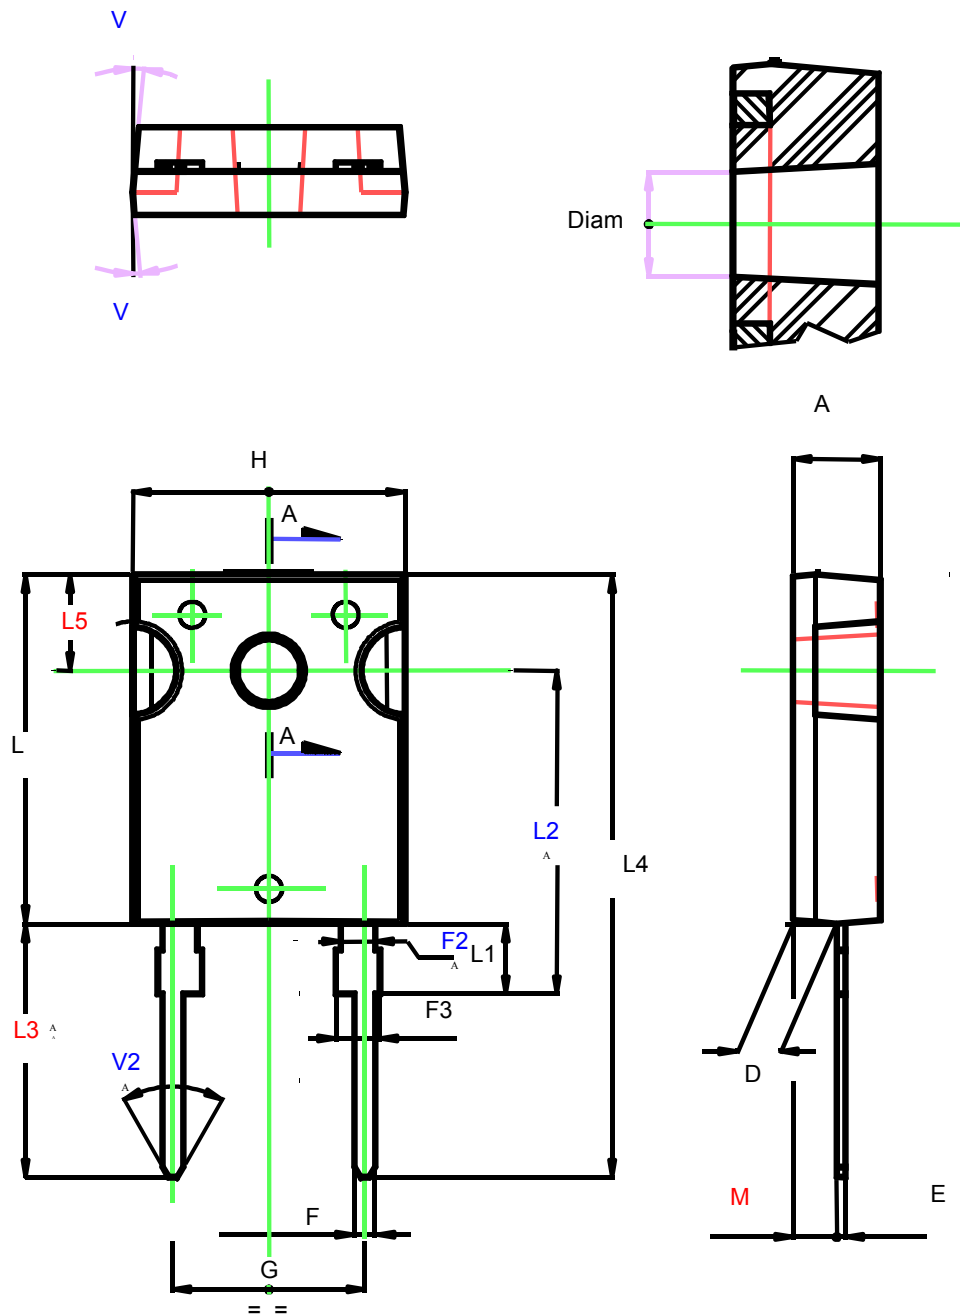



**Table 6. DO-247 package mechanical data**

| Ref.  | Dimensions  |      |       |                             |        |        |
|-------|-------------|------|-------|-----------------------------|--------|--------|
|       | Millimeters |      |       | Inches (for reference only) |        |        |
|       | Min.        | Typ. | Max.  | Min.                        | Typ.   | Max.   |
| A     | 4.85        |      | 5.15  | 0.1909                      |        | 0.2027 |
| D     | 2.2         |      | 2.6   | 0.0866                      |        | 0.1023 |
| E     | 0.4         |      | 0.8   | 0.0157                      |        | 0.0314 |
| F     | 1           |      | 1.4   | 0.0393                      |        | 0.0551 |
| F2    |             | 2    |       |                             | 0.0787 |        |
| F3    | 2           |      | 2.4   | 0.0787                      |        | 0.0944 |
| G     |             | 10.9 |       |                             | 0.4291 |        |
| H     | 15.45       |      | 15.75 | 0.6082                      |        | 0.6200 |
| L     | 19.85       |      | 20.15 | 0.7814                      |        | 0.7933 |
| L1    | 3.7         |      | 4.3   | 0.1456                      |        | 0.1692 |
| L2    |             | 18.5 |       |                             | 0.7283 |        |
| L3    | 14.2        |      | 14.8  | 0.5590                      |        | 0.5826 |
| L4    |             | 34.6 |       |                             | 1.3622 |        |
| L5    |             | 5.5  |       |                             | 0.2165 |        |
| M     | 2           |      | 3     | 0.0787                      |        | 0.1181 |
| V     |             | 5°   |       |                             | 5°     |        |
| V2    |             | 60°  |       |                             | 60°    |        |
| Diam. | 3.55        |      | 3.65  | 0.1397                      |        | 0.1437 |

### 3 Ordering information

**Table 7. Ordering information**

| Order code    | Marking    | Package            | Weight | Base qty. | Delivery mode |
|---------------|------------|--------------------|--------|-----------|---------------|
| STTH30L06G    | STTH30L06G | D <sup>2</sup> PAK | 1.48 g | 50        | Tube          |
| STTH30L06G-TR | STTH30L06G | D <sup>2</sup> PAK | 1.48 g | 1000      | Tape and reel |
| STTH30L06W    | STTH30L06W | DO-247             | 4.40 g | 30        | Tube          |

## Revision history

**Table 8. Document revision history**

| Date        | Revision | Changes   |
|-------------|----------|---|
| 07-Sep-2004 | 1        | First issue.  |
| 21-Oct-2004 | 2        | DOP3I package added.  |
| 11-Jan-06   | 3        | On page 2:<br><ul style="list-style-type: none"> <li>• <math>I_{F(RMS)}</math> corrected from 30 A to 50 A</li> <li>• <math>I_{F(AV)}</math> corrected from 50 A to 30 A</li> </ul> |
| 10-Aug-2006 | 4        | Reformatted to current standards. SOD-93 package removed.   |
| 06-Sep-2011 | 5        | Updated $I_{FSM}$ from 160 A to 300 A. Removed TO-220 and DOP3I.  |
| 09-Nov-2017 | 6        | Removed D <sup>2</sup> PAK package. Minor text change to improve readability.   |
| 10-Jan-2018 | 7        | Updated Table 7: "Ordering information"   |
| 25-Sep-2018 | 8        | Added D <sup>2</sup> PAK package. Updated <a href="#">Table 7. Ordering information</a> . Removed figure 10.  |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.