



ML501

1.9–2.7 GHz High IP3 Mixer with Integrated LO Amp

The Communications Edge™

Product Information

Product Features

- High dynamic range mixer with integrated LO driver
- +30 dBm Input IP3
- 8 dB Conversion Loss
- RF: 1900 – 2700 MHz
- LO: 1600 – 2500 MHz
- IF: 50 – 500 MHz
- 0 dBm Drive Level
- RoHS-compliant SOIC-8 pkg

Applications


- 2.5/3G GSM/CDMA/WCDMA
- PCS/UMTS-band Mobile Infrastructure
- WiBro / WiLAN / WiMAX

Product Description

The ML501 high linearity upconverter or downconverter combines a passive GaAs MESFET mixer with an integrated HBT LO driver in a low-cost lead-free/green/RoHS-compliant SOIC-8 package. WJ's ML501 uses patented techniques to realize +30 dBm Input IP3 with 8 dB conversion loss using an LO drive level of 0 dBm in a downconverting application. The on-chip diplexer in the mixers allows for good matching on the RF and IF ports. The dual-stage LO driver provides a stable input power level into the mixer to allow for consistent performance over a wide range of LO power levels.

Typical applications include frequency up/down conversion, modulation and demodulation for receivers and transmitters used in 2.5G and 3G GSM/CDMA/WCDMA systems in the PCS, or UMTS frequency bands. They can also be used for WiBro/WiLAN/WiMAX infrastructure requiring high linearity frequency conversion.

Functional Diagram



Specifications ⁽¹⁾

Parameter	Units	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
RF Frequency Range	MHz		1900 – 2200			2200 – 2400			2400 – 2700	
LO Frequency Range	MHz		1600 – 2150			1900 – 2350			1900 – 2500	
IF Frequency Range	MHz		50 – 300			50 – 300			200 – 500	
SSB Conversion Loss	dB		8	9		8.1			8.4	
Input IP3 ⁽²⁾	dBm	+28	+30			+30			+28	
Input P1dB	dBm		+21			+20			+20	
LO – RF Isolation ⁽³⁾	dB		9			8			7	
LO – IF Isolation ⁽³⁾	dB		27			27			25	
RF – IF Isolation	dB		20			21			21	
Return Loss: RF Port	dB		16			17			17	
Return Loss: IF Port	dB		20			20			20	
Return Loss: LO Port	dB		15			12			11	
LO Drive Level	dBm	-2.5	0	2.5	-2.5	0	2.5	-2.5	0	2.5
Supply Voltage	V		+5			+5			+5	
Operating Current ⁽⁴⁾	mA	85	110	135		120			130	

1. Min / max limits are tested for the mixer in downconverting application with a low-side LO at 0 dBm at 25 °C with RF/IF = 1900/50, 2200/50, and 1900/300 MHz.

2. IP3 is measured with $\Delta f = 1$ MHz with $R_{Fin} = 0$ dBm / tone.

3. LO is injected with 0 dBm.

4. This refers to the operating current under LO drive. The current can be reduced by increasing the value of the R2 resistor slightly.

Absolute Maximum Rating

Parameter	Rating
Operating Case Temperature	-40 to +85 °C
Storage Temperature	-55 to +150 °C
DC Voltage	+5.5 V
LO Power	+10 dBm
Input IF / RF Power	+20 dBm

Operation of this device above any of these parameters may cause permanent damage.

Ordering Information

Part No.	Description
ML501-G	1.9–2.7 GHz High IP3 Mixer w/ Integrated LO Amp (lead-free/green/RoHS-compliant SOIC-8 package)
ML501-PCB	Full Assembled Evaluation Board

Specifications and information are subject to change without notice



ML501


1.9–2.7 GHz High IP3 Mixer with Integrated LO Amp

The Communications Edge™









Product Information

Typical Downconversion Performance Plots

Performance using the circuitry on the ML501-PCB Evaluation Board

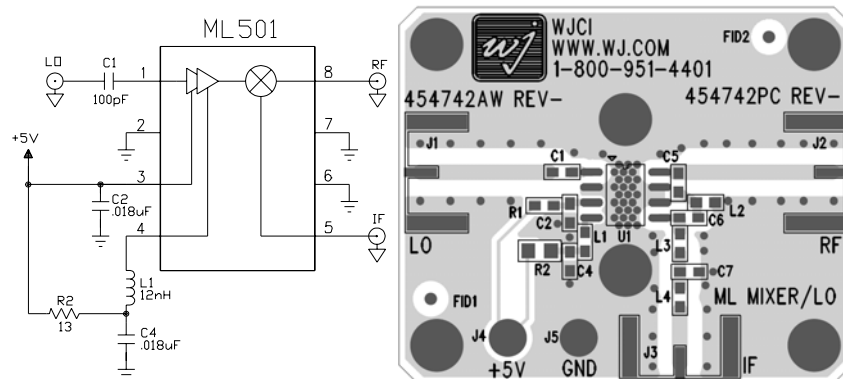


R1 is shown in the silkscreen but is not required for the ML501. A 0Ω jumper is placed in this spot on the PCB.

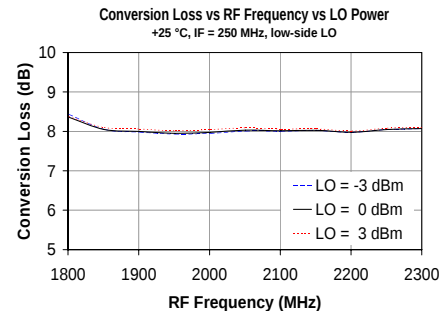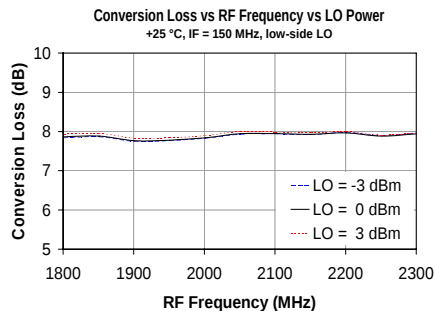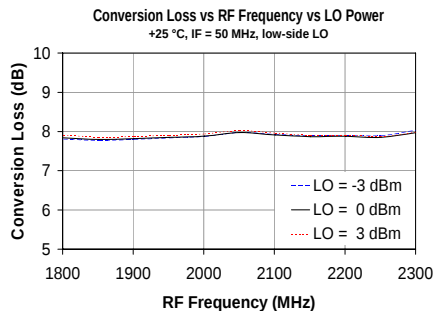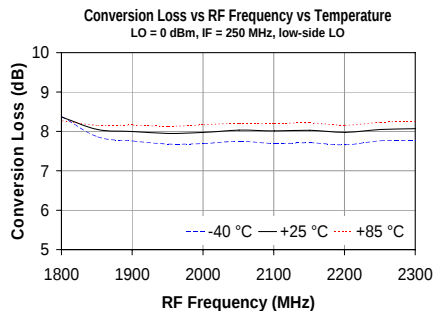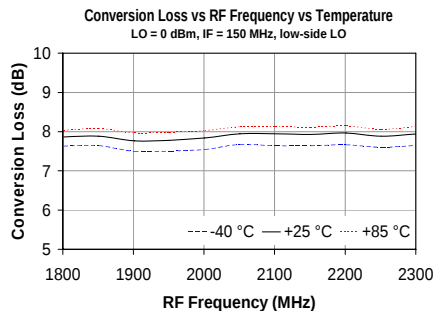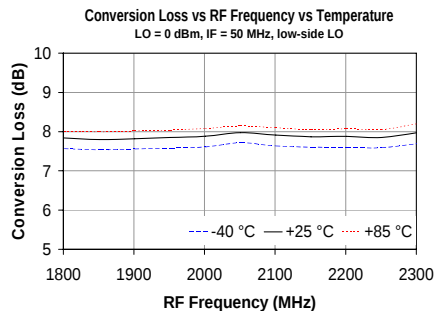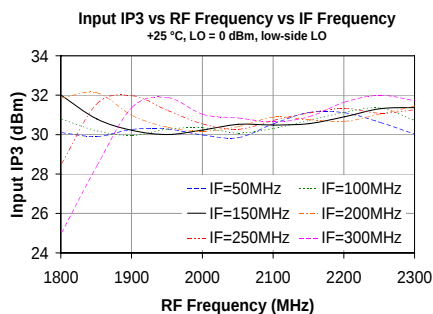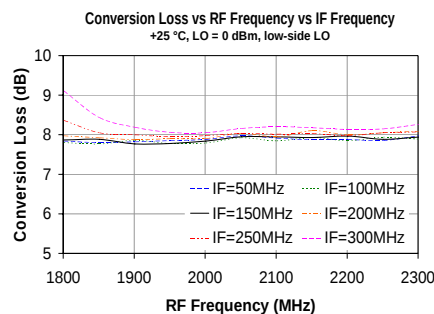

Specifications and information are subject to change without notice



Typical Downconversion Performance Plots (cont'd) Performance using the circuitry on the ML501-PCB Evaluation Board

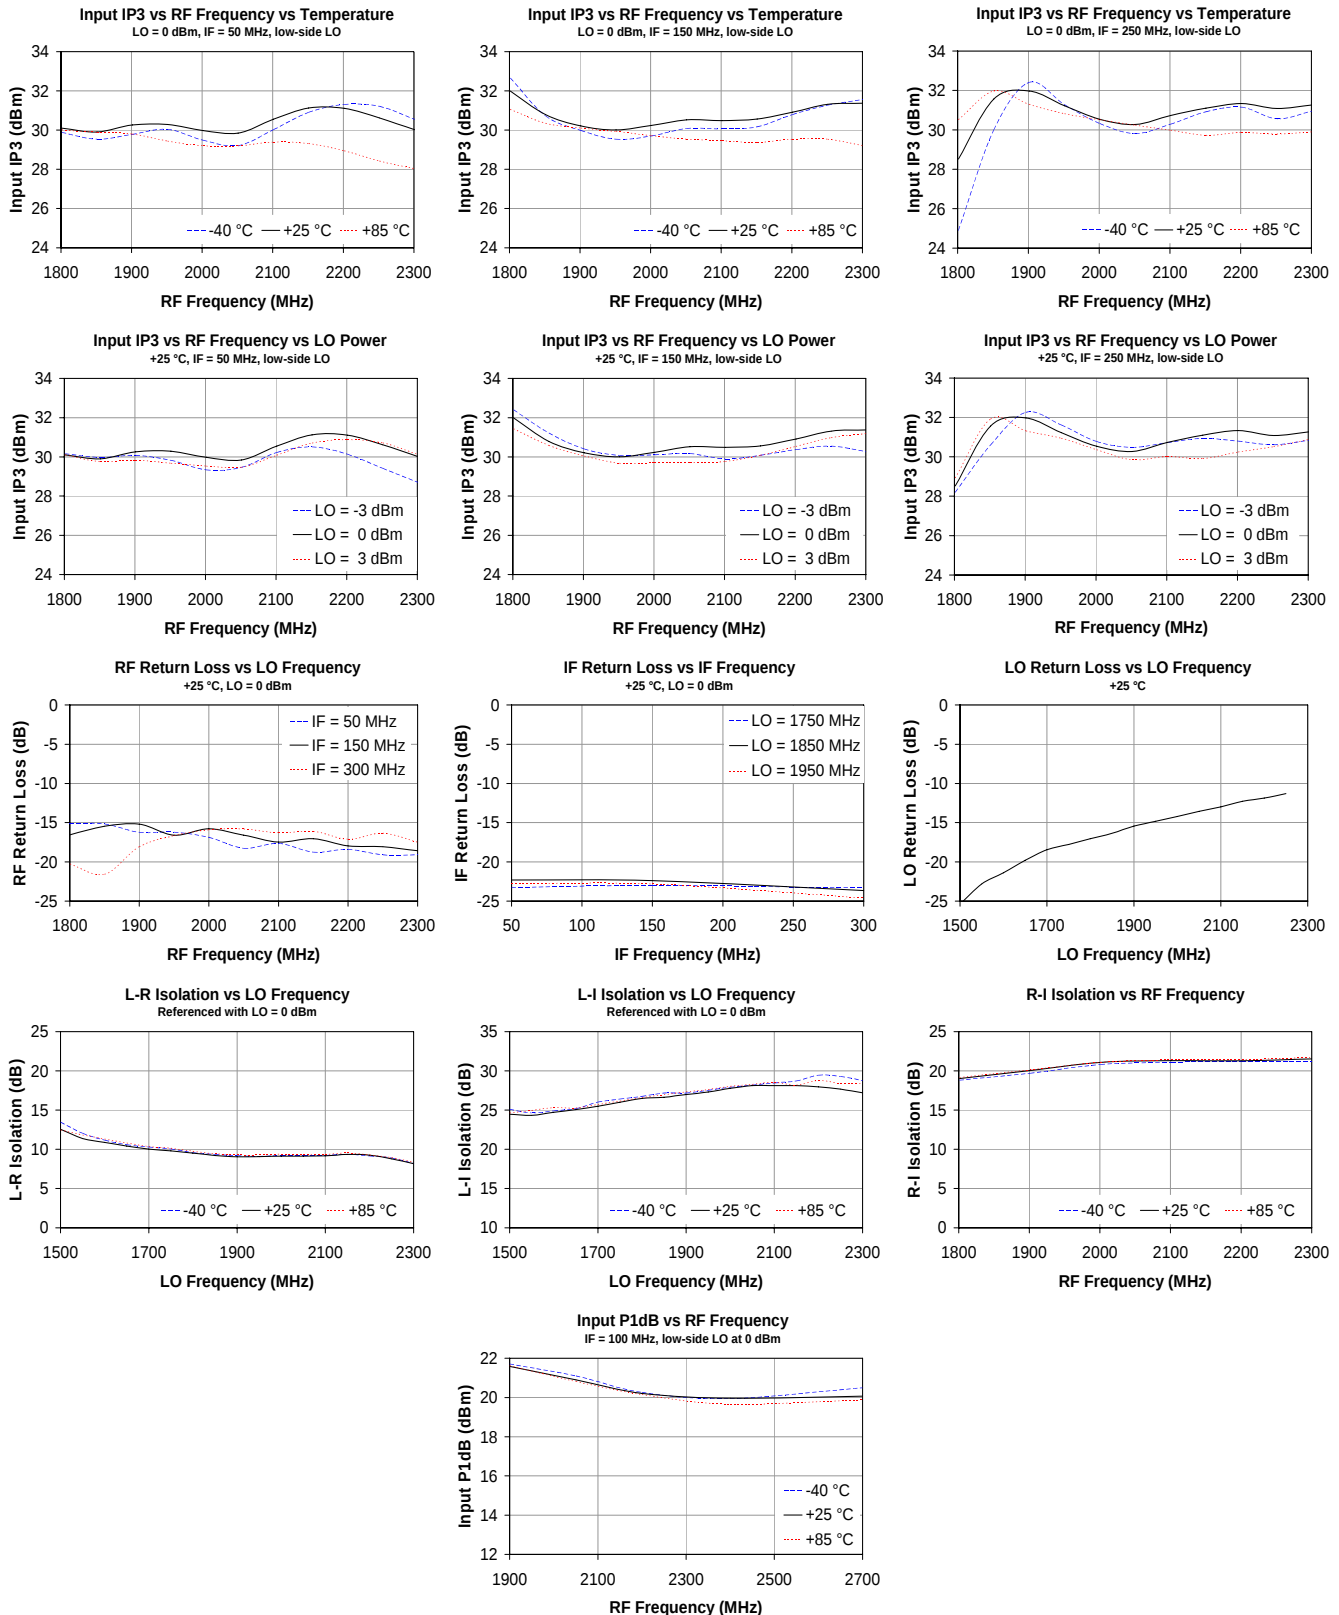



ML501

1.9–2.7 GHz High IP3 Mixer with Integrated LO Amp


The Communications Edge™

Product Information

ML501-G Mechanical Information

This package is lead-free/green/RoHS-compliant. The plating material on the leads is NiPdAu. It is compatible with both lead-free (maximum 260 °C reflow temperature) and lead (maximum 245 °C reflow temperature) soldering processes.

Outline Drawing

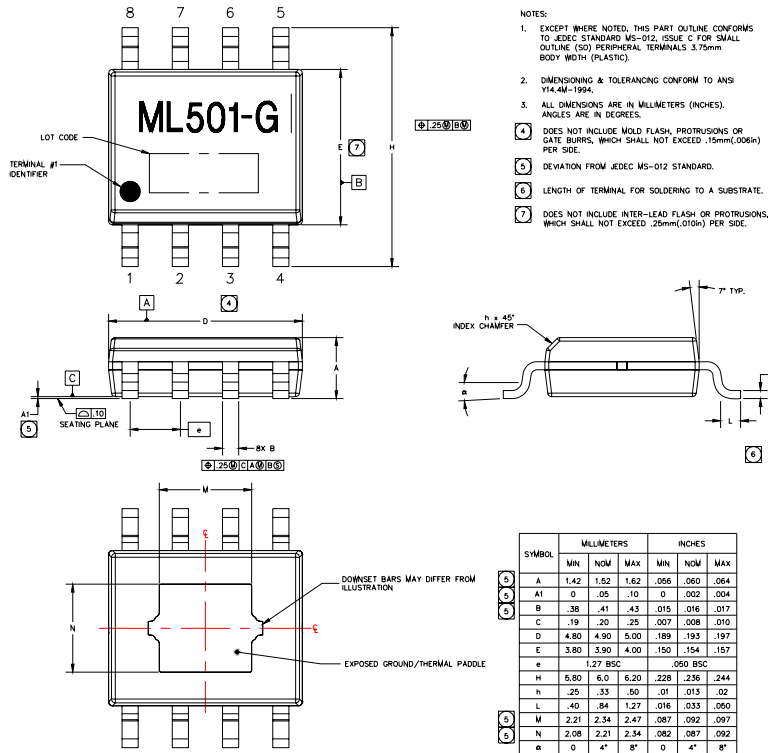

Product Marking

The component will be lasermarked with a "ML501-G" product label with an alphanumeric lot code on the top surface of the package.

Tape and reel specifications for this part will be located on the website in the "Application Notes" section.

ESD / MSL Information




Caution! ESD sensitive device.

ESD Rating: Class 1B
 Value: Passes $\geq 500V$ to $<1000V$
 Test: Human Body Model (HBM)
 Standard: JEDEC Standard JESD22-A114

ESD Rating: Class IV
 Value: Passes $\geq 1000V$
 Test: Charged Device Model (CDM)
 Standard: JEDEC Standard JESD22-C101


MSL Rating: Level 2 at +260 °C convection reflow
 Standard: JEDEC Standard J-STD-020

Mounting Configuration / Land Pattern

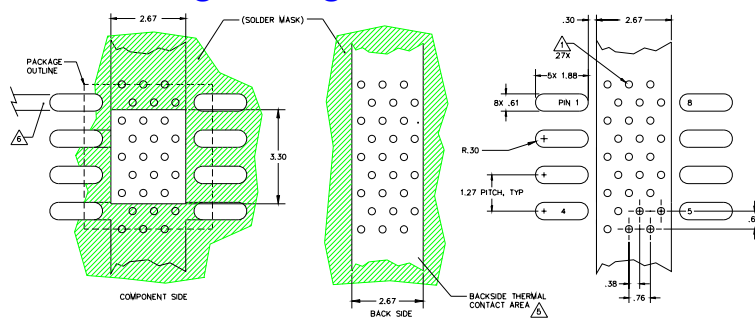

- Ground / thermal vias are critical for the proper performance of this device. Vias should use a .35mm (#8 / .0135") diameter drill and have a final plated thru diameter of .25 mm (.010").
- Add as much copper as possible to inner and outer layers near the part to ensure optimal thermal performance.
- Mounting screws can be added near the part to fasten the board to a heatsink. Ensure that the ground / thermal via region contacts the heatsink.
- All dimensions are in millimeters (inches). Angles are in degrees.
- Do not put solder mask on the backside of the PC board in the region where the board contacts the heatsink.
- RF trace width depends upon the PC board material and construction.
- Use 1 oz. Copper minimum.

Functional Pin Layout

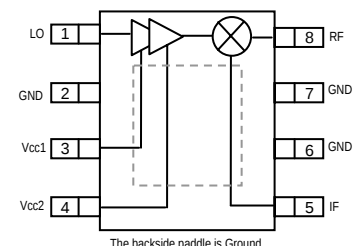

Pin	Function
1	LO
2	GND
3	Vcc1
4	Vcc2
5	IF
6	GND
7	GND
8	RF

Backside paddle is RF and DC ground.

Thermal Specifications

Parameter	Rating
Operating Case Temperature	-40 to +85 °C
Thermal Resistance, Rth	104 °C / W

Specifications and information are subject to change without notice



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.