





**DIP8-pin type featuring
low on-resistance
200V/400V load voltage**

**PhotoMOS®
RF 2 Form A**
Low on-resistance (AQW22○N)

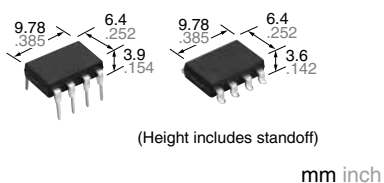

RoHS compliant

FEATURES

- 1. 2-channels (Form A) type with high response speed, low leakage current and low on-resistance.**
- 2. Applicable for 2 Form A use as well as two independent 1 Form A use**
- 3. Low capacitance between output terminals ensures high response speed:**
The capacitance between output terminals is small; Typ. 10 pF. This enables for a fast operation speed of Typ. 0.2 ms.
- 4. High sensitivity and low on-resistance:**
Max. 0.07 A of load current can be controlled with input current of 5 mA. The on-resistance is less than our conventional models.
- 5. Low-level off state leakage current**

6. Controls low-level analog signals:
PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

TYPICAL APPLICATIONS

- **Measuring instruments**
Scanner, IC checker, Board tester, etc.
- **Telephones**
- **Computer input machines**
- **Industrial robots**

TYPES

| | Output rating* | | Package | Part No. | | | | Packing quantity | |
|----------------|----------------|--------------|----------|-----------------------|------------------------|-----------------------------|-----------|--|------------|
| | | | | Through hole terminal | Surface-mount terminal | | Tube | Tape and reel | |
| | Load voltage | Load current | | | Tube packing style | Tape and reel packing style | | | |
| AC/DC dual use | 200 V | 50 mA | DIP8-pin | AQW227N | AQW227NA | AQW227NAX | AQW227NAZ | 1 tube contains: 50 pcs. 1 batch contains: 500 pcs. | 1,000 pcs. |
| | 400 V | 40 mA | | AQW224N | AQW224NA | AQW224NAX | AQW224NAZ | | |

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item | Symbol | AQW227N(A) | AQW224N(A) | Remarks | |
|-------------------------|-------------------------|------------|-----------------------------|--------------------|---|
| Input | LED forward current | I_F | 50 mA | | |
| | LED reverse voltage | V_R | 5 V | | |
| | Peak forward current | I_{FP} | 1 A | | $f = 100 \text{ Hz}$, Duty factor = 0.1% |
| | Power dissipation | P_{in} | 75 mW | | |
| Output | Load voltage (peak AC) | V_L | 200 V | 400 V | |
| | Continuous load current | I_L | 0.05 A (0.07 A) | 0.04 A (0.05 A) | Peak AC, DC (): in case of using only 1 channel |
| | Peak load current | I_{peak} | 0.15 A | | 100 ms (1 shot), $V_L = \text{DC}$ |
| | Power dissipation | P_{out} | 800 mW | | |
| Total power dissipation | P_T | 850 mW | | | |
| I/O isolation voltage | V_{iso} | 1,500 Vrms | | | |
| Ambient temperature | Operating | T_{opr} | -40 to +85°C -40 to +185°F | | (Non-icing at low temperatures) |
| | Storage | T_{stg} | -40 to +100°C -40 to +212°F | | |


RF 2 Form A Low on-resistance (AQW220N)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQW227N(A) | AQW224N(A) | Condition |
|----------------------------------|----------------------|--|------------|------------------------|--|
| Input | LED operate current | Typical | 0.9 mA | | I _L = Max. |
| | | Maximum | 3.0 mA | | |
| | LED turn off current | Minimum | 0.4 mA | | I _L = Max. |
| | | Typical | 0.8 mA | | |
| LED dropout voltage | Typical | 1.25 V (1.14 V at I _F = 5 mA) | | I _F = 50 mA | |
| | Maximum | 1.5 V | | | |
| Output | On resistance | Typical | 30 Ω | 70 Ω | I _F = 5 mA I _L = Max. Within 1 s |
| | | Maximum | 50 Ω | 100 Ω | |
| | Output capacitance | Typical | 10 pF | | I _F = 0 V _B = 0 f = 1 MHz |
| | | Maximum | 15 pF | | |
| Off state leakage current | Maximum | I _{Leak} | *10 nA | | I _F = 0 V _L = Max. |
| Transfer characteristics | Turn on time** | Typical | 0.2 ms | | I _F = 5 mA I _L = Max. |
| | | Maximum | 0.5 ms | | |
| | Turn off time** | Typical | 0.08 ms | | I _F = 5 mA I _L = Max. |
| | | Maximum | 0.2 ms | | |
| | I/O capacitance | Typical | 0.8 pF | | f = 1 MHz V _B = 0 |
| Maximum | | 1.5 pF | | | |
| Initial I/O isolation resistance | Minimum | R _{iso} | 1,000 MΩ | | 500 V DC |

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

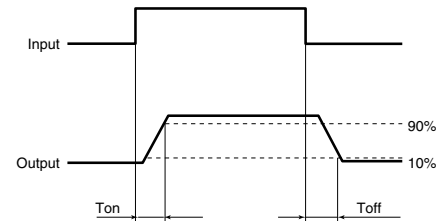

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | Symbol | Number of used channels | Min. | Max. | Unit |
|------------------------|-------------------------|-------------------------|------|------|------|
| LED current | I _F | | 5 | 30 | mA |
| Load voltage (Peak AC) | V _L | | — | 160 | V |
| AQW227N(A) | Continuous load current | 1ch | — | 0.07 | A |
| | | 2ch | — | 0.05 | A |
| AQW224N(A) | Load voltage (Peak AC) | 1ch | — | 320 | V |
| | | 2ch | — | 0.05 | A |
| | | | | 0.04 | A |

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

When using 2 channels

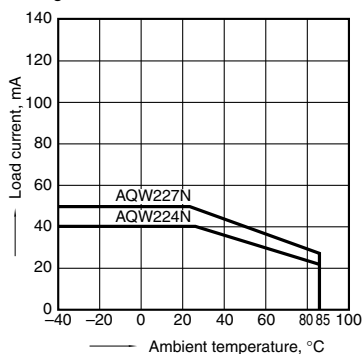


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

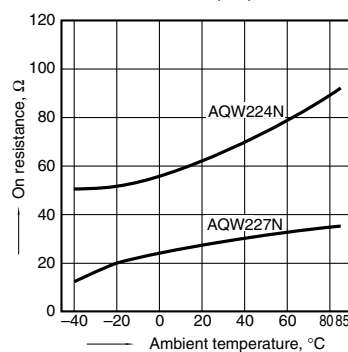


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

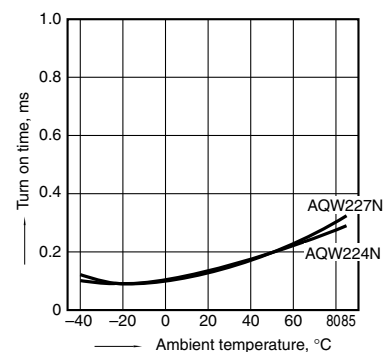


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

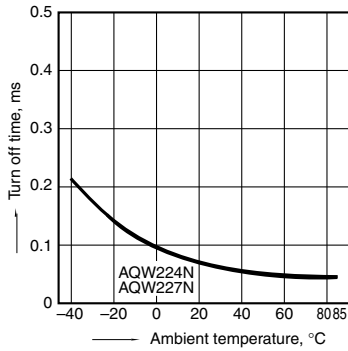


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

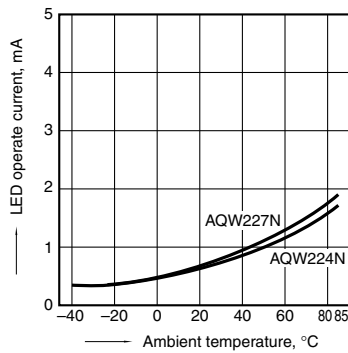


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
Continuous load current: Max. (DC)

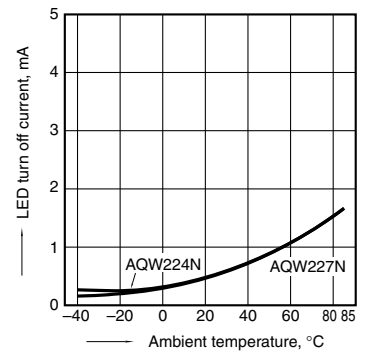


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;
LED current: 5 to 50 mA

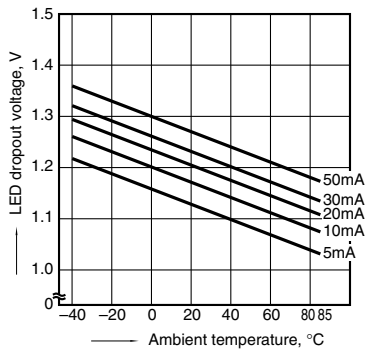


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

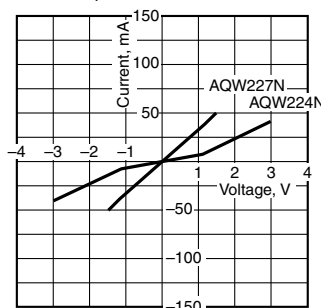


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

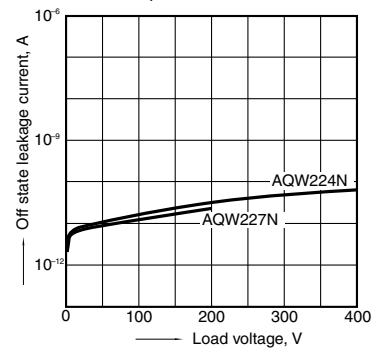


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

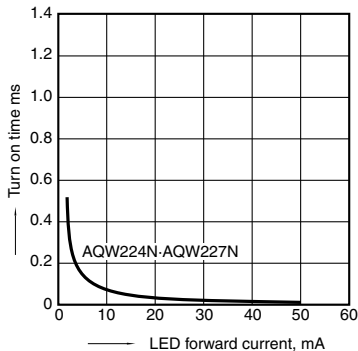


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F

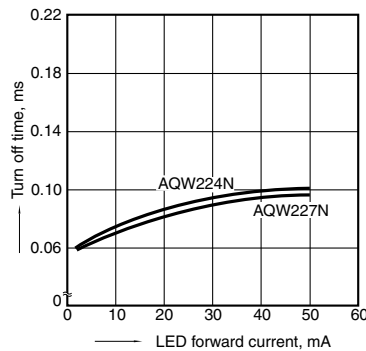


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6,
7 and 8; Frequency: 1 MHz, 30mVrms;
Ambient temperature: 25°C 77°F

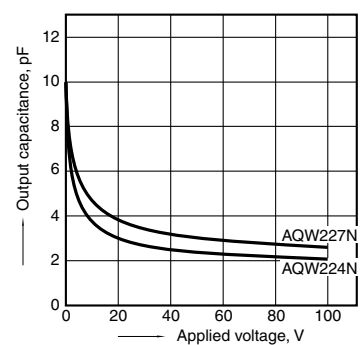


13. Isolation vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6,
7 and 8;
Ambient temperature: 25°C 77°F

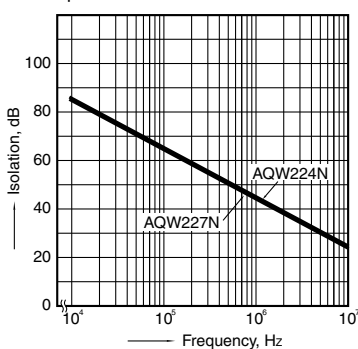

14. Insertion loss vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6,
7 and 8;
Ambient temperature: 25°C 77°F

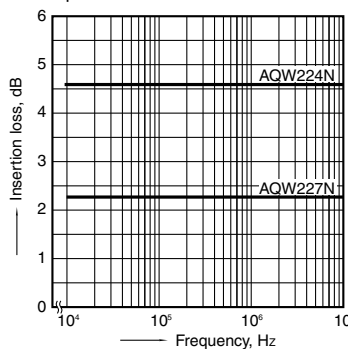

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW224NA](#) [AQW224NAX](#) [AQW224N](#) [AQW224NAZ](#) [AQW227N](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.