



Main

| | |
|-------------------------------|-------------------------|
| Range of product | Zelio Time |
| Product or component type | Industrial timing relay |
| Contacts type and composition | 2 C/O |
| Component name | RE7 |
| Time delay type | C |
| Time delay range | 0.05 s...300 h |

Complementary

| | |
|---|---|
| Discrete output type | Relay |
| Contacts material | 90/10 silver nickel contacts |
| Width pitch dimension | 0.89 in (22.5 mm) |
| [Us] rated supply voltage | 110...240 V ACat 50/60 Hz 24 V AC/DC at 50/60 Hz 42...48 V AC/DCat 50/60 Hz |
| Voltage range | 0.85...1.1 Us |
| Connections - terminals | Screw terminals, clamping capacity: 2 x 1.5 mm ² flexible with cable end Screw terminals, clamping capacity: 2 x 2.5 mm ² flexible without cable end |
| Tightening torque | 5.31...9.73 lbf.in (0.6...1.1 N.m) |
| Setting accuracy of time delay | +/- 10 % of full scale |
| Repeat accuracy | +/- 0.2 % |
| Temperature drift | < 0.07 %/°C |
| Voltage drift | < 0.2 %/V |
| Minimum pulse duration | 20 ms |
| Reset time | 50 ms |
| Maximum switching voltage | 250 V AC/DC |
| Mechanical durability | 20000000 cycles |
| [Ith] conventional free air thermal current | 8 A |
| [Ie] rated operational current | <= 2 A DC-13 24 V at 158 °F (70 °C) conforming to IEC 60947-5-1/1991/VDE 0660 <= 3 A AC-15 at 158 °F (70 °C) conforming to IEC 60947-5-1/1991/VDE 0660 <= 0.1 A DC-13 250 V at 158 °F (70 °C) conforming to IEC 60947-5-1/1991/VDE 0660 <= 0.2 A DC-13 115 V at 158 °F (70 °C) conforming to IEC 60947-5-1/1991/VDE 0660 |
| Minimum switching capacity | 12 V / 10 mA |
| Input voltage | < 60 V Y1Z2 terminal(s) |
| Maximum switching current | 1 mA Y1Z2 terminal(s) |
| Input compatibility | 3/4 wires sensors PNP/NPN without internal load 50 m Y1Z2 terminal(s) |
| Marking | CE |
| Overvoltage category | III conforming to IEC 60664-1 |
| [Ui] rated insulation voltage | 250 V between contact circuit and control inputs IEC certified 250 V between contact circuit and power supply IEC certified 300 V between contact circuit and control inputs CSA certified 300 V between contact circuit and power supply CSA certified |
| Supply disconnection value | > 0.1 Uc |
| Operating position | Any position without derating |
| Surge withstand | 2 kV conforming to IEC 61000-4-5 level 3 |
| Power consumption in VA | 2 VA 48 V 1.2 VA 24 V 12.5 VA 240 V 2.8 VA 110 V |
| Power consumption in W | 0.8 W 24 V 1.6 W 48 V |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|----------------------|--|
| Terminal description | (15-16-18)OC_ON_OFF (25-26-28)OC_ON_OFF (B1-A2)CO (Y1)UNUSED (Z2)UNUSED ALT |
| Height | 3.07 in (78 mm) |
| Width | 0.89 in (22.5 mm) |
| Depth | 3.15 in (80 mm) |
| Product weight | 0.33 lb(US) (0.15 kg) |

Environment


| | |
|---------------------------------------|--|
| immunity to microbreaks | 3 ms |
| standards | EN/IEC 61812-1 |
| product certifications | CSA GL UL |
| ambient air temperature for storage | -40...185 °F (-40...85 °C) |
| ambient air temperature for operation | -4...140 °F (-20...60 °C) |
| relative humidity | 15...85 % (3K3) conforming to IEC 60721-3-3 |
| vibration resistance | 0.35 mm (f = 10...55 Hz) conforming to IEC 60068-2-6 |
| shock resistance | 15 gn 11 ms conforming to IEC 60068-2-27 |
| IP degree of protection | IP20 (terminals) IP50 (housing) |
| pollution degree | 3 conforming to IEC 60664-1 |
| dielectric strength | 2.5 kV |
| non-dissipating shock wave | 4.8 kV |
| resistance to electrostatic discharge | 6 kV (in contact) conforming to IEC 61000-4-2 level 3 8 kV (in air) conforming to IEC 61000-4-2 level 3 |
| resistance to electromagnetic fields | 9.14 V/yd (10 V/m) conforming to IEC 61000-4-3 level 3 |
| resistance to fast transients | 2 kV conforming to IEC 61000-4-4 level 3 |
| disturbance radiated/conducted | CISPR 11 group 1 - class A CISPR 22 - class A |

Contractual warranty


| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Width 22.5 mm

Rail Mounting

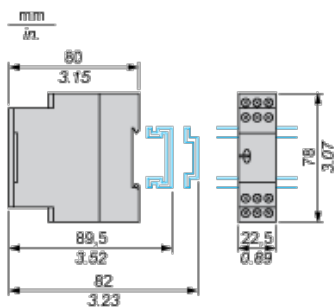

Screw Fixing

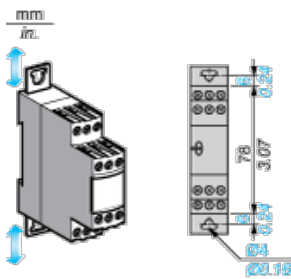


Internal Wiring Diagram



Recommended Application Wiring Diagram


Start by External Control

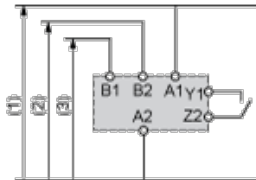


- 1 Supply
- 2 12...48 V
- 3 24 V

Control of Several Relays

Control of several relays with a single external control contact

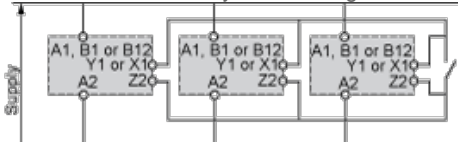


Connection of an External Control Contact Without Using Terminal Z2



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.



Direct current supply only.


It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection 3-Wire NPN or PNP Sensor

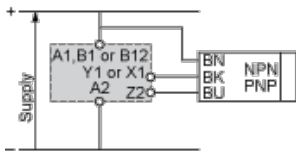


Connection 3-Wire NPN or PNP Sensor Without Using Terminal Z2

Connection NPN

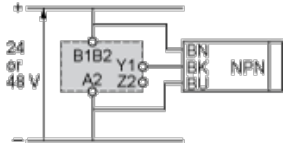

It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.

Connection PNP

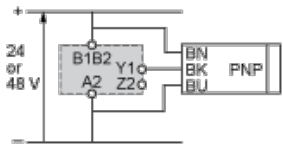

It is advisable to follow the recommended wiring schemes detailed above if the restrictions given are taken into account.


Connection Precautions

⚠ WARNING

UNEXPECTED EQUIPMENT OPERATION

No galvanic isolation between supply terminals and control inputs.


Failure to follow these instructions can result in death, serious injury, or equipment damage.

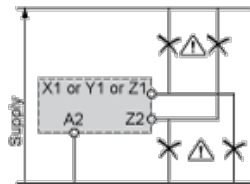

Performance Curves

A.C. Load Curve 1

Electrical durability of contacts on resistive loading millions of operating cycles

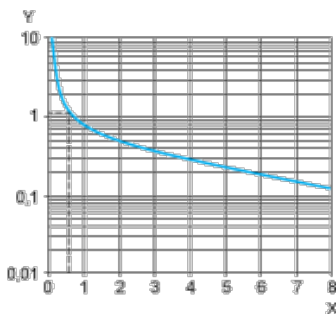


X Current broken in A

Y Millions of operating cycles

A.C. Load Curve 2


Reduction factor k for inductive loads (applies to values taken from durability curve 1).

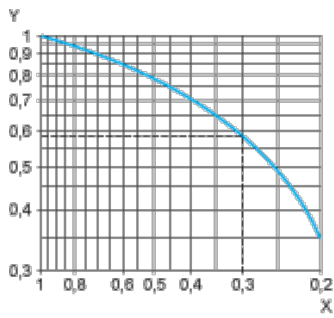


X Power factor on breaking ($\cos \phi$)

Y Reduction factor k

Example: An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$. For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles as indicated by curve 2. For $\cos \phi = 0.3$: $k = 0.6$. The electrical durability therefore becomes: $1.5 \cdot 10^6$ operating cycles $\times 0.6 = 900\,000$ operating cycles.



D. C. Load Limit Curve

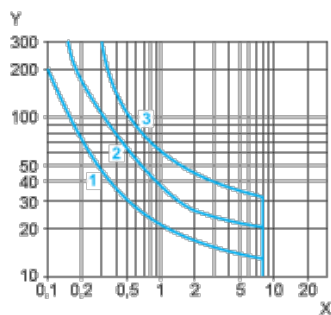

X Current in A

Y Voltage in V

1 $L/R = 20$ ms

2 L/R with load protection diode


3 Resistive load

Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output




Function: 2 Outputs

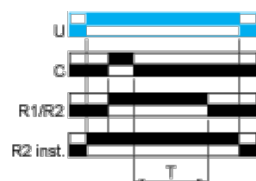

2 timed outputs (R1/R2) or 1 timed output (R1) and 1 instantaneous output (R2 inst.)

Legend

Relay de-energised

 Relay energised

 Output open

 Output closed

C Control contact

G Gate

R Relay or solid state output

R1/R22 timed outputs

R2 The second output is instantaneous if the right position is selected
inst.

T Timing period

Ta - Adjustable On-delay

Tr - Adjustable Off-delay

U Supply



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.