PCI-1713U
PCI-1715U

100 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

500 kS/s, 12-bit, 32-ch Isolated Analog Input Universal PCI Card

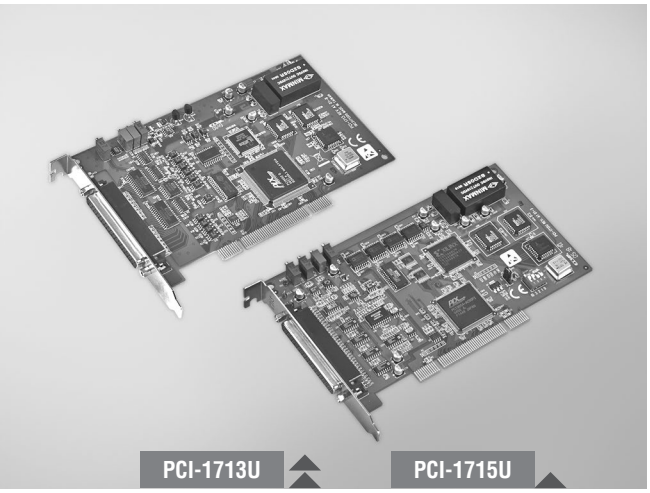

Features

- 2,500 V_{DC} isolation protection
- 32-ch single-ended or 16-ch differential or a combination of analog input
- 12-bit resolution for A/D conversion
- Programmable gain for each input channel
- Onboard FIFO memory (PCI-1713U: 4,096 samples; PCI-1715U: 1,024 samples)
- Software, internal or external pacer sampling modes supported
- Universal PCI bus
- BoardID™ switch

Specifications

Analog Input

- **Channels** 32 single-ended/16 differential (software programmable)
- **Resolution** 12 bits
- **Max. Sampling Rate** PCI-1713U: 100 kS/s
  PCI-1715U: 500 kS/s

Note: The sampling rate for each channels will be affected by used channel number. For example, if 4 channels of PCI-1713U are used, the sampling rate is 100k/4 = 25 kS/s per channel.

- **FIFO Size** PCI-1713U: 4,096 samples
  PCI-1715U: 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Isolation Protection** 2,500 V_{DC}
- **Input Impedance** 1 GΩ
- **Sampling Modes** Software, onboard programmable pacer and external clock (TTL level)
- **Input Range (V, software programmable) & Absolute Accuracy**

Unipolar	N/A	0 ~10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
Bipolar	±10	±5	±2.5	±1.25	±0.625
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

* ±1 LSB is added as the derivative for absolute accuracy

General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x DB37 female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA
  Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

Ordering Information

- **PCI-1713U** 100 kS/s, 12-bit, 32-ch Isolated AI PCI Card
- **PCI-1715U** 500 kS/s, 12-bit, 32-ch Isolated AI PCI Card

Accessories

- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCL-10137-1E** DB37 Cable, 1 m
- **PCL-10137-2E** DB37 Cable, 2 m
- **PCL-10137-3E** DB37 Cable, 3 m

Pin Assignments

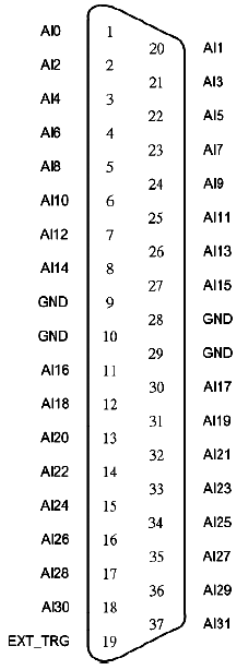

All product specifications are subject to change without notice

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.