

DSP1S Series

Single Output DC-DC Converters

The DSP1 Series is specifically designed to convert a nominal 5 Volt input into an isolated output voltage.

The semi-regulated output voltages were designed to allow analog circuits and three terminal regulators to operate within their most efficient input voltage range.

This series achieves high power densities through the use of 350 kHz fixed-frequency switching converters.

Key Features & Benefits

- RoHS lead solder exemption compliant
- Up to 1 Watt unregulated output power
- Single-In-Line package
- Four-terminal operation
- Efficiencies to 75%
- Output Voltages: 5V, 7V, 12V, 14V, 15V, 17V
- 700 V isolation
- -40 °C to +85 °C operation



1. MODEL SELECTION

| MODEL | INPUT RANGE [VDC] | | | OUTPUT | |
|-----------|-------------------|-----|-------|--------|-----------|
| | MIN | MAX | [VDC] | [mA] | POWER [W] |
| DSP1N5S5 | 4.5 | 5.5 | 5 | 150 | 0.75 |
| DSP1N5S7 | 4.5 | 5.5 | 7 | 140 | 1 |
| DSP1N5S12 | 4.5 | 5.5 | 12 | 80 | 1 |
| DSP1N5S14 | 4.5 | 5.5 | 14 | 70 | 1 |
| DSP1N5S15 | 4.5 | 5.5 | 15 | 65 | 1 |
| DSP1N5S17 | 4.5 | 5.5 | 17 | 60 | 1 |

2. GENERAL SPECIFICATIONS¹

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | TYP | MAX | UNITS |
|---|--------------------------|------------------------|-----|-----|-----------|
| <i>Isolation</i> | | | | | |
| Isolation Voltage | Input to Output 10 µA | 700 | | | VDC |
| Capacitance | Input to Output | | 25 | | pF |
| <i>Environmental</i> | | | | | |
| Case Operating Range (T _c) ² | | -40 | | 85 | °C |
| Storage Range | | -55 | | 105 | °C |
| Thermal Impedance ³ | | 58 | | | °C / Watt |
| <i>General</i> | | | | | |
| MTBF | Calculated | 700,000 | | | hrs |
| Weight | | 0.1/28 | | | oz/g |
| Case Material | | Non Conductive Plastic | | | |

NOTES

¹ All parameters measured at T_c = 25 °C, nominal input voltage and full rated load unless otherwise noted.

² Derate output power linearly to 0.6 watts from 70 °C to 85 °C.

³ The case Thermal Impedance is specified as the case temperature rise over ambient per package dissipated.

3. INPUT SPECIFICATIONS¹

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | TYP | MAX | UNITS |
|-------------------------------|--|--|--|-----|-------|
| Voltage Range | | 4.5 | | 5.5 | VDC |
| Reflected Ripple ² | DSP1N5S7 / DSP1N5S12 / DSP1N5S14 / DSP1N5S15 / DSP1N5S17 | DSP1N5S5 DSP1N5S7 DSP1N5S12 DSP1N5S14 DSP1N5S15 DSP1N5S17 | 50 65 | | mApp |
| Input Current | Full Load | DSP1N5S5 DSP1N5S7 DSP1N5S12 DSP1N5S14 DSP1N5S15 DSP1N5S17 | 221 280 263 268 267 279 | | mA |
| | No Load (all models) | | 20 | | mA |
| Efficiency | DSP1N5S12 / DSP1N5S14 / DSP1N5S15 / DSP1N5S17 | DSP1N5S5 DSP1N5S7 | 68 70 73 | | % |
| Switching Frequency | | | 350 | | kHz |

4. OUTPUT SPECIFICATIONS¹

| PARAMETER | CONDITIONS / DESCRIPTION | MIN | TYP | MAX | UNITS |
|---|--------------------------|-------|-----------|-------|--------|
| Output Voltage | DSP1N5S5 | 5 | | | |
| | DSP1N5S7 | 7 | | | |
| | DSP1N5S12 | 12 | | | |
| | DSP1N5S14 | 14 | | | |
| | DSP1N5S15 | 15 | | | |
| | DSP1N5S17 | 17 | | | |
| Output Voltage Accuracy ³ | DSP1N5S5 | 4.75 | 5.00 | 5.25 | |
| | DSP1N5S7 | 6.65 | 7.00 | 7.35 | |
| | DSP1N5S12 | 11.40 | 12.00 | 12.60 | |
| | DSP1N5S14 | 13.30 | 14.00 | 14.70 | |
| | DSP1N5S15 | 14.25 | 15.00 | 15.75 | |
| | DSP1N5S17 | 16.15 | 17.00 | 17.85 | |
| Output Voltage, No Load | DSP1N5S5 | 7 | | | |
| | DSP1N5S7 | 10 | | | |
| | DSP1N5S12 | 16 | | | |
| | DSP1N5S14 | 19 | | | |
| | DSP1N5S15 | 21 | | | |
| | DSP1N5S17 | 24 | | | |
| Rated Load Range | DSP1N5S5 | | | 150 | |
| | DSP1N5S7 | | | 140 | |
| | DSP1N5S12 | | 0 | 80 | |
| | DSP1N5S14 | | | 70 | |
| | DSP1N5S15 | | | 65 | |
| | DSP1N5S17 | | | 60 | |
| Load Regulation ⁴ | 75% - 20% Load | | +8 | | % |
| | 75% - 100% Load | | -5 | | |
| Line Regulation ⁵ | | | 1.6 | | % |
| Noise, Peak – Peak ² | | | 70 | | mVpp |
| Temperature Coefficient | | | 400 | | ppm/°C |
| Short Circuit Protection to Common ⁶ | | | Momentary | | |

NOTES

- ¹ All parameters measured at Tc= 25 °C, nominal input voltage and full rated load unless otherwise noted.
- ² Noise measurement bandwidth is 20 MHz. Input Reflected Ripple and output noise are measured with an external 10µF/25V tantalum capacitor connected across the input and output pins.
- ³ Output Voltage Accuracy measured at 75% of maximum Rated Load.
- ⁴ Load Regulations measured relative to 75% of maximum Rated Load Current.
- ⁵ Line Regulation is for a 1.0% change in input Voltage.
- ⁶ Use input fuse for protection. See Applying the input.

5. DSP1 SERIES APPLICATION NOTES

EXTERNAL CAPACITANCE REQUIREMENTS

Output filtering is required for operation. A minimum of 10 F is specified for optimal performance. Output capacitance may be increased for additional filtering, not to exceed 400 F. To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5 Ohms from DC to 350 kHz is required. If a capacitive input source is farther than 2" from the converter, it is recommended to use a 10 F, 25 V solid tantalum capacitor.

REGULATION

This converter uses a semi-regulated design. The output will vary as the load is changed, with output decreasing with increasing load. See Output Voltage vs. Output Load curves. Additionally, output voltage will change in proportion to a change in input voltage. The typical output voltage will change 1.2% for each 1% change in input voltage.

NEGATIVE OUTPUTS

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.

DSP1 Series

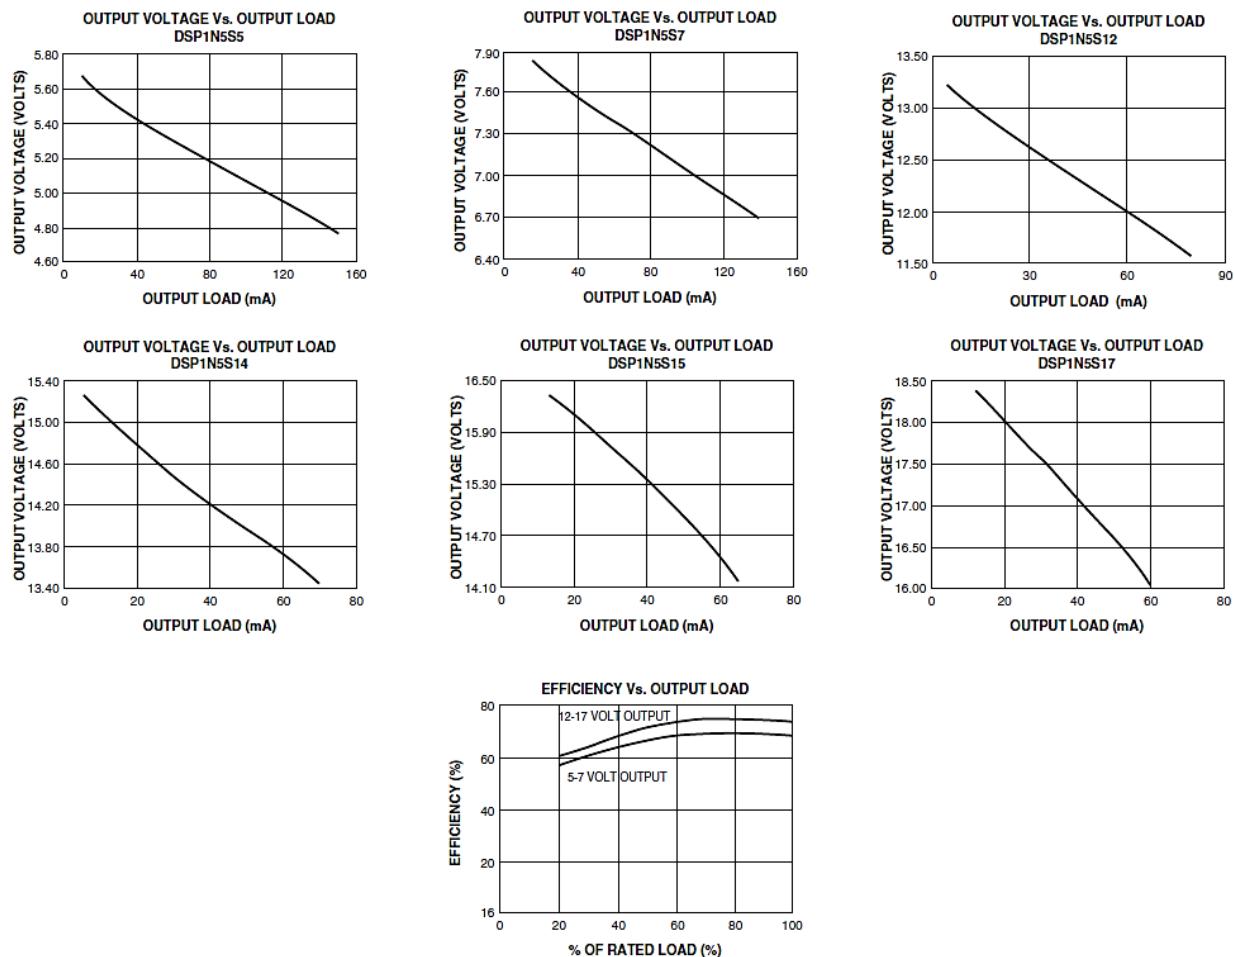


Figure 1. Typical Performance ($T_c = 25^\circ C$)

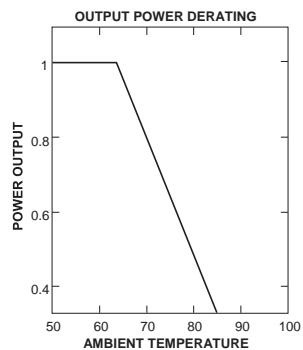
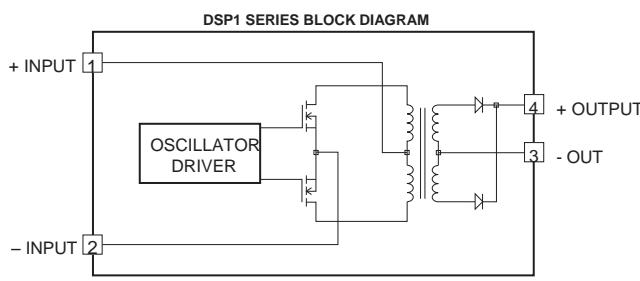


Figure 2. Block Diagram

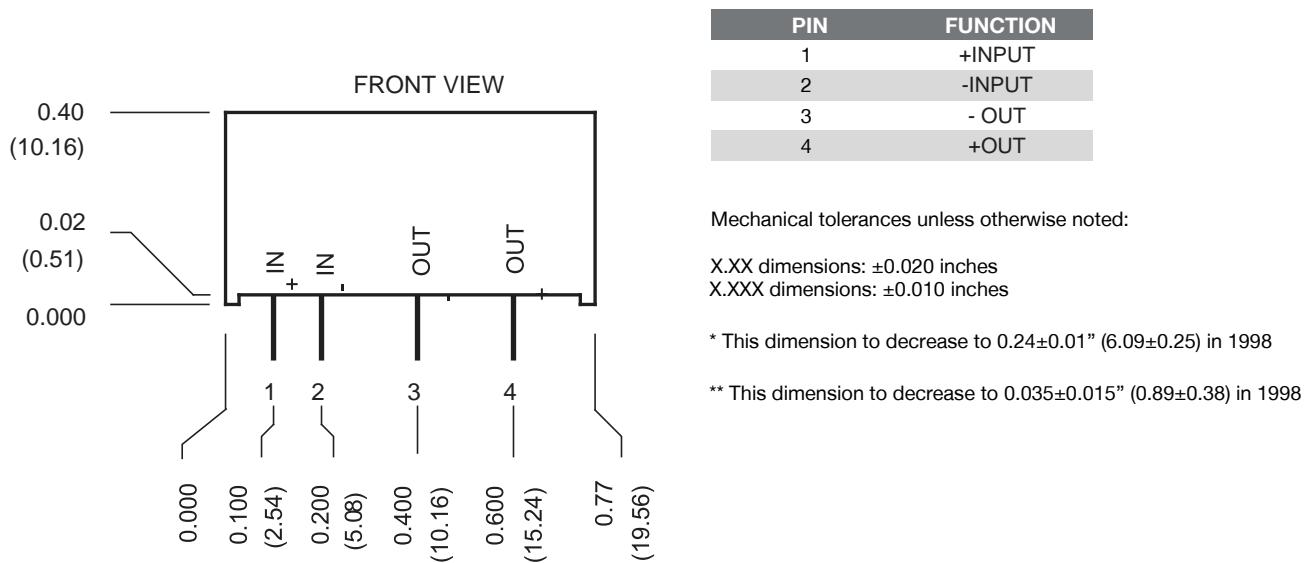


Figure 3. Mechanical Dimensions

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.