

ASML-5829

Schottky Assisted Low Power PIN Diode Limiter




Data Sheet

Description

The ASML-5829 is specifically designed for low power limiter applications, where it can be used to protect the receiver system from being damaged by large input signals, and allow the receiver system to function normally with the absence of large signal. The Schottky enhanced limiter will have a lower limiting threshold compared to the more conventional self-biased PIN limiter. The PIN diode is placed at the input, to protect the Schottky from high RF power levels.

Pin Connections, Package Marking & Orientation, SOT-323

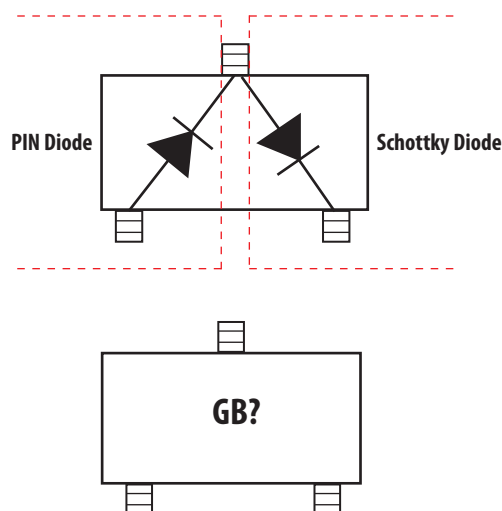

Notes:

GB = Device Code

? = Month code indicates the month of manufacture

Features

- Low Power Limiter with unique combination of PIN and Schottky Diode
- Low limiting threshold power (OP1dB: 6.05 dBm @900MHz)
- Semi integrated solution in Surface Mount SOT-323 Package
 - increase flexibility
 - save board space
 - reduce cost
- PIN Diode features:
 - Low Capacitance
 - Low Resistance at Low Current
 - Low Failure in Time (FIT) Rate^[1]
- Schottky Diode features:
 - Low Turn-On Voltage (As Low as 0.34 V at 1 mA)
 - Low FIT (Failure in Time) Rate^[1]

Note:

1. For more information see the Surface Mount PIN Reliability Data Sheet.

Table 1. Absolute Maximum Rating ^[1] T_c = +25°C, PIN diode

Symbol	Parameter	Units	Absolute Max. for PIN Diode	Absolute Max. for Schottky Diode
I _F	Forward Current (1μs Pulse)	Amp	1	1
P _{IV}	Peak Inverse Voltage	V	100	15
T _J	Junction Temperature	°C	150	
T _{STG}	Storage Temperature	°C	-65 to 150	
θ _{JC}	Thermal Resistance ^[2]	°C/W	150	

Notes:

1. Operation in excess of anyone of these conditions may result in permanent damage to the device.
2. T_C = 25°C, T_C where is defined to be the temperature at the package pins where contacts is made to the circuit board.

Table 2. Electrical Specifications, T_c = +25°C, PIN diode

Symbol	Parameter and Test Condition	Units	Min.	Typ	Max.
V _{BR}	Breakdown Voltage @ I _R ≤ 10μA	V	100	128	–
V _F	Forward Voltage @ I _F = 30mA	V	–	0.90	–
R _S	Typical Series Resistance @ Freq = 100MHz & I _F = 1mA	Ohm	–	4.00	–
R _S	Typical Series Resistance @ Freq = 100MHz & I _F = 5mA	Ohm	–	1.90	2.5
C _T	Typical Total Capacitance @ Freq = 1MHz & V _R = 5V	pF	–	0.28	0.375
τ	Carrier Lifetime @ I _F = 10mA & I _R = 6mA	ns	–	200	–

Table 3. Electrical Specifications, T_c = +25°C, Schottky diode

Symbol	Parameter and Test Condition	Units	Min.	Typ	Max.
V _{BR}	Breakdown Voltage @ I _R ≤ 100μA	V	15	22	–
I _R	Reverse Leakage Current @ V _{BR} = 1V	nA	–	40	100
V _F	Forward Voltage @ I _F = 1mA	V	–	0.32	0.34
V _F	Forward Voltage @ I _F = 10mA	V	–	0.45	0.50
C _T	Typical Total Capacitance @ Freq = 1MHz & V _R = 0V	pF	–	0.7	1.0
RD	Typical Dynamic Resistance, I _F = 5mA	Ohm	–	12	–

ASML-5829 Typical Performance, $T_c = +25^\circ\text{C}$

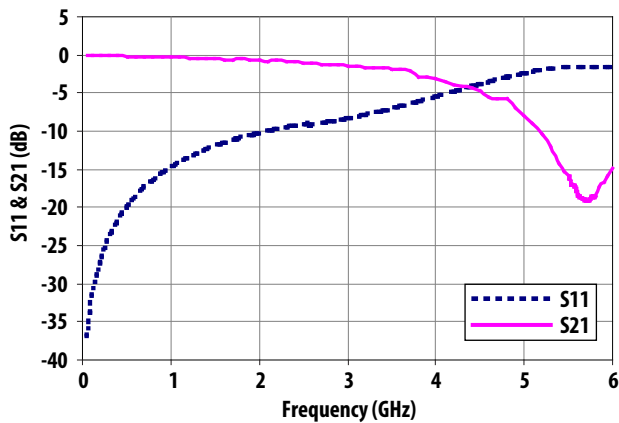


Figure 1. S11 & S21 vs Frequency at Input Power = 0dBm

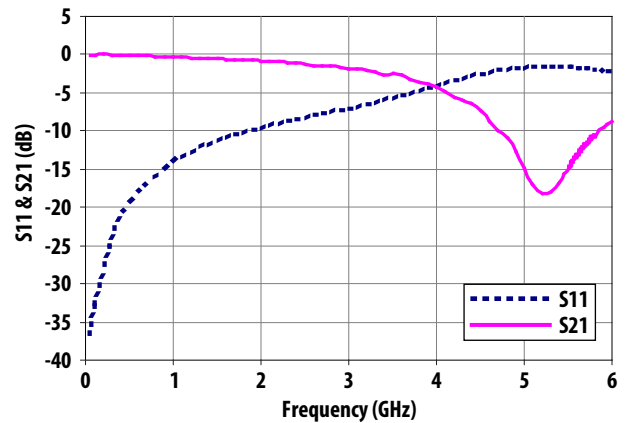


Figure 2. S11 & S21 vs Frequency at Input Power = -30dBm

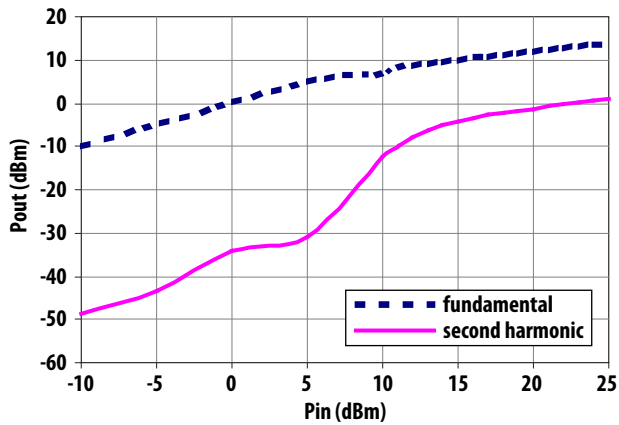


Figure 3. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 450MHz

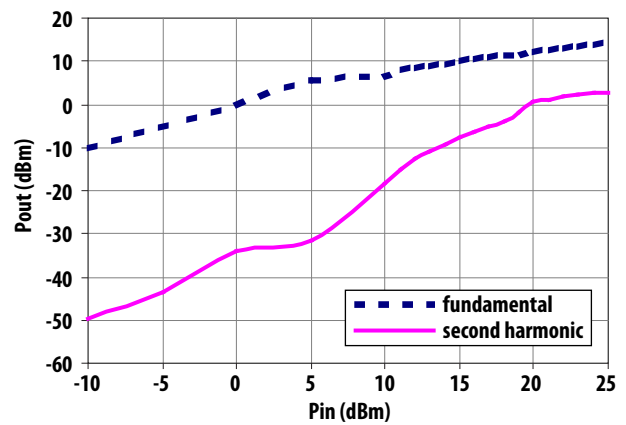


Figure 4. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 900MHz

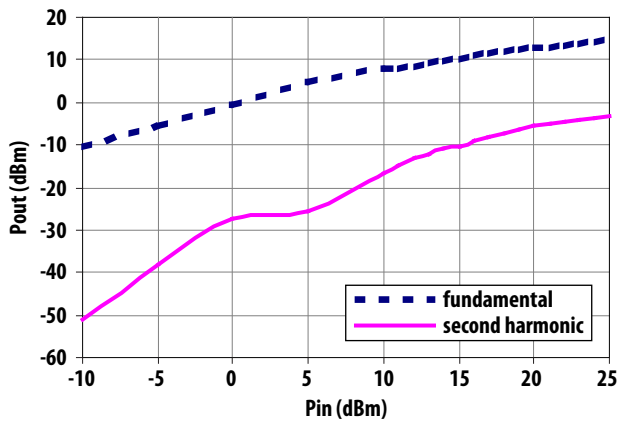


Figure 5. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 1.8GHz

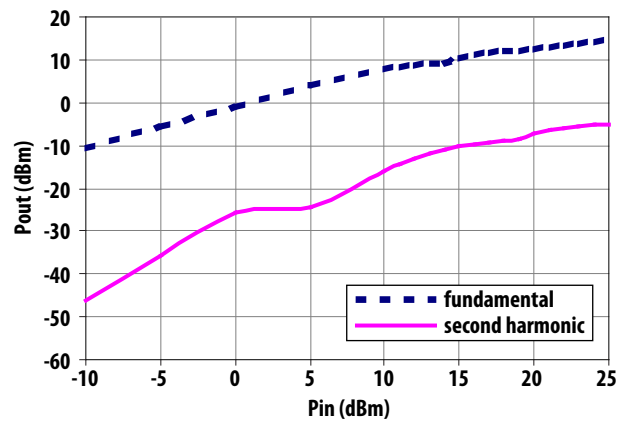


Figure 6. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 2.0GHz

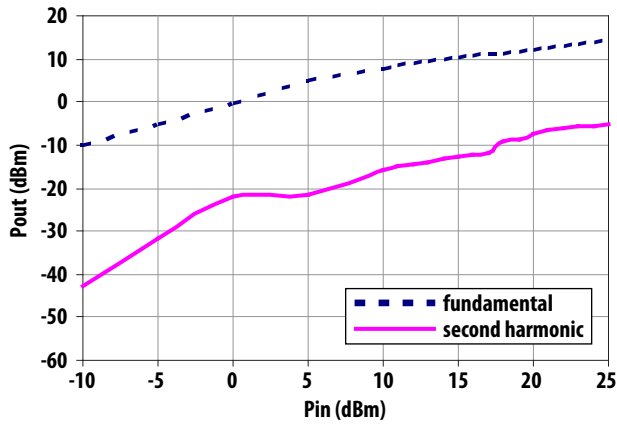


Figure 7. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 2.5GHz




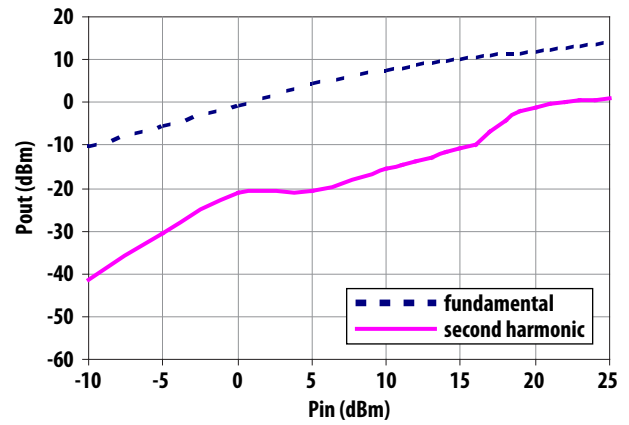


Figure 8. P_{out} fundamental & P_{out} second harmonic vs P_{in} at freq = 2.7GHz

SOT-323 Package Outline

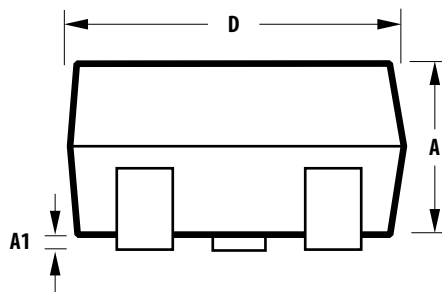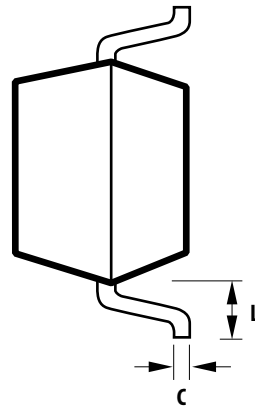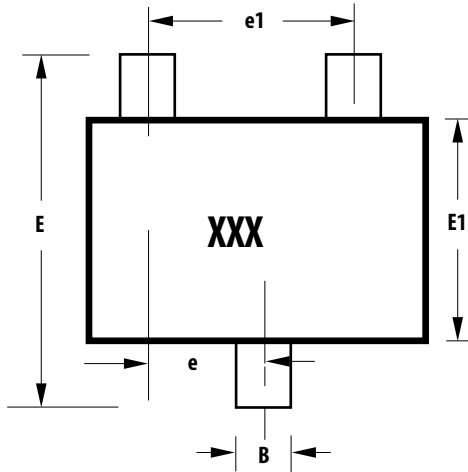

Notes:
XXX-package marking
Drawings are not to scale

SYMBOL	DIMENSIONS (mm)	
	MIN.	MAX.
A	0.80	1.00
A1	0.00	0.10
B	0.15	0.40
C	0.10	0.20
D	1.80	2.25
E1	1.10	1.40
e	0.65 typical	
e1	1.30 typical	
E	1.80	2.40
L	0.425 typical	


Part Number Ordering Information

Part Number	No. of Devices	Container
ASML-5829-BLK	100	Bulk, per Antistatic bag
ASML-5829-TR1	3000	Tape & Reel, per 7" Reel
ASML-5829-TR2	10000	Tape & Reel, per 13" Reel

Tape and Reeling conforms to Electronic Industries RS-481, "Taping of Surface Mounted Components for Automated Placement".



For lead-free option, the part number will have the character "G" at the end, eg. -TR2G for a 10K pc lead-free reel.

Recommended PCB Pad Layout for AVAGO's SOT-323 Products




Dimensions in inches

Device Orientation

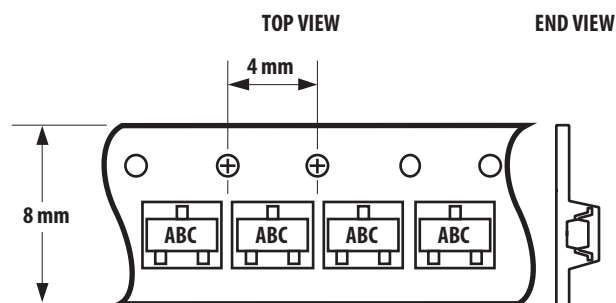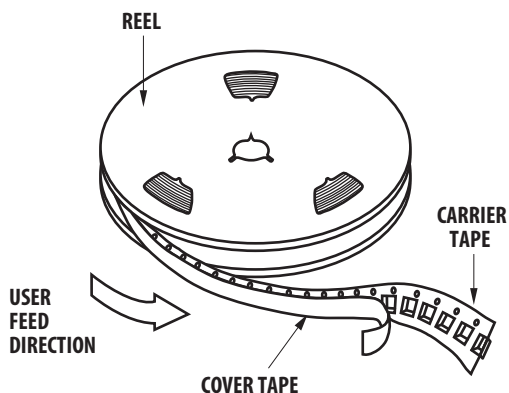

Note: "AB" represents package marking code.
"C" represents date code.

Tape Dimensions and Product Orientation

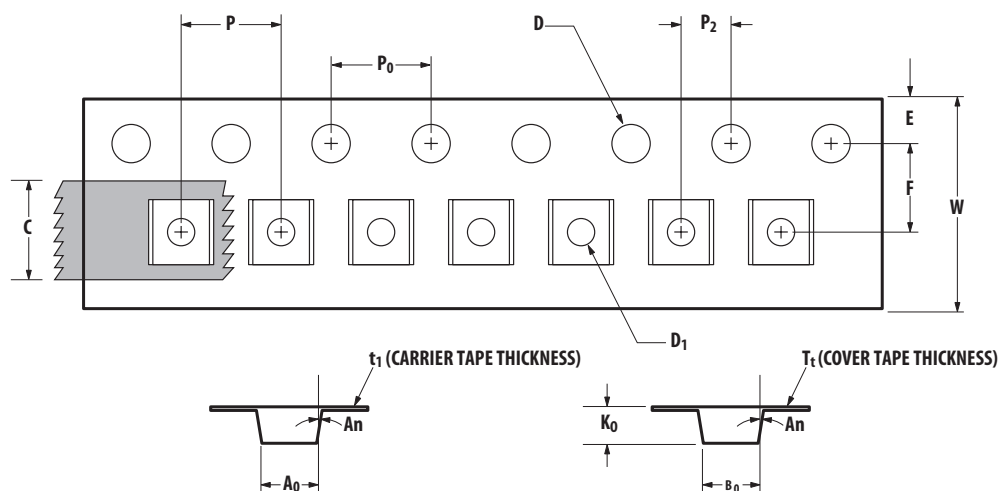

	DESCRIPTION	SYMBOL	SIZE (mm)	SIZE (INCHES)
CAVITY	LENGTH	A ₀	2.40 ± 0.10	0.094 ± 0.004
	WIDTH	B ₀	2.40 ± 0.10	0.094 ± 0.004
	DEPTH	K ₀	1.20 ± 0.10	0.047 ± 0.004
	PITCH	P	4.00 ± 0.10	0.157 ± 0.004
	BOTTOM HOLE DIAMETER	P	4.00 ± 0.10	0.157 ± 0.004
		D ₁	1.00 + 0.25	0.039 + 0.010
PERFORATION	DIAMETER	D	1.55 ± 0.05	0.061 ± 0.002
	PITCH	P ₀	4.00 ± 0.10	0.157 ± 0.004
	POSITION	E	1.75 ± 0.10	0.069 ± 0.004
CARRIER TAPE	WIDTH	W	8.00 ± 0.30	0.315 ± 0.012
	THICKNESS	t ₁	0.254 ± 0.02	0.0100 ± 0.0008
COVER TAPE	WIDTH	C	5.4 ± 0.10	0.205 ± 0.004
	TAPE THICKNESS	T _t	0.062 ± 0.001	0.0025 ± 0.00004
DISTANCE	CAVITY TO PERFORATION (WIDTH DIRECTION)	F	3.50 ± 0.05	0.138 ± 0.002
	CAVITY TO PERFORATION (LENGTH DIRECTION)	P ₂	2.00 ± 0.05	0.079 ± 0.002
ANGLE	FOR SOT-323 (SC70-3 LEAD) FOR SOT-363 (SC70-6 LEAD)	A _n	8°C MAX 10°C MAX	

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved.
AV02-1692EN - January 13, 2009

Avago
TECHNOLOGIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.