

ATC 700 A Series NPO Porcelain and Ceramic Multilayer Capacitors

- Case A Size (.055" x .055")
- Low ESR/ESL
- Low Noise
- Rugged Construction
- Extended WVDC up to 250 VDC
- Capacitance Range 0.1 pF to 1000 pF
- Zero TCC
- High Self-Resonance
- Established Reliability (QPL)

ATC, the industry leader, offers new improved ESR/ESL performance for the 700 A Series RF/Microwave Capacitors. The superior high self-resonance and zero TCC characteristic of this Series provide excellent performance over a broad range of RF and microwave applications requiring minimum drift. High density porcelain and ceramic constructions provide a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning and DC Blocking.

Typical circuit applications: Filters, Oscillators and Timing

ENVIRONMENTAL TESTS

ATC 700 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.



ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q):

Greater than 10,000 (0.1 pF to 100 pF) @ 1 MHz.
Greater than 2000 (110 pF to 1000 pF) @ 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):

0 ±30 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):

0.1 pF to 470 pF:

10⁶ Megohms min. @ +25°C at rated WVDC.

10⁵ Megohms min. @ +125°C at rated WVDC.

510 pF to 1000 pF:

10⁵ Megohms min. @ +25°C at rated WVDC.

10⁴ Megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC): See Capacitance Values Table, p 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of rated WVDC for 5 secs.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None

(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES: Available in various surface mount styles. See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
sales@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com

THE ENGINEERS' CHOICE™

www.atceramics.com



THE
ENGINEERS'
CHOICE®

ISO 9001 REGISTERED
COMPANY

ATC # 001-813 Rev. N, 9/14

ATC 700 A Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.
0R1	0.1	B			2R4	2.4				200	20				151	150			
0R2	0.2				2R7	2.7				220	22				161	160			
0R3	0.3	B, C			3R0	3.0				240	24				181	180			
0R4	0.4				3R3	3.3				270	27				201	200			
0R5	0.5				3R6	3.6				300	30				221	220			
0R6	0.6				3R9	3.9	B, C,			330	33				241	240			
0R7	0.7				4R3	4.3	D			360	36				271	270			
0R8	0.8				4R7	4.7				390	39				301	300			
0R9	0.9				5R1	5.1				430	43				331	330			
1R0	1.0				5R6	5.6				470	47				361	360			
1R1	1.1				6R2	6.2				510	51				391	390			
1R2	1.2	B, C, D	150	250	6R8	6.8		150	250	560	56	F, G, J, K, M	150		431	430	F, G, J, K, M	150	N/A
1R3	1.3				7R5	7.5	B, C, J, K, M			620	62				471	470			
1R4	1.4				8R2	8.2				680	68				511	510			
1R5	1.5				9R1	9.1				750	75				561	560			
1R6	1.6				100	10				820	82				621	620			
1R7	1.7				110	11				910	91				681	680			
1R8	1.8				120	12				101	100				751	750			
1R9	1.9				130	13	F, G, J, K, M			111	110				821	820		50	
2R0	2.0				150	15				121	120				911	910			
2R1	2.1				160	16				131	130				102	1000			
2R2	2.2				180	18													

VRMS = 0.707 x WVDC

SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

Capacitance values in **bold** type indicate porcelain dielectric. All other capacitance values indicate ceramic dielectric.

All 700 A Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

ATC PART NUMBER CODE

Series ATC700 A 6R 8 J W 150 X T

Case Size

Capacitance Code: First 2 significant digits for capacitance.
R=Decimal Point

Indicates number of zeros following digits of capacitance in picofarads except for decimal values.

Capacitance Tolerance

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

Packaging
T - Tape and Reel, 1000 pc. qty.*
TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.*
I - Special Packaging. Consult Factory.
*Consult ATC for other quantities
ATC Cap-Pac® packaging (100 pc. qty. std.) is also available. For this option, leave last field blank.

Laser Marking

WVDC

Termination Code

The above part number refers to a 700 A Series (case size A) 6.8 pF capacitor, J tolerance (±5%), 150 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Cap-Pac® packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America

sales@atceramics.com





ATC Europe

sales@atceramics.com

ATC Asia

sales@atceramics-asia.com

ATC 700 A Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			Lead and Termination Dimensions and Materials	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700A	W	CDR12BP	A  Solder Plate		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Tin/Lead, Solder Plated over Nickel Barrier Termination
700A	P	CDR12BP	A  Pellet		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Heavy Tin/Lead Coated, over Nickel Barrier Termination
700A	T	N/A	A  Solderable Nickel Barrier		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	RoHS Compliant Tin Plated over Nickel Barrier Termination
700A	CA	CDR11BP	A  Gold Chip		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	RoHS Compliant Gold Plated over Nickel Barrier Termination

For a complete military catalog, request American Technical Ceramics document ATC 001-818.




A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 700 A Non-Magnetic Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
700A	WN	Meets Requirements	A Non-Mag Solder Plate		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
700A	PN	Meets Requirements	A Non-Mag Pellet		.055 +.035 -.010 (1.40 +0.89 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
700A	TN	Meets Requirements	A Non-Mag Solderable Barrier		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination


*Capacitors with values greater than 100 pF contain a trace magnetic element that may exhibit weak magnetic properties.

Suggested Mounting Pad Dimensions

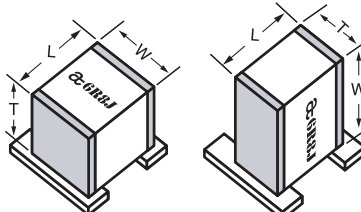

Horizontal Electrode Orientation

Vertical Electrode Orientation



Case A

	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090

Dimensions are in inches.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
saleseur@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 700 A Performance Data


ESR VS. CAPACITANCE
ATC SERIES 700, CASE A

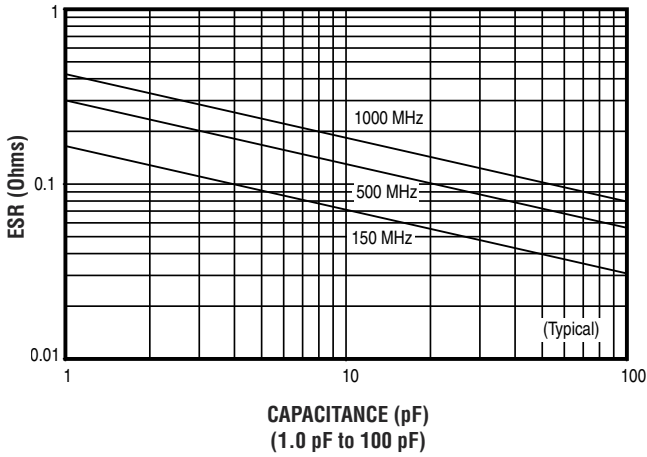


Q VS. CAPACITANCE
ATC SERIES 700, CASE A

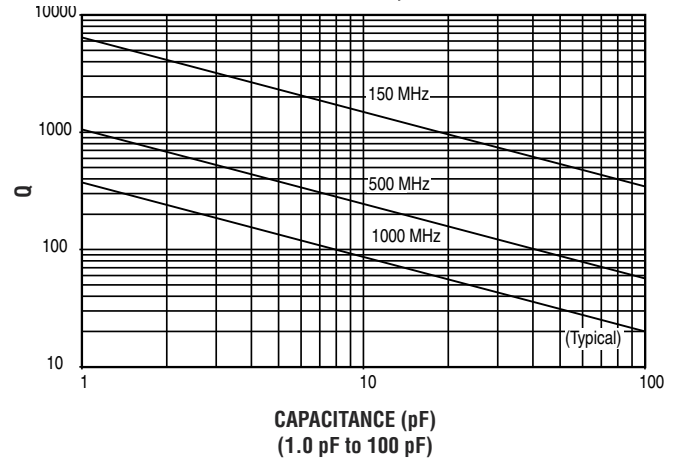


ESR VS. CAPACITANCE
ATC SERIES 700, CASE A

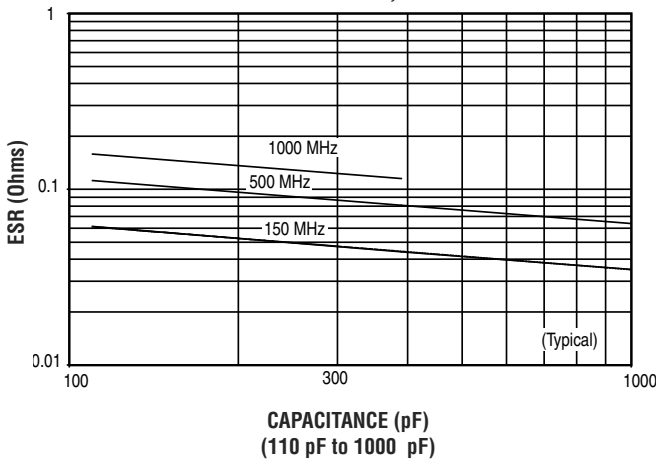


Q VS. CAPACITANCE
ATC SERIES 700, CASE A

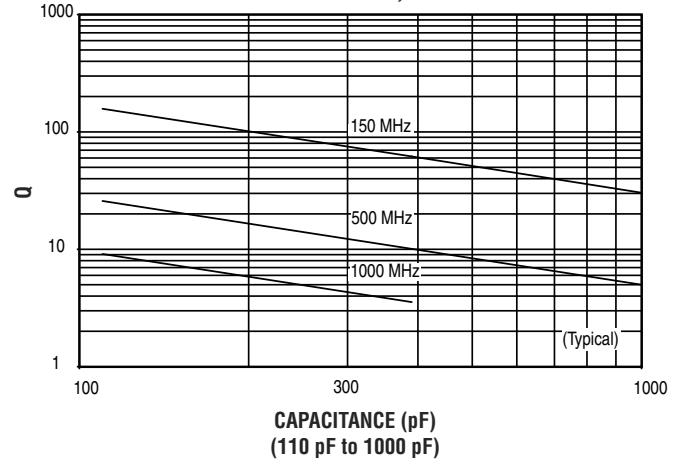

SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 700, CASE A

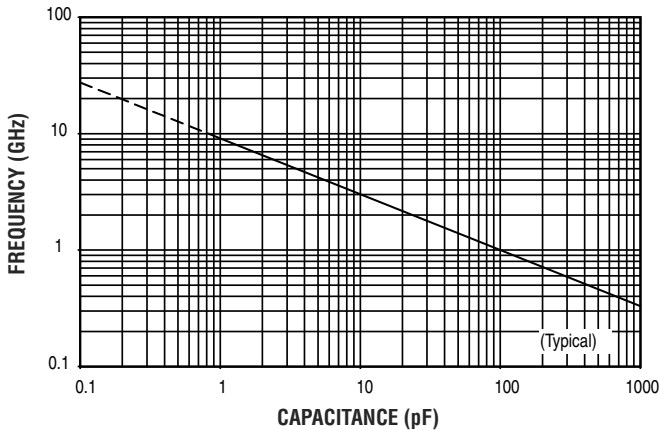

CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 700, CASE A

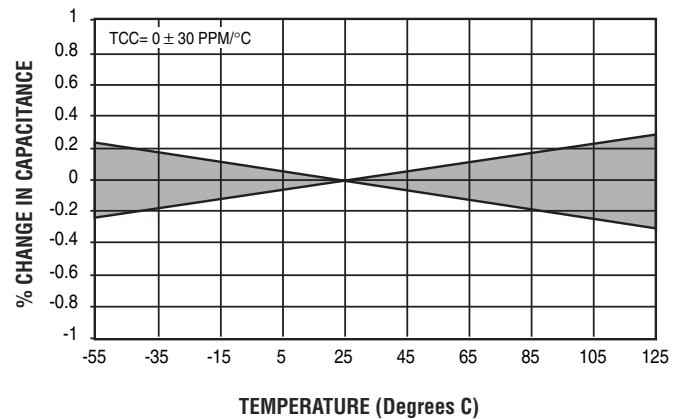

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com


ATC Asia
sales@atceramics-asia.com

ATC 700 A Performance Data


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A**

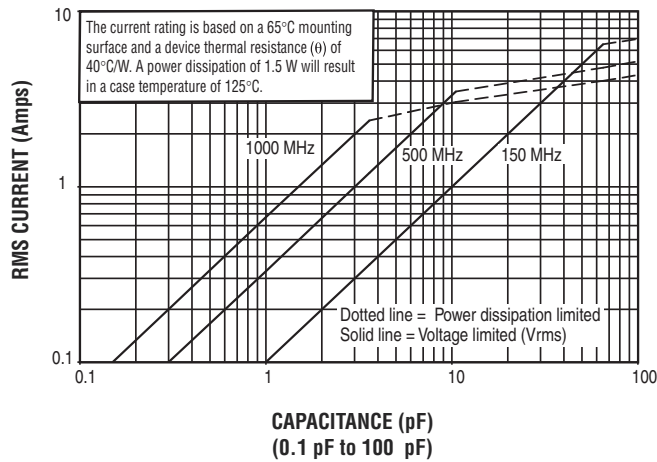


**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A**

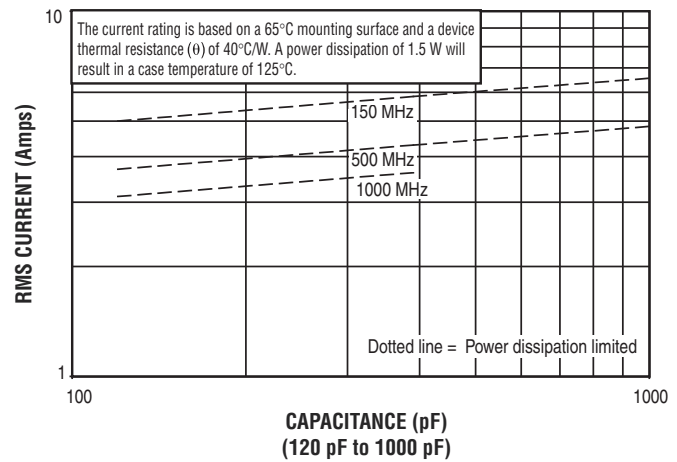

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A, EXTENDED VOLTAGE**

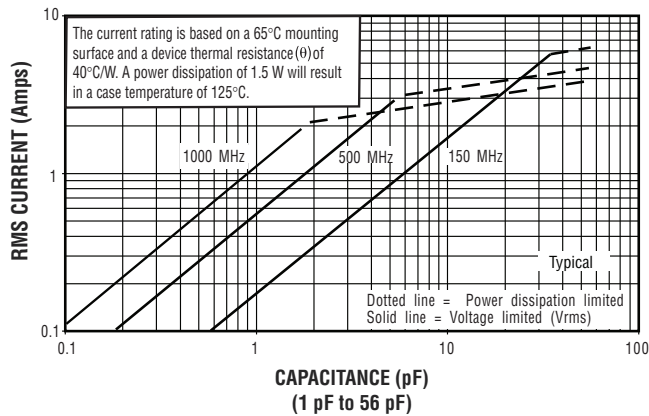

**CURRENT RATING VS. CAPACITANCE
ATC SERIES 700, CASE A, EXTENDED VOLTAGE**

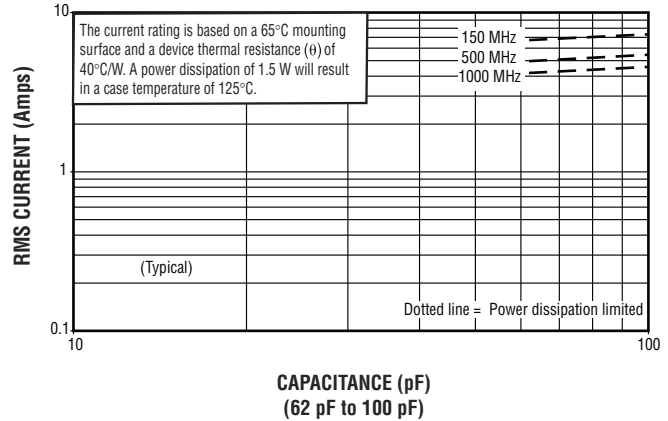

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-813 Rev. N, 9/14



AMERICAN
ATC North America
sales@atceramics.com

TECHNICAL
ATC Europe
saleseur@atceramics.com

CERAMICS
ATC Asia
sales@atceramics-asia.com



THE ENGINEERS' CHOICE™

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

American Technical Ceramics (ATC):

[700A0R1BT150XT](#) [700A0R1BW150XT](#) [700A0R2BT150XT](#) [700A0R3BT150XT](#) [700A0R3CW150XT](#)
[700A0R4BT150XT](#) [700A0R5BT150XT](#) [700A0R5DW150XT](#) [700A0R6BW150XT](#) [700A0R6CT150XT](#)
[700A0R7BT150XT](#) [700A0R7BW150XT](#) [700A0R7CT150XT](#) [700A0R7CW150XT](#) [700A0R7DW150XT](#)
[700A0R8BW150XT](#) [700A0R8CT150XT](#) [700A0R8CW150XT](#) [700A0R8DW150XT](#) [700A0R9BT150XT](#)
[700A0R9BW150XT](#) [700A0R9CT150XT](#) [700A0R9CW150XT](#) [700A0R9DT150XT](#) [700A0R9DW150XT](#)
[700A100GW150XT](#) [700A100JW150XT](#) [700A100KT150XT](#) [700A100MT150XT](#) [700A100MW150XT](#)
[700A101GW150XT](#) [700A101JW150XT](#) [700A101KT150XT](#) [700A101KW150XT](#) [700A101MT150XT](#) [700A102FT50XT](#)
[700A102FW50XT](#) [700A102JW50XT](#) [700A102KT50XT](#) [700A102KW50XT](#) [700A102MW50XT](#) [700A110FW150XT](#)
[700A110JT150XT](#) [700A111FT150XT](#) [700A111FW150XT](#) [700A111GT150XT](#) [700A111JT150XT](#) [700A111JW150XT](#)
[700A111KW150XT](#) [700A111MW150XT](#) [700A120FT150XT](#) [700A120FW150XT](#) [700A120KW150XT](#)
[700A120MT150XT](#) [700A121GT150XT](#) [700A121JW150XT](#) [700A121KT150XT](#) [700A121KW150XT](#) [700A121MT150XT](#)
[700A130GT150XT](#) [700A130JT150XT](#) [700A130KT150XT](#) [700A130KW150XT](#) [700A130MT150XT](#)
[700A130MW150XT](#) [700A131FT150XT](#) [700A131JT150XT](#) [700A131JW150XT](#) [700A131KW150XT](#) [700A131MW150XT](#)
[700A150FT150XT](#) [700A150JT150XT](#) [700A150JW150XT](#) [700A150KW150XT](#) [700A151FT150XT](#) [700A151JT150XT](#)
[700A151MT150XT](#) [700A151MW150XT](#) [700A160FT150XT](#) [700A160GW150XT](#) [700A160KW150XT](#)
[700A161GT150XT](#) [700A161JT150XT](#) [700A161JW150XT](#) [700A161MT150XT](#) [700A180FW150XT](#) [700A180JT150XT](#)
[700A180JW150XT](#) [700A180KT150XT](#) [700A180KW150XT](#) [700A180MT150XT](#) [700A181FW150XT](#) [700A181GT150XT](#)
[700A181GW150XT](#) [700A181KW150XT](#) [700A181MT150XT](#) [700A1R0BT150XT](#) [700A1R0CT150XT](#)
[700A1R0DT150XT](#) [700A1R1BT150XT](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.