

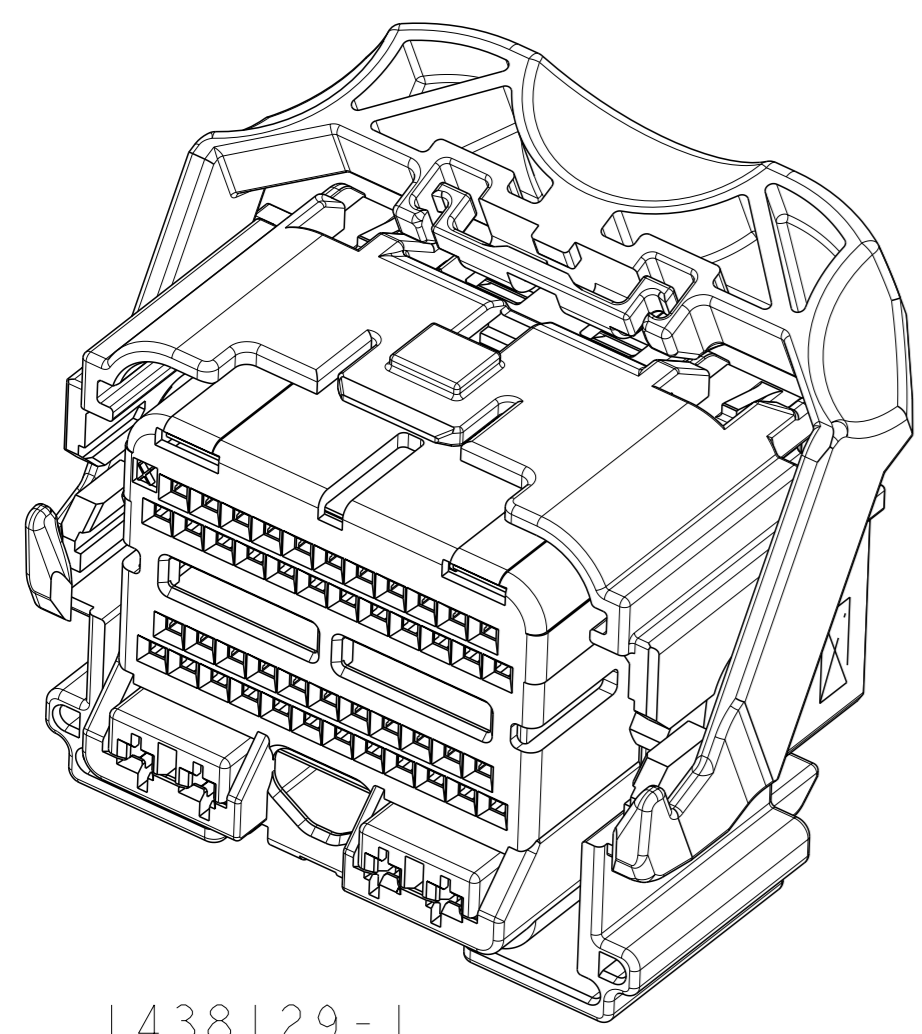



REVISIONS					
#	LY#	DESCRIPTION	DATE	OWN	APVD
F34		REVISED PER ECO-17-007768	30MAY2017	DLD	DCM
F35		REVISED PER ECO-17-014872	24OCT2017	JMS	CM
F36		REVISED PER ECO-18-005691	16APR2018	JMS	CM
F37		ECO-18-013134	13SEP2018	KP	CM

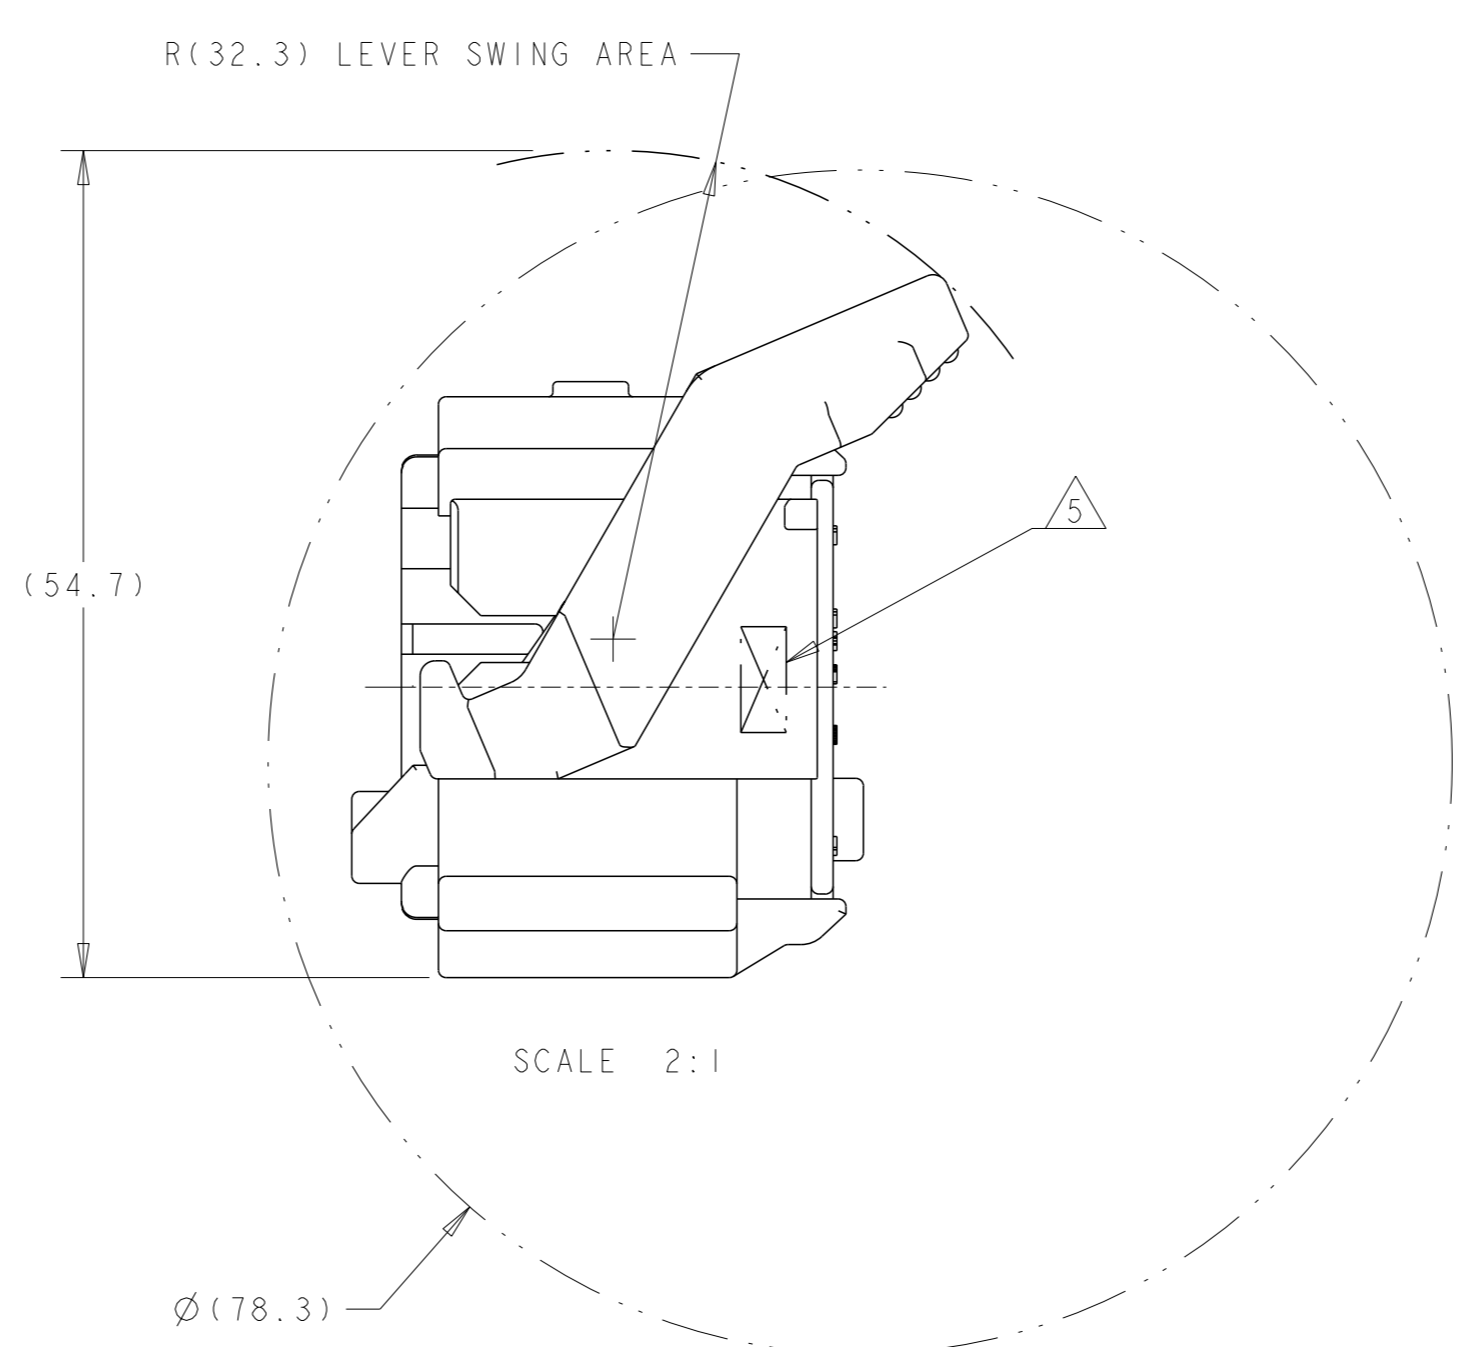



1438129-1  
 SHOWN WITH SPACER  
 IN SEATED POSITION

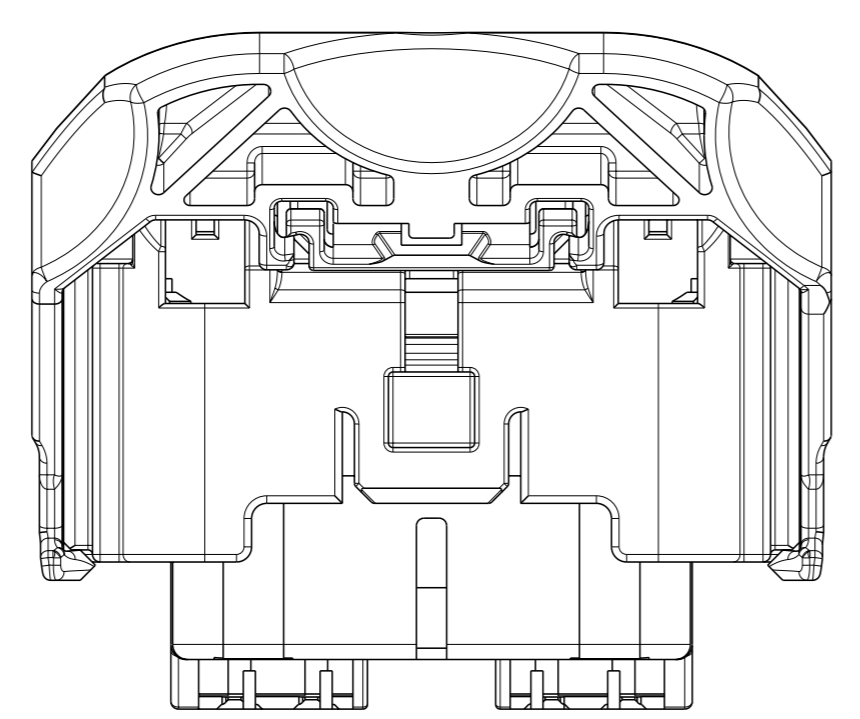



- 1. PRINT PART NUMBER (5S4T-14A464-L\*-\*\*\*, 5S4T-14A464-M\*-\*\*\*, 5S4T-14A464-N\*-\*\*\*) AND TRACEABILITY (YY : 2 DIGIT YEAR, JJJ = JULIAN DATE, HH = 2 DIGIT MILITARY HOUR CODE IN THE LOCATION AT ASSEMBLY. SEE SHEET 3 THRU 7 (-\*) PART NUMBERS.
- 2. APPLICABLE MOLEX (1.5) POWER TERMINAL PART NUMBERS:  
 33012-0002 TIN 0.50-1.50mm<sup>2</sup>
- 3. CAM LEVER AND SPACER ARE SHIPPED IN THEIR PRE-ASSEMBLED POSITIONS.
- 4. REFERENCE TE CONNECTIVITY INSTRUCTION SHEET 408-8893.
- 5. COMPANY LOGO.

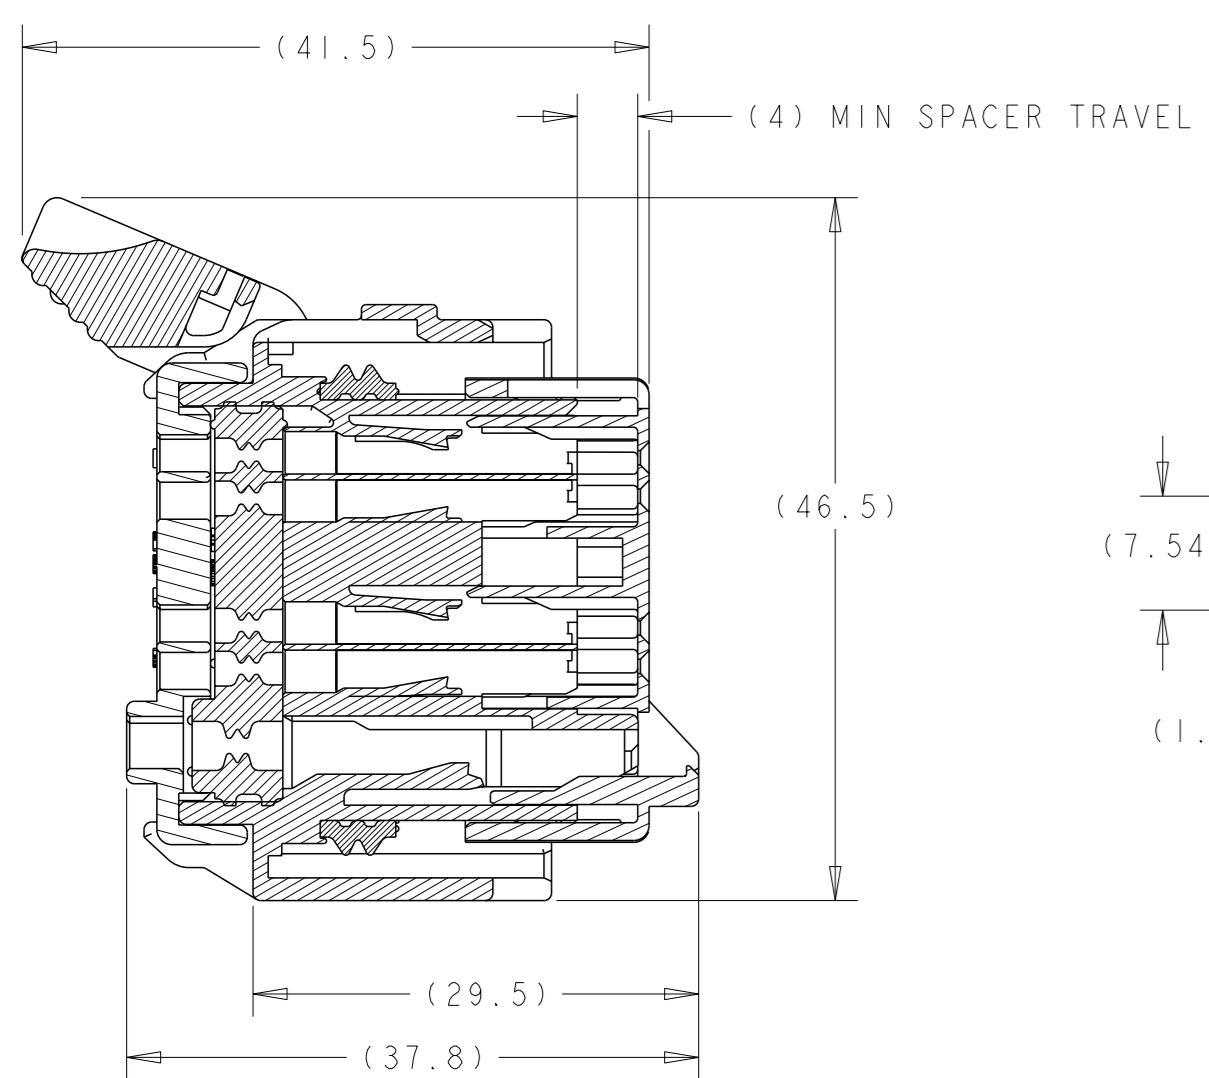

SECTION A-A  
 SPACER AND LEVER IN  
 PRE-SEATED POSITION  
 (DELIVERY CONDITION)

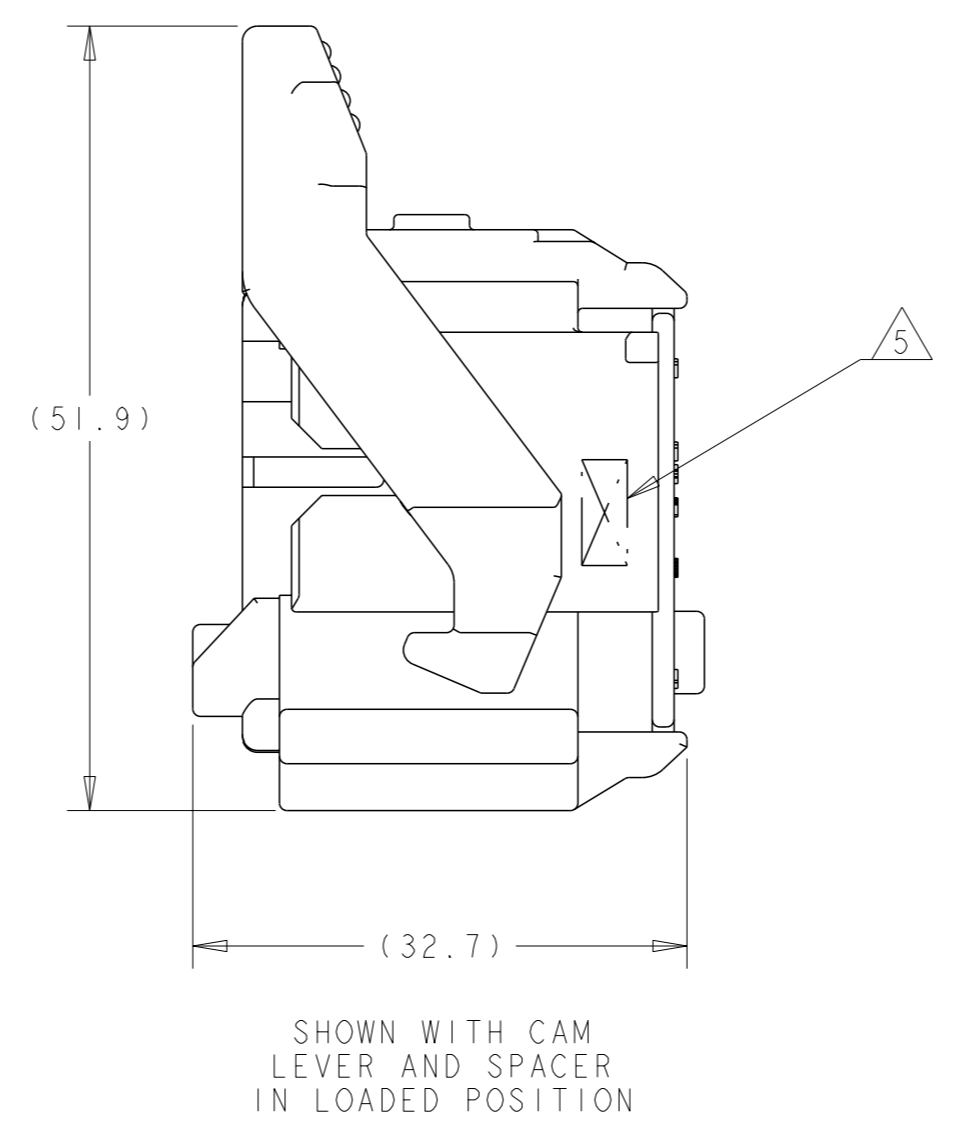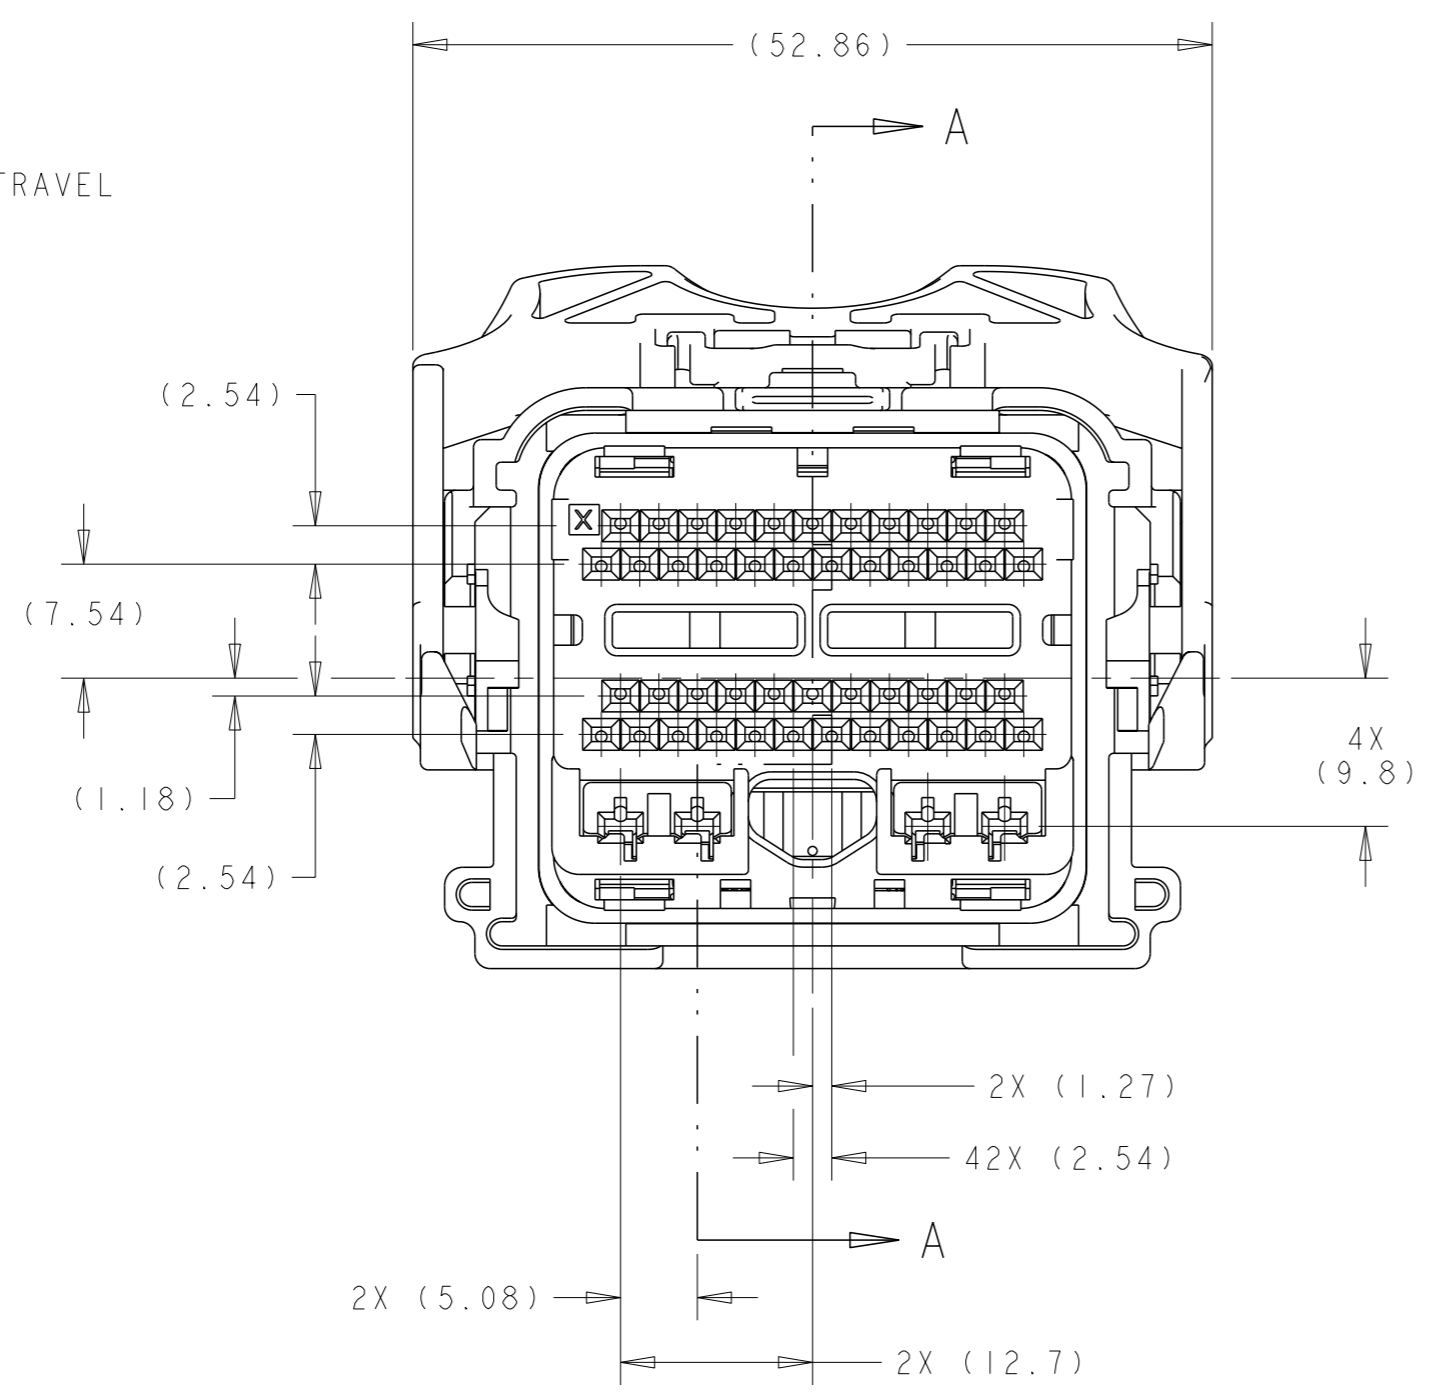

SHOWN WITH CAM  
 LEVER AND SPACER  
 IN LOADED POSITION

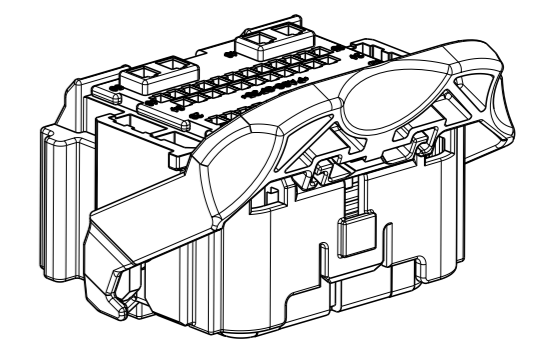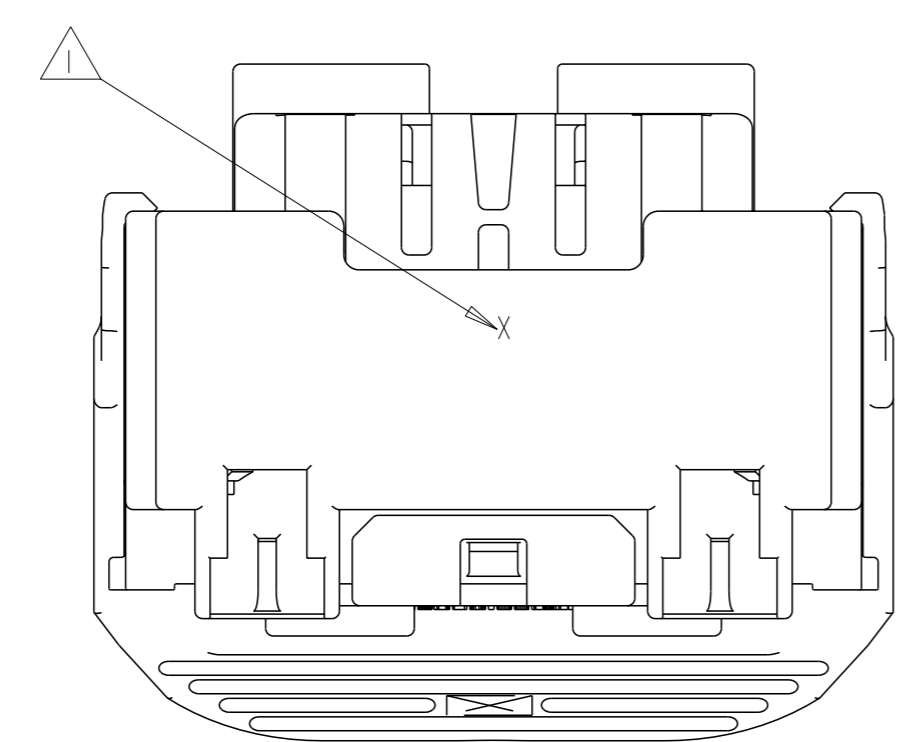

SCALE 1:1



APPLICABLE COMPONENTS (FOR REFERENCE ONLY)						
DESCRIPTION	NOMINAL TERMINAL SIZE	COLOR/PLATING	FORD COMPONENT PART NUMBER	SUPPLIER PART NUMBER	MATERIAL/SPECIFICATION NUMBER	SAE WIRE SIZE
TERMINAL - FEMALE (Ag)	0.64 (CAT. 0)	SILVER	7S4T-14474-AA	I393366-2	COPPER ALLOY/SILVER PLATE	20AWG
TERMINAL - FEMALE (Ag)	0.64 (CAT. 0)	SILVER	7S4T-14474-BA	I393367-2	COPPER ALLOY/SILVER PLATE	18AWG
TERMINAL - FEMALE (Sn)	0.64 (CAT. 0)	TIN	1L2T-14474-AA	I393366-1	COPPER ALLOY/TIN PLATE	20AWG
TERMINAL - FEMALE (Sn)	0.64 (CAT. 0)	TIN	1L2T-14474-BA	I393367-1	COPPER ALLOY/TIN PLATE	18AWG
TERMINAL - FEMALE (Au)	0.64 (CAT. 0)	GOLD	1L2T-14474-CA	I393365-1	COPPER ALLOY/GOLD PLATE	20AWG
TERMINAL - FEMALE (Au)	0.64 (CAT. 0)	GOLD	1L2T-14474-DA	I393364-1	COPPER ALLOY/GOLD PLATE	18AWG
TERMINAL - FEMALE (Au)	0.64 (CAT. 0)	GOLD	1L2T-14474-DA	I393364-1	COPPER ALLOY/GOLD PLATE	22AWG

ANY DESIGN CHANGES ON THIS ASSEMBLY MAY  
 ALSO BE REQUIRED ON ASSEMBLY DRAWING 1438691


SEE TABLES  
 SHEETS 3 THRU 7  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: R. VESTAL 15APR2005	
DIMENSIONS: mm		CHK: T. VALASEK 15APR2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: T. VALASEK 15APR2005	NAME: 50-WAY HARNESS ASSEMBLY, PCM
0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±1° FINISH		PRODUCT SPEC: -	APPLICATION SPEC: -
MATERIAL: -		WEIGHT: -	RESTRICTED TO: -
CUSTOMER DRAWING		SIZE: A1 00779	SCALE: 1:1 SHEET 1 OF 10 REV F37


REVISIONS				
P	LY#	DESCRIPTION	DATE	OWN
-	-	SEE SHEET 1	-	-

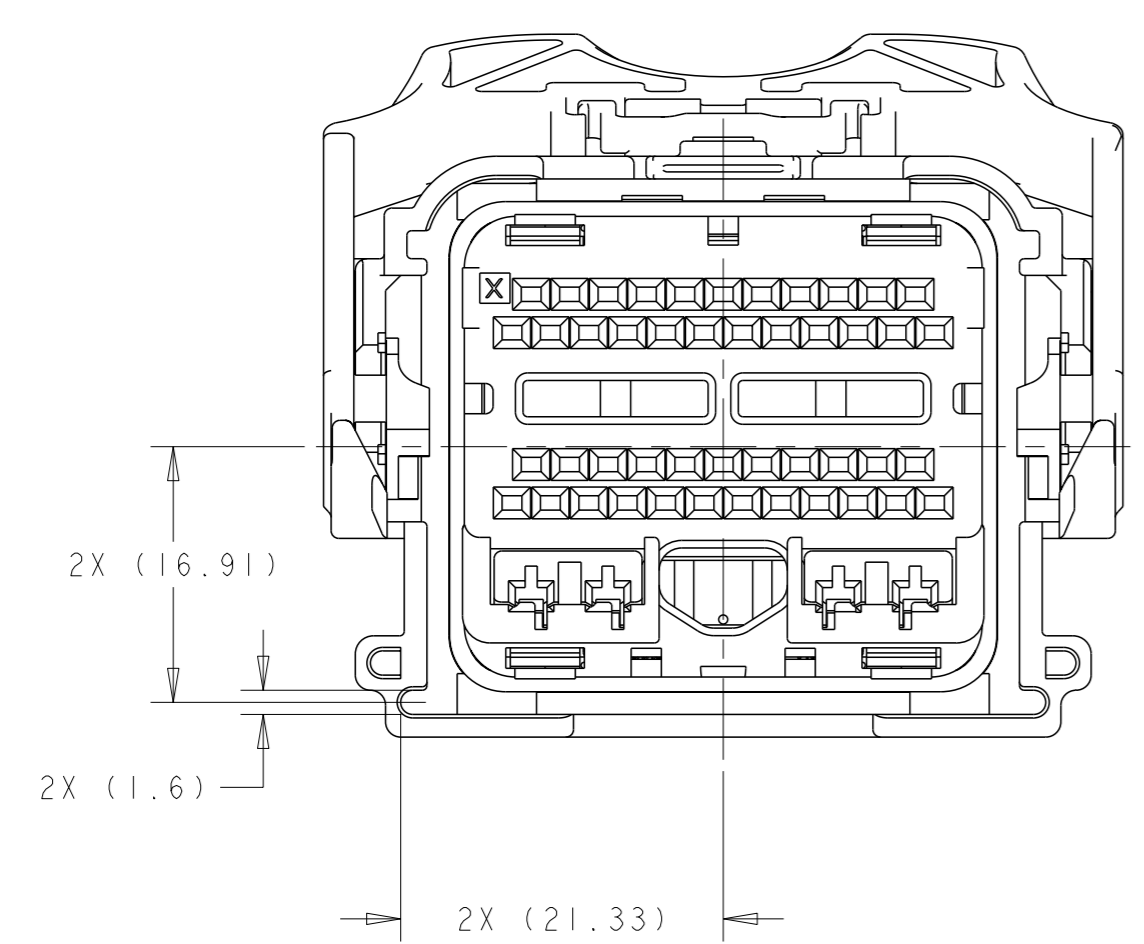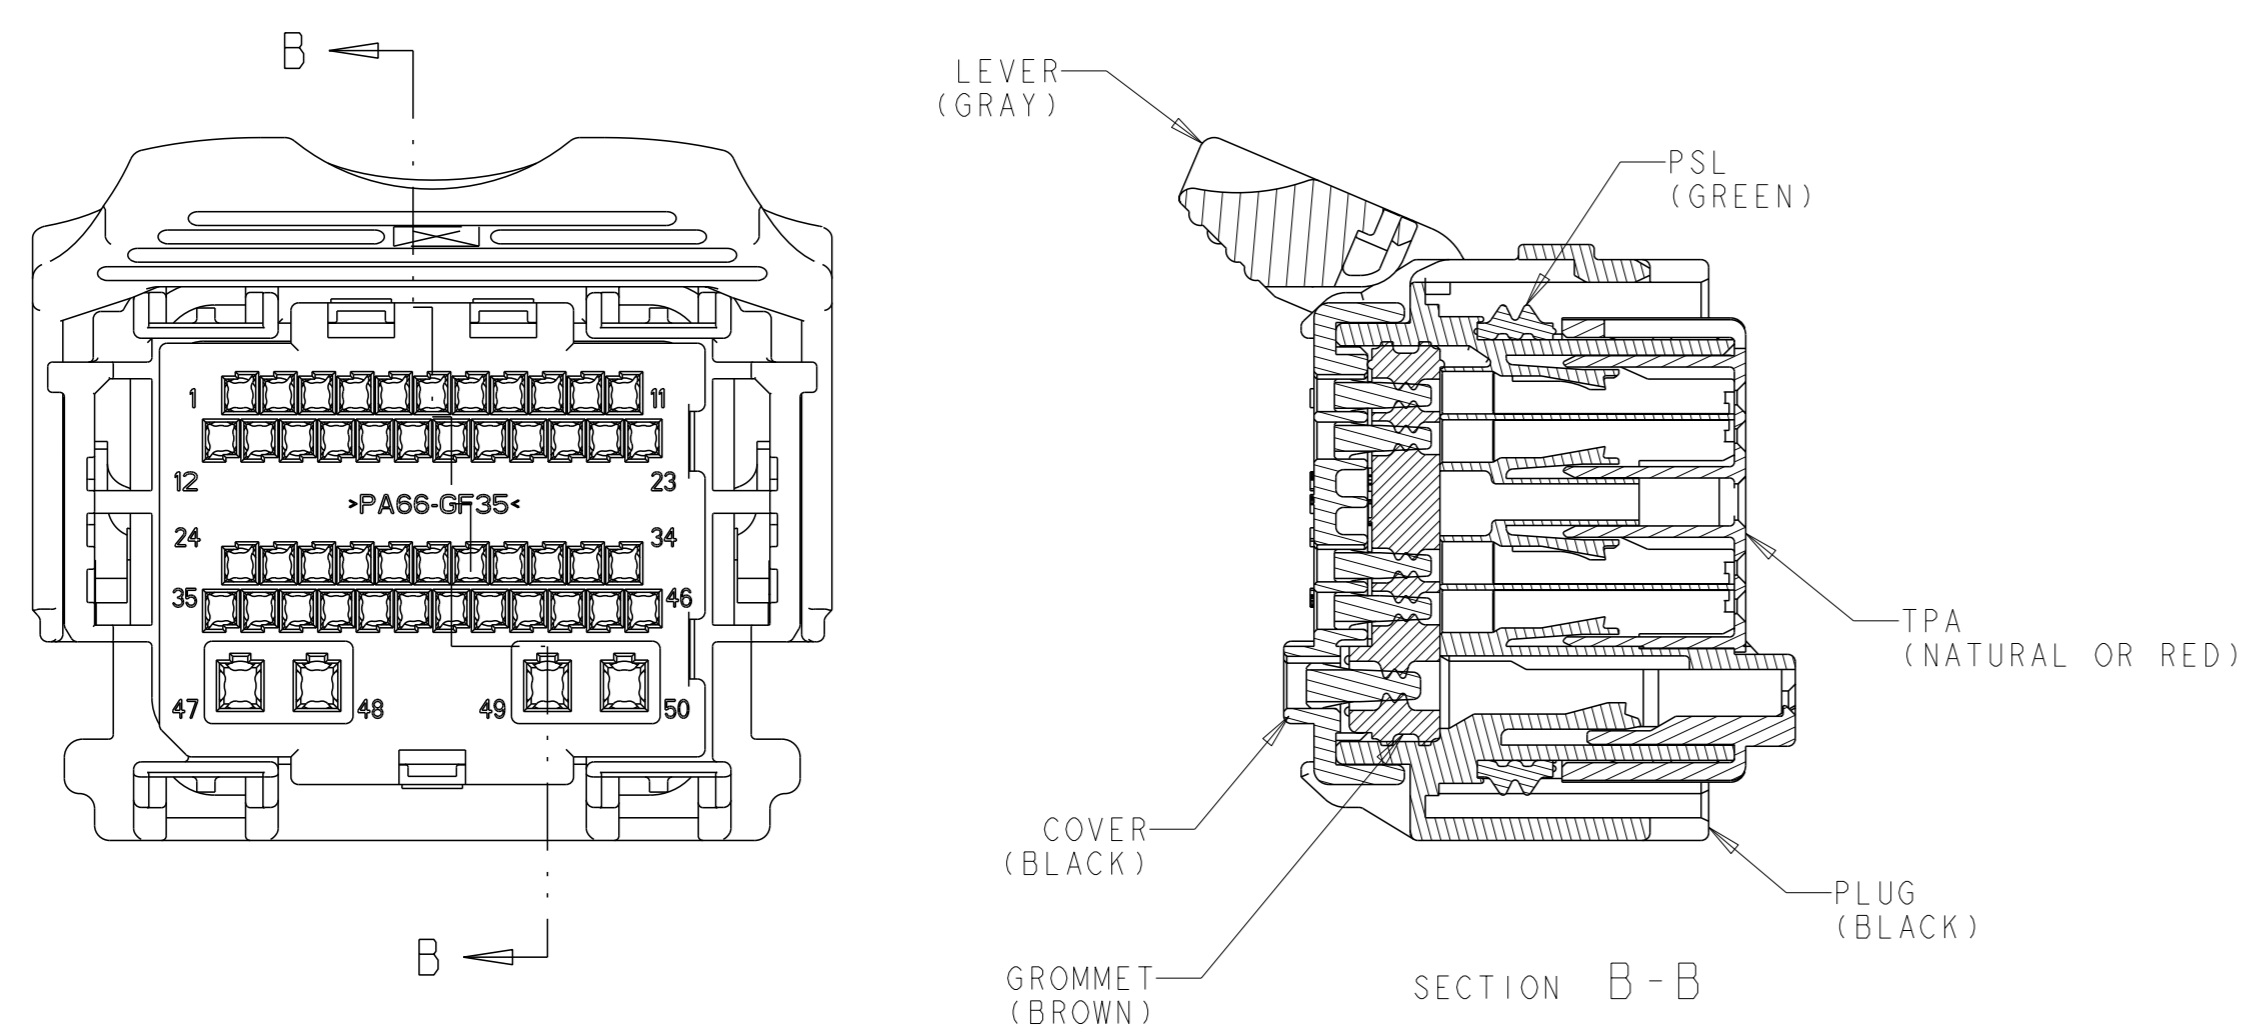


1438129-1  
KEYING OPTION "A"

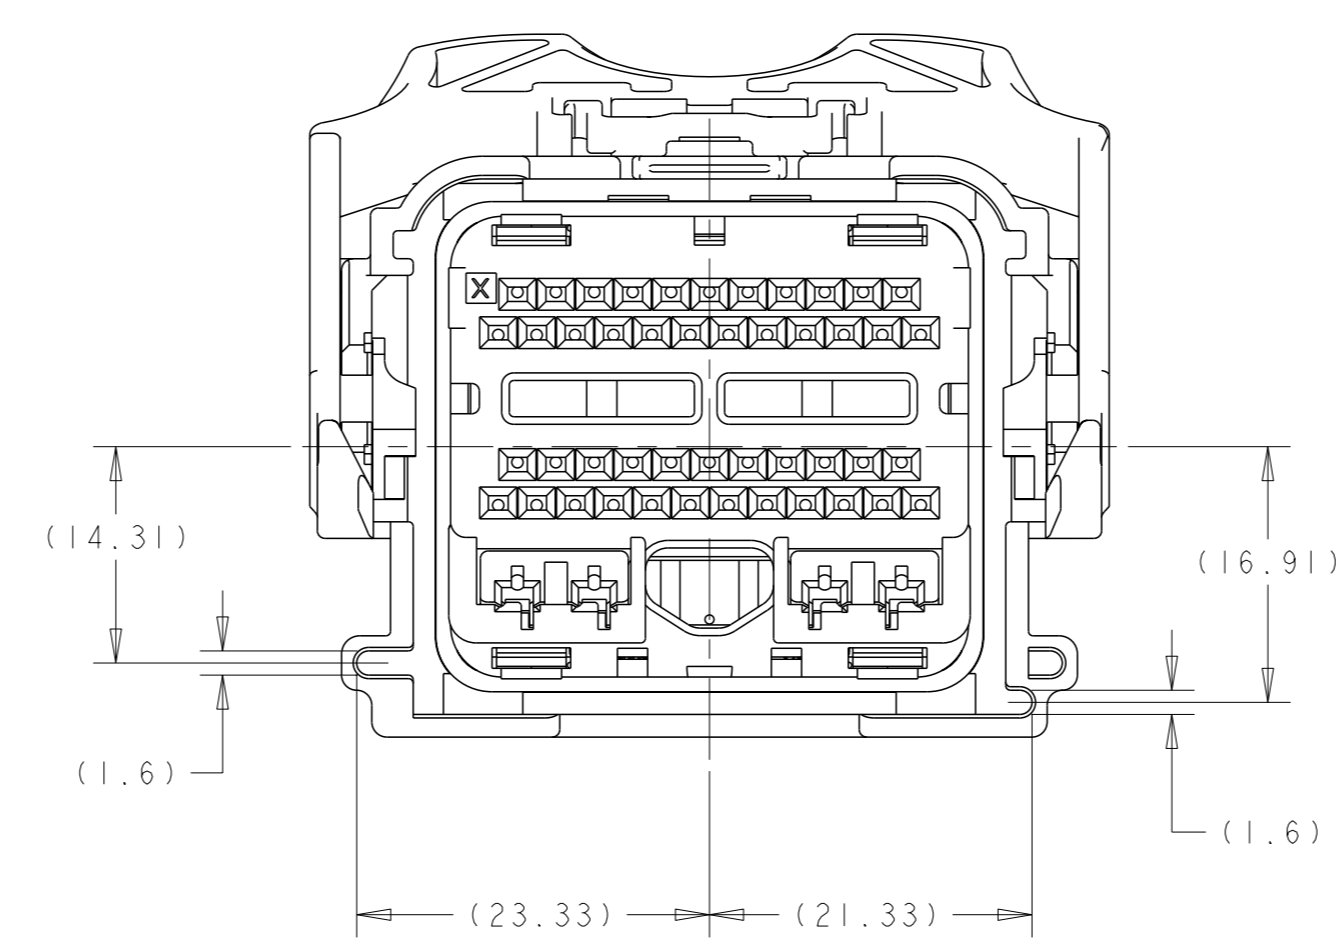


1438129-2  
KEYING OPTION "B"

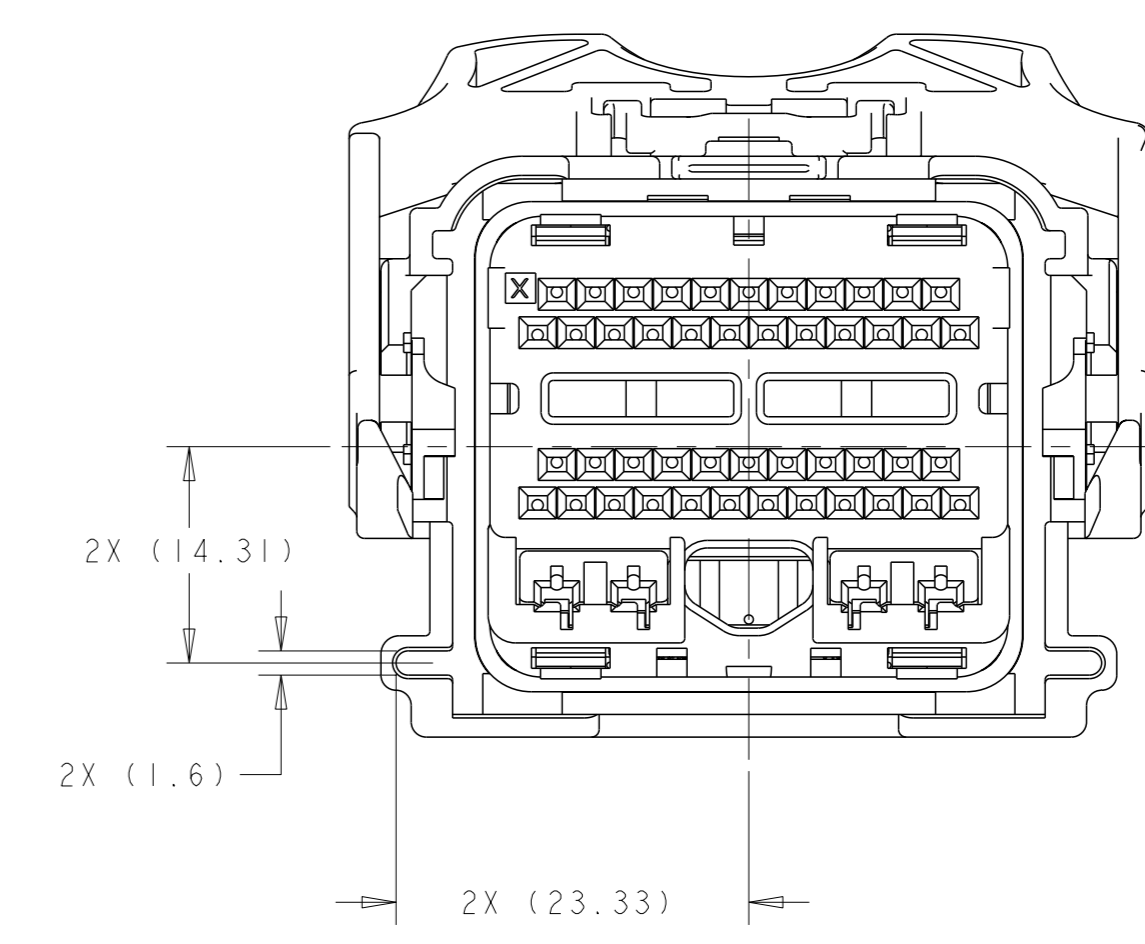


1438129-3  
KEYING OPTION "C"

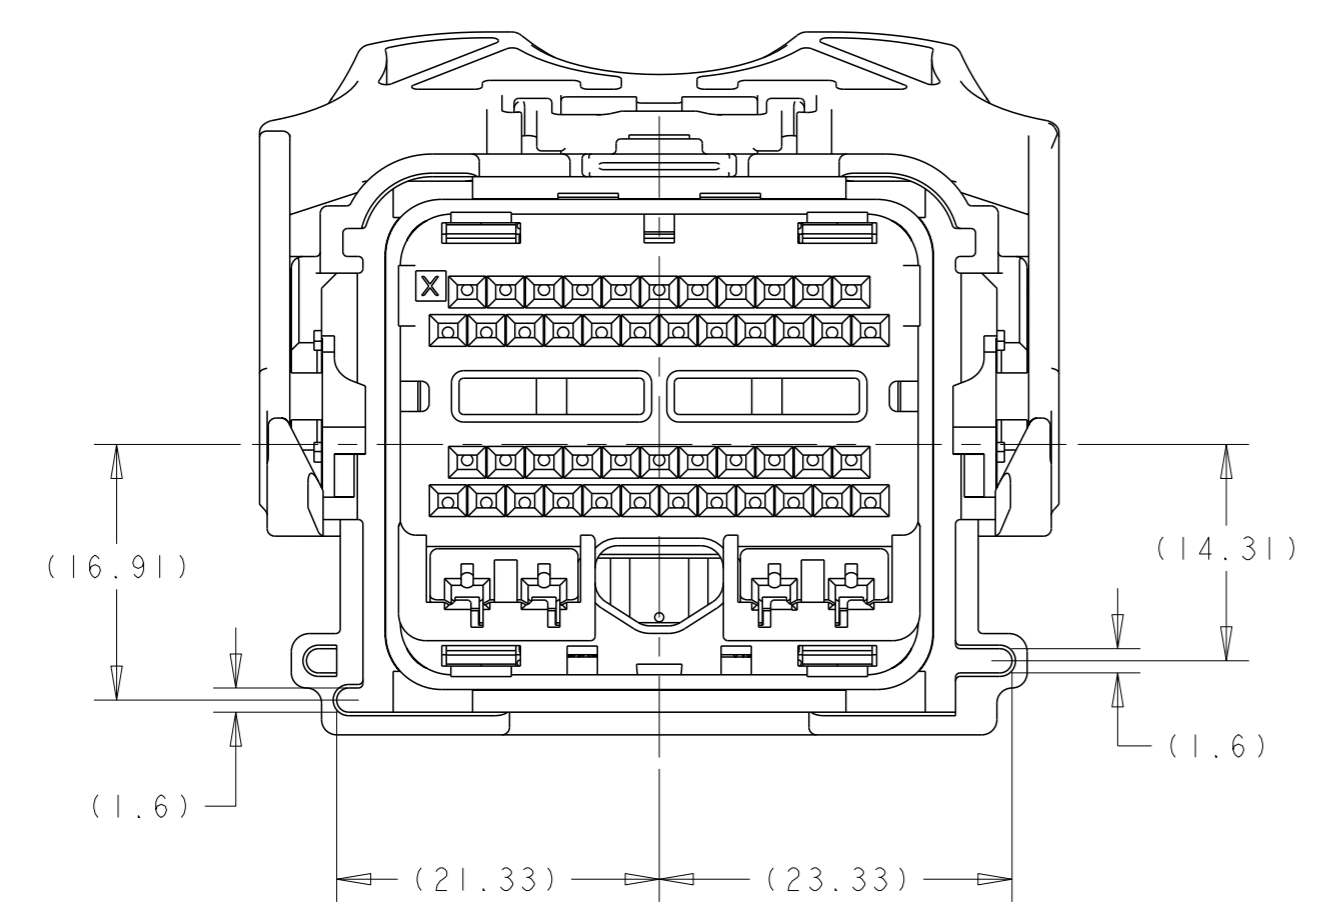

1438129-4  
KEYING OPTION "D"

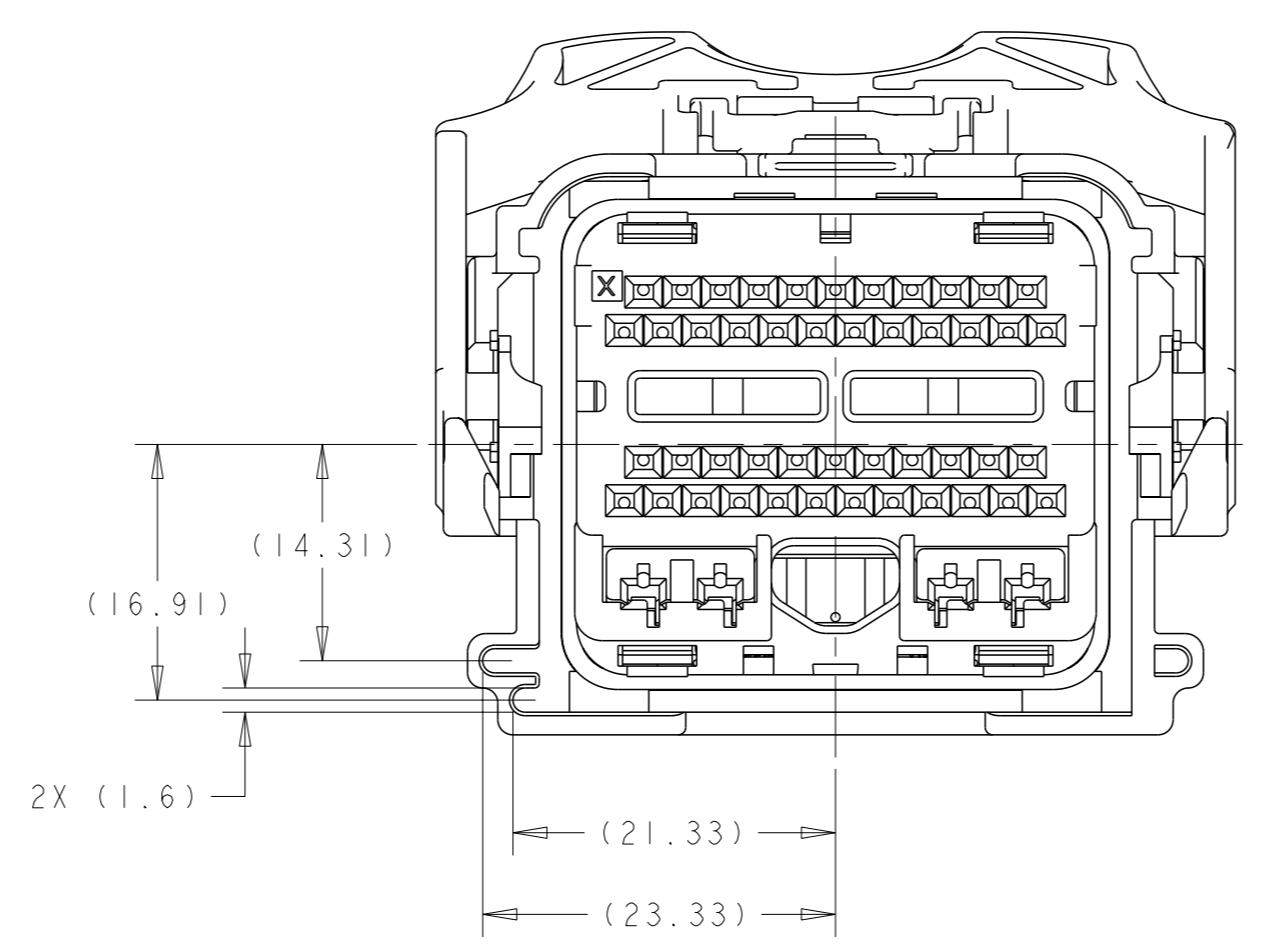

1438129-5  
KEYING OPTION "E"

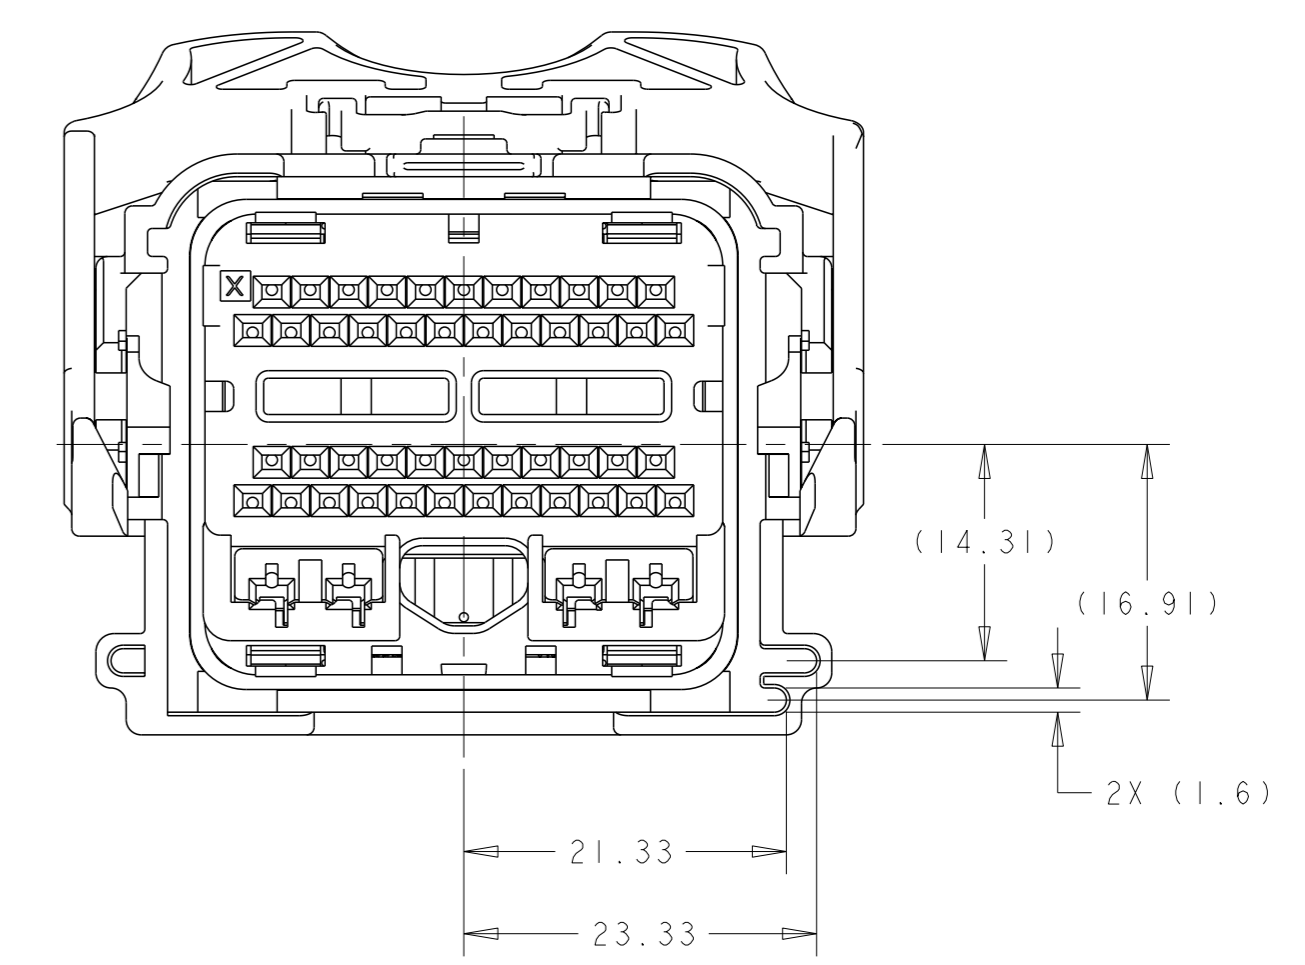

1438129-6  
KEYING OPTION "F"

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. VESTAL 15APR2005	
DIMENSIONS:		CHK T. VALASEK 15APR2005	
mm	0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ±	APVD T. VALASEK 15APR2005	NAME 50-WAY HARNESS ASSEMBLY, PCM
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE A100779
MATERIAL		APPLICATION SPEC	CAGE CODE C=1438129
FINISH		WEIGHT	DRAWING NO. 1438129
CUSTOMER DRAWING		SCALE 2:1	SHEET 2 OF 10





REVISIONS				
#	LY#	DESCRIPTION	DATE	OWN / APPV
-	-	SEE SHEET 1	-	-

KEYING OPTION B	46	43 42 41 40	38 37	34 33 32	31 30 29 28	27 26 25 24	22	20 19	17 16 15 14 13	9 8 7 6 5 4	1	6-1924783-8	5S4T-14A464-MA-094					
	46	43	41 40 39 38 37	34 33 32	31 30 29 28	27 26 25 24	22	20 19	17 16 15 14	9 8 7 5 4	2	6-1924783-3	5S4T-14A464-MA-093					
					33 32		27				9		3	1	4-1924783-3	5S4T-14A464-MA-092		
			42	40 39	34 33 32		29	26	20	15 13	9 7		3	2	2-1924783-4	5S4T-14A464-MA-091		
	46	43 42		39	34 33 32		29	26 25	22	15 14	9 7			1	2-1924783-2	5S4T-14A464-MA-090		
			42	39	34 33	31		27 25	22 20						1-1924783-9	5S4T-14A464-MA-089		
			42	39	34 33	31		25	22 20						1-1924783-8	5S4T-14A464-MA-088		
	46	43 42		39	34 33 32		29	26 25	22	15 14	9 7				1-1924783-4	5S4T-14A464-MA-087		
		43		39	34 33 32		29			15 14					1-1924783-3	5S4T-14A464-MA-086		
		43	41 40 39 38 37		34	32 31	29		20	15 14 13				3	1-1924783-2	5S4T-14A464-MA-085		
		43 42		38		31	29	27 25	22 20	18 16 15				1	1924783-8	5S4T-14A464-MA-084		
		43 42		38		31		27 25	22 20	18 16 15				1	1924783-7	5S4T-14A464-MA-083		
		43 42		38		31	29	27 25	22	18 16 15				1	1924783-3	5S4T-14A464-MA-082		
		43 42		38		31		27 25	22	18 16 15				1	1924783-2	5S4T-14A464-MA-081		
	46							28 27			9			1	9-1438950-9	5S4T-14A464-MA-080		
			42	39	34 33 32	31		26 25	20						9-1438950-6	5S4T-14A464-MA-079		
			42	39	34 33 32	31		27 26 25	20						9-1438950-5	5S4T-14A464-MA-078		
		43			34 33 32		29			15 14					9-1438950-4	5S4T-14A464-MA-077		
	46							28		13	9			1	9-1438950-1	5S4T-14A464-MA-076		
	46	43 42		39 38 37		33	31	27 25	22	18 16			7		2	8-1438950-9	5S4T-14A464-MA-075	
	46	43		39 38 37		33		27 25	22	18 16			7			8-1438950-8	5S4T-14A464-MA-074	
		45 44		40 39 38 37 36 35 34	33 32 31 30	28 27 26 25 24 23	21 20 19 18 17 16		13	10 9 8 7 6 5 4 3 2 1				1	8-1438950-7	5S4T-14A464-MA-073		
		43		39 38		33	30		20 19	15 14 13					7-1438950-7	5S4T-14A464-MA-072		
		43		39		33	30		20 19	15 13					7-1438950-5	5S4T-14A464-MA-071		
		43		39		34 33 32			20	15					7-1438950-4	5S4T-14A464-MA-070		
	CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS		42 41 40 39 38		34 33 32		29	26	20	15 14 13	9 7		3	6	6-1438950-9	5S4T-14A464-MA-069		
	BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATIONS	50	46		42		37		33	31 30 29 28 27		24 22		19 18 17 16 14		6 5	6-1438950-4	5S4T-14A464-MA-067
	TERMINAL HOLE POSITION	50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1	46		42		37		33	31 30 29 28		24 22		19 18 17 16 14		6 5	6-1438950-3	5S4T-14A464-MA-066


KEYING OPTION B

CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATIONS

TERMINAL HOLE POSITION

5S4T-14A464-M\* PIN-OUT CHART

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. VESTAL 15APR2005	<b>TE</b> TE Connectivity
DIMENSIONS: mm		CHK T. VALASEK 15APR2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES FINISH *		APPV T. VALASEK 15APR2005	
		PRODUCT SPEC	<b>50-WAY HARNESS ASSEMBLY, PCM</b>
		APPLICATION SPEC	
MATERIAL		WEIGHT	RESTRICTED TO
ASSEMBLY PART NUMBER		SCALE 1:1 SHEET 5 OF 10 REV F37	
FORD PART NUMBER		CUSTOMER DRAWING	
SIZE CAGE CODE DRAWING NO		A100779C=1438129	





REVISIONS				
P	LY#	DESCRIPTION	DATE	OWN APVD
-	-	SEE SHEET 1	-	-

KEYING OPTION C

CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS	39	38	37	36	29	28	23	20	19	10	9	8	7	6	5	7-1924783-8	5S4T-14A464-NA-135																																					
BLANK CAVITIES INDICATES OPEN TERMINAL LOCATIONS	39	38	37	36	29	28	23	20	19	10	9	8	7	7-1924783-4	5S4T-14A464-NA-134																																							
TERMINAL HOLE POSITION	50	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	7-1924783-2	5S4T-14A464-NA-133	7-1924783-0	5S4T-14A464-NA-132

5S4T-14A464-N\* PIN-OUT CHART


ASSEMBLY PART NUMBER  
FORD PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.



DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.3 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES FINISH *1°	OWN R. VESTAL 15APR2005 CHK T. VALASEK 15APR2005 APVD T. VALASEK 15APR2005	NAME <b>STE</b> TE Connectivity 50-WAY HARNESS ASSEMBLY, PCM
MATERIAL	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO A100779C=1438129	RESTRICTED TO
CUSTOMER DRAWING	WEIGHT	SCALE 1:1 SHEET 8 OF 10 REV 37	




REVISIONS				
REV	DATE	DESCRIPTION	APPV	OWN
-	-	SEE SHEET 1	-	-

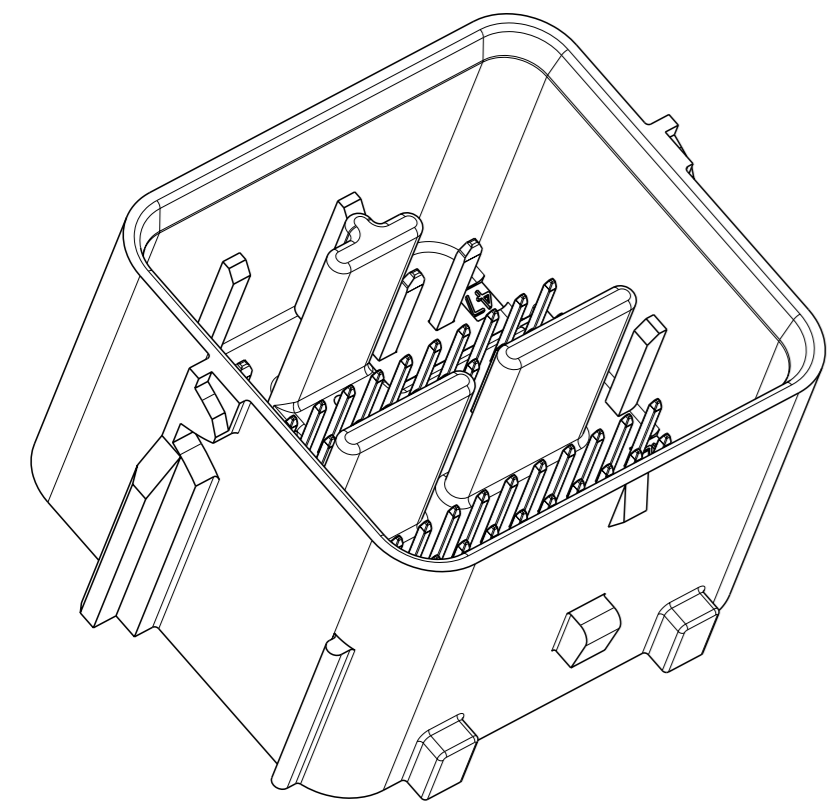

SCALE 2:1

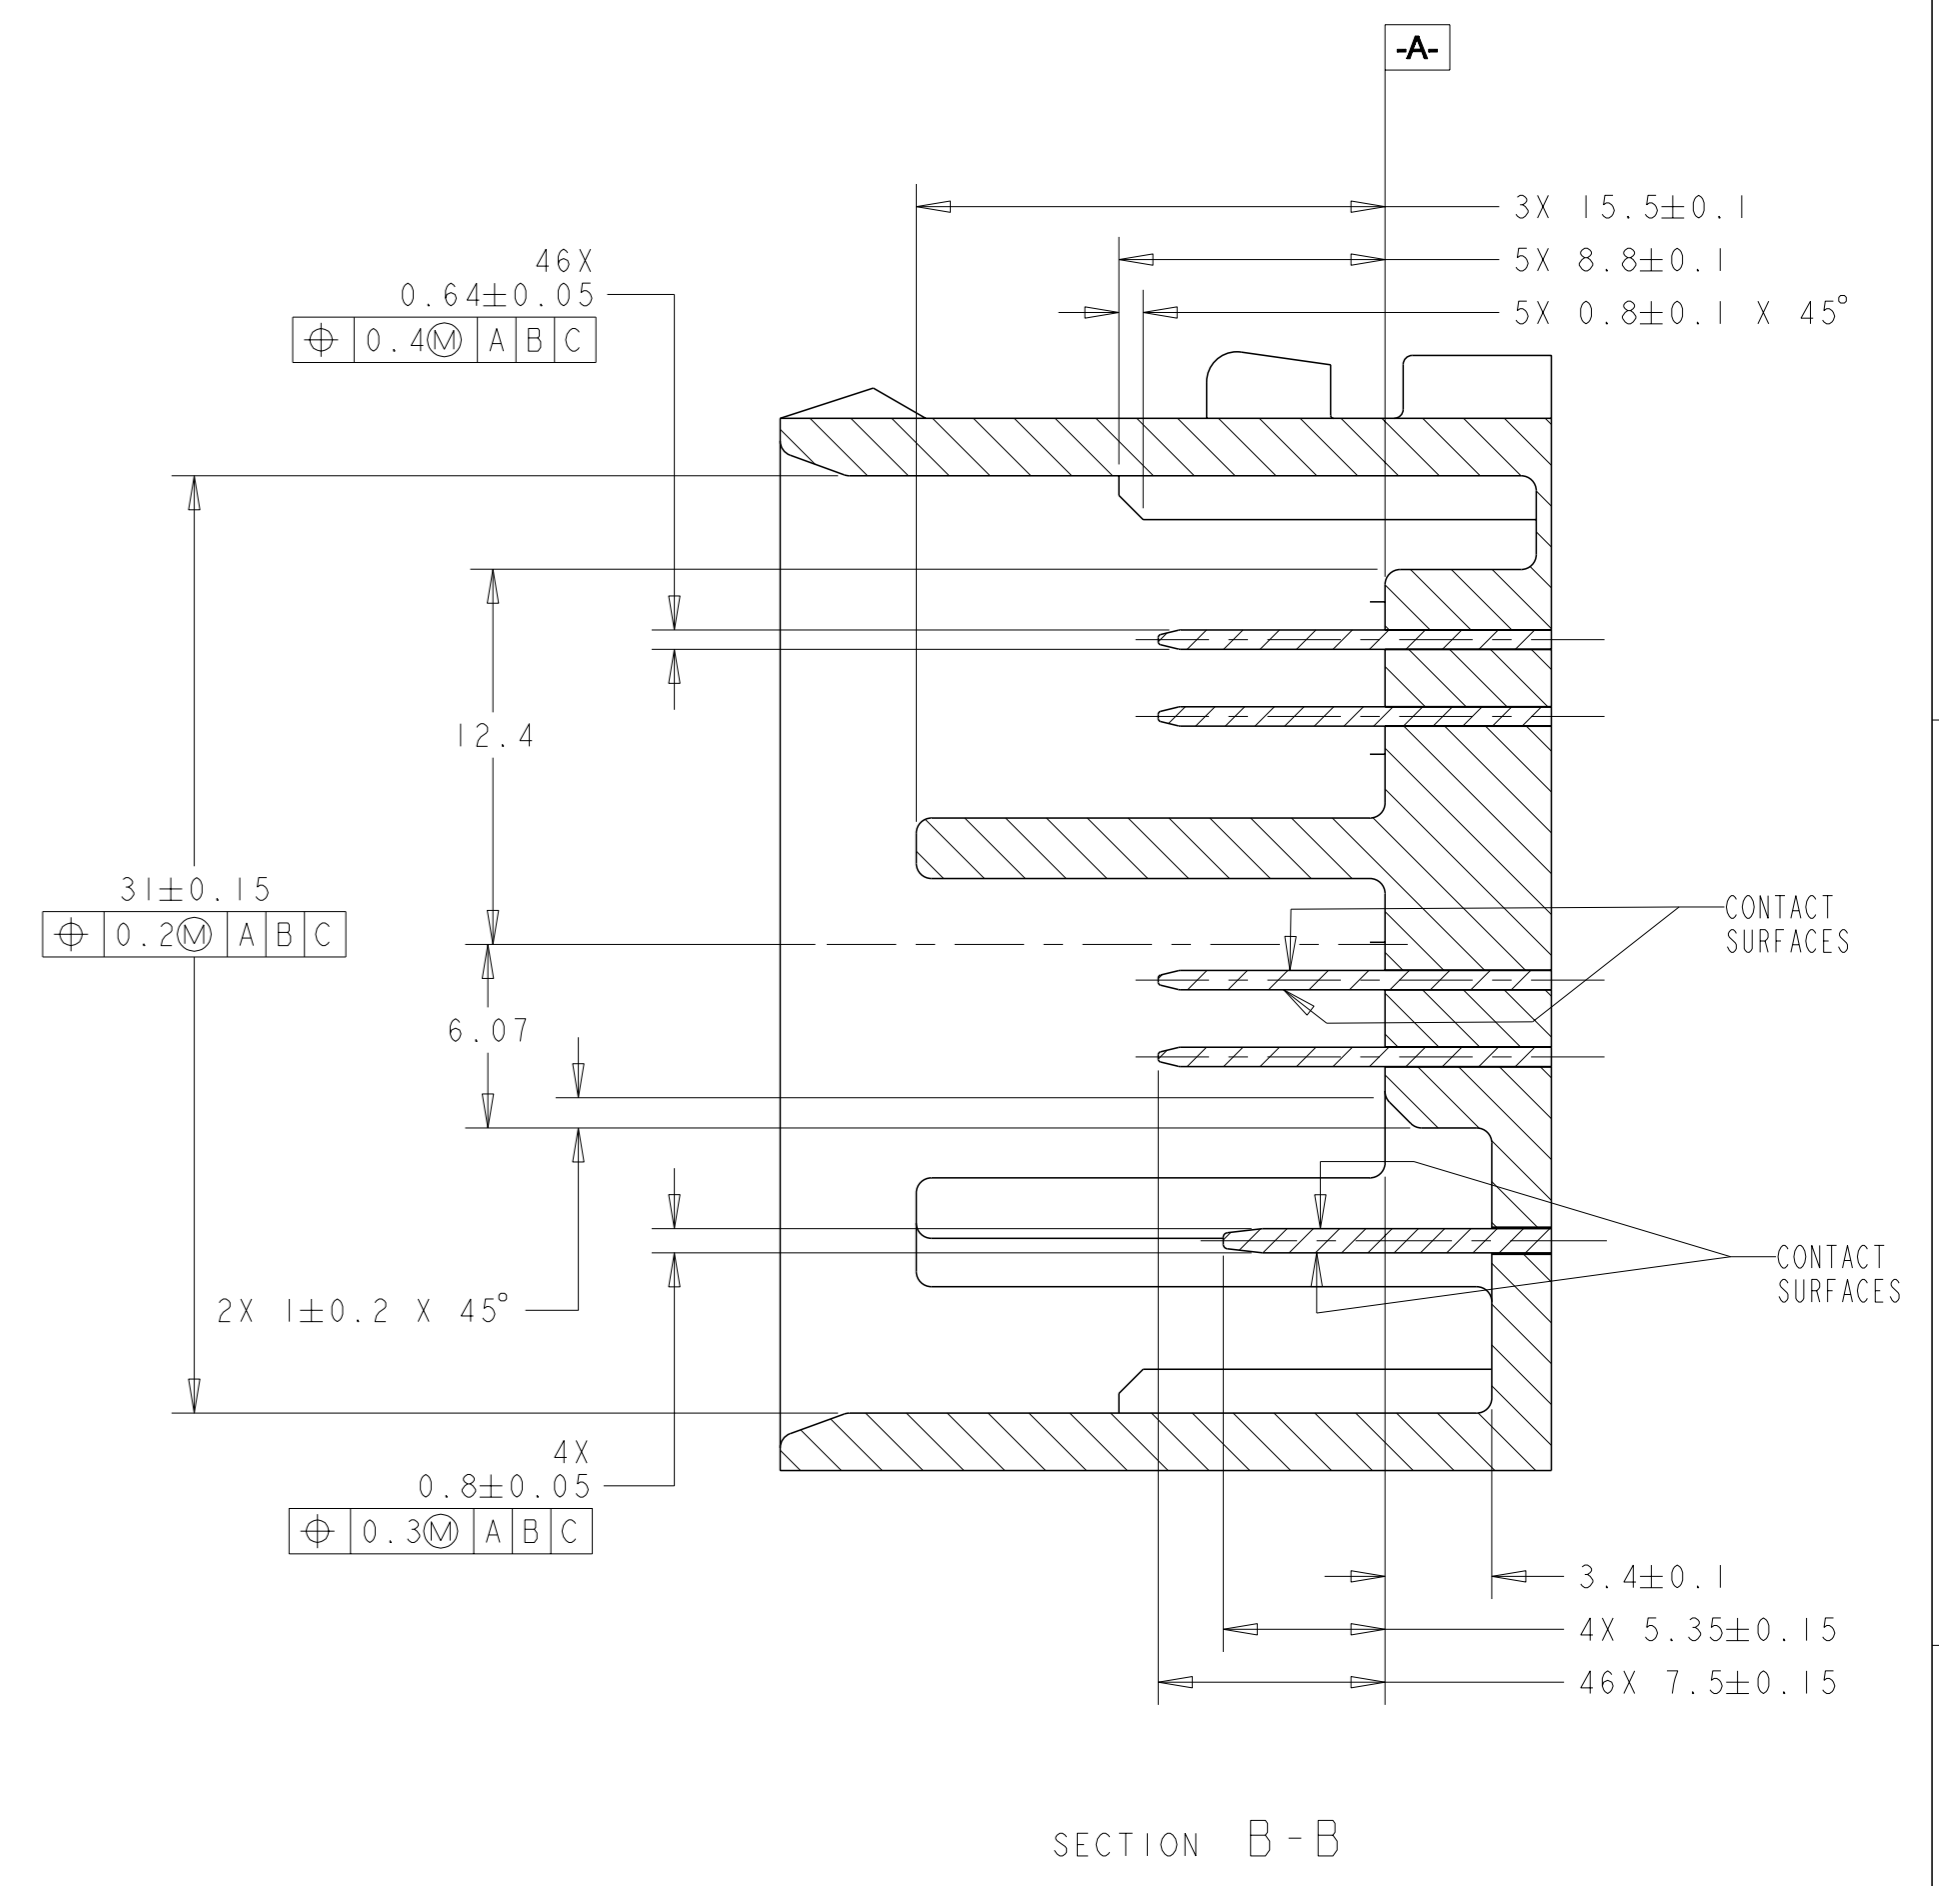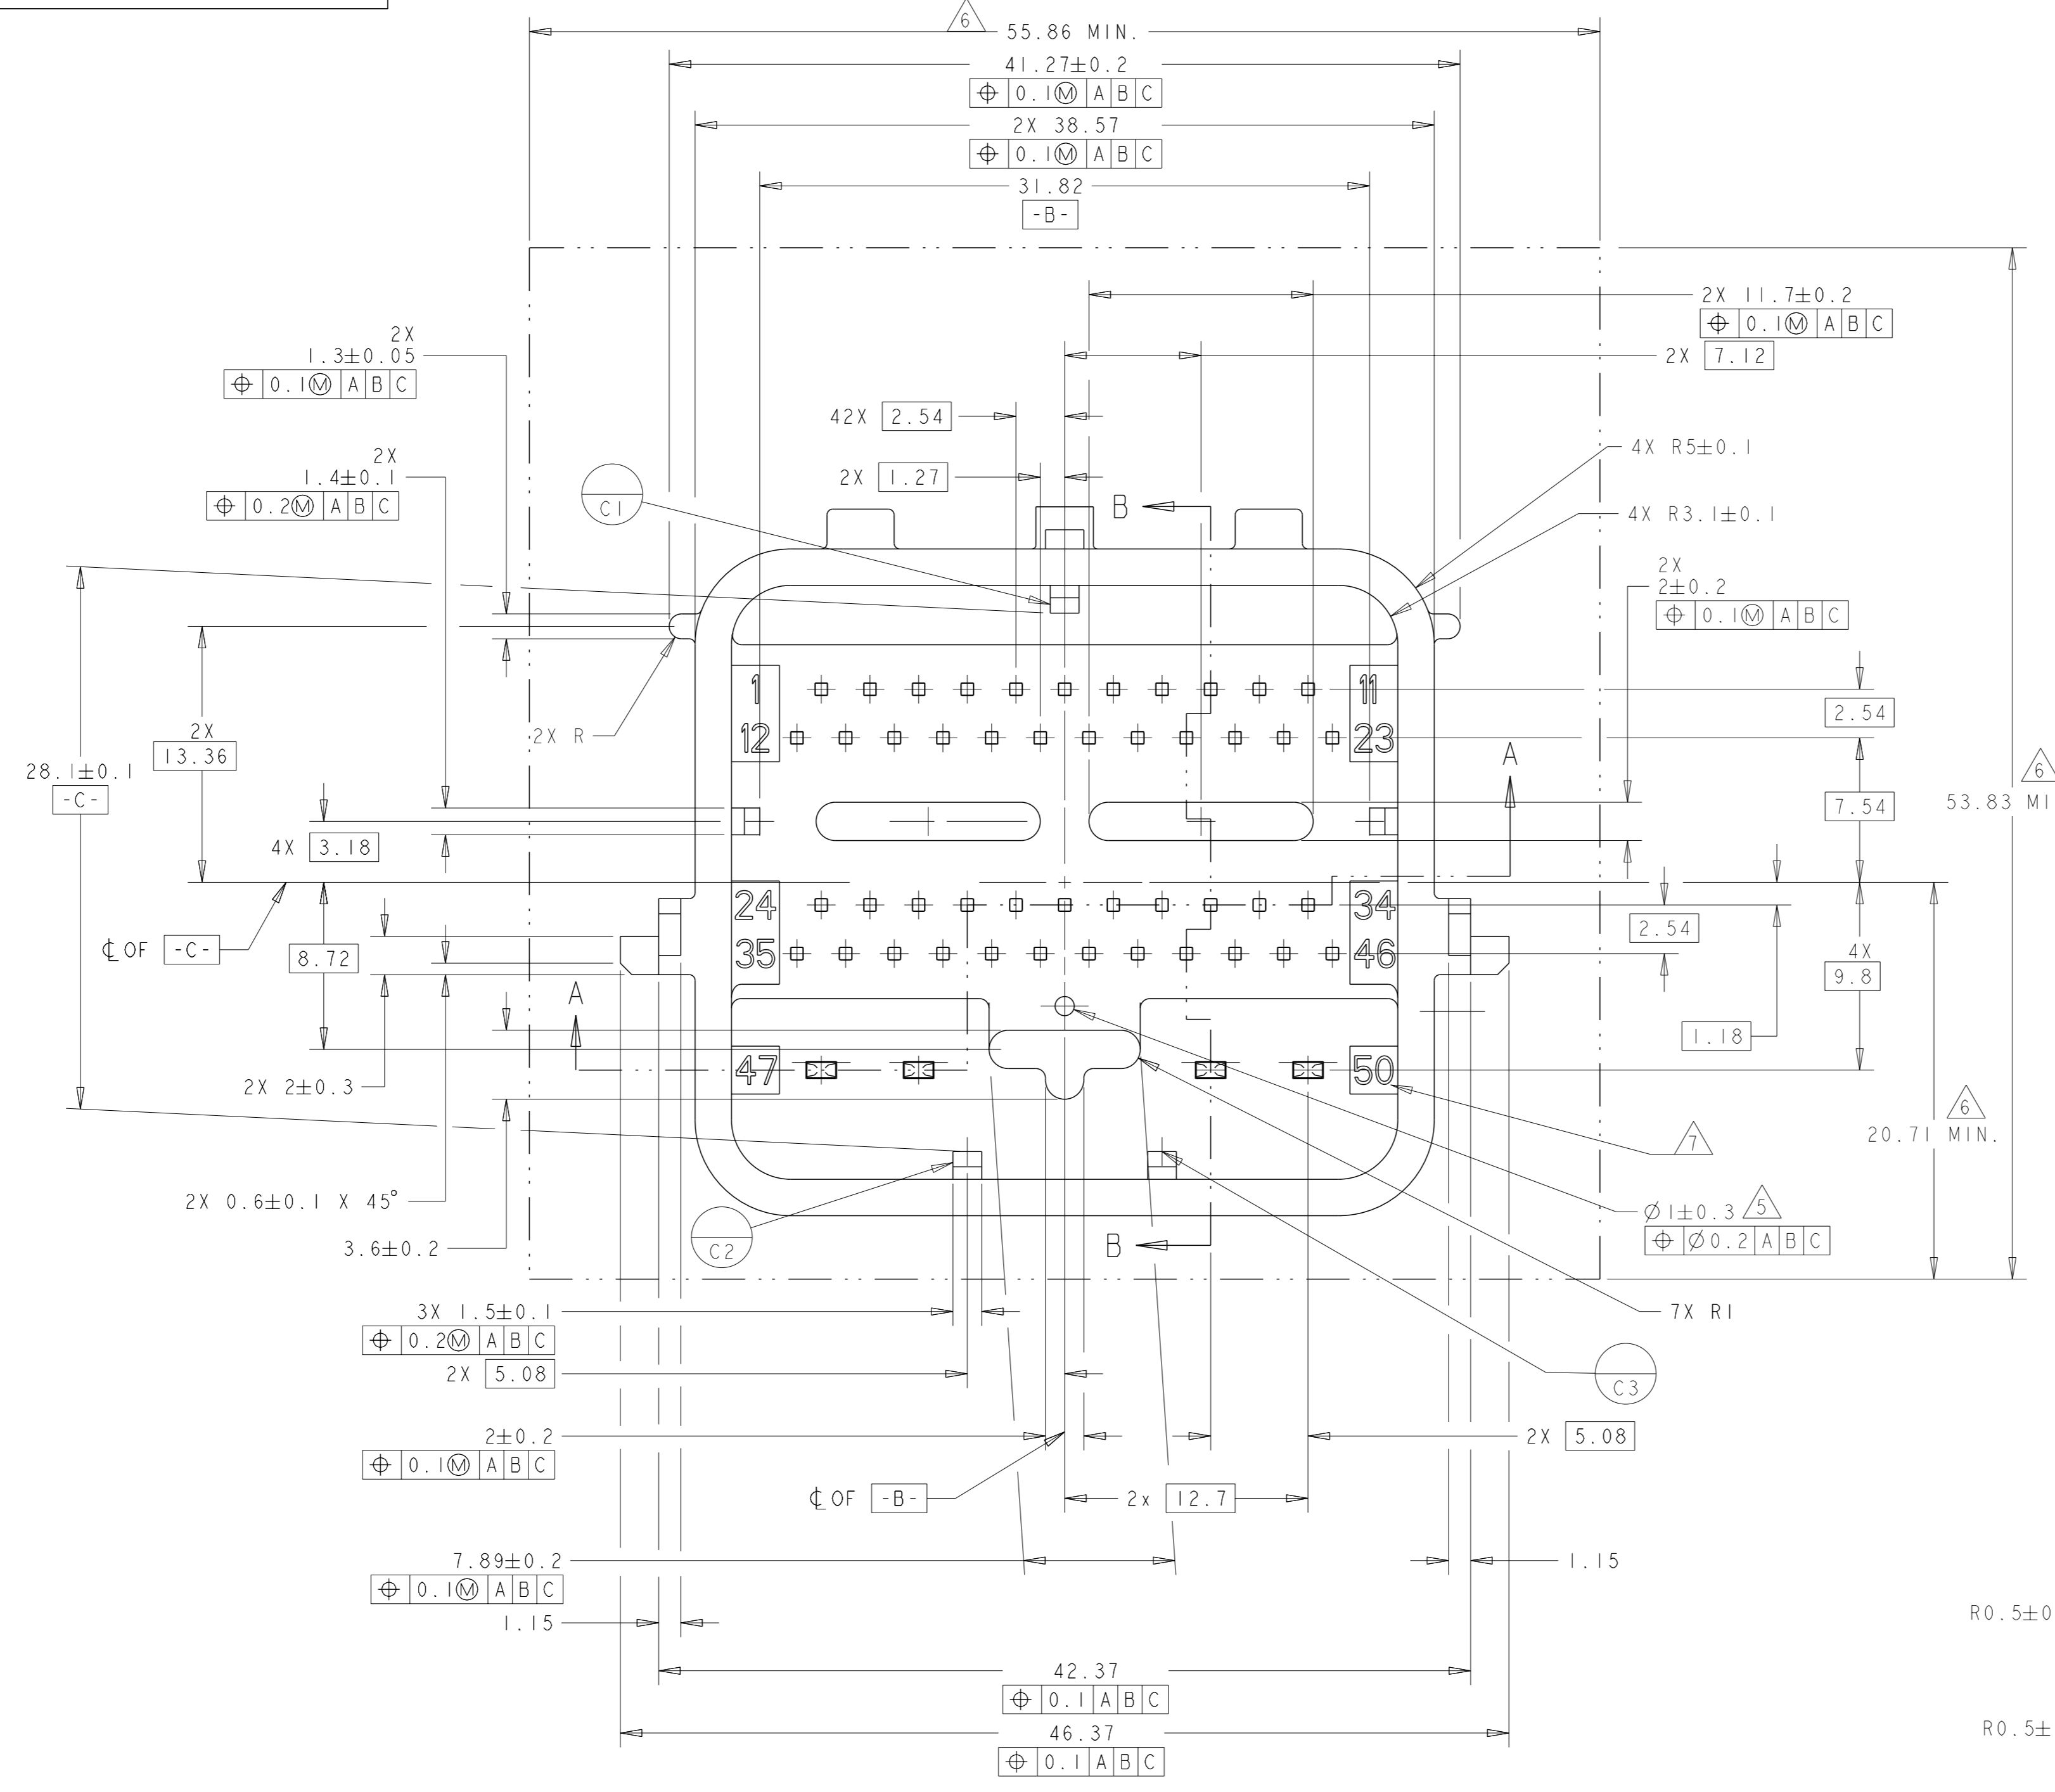


SECTION B-B

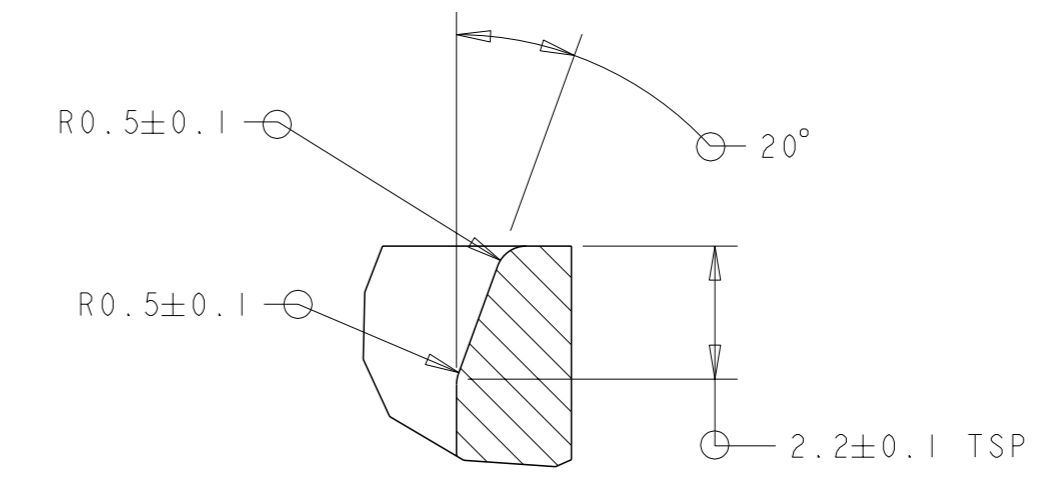

DETAIL E SCALE 8:1

NOTES: UNLESS OTHERWISE SPECIFIED

- GENERAL TOLERANCE:  
 ±0.3 ALL ONE PLACE DIMENSIONS  
 ±0.10 ALL TWO PLACE DIMENSIONS  
 ±1°00' ALL ANGULAR DIMENSIONS
- DRAFT ANGLE PERMISSIBLE ONLY WITHIN DRAWING TOLERANCE.
- SEALING SURFACE, NO WITNESS LINES OR DAMAGE PERMITTED.
- ALL UNMARKED RADIUS TO BE 0.5 MAX., UNLESS OTHERWISE SPECIFIED.
- VENT HOLE SIZE AND LOCATION IS OPTIONAL.
- THIS AREA TO REMAIN CLEAR FOR THE HARNESS ASSEMBLY.
- TERMINAL POSITION IDENTIFICATION.
- MATES WITH TYCO ELECTRONICS PART NUMBERS 1438129- & 1438950-\*









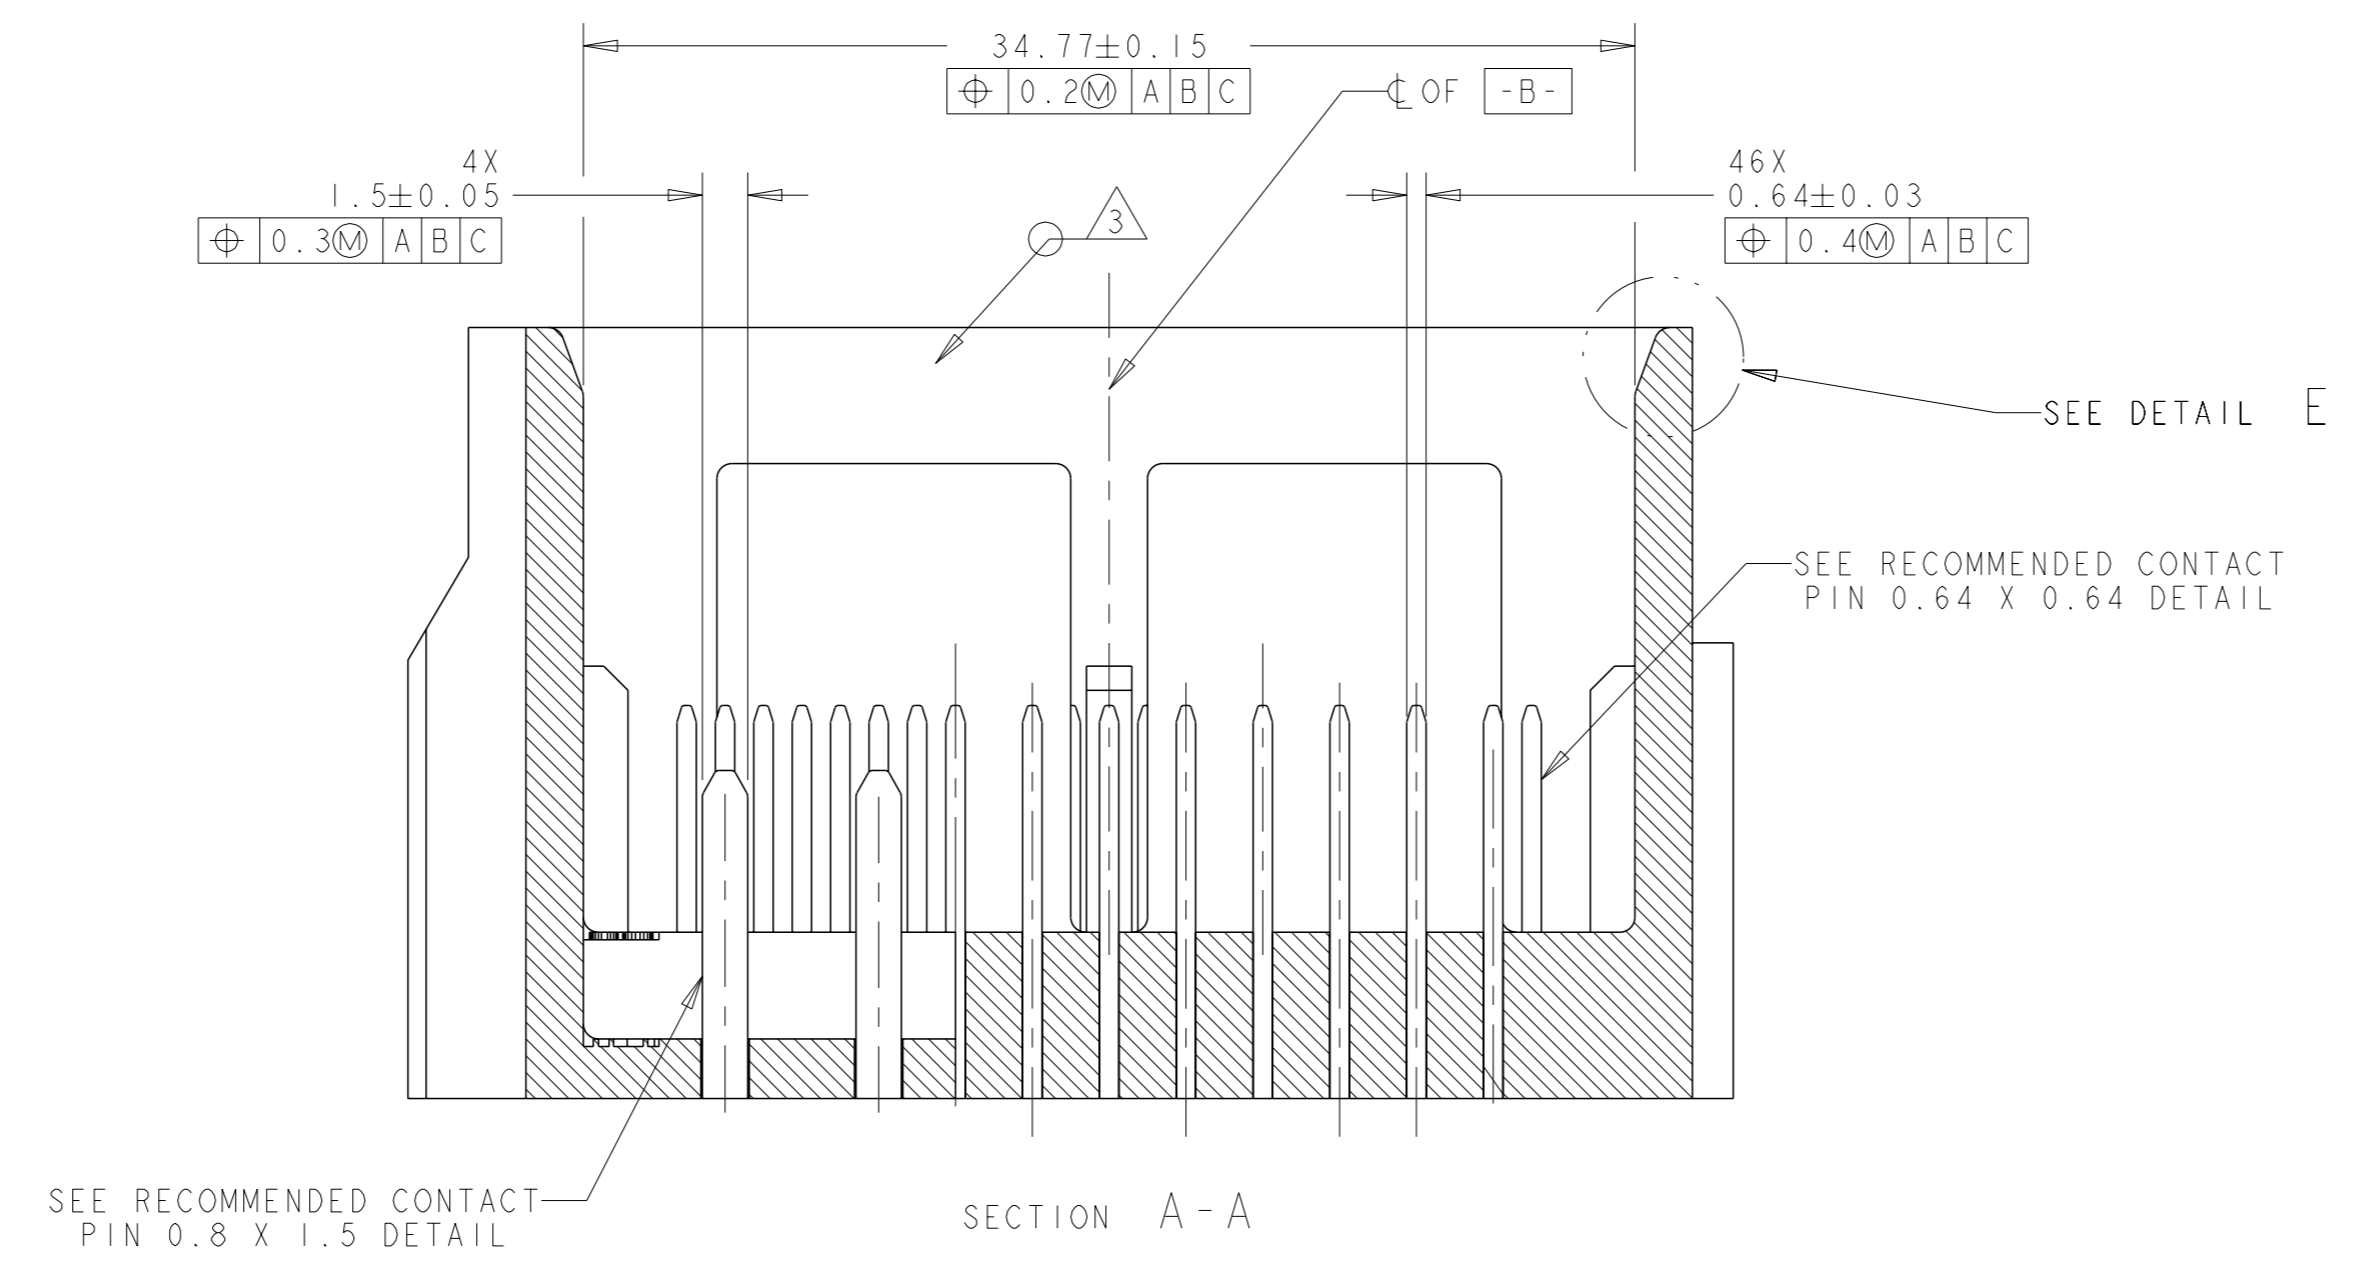


SECTION A-A

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN R. VESTAL 15APR2005	TE Connectivity NAME 50-WAY HARNESS ASSEMBLY, PCM PRODUCT SPEC - APPLICATION SPEC - WEIGHT - MATERIAL - FINISH - CUSTOMER DRAWING	SIZE CAGE CODE DRAWING NO. RESTRICTED TO
DIMENSIONS:		CHK T. VALASEK 15APR2005		A100779C=1438129
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV T. VALASEK 15APR2005		SCALE 1:1 SHEET 9 OF 10 REV F37
mm	0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±1°			

HEADER INTERFACE KEYING OPTIONS

REVISIONS				
REV	DATE	DESCRIPTION	OWN	APVD
-	-	SEE SHEET 1	-	-

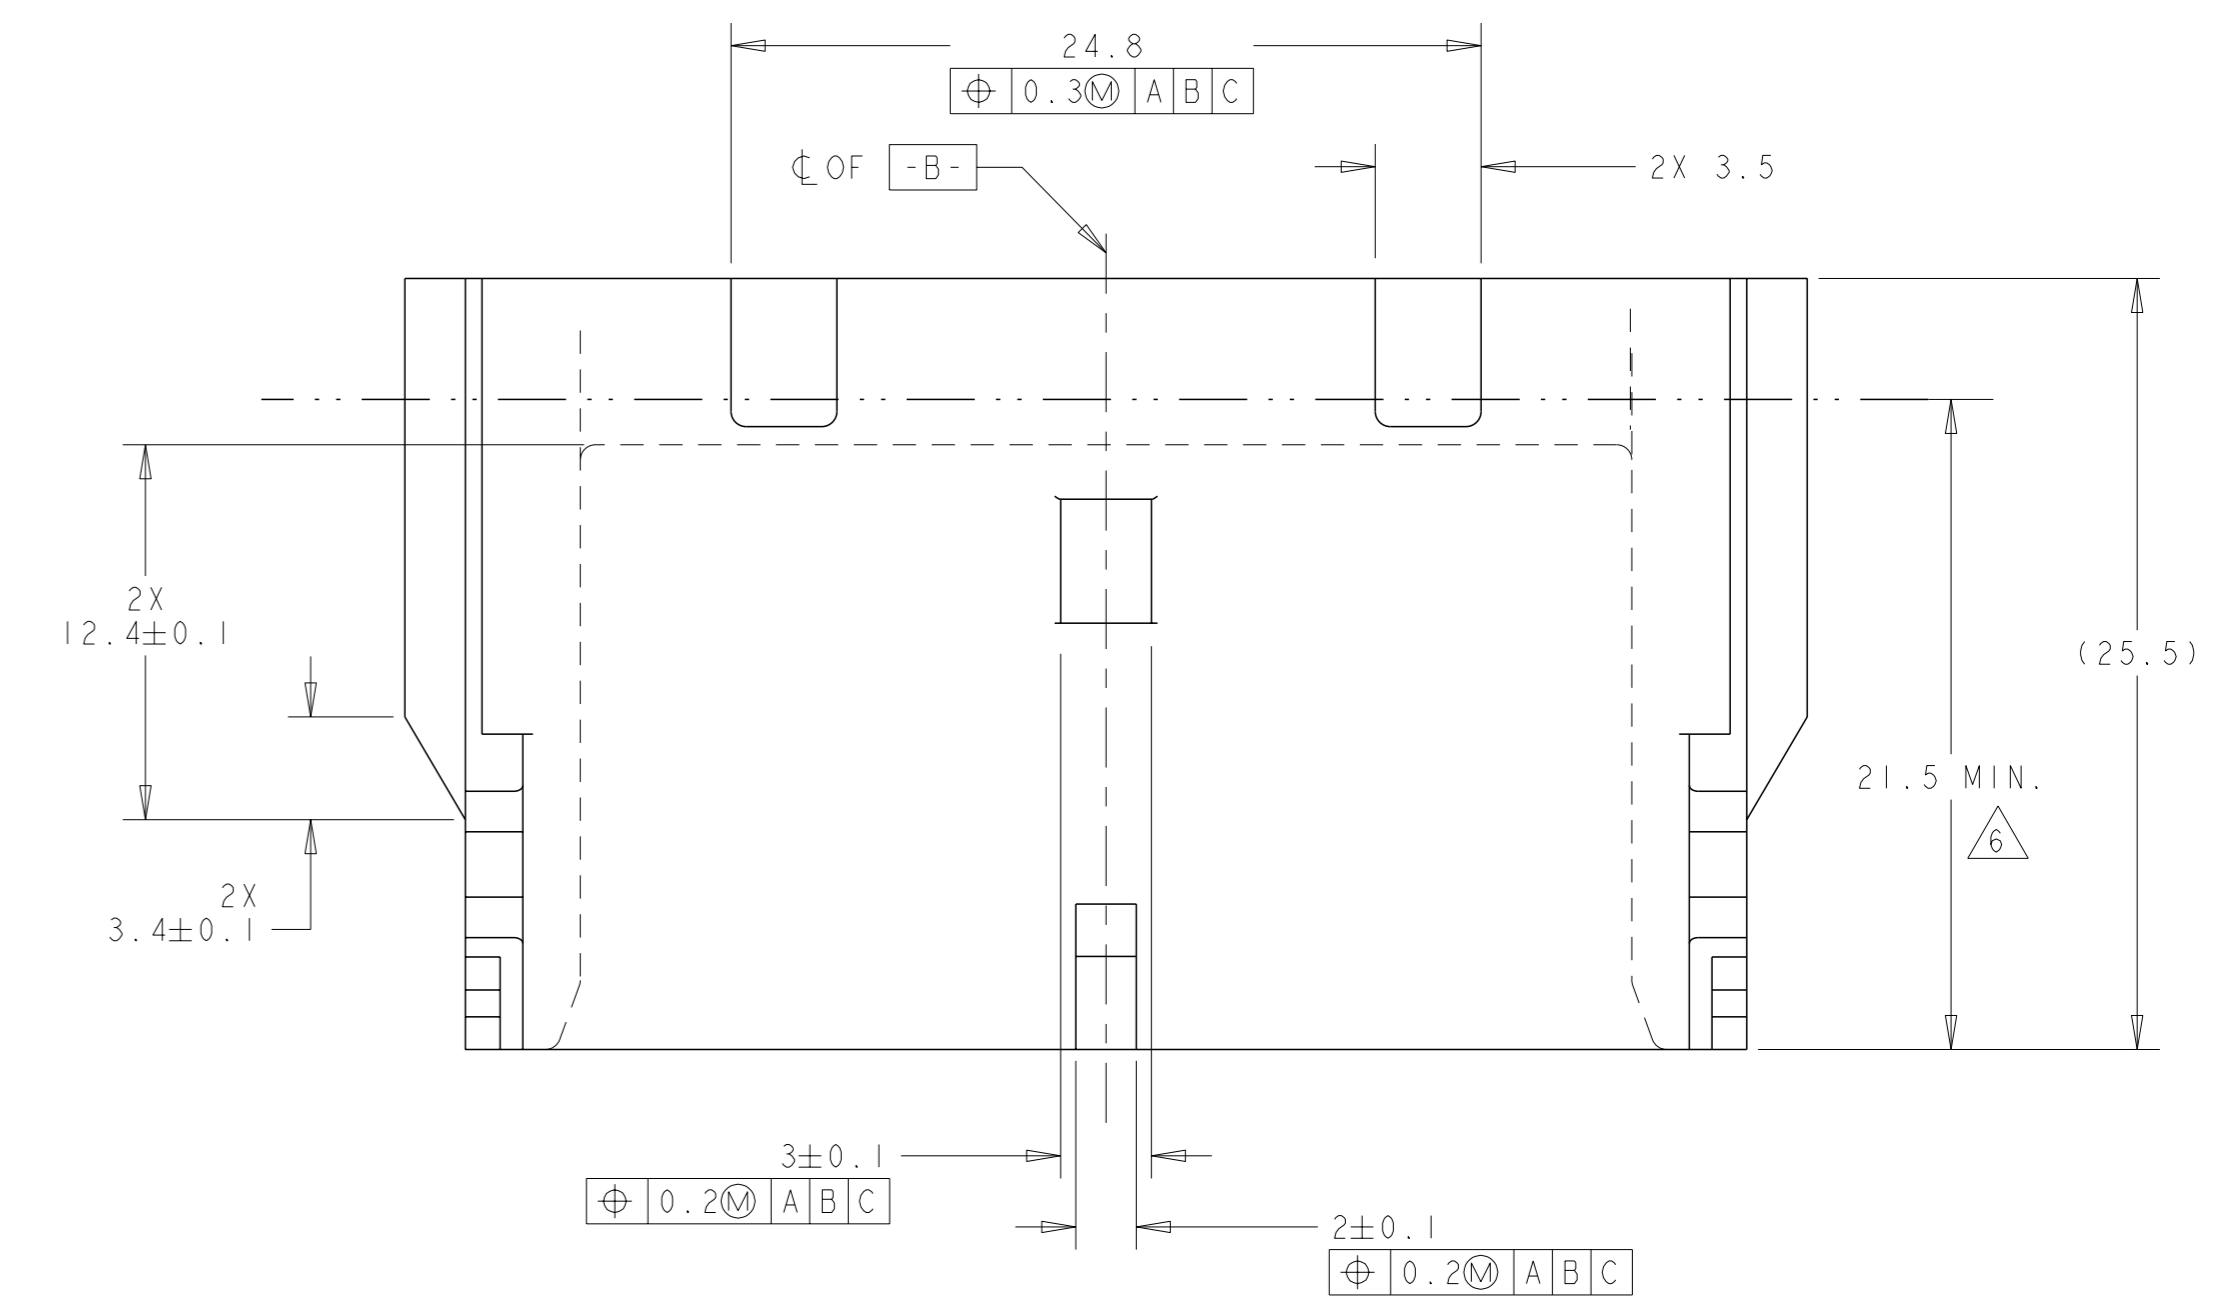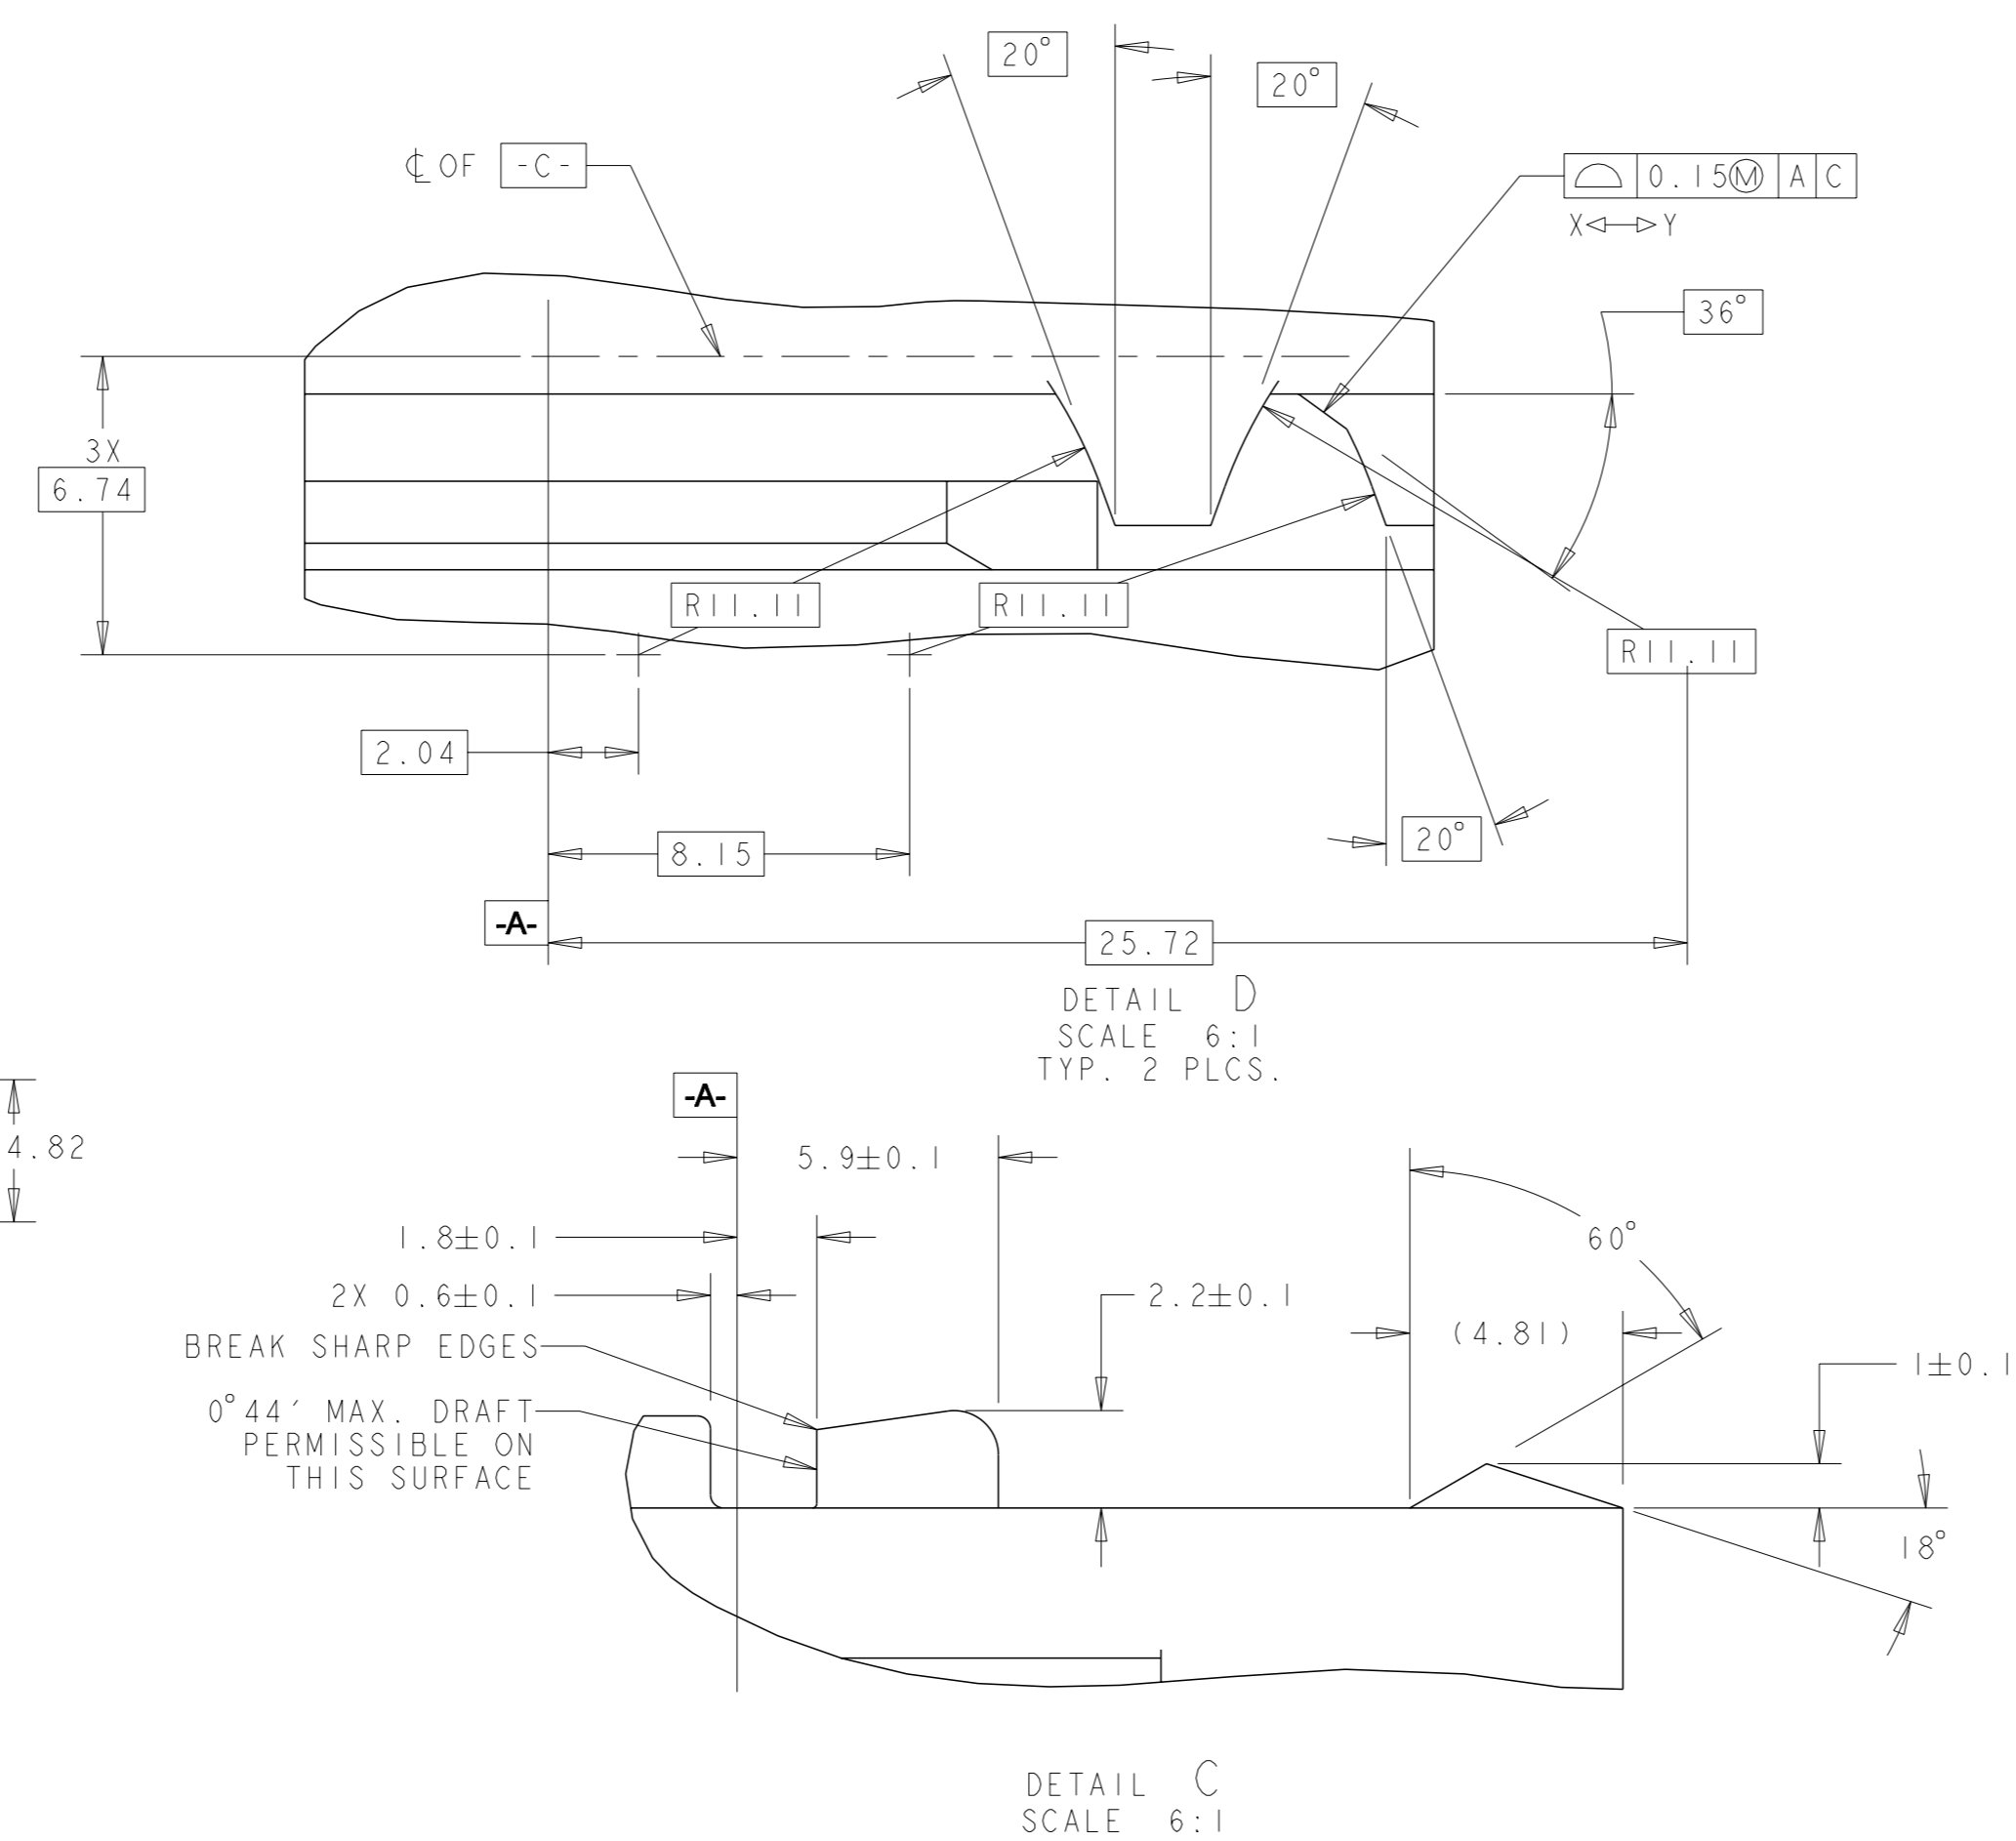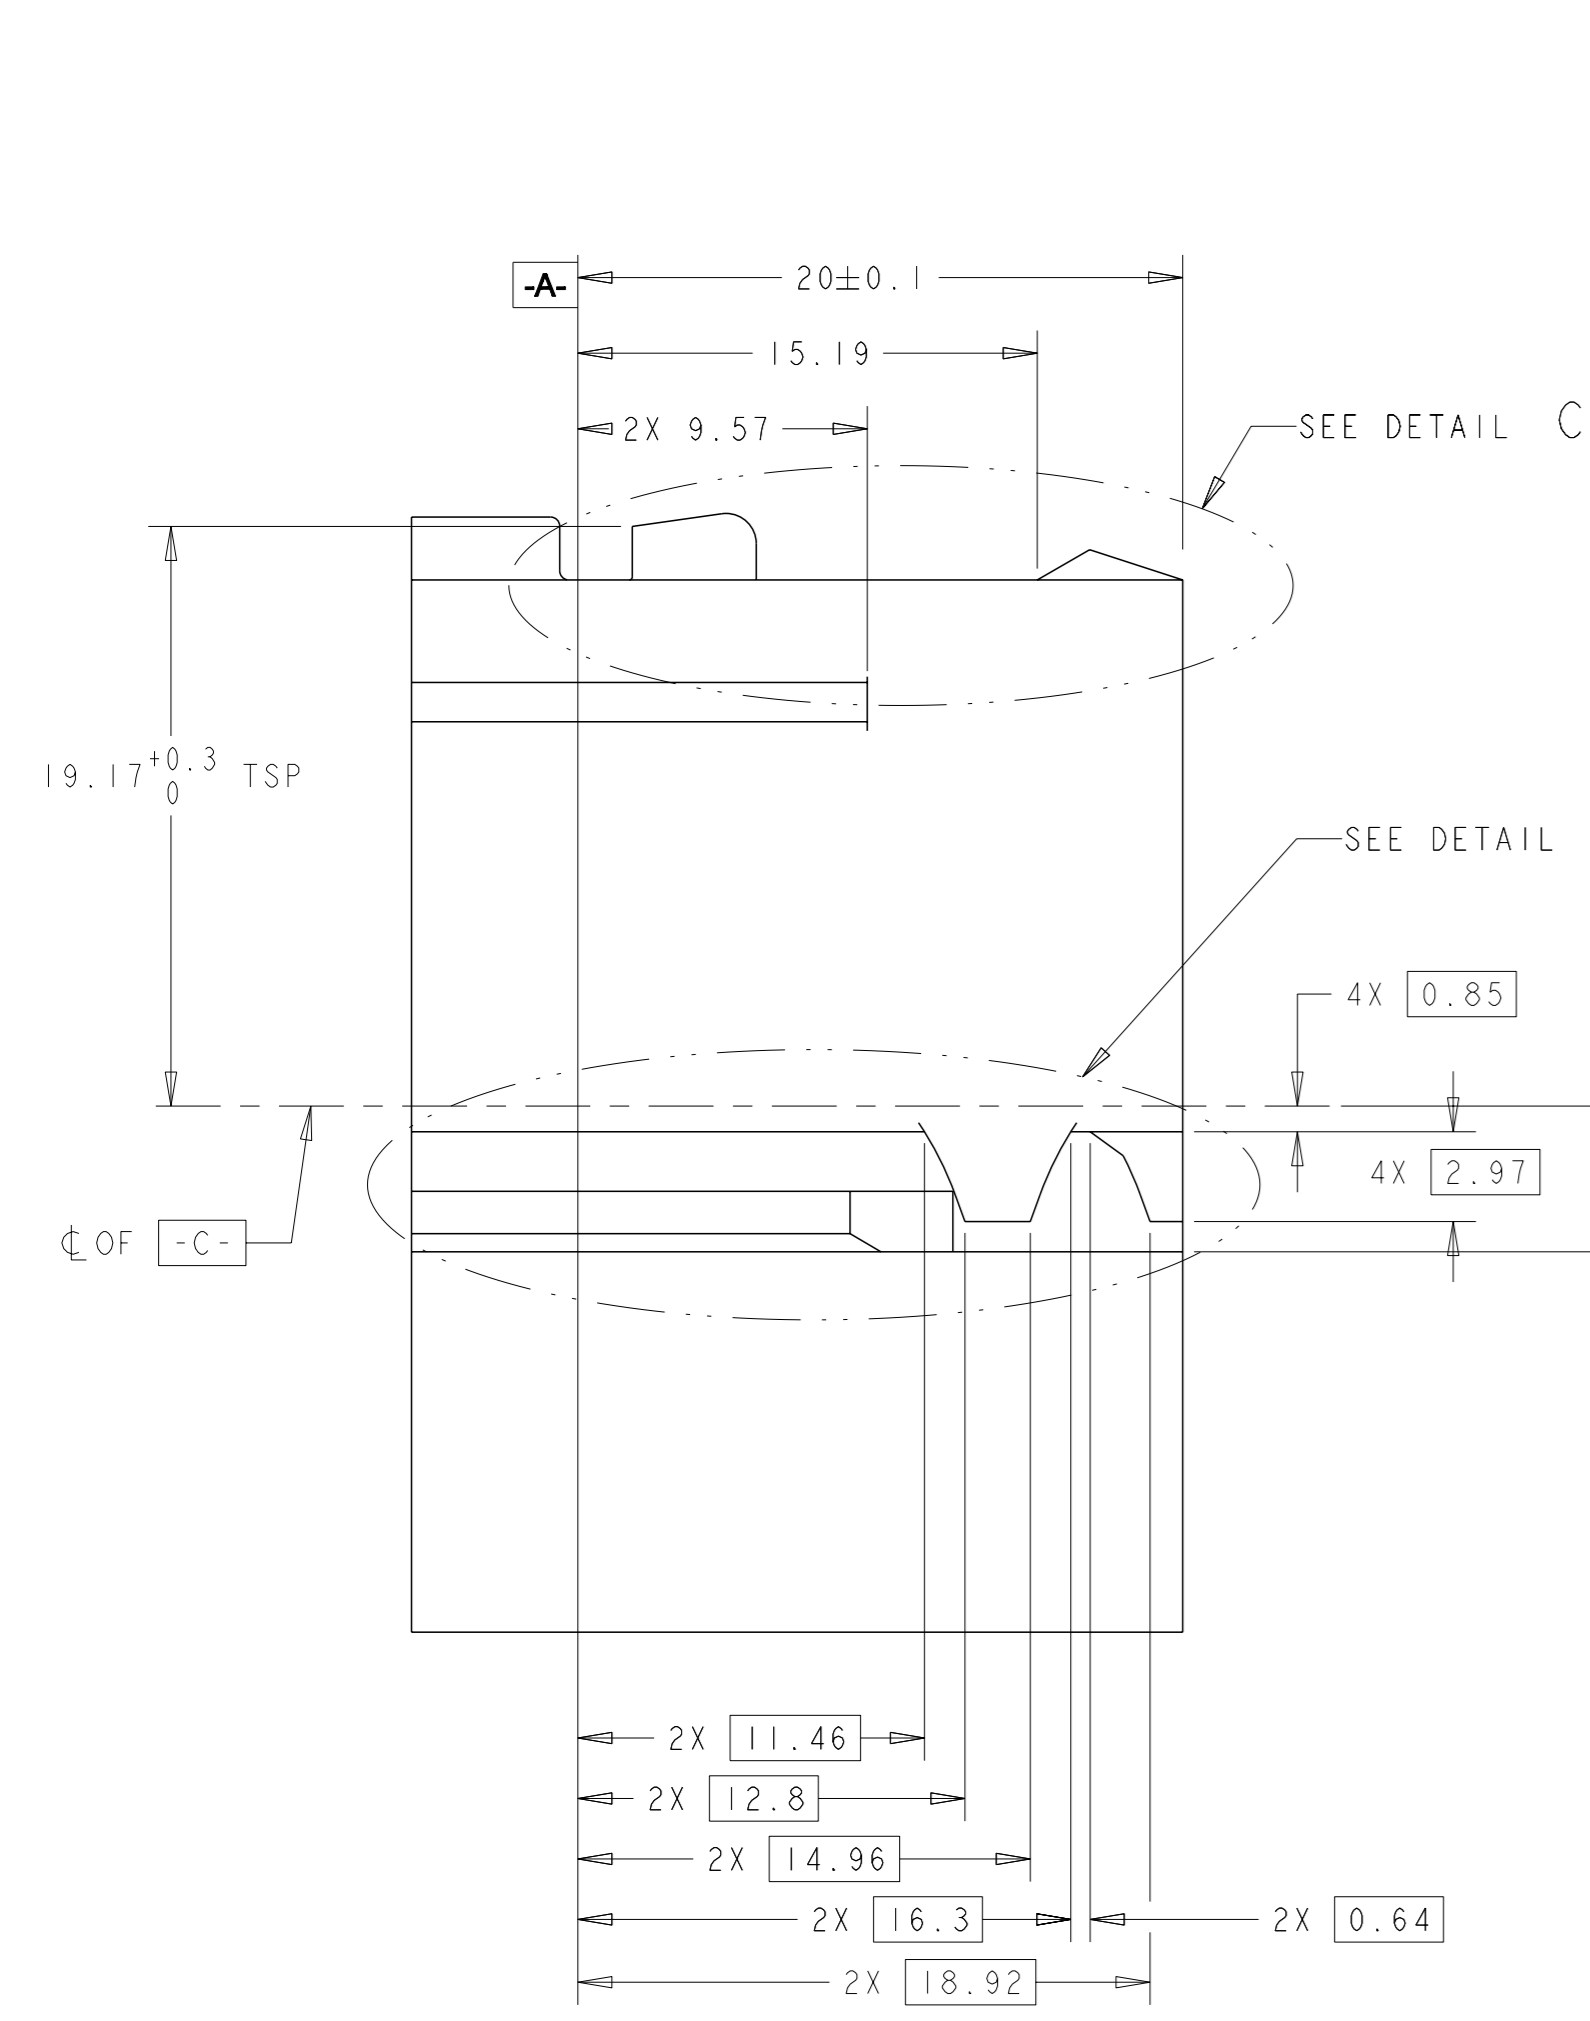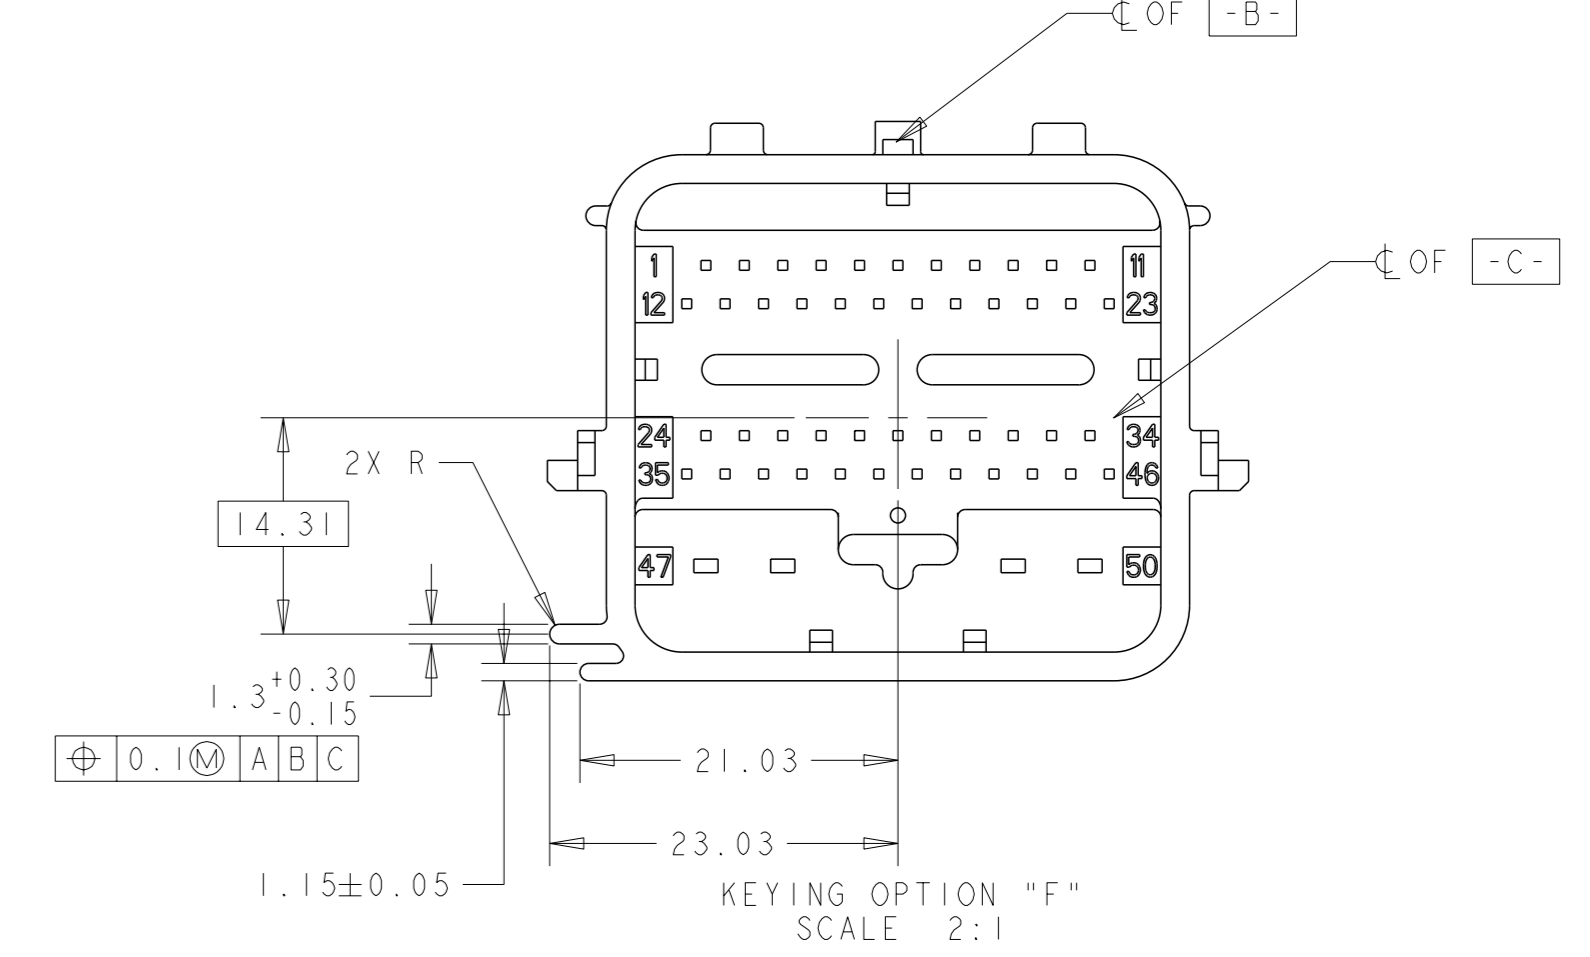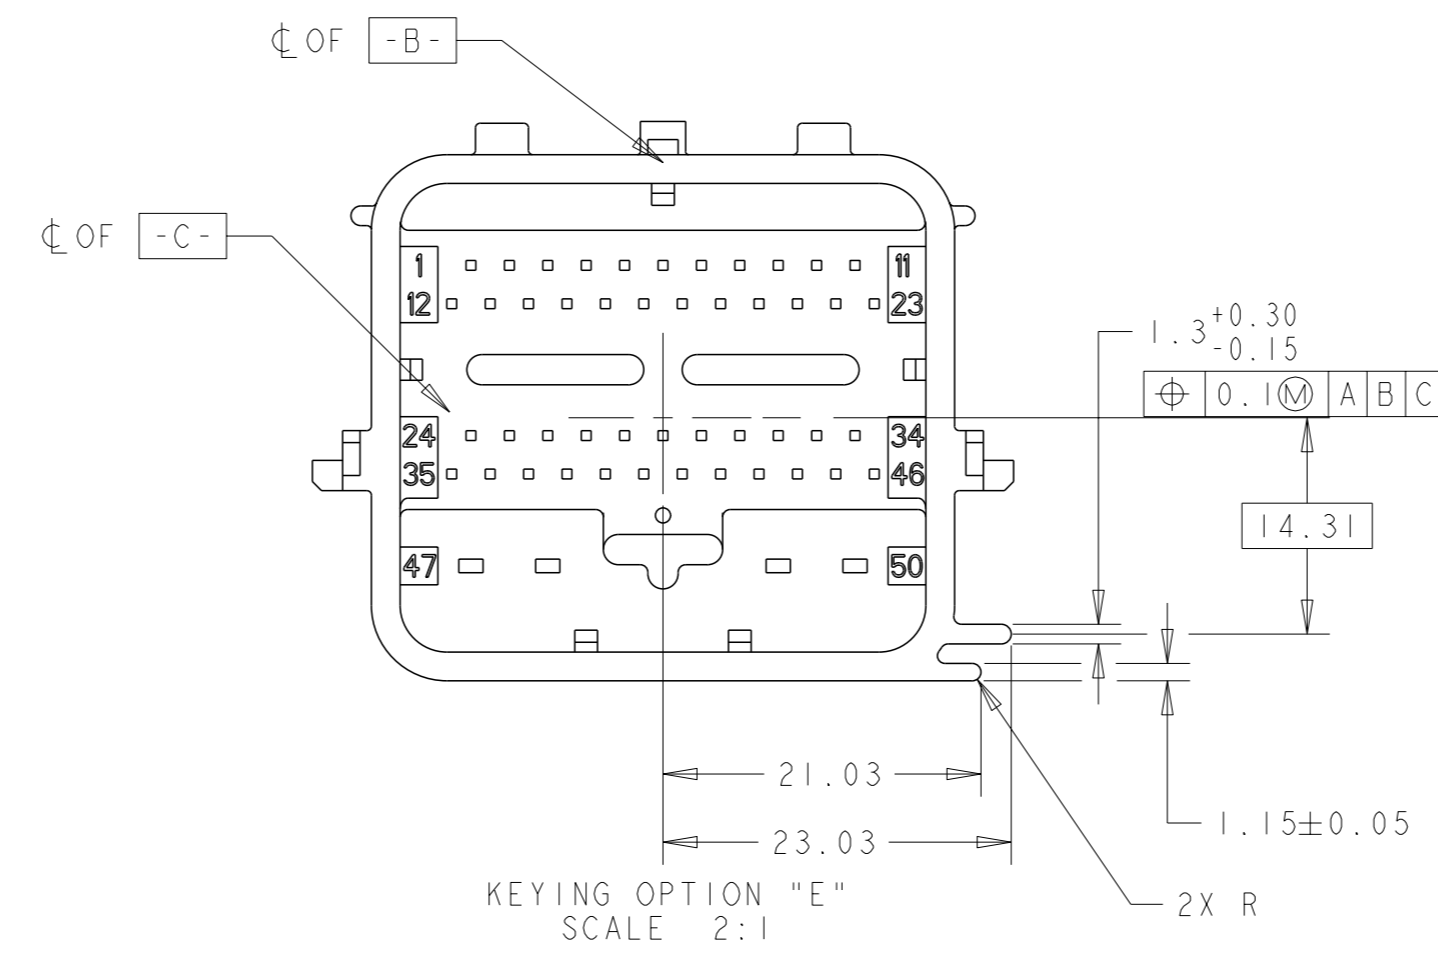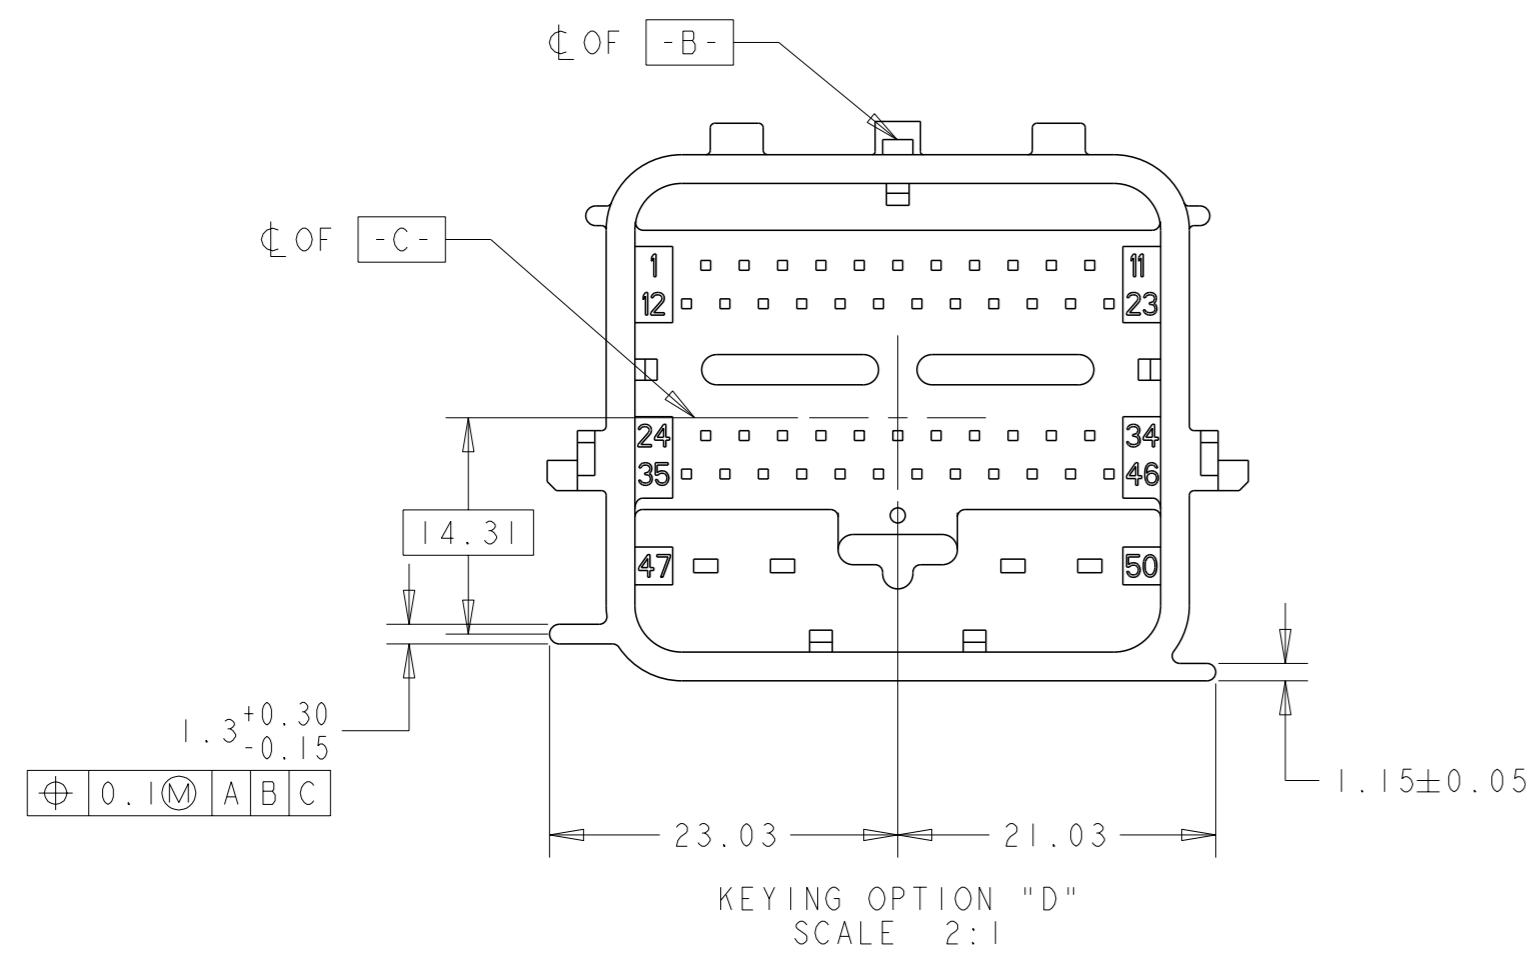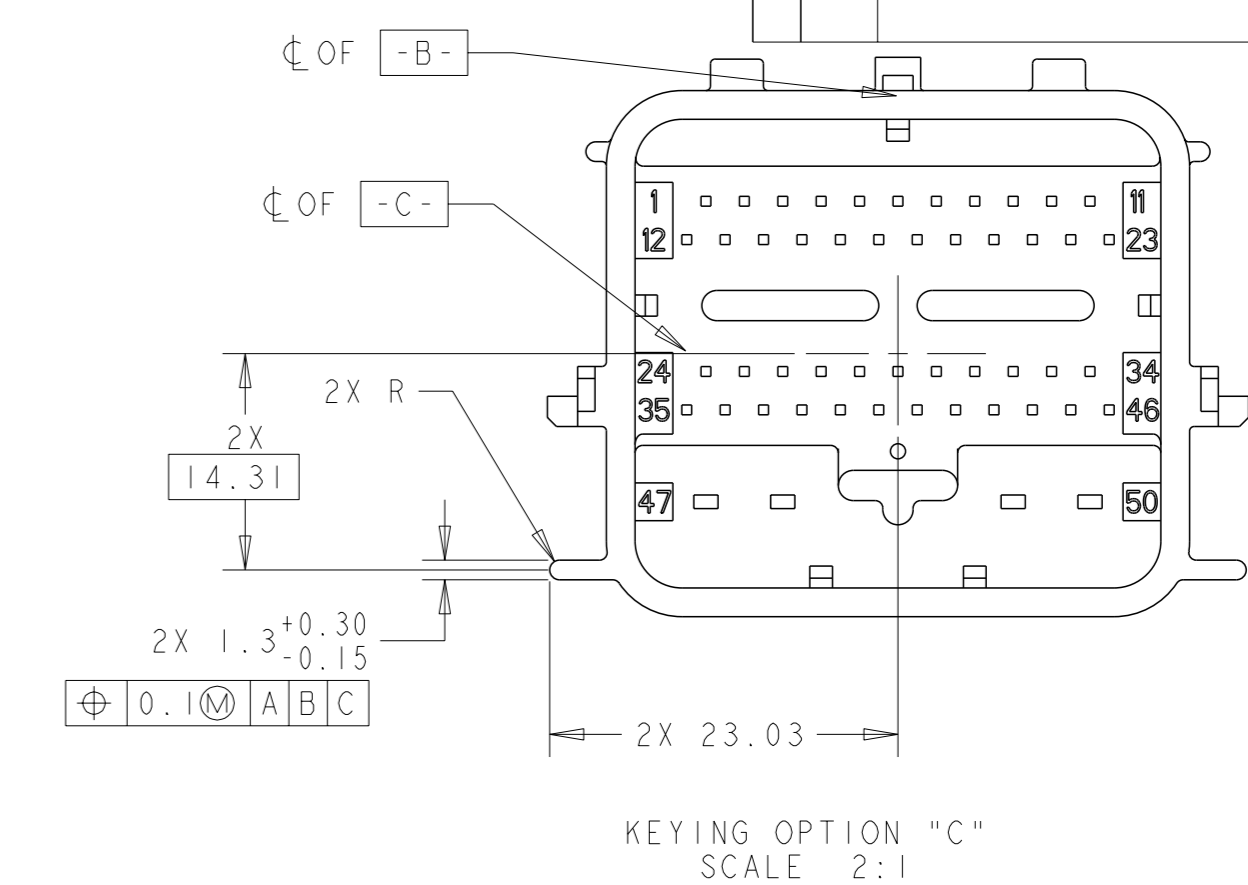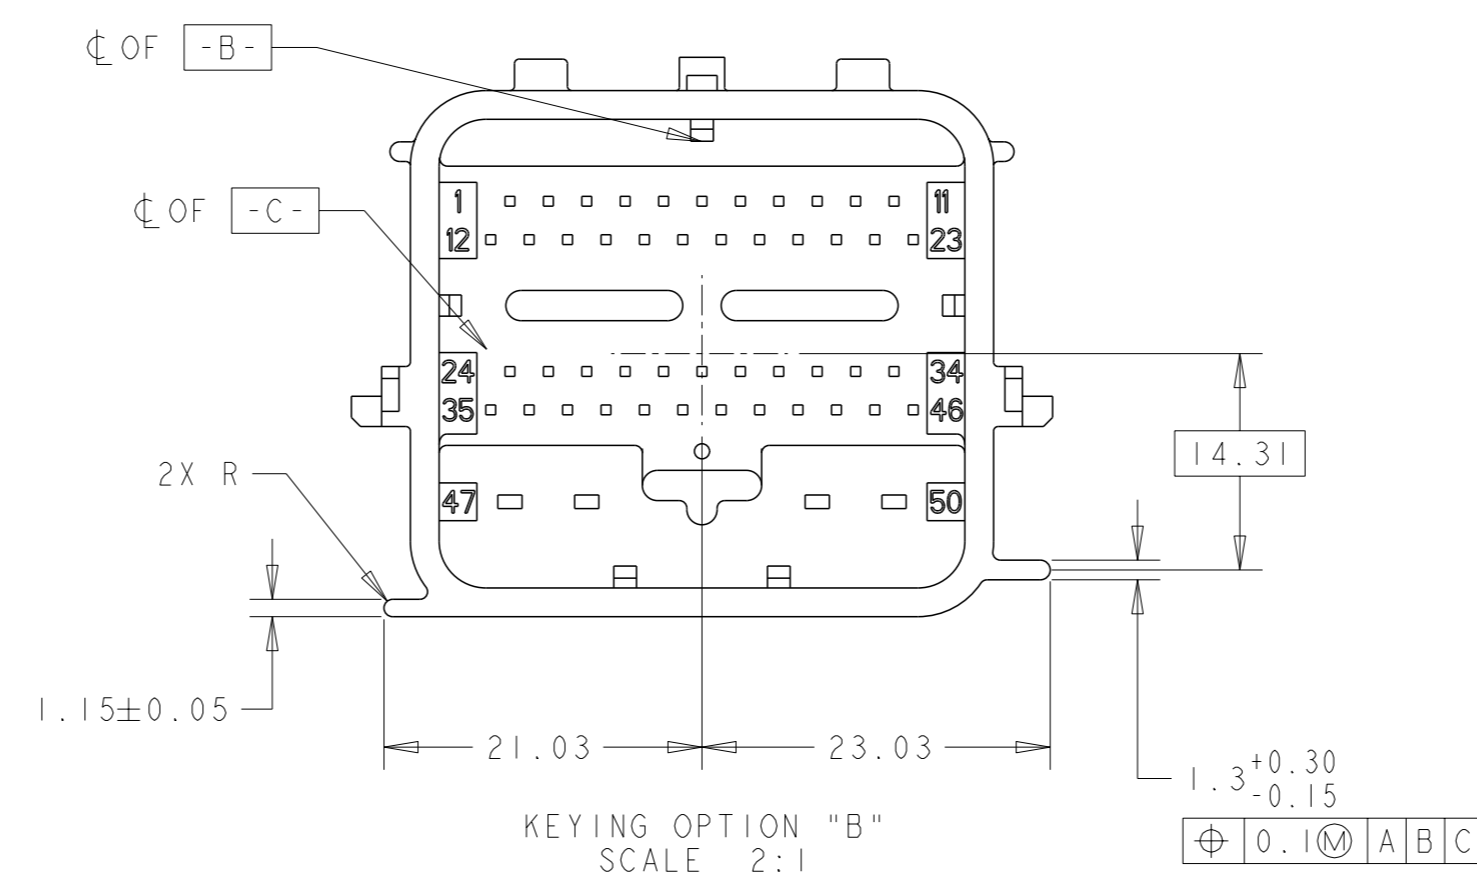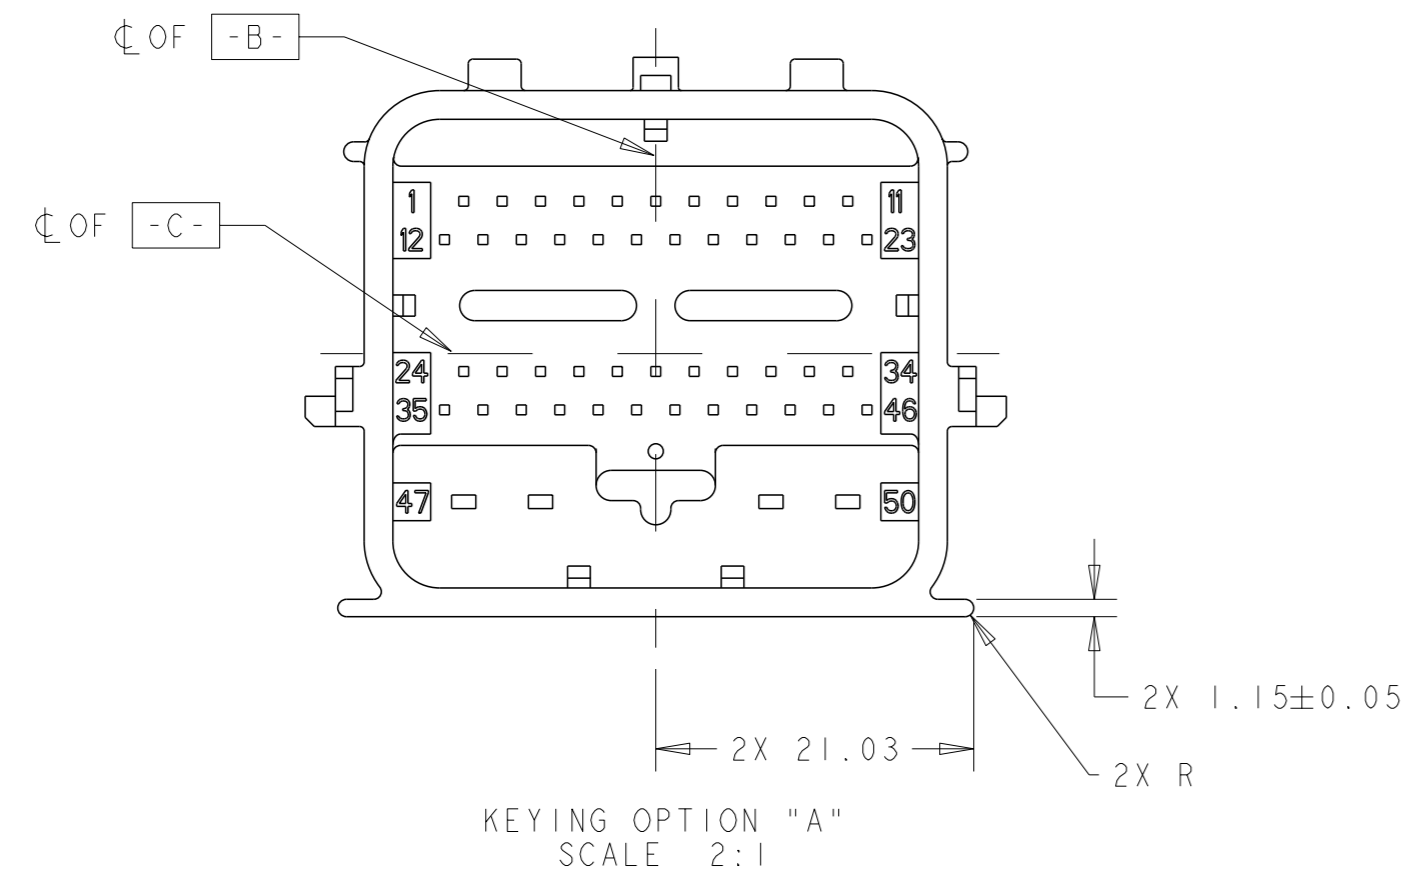

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: R. VESTAL 15APR2005	TE Connectivity
DIMENSIONS: mm		CHK: T. VALASEK 15APR2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: T. VALASEK 15APR2005	NAME: 50-WAY HARNESS ASSEMBLY, PCM
0 PLC ±	1 PLC ±0.3	PRODUCT SPEC	SIZE: A1
2 PLC ±0.10	3 PLC ±	APPLICATION SPEC	CAGE CODE: 1438129
4 PLC ±	ANGLES ±*	WEIGHT	RESTRICTED TO
MATERIAL	FINISH	CUSTOMER DRAWING	SCALE: 1:1 SHEET 10 OF 10 REV: F37



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.