


1200 V power Schottky silicon carbide diode

Datasheet - production data

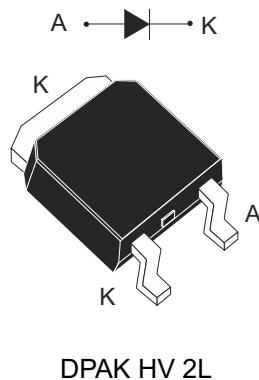

Description

ST's 1200 V high-performance rectifier is specifically designed to be used in photo-voltaic inverters or in applications where negligible switching losses are required.

The STPSC6H12 helps to increase the application efficiency yield by up to 2% thanks to its ability to work at high frequency whatever the temperature.

The central lead of the DPAK package is removed to meet the IEC60664 and UL 840 standard requirements for a higher voltage.

These characteristics make it the best-in-class 1200 V diode.

Features

- High frequency free-wheel / boost diode
- Robust high-voltage periphery
- Ultrafast high voltage switching independent of temperature

Table 1. Device summary

| Symbol | Value |
|-------------------------|--------|
| $I_{F(AV)}$ | 6 A |
| V_{RRM} | 1200 V |
| T_j (max.) | 175 °C |
| V_F (6 A, 25 °C) typ. | 1.55 V |
| C_j (300 V) typ. | 30 pF |

1 Characteristics

Table 2. Absolute ratings (limiting values at 25 °C unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|--------------|---|--|---|-----------------|---|
| V_{RRM} | Repetitive peak reverse voltage | | 1200 | V | |
| $I_{F(RMS)}$ | Forward rms current | | 11 | A | |
| $I_{F(AV)}$ | Average forward current | | 6 | A | |
| I_{FSM} | Surge non repetitive forward current | | $t_p = 10 \text{ ms sinusoidal}, T_c = 25 \text{ °C}$ $t_p = 10 \text{ ms sinusoidal}, T_c = 150 \text{ °C}$ $t_p = 10 \mu\text{s square}, T_c = 25 \text{ °C}$ | 36 30 100 | A |
| I_{FRM} | Repetitive peak forward current | | $\delta = 0.1, T_c = 125 \text{ °C}$ | 28 | A |
| T_{stg} | Storage temperature range | | -65 to +175 | °C | |
| T_j | Operating junction temperature range ⁽¹⁾ | | -40 to +175 | °C | |

1. $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th(j-a)}}$ condition to avoid thermal runaway for a diode on its own heatsink

Table 3. Thermal resistance

| Symbol | Parameter | Typ. | Max. | Unit |
|---------------|------------------|------|------|------|
| $R_{th(j-c)}$ | Junction to case | 1.3 | 1.9 | °C/W |

Table 4. Static electrical characteristics

| Symbol | Parameter | Tests conditions | | Min. | Typ. | Max. | Unit |
|----------------------|-------------------------|------------------------|---------------------|------|------|------|------|
| I_R ⁽¹⁾ | Reverse leakage current | $T_j = 25 \text{ °C}$ | $V_R = V_{RRM}$ | - | 100 | 400 | μA |
| | | $T_j = 150 \text{ °C}$ | | - | 0.65 | 1.5 | mA |
| V_F ⁽²⁾ | Forward voltage drop | $T_j = 25 \text{ °C}$ | $I_F = 6 \text{ A}$ | - | 1.55 | 1.9 | V |
| | | $T_j = 150 \text{ °C}$ | | - | 2.05 | 2.6 | |

1. $t_p = 10 \text{ ms}, \delta < 2\%$

2. $t_p = 500 \mu\text{s}, \delta < 2\%$

To evaluate the conduction losses use the following equation:

$$P = 0.89 \times I_{F(AV)} + 0.285 \times I_F^2(\text{RMS})$$

Table 5. Dynamic electrical characteristics

| Symbol | Parameter | Test conditions | | Typ. | Unit |
|----------------|-------------------------|---|--|------|------|
| $Q_{cj}^{(1)}$ | Total capacitive charge | $V_R = 800 \text{ V}$ | | 29 | nC |
| C_j | Total capacitance | $V_R = 0 \text{ V}, T_c = 25 \text{ °C}, F = 1 \text{ MHz}$ | | 330 | pF |
| | | $V_R = 300 \text{ V}, T_c = 25 \text{ °C}, F = 1 \text{ MHz}$ | | 30 | |

1. Most accurate value for the capacitive charge:

$$Q_{cj} = \int_0^{V_{OUT}} c_j(V_R) \cdot dV_R$$

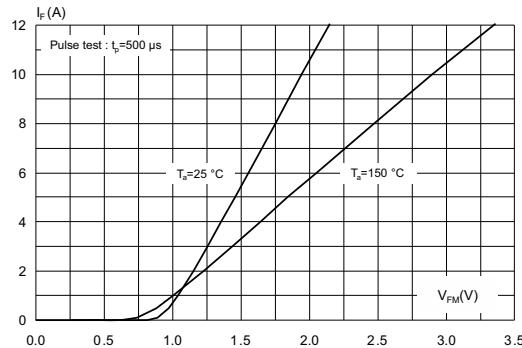
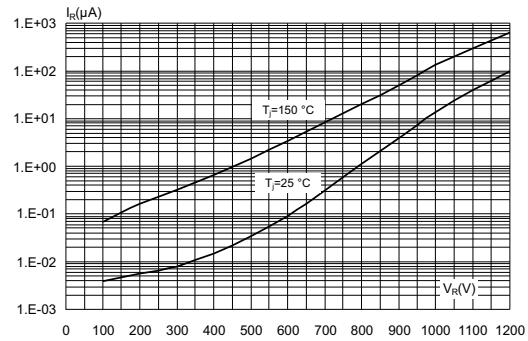
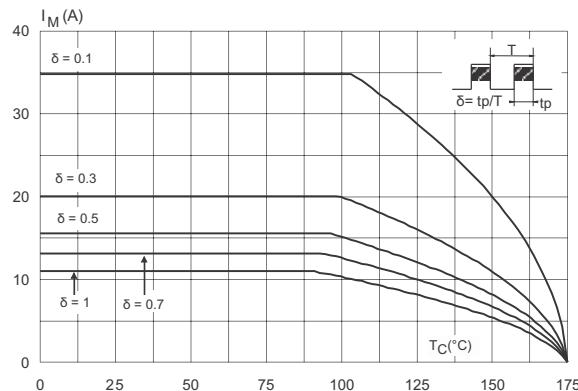
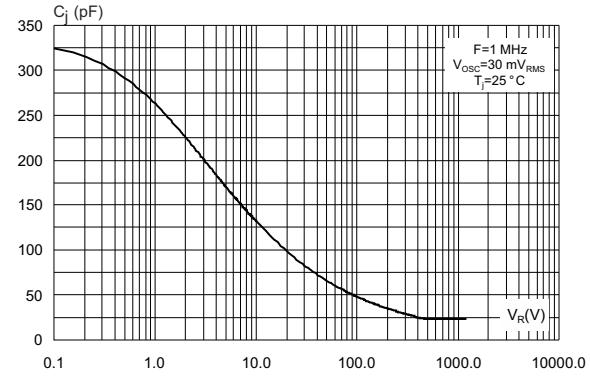
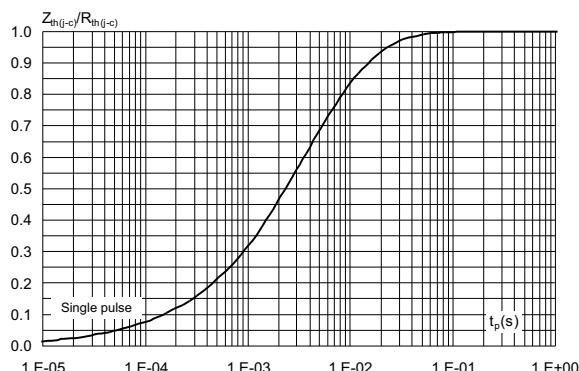
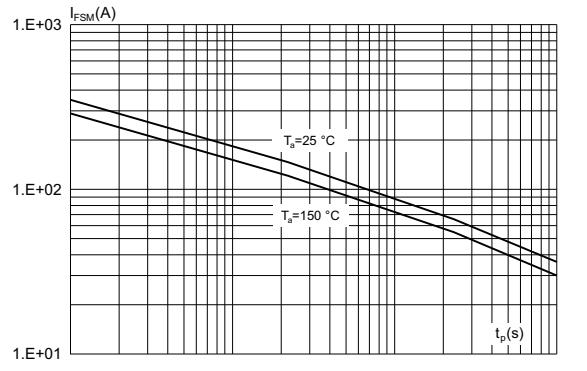
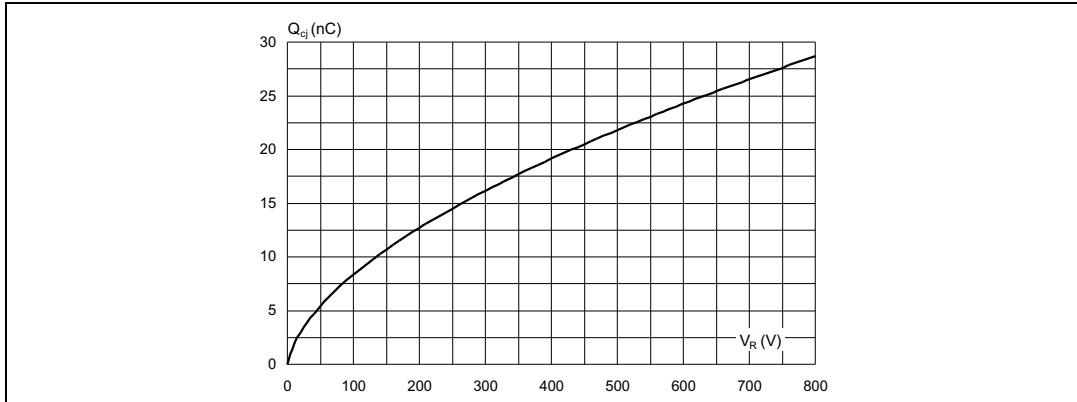
Figure 1. Forward voltage drop versus forward current (typical values)**Figure 2. Reverse leakage current versus reverse voltage applied (typical values)****Figure 3. Peak forward current versus case temperature****Figure 4. Junction capacitance versus reverse voltage applied (typical values)****Figure 5. Relative variation of thermal impedance junction to case versus pulse duration****Figure 6. Non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform)**

Figure 7. Total capacitive charges versus reverse voltage applied (typical values)

2 Package information

- Epoxy meets UL94, V0
- Lead-free package

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com.
ECOPACK® is an ST trademark.

2.1 DPAK HV 2L package information

Figure 8. DPAK HV 2L package outline

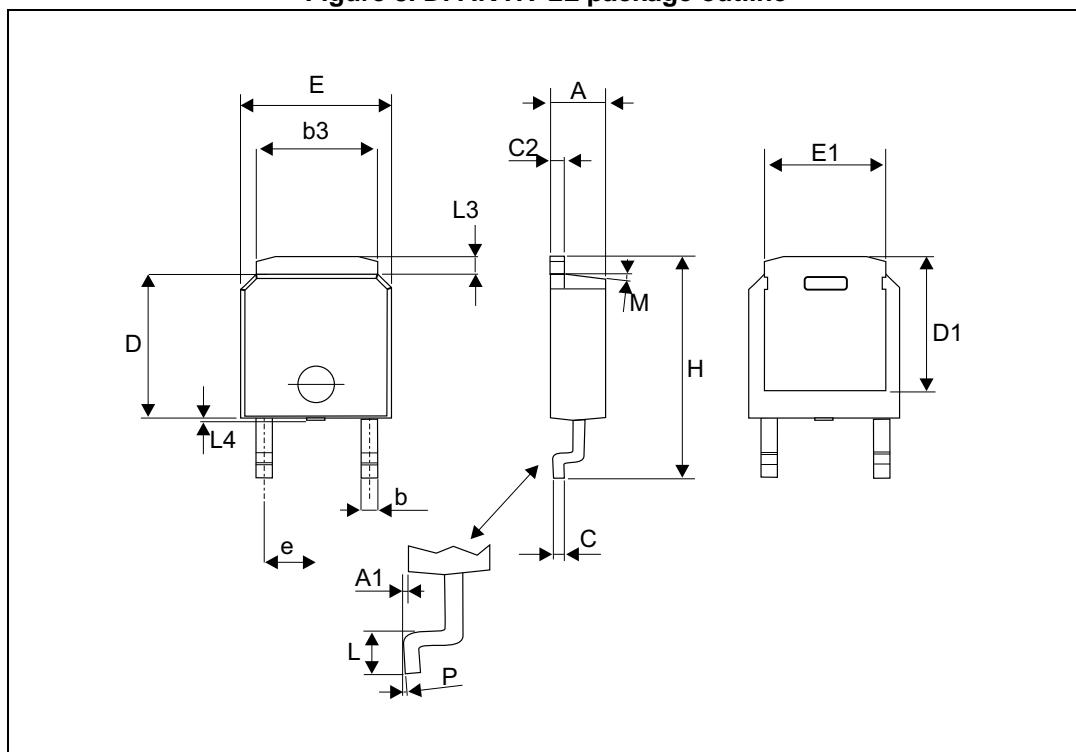
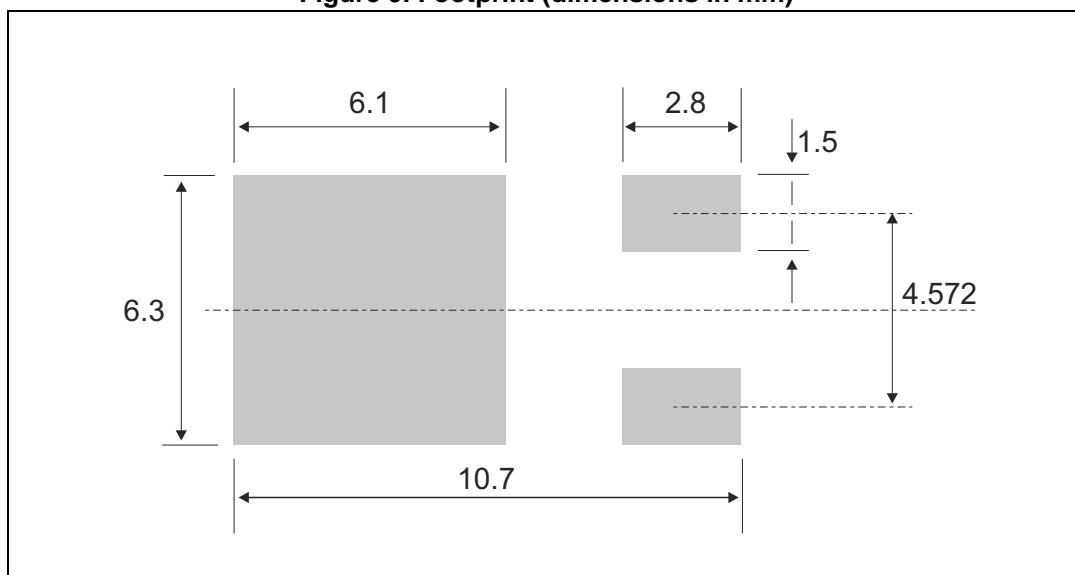


Table 6. DPAK HV 2L package mechanical data

| Ref. | Dimensions | | | | | |
|-------------------|-------------|------|-------|-----------|-------|-------|
| | Millimeters | | | Inches | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 2.16 | 2.29 | 2.40 | 0.085 | 0.090 | 0.094 |
| A1 | 0.06 | 0.08 | 0.13 | 0.002 | 0.003 | 0.005 |
| b | 0.71 | 0.76 | 1.07 | 0.028 | 0.029 | 0.030 |
| b3 | 5.004 | 5.10 | 5.21 | 0.197 | 0.201 | 0.205 |
| c | 0.46 | 0.51 | 0.56 | 0.018 | 0.020 | 0.025 |
| c2 | 0.76 | 0.81 | 0.86 | 0.029 | 0.032 | 0.034 |
| D | 5.97 | 6.10 | 6.22 | 0.235 | 0.240 | 0.245 |
| D1 | 5.84 REF | | | 0.230 REF | | |
| E | 6.48 | 6.60 | 6.73 | 0.255 | 0.260 | 0.265 |
| E1 | 4.95 | 5.08 | 5.21 | 0.195 | 0.200 | 0.205 |
| e | 2.29 REF | | | 0.90 REF | | |
| H | 9.70 | 9.83 | 10.08 | 0.382 | 0.387 | 0.397 |
| L | 1.02 | 1.14 | 1.40 | 0.040 | 0.045 | 0.055 |
| L3 | | | 1.14 | | | 0.045 |
| L4 ⁽¹⁾ | 0.000 | | 0.15 | 0.000 | | 0.006 |
| M | | 7° | | | 7° | |
| P | | | 5° | | | 5° |

1. Maximum plastic protrusion

Figure 9. Footprint (dimensions in mm)

3 Ordering information

Table 7. Ordering information

| Order code | Marking | Package | Weight | Base qty | Delivery mode |
|----------------|------------|------------|--------|----------|---------------|
| STPSC6H12B-TR1 | STPSC 6H12 | DPAK HV 2L | 0.368g | 2500 | Tape and reel |

4 Revision history

Table 8. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 02-Aug-2013 | 1 | First issue. |
| 05-Aug-2013 | 2 | Corrected typographical error in <i>Table 7</i> . |
| 13-Mar-2015 | 3 | Updated marking information in <i>Table 7: Ordering information</i> . |
| 06-May-2015 | 4 | Updated cover page. Format updated to current standard. |
| 01-Sep-2016 | 5 | Updated cover image and <i>Figure 8</i> . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.