

### PROTECTION PRODUCTS - RailClamp®

#### Description

RailClamps are ultra low capacitance TVS arrays designed to protect high speed data interfaces. This series has been specifically designed to protect sensitive components which are connected to high-speed data and transmission lines from overvoltage caused by **ESD** (electrostatic discharge), **CDE** (Cable Discharge Events), and **EFT** (electrical fast transients).

The RClamp™1502B has a typical capacitance of only 0.60pF (pin 1 to 2). This means it can be used on circuits operating in excess of 3GHz without signal attenuation. They may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 ( $\pm 15\text{kV}$  air,  $\pm 8\text{kV}$  contact discharge). Each device can be configured to protect 1 bidirectional line or two unidirectional lines.

These devices are in a small SC-75 (SOT-523) package and feature a lead-free, matte tin finish. They are compatible with both lead free and SnPb assembly techniques. They are designed for use in applications where board space is at a premium. The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as Automatic Test Equipment and Infiniband circuits.

#### Features

- ◆ Transient protection for high-speed data lines to **IEC 61000-4-2 (ESD)  $\pm 15\text{kV}$  (air),  $\pm 8\text{kV}$  (contact)**  
**IEC 61000-4-4 (EFT) 40A (5/50ns)**
- ◆ Designed to replace polymer TVS
- ◆ Protects up to two I/O lines
- ◆ Ultra-Low capacitance ( **$< 1\text{pF}$** )
- ◆ No insertion loss to  **$> 3.0\text{GHz}$**
- ◆ Low profile ( **$< 1\text{mm}$** )
- ◆ Low leakage current and clamping voltage
- ◆ Low operating voltage: 15.0V
- ◆ Solid-state silicon-avalanche technology


#### Mechanical Characteristics

- ◆ SC-75 (SOT-523) package
- ◆ Lead Finish: Matte Tin
- ◆ RoHS/WEEE Compliant
- ◆ Molding compound flammability rating: UL 94V-0
- ◆ Marking: P6
- ◆ Packaging: Tape and Reel

#### Applications


- ◆ Automatic Test Equipment
- ◆ Firewire Ports
- ◆ GaAs Photodetector Protection
- ◆ HBT Power Amp Protection
- ◆ Infiniband Transceiver Protection

#### Dimensions

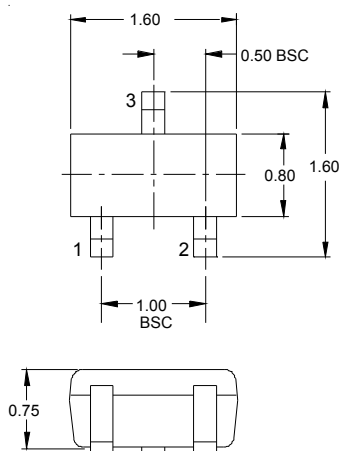

**Nominal Dimensions (mm)**

#### Schematic & PIN Configuration

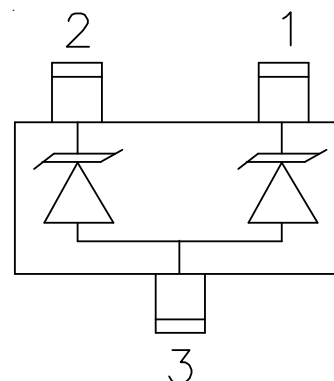

**SC-75 3L (Top View)**

## PROTECTION PRODUCTS

### Absolute Maximum Rating

| Rating                                                         | Symbol    | Value       | Units |
|----------------------------------------------------------------|-----------|-------------|-------|
| Peak Pulse Power ( $t_p = 8/20\mu s$ )                         | $P_{pk}$  | 200         | Watts |
| Peak Pulse Current ( $t_p = 8/20\mu s$ )                       | $I_{pp}$  | 5           | A     |
| ESD per IEC 61000-4-2 (Air)<br>ESD per IEC 61000-4-2 (Contact) | $V_{ESD}$ | 15<br>8     | kV    |
| Operating Temperature                                          | $T_J$     | -55 to +125 | °C    |
| Storage Temperature                                            | $T_{STG}$ | -55 to +150 | °C    |


### Electrical Characteristics (T=25°C)

| Parameter                 | Symbol    | Conditions                                                                           | Minimum | Typical | Maximum | Units   |
|---------------------------|-----------|--------------------------------------------------------------------------------------|---------|---------|---------|---------|
| Reverse Stand-Off Voltage | $V_{RWM}$ | Pin 1 or Pin 2 to Pin 3<br>and Between Pins 1 and 2                                  |         |         | 15      | V       |
| Reverse Breakdown Voltage | $V_{BR}$  | $I_t = 1mA$<br>Pin 1 or Pin 2 to Pin 3<br>and Between Pins 1 and 2                   | 16.7    |         |         | V       |
| Reverse Leakage Current   | $I_R$     | $V_{RWM} = 15V, T=25^\circ C$<br>Pin 1 or Pin 2 to Pin 3<br>and Between Pins 1 and 2 |         |         | 1       | $\mu A$ |
| Clamping Voltage          | $V_C$     | $I_{pp} = 1A, t_p = 8/20\mu s$<br>Pin 1 to Pin 2                                     |         |         | 32      | V       |
| Clamping Voltage          | $V_C$     | $I_{pp} = 5A, t_p = 8/20\mu s$<br>Pin 1 or Pin 2 to Pin 3                            |         |         | 36      | V       |
| Clamping Voltage          | $V_C$     | $I_{pp} = 5A, t_p = 8/20\mu s$<br>Pin 1 to Pin 2                                     |         |         | 40      | V       |
| Junction Capacitance      | $C_j$     | $V_R = 0V, f = 1MHz$<br>Pin 1 to Pin 2                                               |         | 0.60    | 0.9     | pF      |
| Junction Capacitance      | $C_j$     | $V_R = 0V, f = 1MHz$<br>Pin 1 or Pin 2 to Pin 3                                      |         |         | 1.5     | pF      |


## PROTECTION PRODUCTS

### Typical Characteristics


**Non-Repetitive Peak Pulse Power vs. Pulse Time**

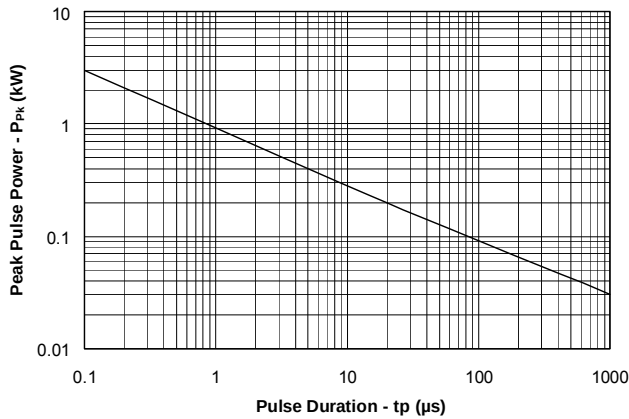


**Power Derating Curve**

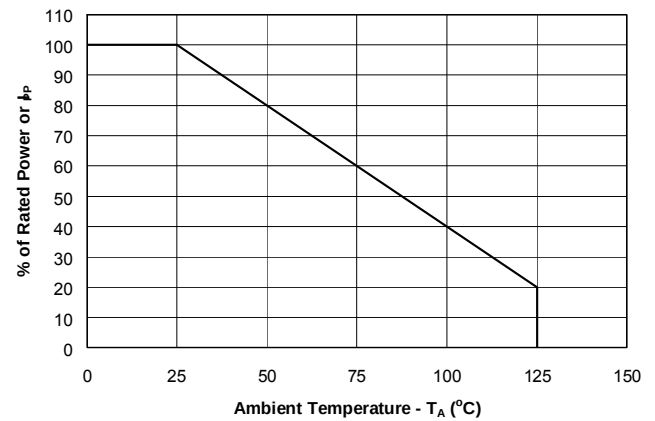


**Clamping Voltage vs. Peak Pulse Current  
Pin 1 or Pin 2 to Pin 3**

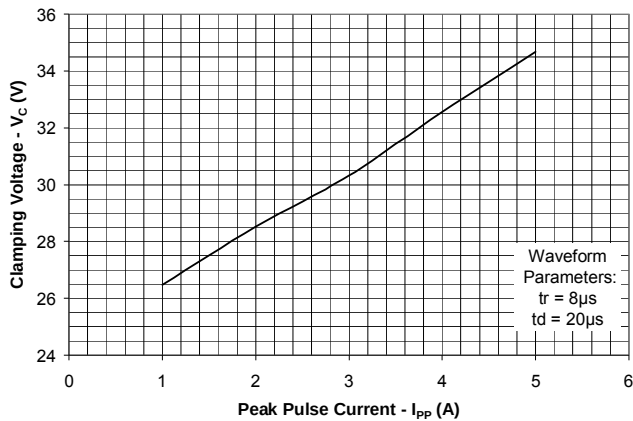


**Clamping Voltage vs. Peak Pulse Current  
Pin 1 to Pin 2**

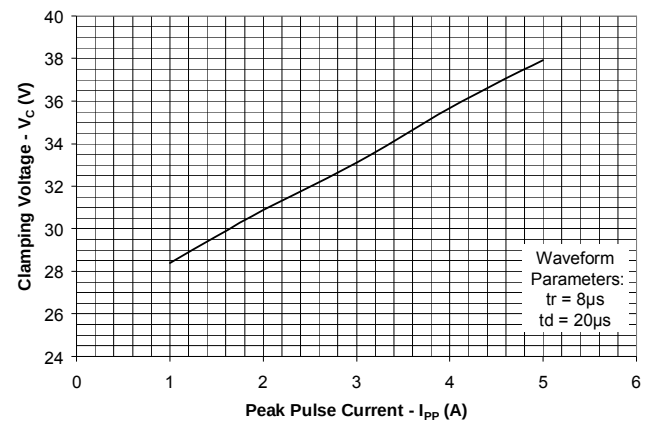

**Normalized Capacitance vs. Reverse Voltage  
Pin 1 or Pin 2 to Pin 3**

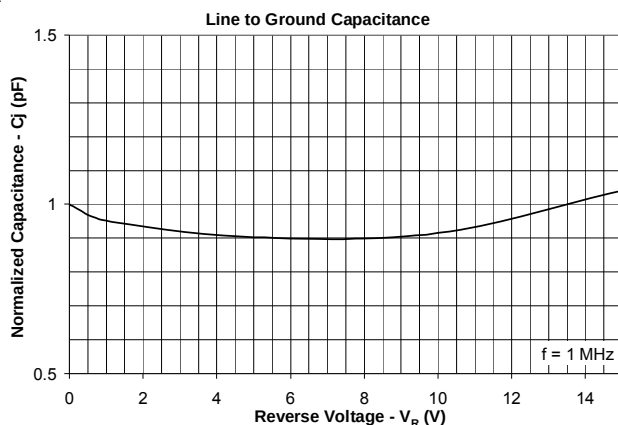


**Junction Capacitance vs. Reverse Voltage  
Pin 1 to Pin 2**

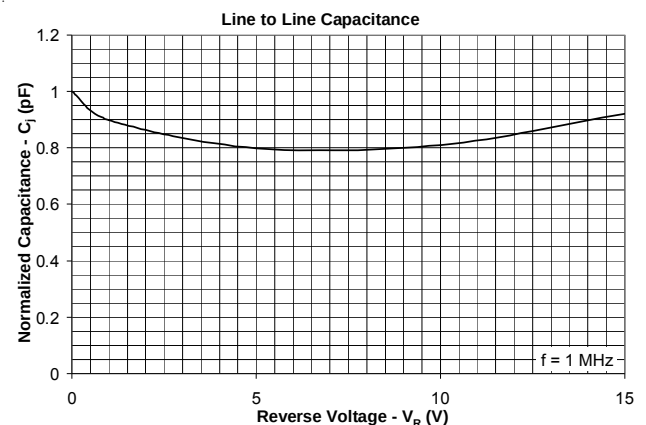


## PROTECTION PRODUCTS

### Typical Characteristics


**Insertion Loss S21 (Pin 1 to Pin 2)**

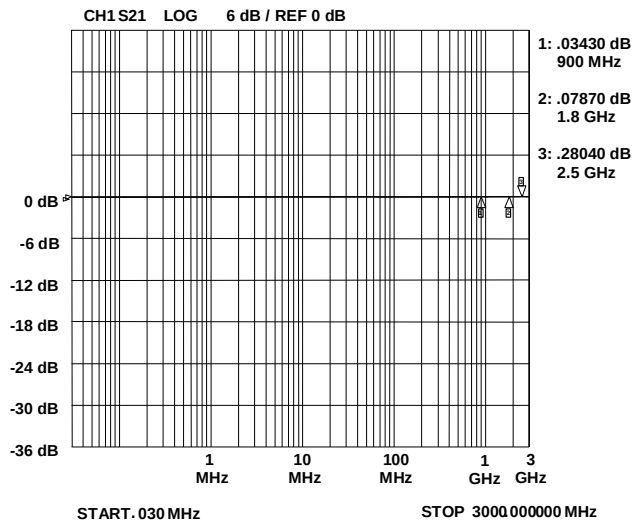


**Insertion Loss S21 (Pin 1 or Pin 2 to Pin 3)**

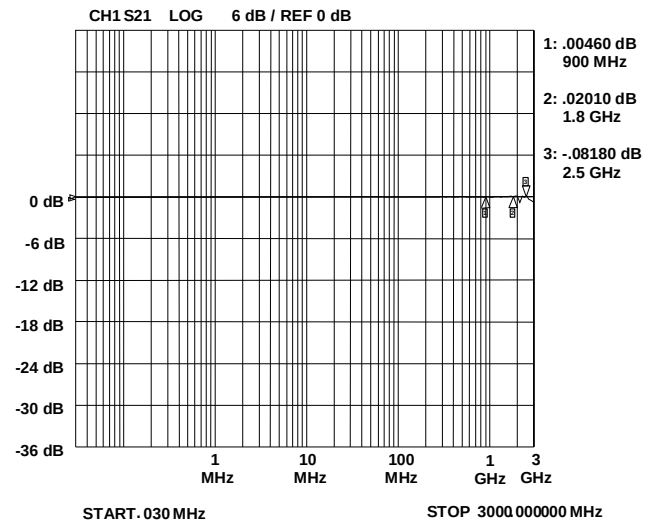


**ESD Response (4kV Contact per IEC 61000-4-2)**

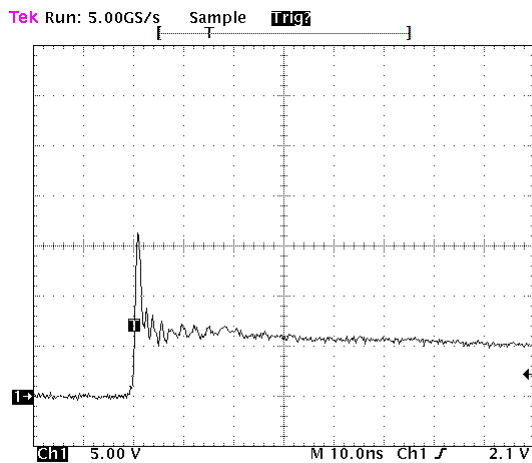

**ESD Response (8kV Contact per IEC 61000-4-2)**

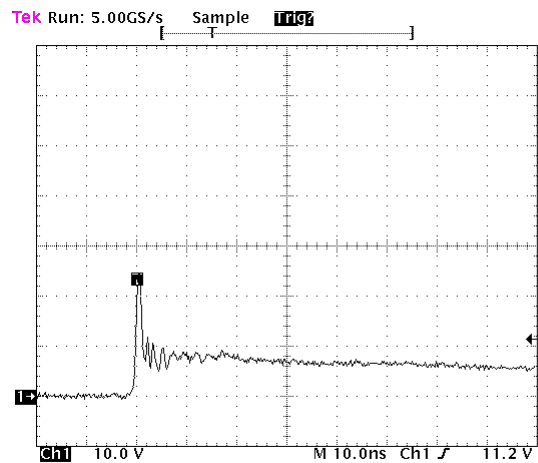

**Analog Crosstalk**

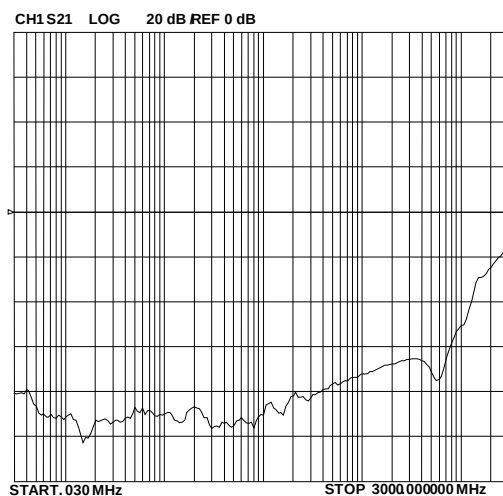

## PROTECTION PRODUCTS

### Applications Information

#### Device Connection Options

This device is optimized for protection of 1 line operating in excess of 3GHz. It may also be used to protect two lines, but it is recommended it not be used much beyond 1GHz due to cross talk limitations. The device is connected as follows:


One data line can be connected to either pin 1 or pin 2 with the other connected to ground. The connection to ground should be made directly to a ground plane. The path length should also be kept as short as possible to minimize parasitic inductance. Pin 3 is not connected.


Protection of two lines is achieved by connecting data lines at pins 1 & 2. Pin 3 is connected to ground. The connection to ground should be made directly to a ground plane. The path length should also be kept as short as possible to minimize parasitic inductance.

#### Matte Tin Lead Finish

Matte tin has become the industry standard lead-free replacement for SnPb lead finishes. A matte tin finish is composed of 100% tin solder with large grains. Since the solder volume on the leads is small compared to the solder paste volume that is placed on the land pattern of the PCB, the reflow profile will be determined by the requirements of the solder paste. Therefore, these devices are compatible with both lead-free and SnPb assembly techniques. In addition, unlike other lead-free compositions, matte tin does not have any added alloys that can cause degradation of the solder joint.

**Figure 1. Pin Configuration**

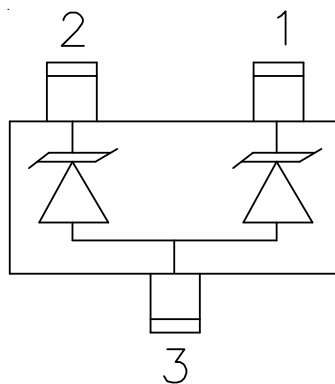


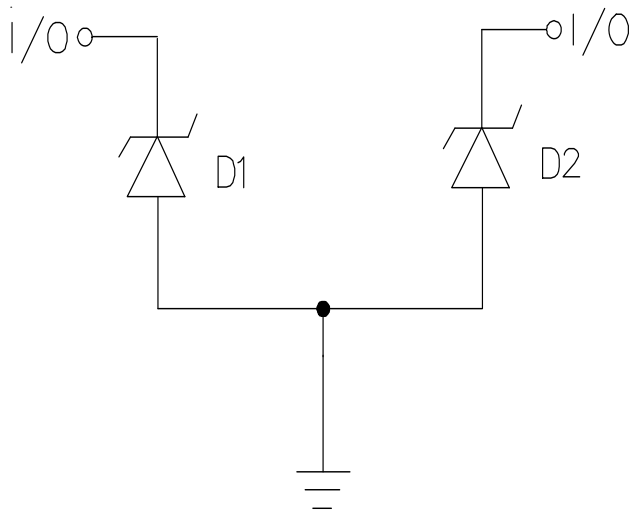**PROTECTION PRODUCTS**
**Applications Information - Spice Model**

**RClamp1502B Spice Model**


| <b>Table 1 - RClamp1502B Spice Parameters</b> |             |                 |                 |
|-----------------------------------------------|-------------|-----------------|-----------------|
| <b>Parameter</b>                              | <b>Unit</b> | <b>D1 (TVS)</b> | <b>D2 (TVS)</b> |
| IS                                            | Amp         | 1.23E-14        | 1.23E-14        |
| BV                                            | Volt        | 21.8            | 21.8            |
| VJ                                            | Volt        | 0.72            | 0.72            |
| RS                                            | Ohm         | 2.801           | 2.801           |
| IBV                                           | Amp         | 1.0E-3          | 1.0E-3          |
| CJO                                           | Farad       | 1.3E-12         | 1.3E-12         |
| TT                                            | sec         | 2.541E-9        | 2.541E-9        |
| M                                             | --          | 0.033           | 0.033           |
| N                                             | --          | 1.1             | 1.1             |
| EG                                            | eV          | 1.11            | 1.11            |

## PROTECTION PRODUCTS
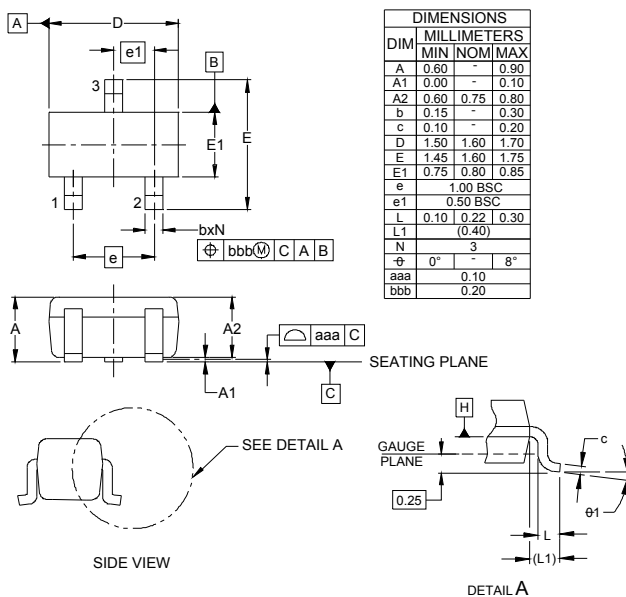
### Outline Drawing -SC-75 (SOT-523)



### Land Pattern -SC-75 (SOT-523)

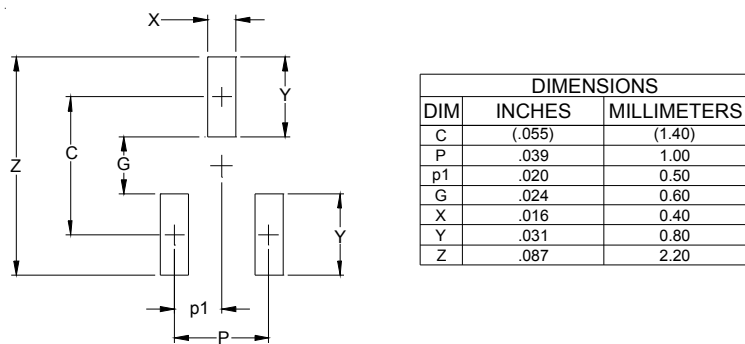


**NOTES:**

- THIS LAND PATTERN IS FOR REFERENCE PURPOSES ONLY  
CONSULT YOUR MANUFACTURING GROUP TO ENSURE YOUR  
COMPANY'S MANUFACTURING GUIDELINES ARE MET.

## PROTECTION PRODUCTS

### Marking





### Ordering Information

| Part Number     | Qty per Reel | Reel Size |
|-----------------|--------------|-----------|
| RClamp1502B.TCT | 3,000        | 7 Inch    |

RailClamp and RClamp are registered marks of Semtech Corporation

### Tape and Reel Specification

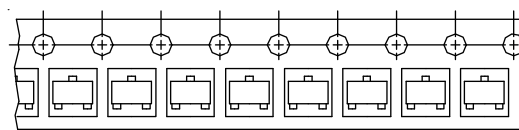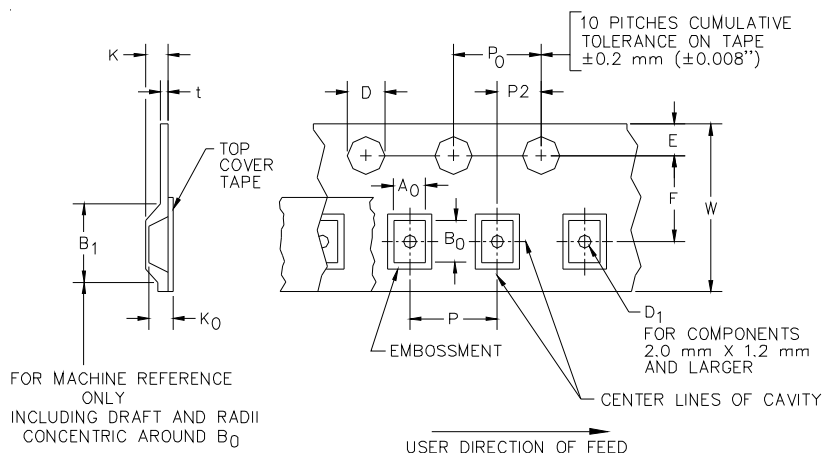

**Device Orientation in Tape**

| A0          | B0          | K0          |
|-------------|-------------|-------------|
| 1.85±0.05mm | 1.85±0.05mm | 0.88±0.05mm |

| Tape Width | B, (Max)      | D                                         | D1 (MIN)      | E                        | F                       | K (MAX)       | P                      | P0                     | P2                     | T(MAX)        | W                  |
|------------|---------------|-------------------------------------------|---------------|--------------------------|-------------------------|---------------|------------------------|------------------------|------------------------|---------------|--------------------|
| 8 mm       | 4.2 mm (.165) | 1.5 + 0.1 mm - 0.0 mm (0.59 +.005 - .000) | 1.0 mm (.039) | 1.750±.10 mm (.069±.004) | 3.5±0.05 mm (.138±.002) | 2.4 mm (.094) | 4.0±0.1 mm (.157±.004) | 4.0±0.1 mm (.157±.004) | 2.0±0.05mm (.079±.002) | 0.4 mm (.016) | 8.3 mm (.312±.012) |

### Contact Information

Semtech Corporation  
Protection Products Division  
200 Flynn Rd., Camarillo, CA 93012  
Phone: (805)498-2111 FAX (805)498-3804





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.