

## Data Sheet



### Description

This family of SMT LEDs is packaged in the industry standard PLCC-2 package. These SMT LEDs have high reliability performance and are designed to work under a wide range of environmental conditions. This high reliability feature makes them ideally suited to be used under harsh interior automotive as well as interior signs application conditions.

To facilitate easy pick & place assembly, the LEDs are packed in EIA-compliant tape and reel. Every reel will be shipped in single intensity and color bin, except red color, to provide close uniformity.

These LEDs are compatible with IR solder reflow process. Due to the high reliability feature of these products, they can also be mounted using through-the-wave soldering process.

The super wide viewing angle at 120° makes these LEDs ideally suited for panel, push button, or general backlighting in automotive interior, office equipment, industrial equipment, and home appliances. The flat top emitting surface makes it easy for these LEDs to mate with light pipes. With the built-in reflector pushing up the intensity of the light output, these LEDs are also suitable to be used as LED pixels in interior electronic signs.

### Features


- Industry standard PLCC-2 package
- High reliability LED package
- High brightness using AlInGaP and InGaN dice technologies
- Available in full selection of colors
- Super wide viewing angle at 120°
- Available in 8 mm carrier tape on 7 inch reel (2000 pieces)
- Compatible with both IR and TTW soldering process

### Applications



- Interior automotive
  - Instrument panel backlighting
  - Central console backlighting
  - Cabin backlighting
- Electronic signs and signals
  - Interior full color sign
  - Variable message sign
- Office automation, home appliances, industrial equipment
  - Front panel backlighting
  - Push button backlighting
  - Display backlighting

**CAUTION:** HSMN,M,K and E-A10x-xxxxx LEDs are Class 2 ESD sensitive. Please observe appropriate precautions during handling and processing. Refer to Avago Application Note AN-1142 for additional details.


## Package Dimensions

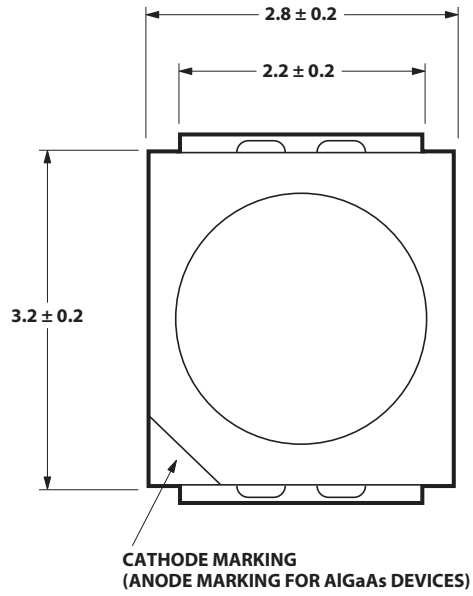

TOP MOUNT

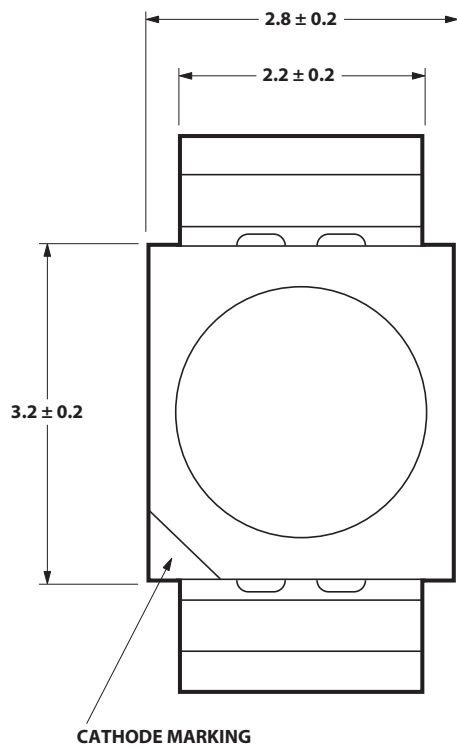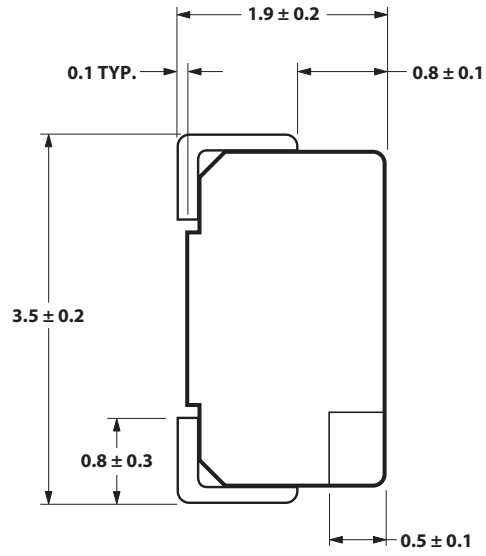

REVERSE MOUNT

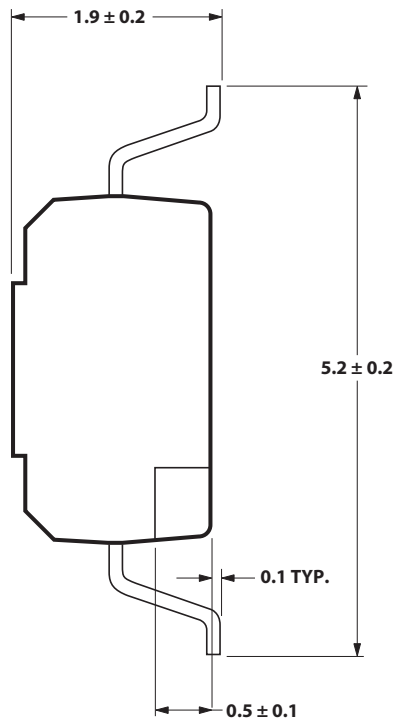

NOTE: ALL DIMENSIONS IN MILLIMETERS.

**Table 1. Device Selection Guide**

| <b>Red</b>         |                     |                      |                      |                          |                        |
|--------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b> | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMS-A100-J00J1    | 4.50                | 15.00                | -                    | 20                       | GaP                    |
| HSMS-A100-L00J1    | 11.20               | 15.00                | -                    | 20                       | GaP                    |
| HSMS-A100-H70J2    | 3.55                | -                    | 7.20                 | 10                       | GaP                    |
| HSMS-A100-J80J2    | 5.60                | -                    | 14.00                | 10                       | GaP                    |
| HSMH-A100-L00J1    | 11.20               | 15.00                | -                    | 20                       | AlGaAs                 |
| HSMH-A100-N00J1    | 28.50               | 50.00                | -                    | 20                       | AlGaAs                 |
| HSMH-A100-M80J2    | 22.40               | -                    | 56.00                | 10                       | AlGaAs                 |
| HSMC-A100-Q00J1    | 71.50               | 100.00               | -                    | 20                       | AlInGaP                |
| HSMC-A100-R00J1    | 112.50              | 140.00               | -                    | 20                       | AlInGaP                |
| HSMC-A101-S00J1    | 180.00              | 220.00               | -                    | 20                       | AlInGaP                |
| HSMZ-A100-T00J1    | 285.00              | 350.00               | -                    | 20                       | AlInGaP                |
| HSMC-A100-P30J1    | 45.00               | -                    | 90.00                | 20                       | AlInGaP                |
| <b>Red Orange</b>  |                     |                      |                      |                          |                        |
| <b>Part Number</b> | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMJ-A100-Q00J1    | 71.50               | 100.00               | -                    | 20                       | AlInGaP                |
| HSMJ-A101-S00J1    | 180.00              | 200.00               | -                    | 20                       | AlInGaP                |
| HSMV-A100-T00J1    | 285.00              | 350.00               | -                    | 20                       | AlInGaP                |
| HSMJ-A100-R40J1    | 112.50              | -                    | 285.00               | 20                       | AlInGaP                |
| HSMV-A100-S80J1    | 224.00              | -                    | 560.00               | 20                       | AlInGaP                |
| <b>Orange</b>      |                     |                      |                      |                          |                        |
| <b>Part Number</b> | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMD-A100-J00J1    | 4.50                | 15.00                | -                    | 20                       | GaP                    |
| HSMD-A100-L00J1    | 11.20               | 15.00                | -                    | 20                       | GaP                    |
| HSMD-A100-K4PJ2    | 7.20                | -                    | 18.00                | 10                       | GaP                    |
| HSML-A100-Q00J1    | 71.50               | 100.00               | -                    | 20                       | AlInGaP                |
| HSML-A101-S00J1    | 180.00              | 220.00               | -                    | 20                       | AlInGaP                |

| <b>Yellow / Amber</b> |                     |                      |                      |                          |                        |
|-----------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b>    | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMY-A100-J00J1       | 4.50                | 12.00                | -                    | 20                       | GaP                    |
| HSMY-A100-L00J1       | 11.20               | 12.00                | -                    | 20                       | GaP                    |
| HSMY-A100-J35J2       | 4.50                | -                    | 9.00                 | 10                       | GaP                    |
| HSMA-A100-Q00J1       | 71.50               | 100.00               | -                    | 20                       | AllnGaP                |
| HSMA-A101-S00J1       | 180.00              | 220.00               | -                    | 20                       | AllnGaP                |
| HSMU-A100-S00J1       | 180.00              | 320.00               | -                    | 20                       | AllnGaP                |
| HSMA-A101-R8WJ1       | 140.00              | -                    | 355.00               | 20                       | AllnGaP                |
| HSMU-A100-S4WJ1       | 180.00              | -                    | 450.00               | 20                       | AllnGaP                |

| <b>Yellow Green</b> |                     |                      |                      |                          |                        |
|---------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b>  | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMG-A100-J02J1     | 4.50                | 18.00                | -                    | 20                       | GaP                    |
| HSMG-A100-K72J2     | 9.00                | -                    | 18.00                | 10                       | GaP                    |
| HSME-A100-M02J1     | 18.00               | 70.00                | -                    | 20                       | AllnGaP                |
| HSME-A100-N82J1     | 35.50               | -                    | 90.00                | 20                       | AllnGaP                |

| <b>Emerald Green</b> |                     |                      |                      |                          |                        |
|----------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b>   | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMG-A100-H01J1      | 2.80                | 8.00                 | -                    | 20                       | GaP                    |
| HSMG-A100-H41J2      | 2.80                | -                    | 7.20                 | 10                       | GaP                    |
| HSME-A100-L01J1      | 11.20               | 40.00                | -                    | 20                       | AllnGaP                |
| HSME-A100-M3PJ1      | 18.00               | -                    | 35.50                | 20                       | AllnGaP                |


| <b>Green</b>       |                     |                      |                      |                          |                        |
|--------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b> | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMM-A101-R00J1    | 112.50              | 200.00               | -                    | 20                       | InGaN                  |
| HSMM-A100-S00J1    | 180.00              | 350.00               | -                    | 20                       | InGaN                  |
| HSMM-A100-U4PJ1    | 450.00              | -                    | 1125.00              | 20                       | InGaN                  |
| HSMM-A100-V7PJ1    | 900.00              | -                    | 1800.00              | 20                       | InGaN                  |

| <b>Blue</b>        |                     |                      |                      |                          |                        |
|--------------------|---------------------|----------------------|----------------------|--------------------------|------------------------|
| <b>Part Number</b> | <b>Min IV (mcd)</b> | <b>Typ. IV (mcd)</b> | <b>Max. IV (mcd)</b> | <b>Test Current (mA)</b> | <b>Dice Technology</b> |
| HSMN-A101-N00J1    | 28.50               | 50.00                | -                    | 20                       | InGaN                  |
| HSMN-A100-P00J1    | 45.00               | 70.00                | -                    | 20                       | InGaN                  |
| HSMN-A100-R4YJ1    | 112.50              | -                    | 285.00               | 20                       | InGaN                  |

Notes:

1. The luminous intensity IV<sub>v</sub> is measured at the mechanical axis of the lamp package. The actual peak of the spatial radiation pattern may not be aligned with this axis.
2. IV Tolerance = ±12%

## Part Numbering System

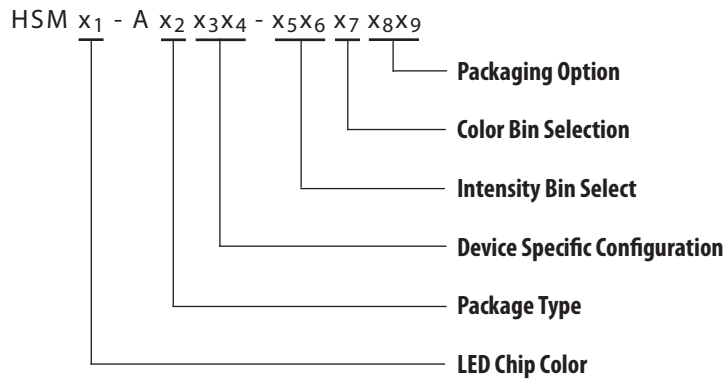

## Absolute Maximum Ratings (T<sub>A</sub> = 25°C)

| Parameters                          | HSM S/D/Y/G     | HSM H  | HSM C/J/L/A            | HSM E                | HSM Z/V/U              | HSM M/K/B/N |
|-------------------------------------|-----------------|--------|------------------------|----------------------|------------------------|-------------|
| DC Forward Current <sup>[1]</sup>   | 30 mA           | 30 mA  | 30 mA <sup>[3,4]</sup> | 20 mA <sup>[4]</sup> | 30 mA <sup>[3,4]</sup> | 30 mA       |
| Peak Forward Current <sup>[2]</sup> | 100 mA          | 100 mA | 100 mA                 | 100 mA               | 100 mA                 | 100 mA      |
| Power Dissipation                   | 63 mW           | 60 mW  | 63 mW                  | 48 mW                | 72 mW                  | 114 mW      |
| Reverse Voltage                     | 5 V             |        |                        |                      |                        |             |
| Junction Temperature                | 110°C           |        |                        |                      |                        |             |
| Operating Temperature               | -55°C to +100°C |        |                        |                      |                        |             |
| Storage Temperature                 | -55°C to +100°C |        |                        |                      |                        |             |

### Notes:

1. Derate linearly as shown in Figure 4.
2. Duty factor = 10%, Frequency = 1 kHz.
3. Drive current between 10 mA and 30 mA is recommended for best long term performance.
4. Operation at current below 5 mA is not recommended.

**Optical Characteristics (T<sub>A</sub> = 25°C)**

| Color         | Part Number | Dice Technology | Peak Wavelength<br>$\lambda_{PEAK}$ (nm)<br>Typ. | Dominant Wavelength <sup>[1]</sup><br>$\lambda_D$ (nm)<br>Typ. | Viewing Angle<br>$2\theta_{1/2}$ <sup>[2]</sup><br>(Degrees)<br>Typ. | Luminous Efficacy $\eta_V$ <sup>[3]</sup><br>(lm/W)<br>Typ. | Luminous Intensity/<br>Total Flux<br>$I_V(\text{mcd})/\Phi_V(\text{mlm})$<br>Typ. |
|---------------|-------------|-----------------|--------------------------------------------------|----------------------------------------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Red           | HSMS-A100   | GaP             | 635                                              | 626                                                            | 120                                                                  | 120                                                         | 0.45                                                                              |
|               | HSMH-A100   | AlGaAs          | 645                                              | 637                                                            | 120                                                                  | 63                                                          | 0.45                                                                              |
|               | HSMC-A10x   | AlInGaP         | 635                                              | 626                                                            | 120                                                                  | 150                                                         | 0.45                                                                              |
|               | HSMZ-A100   | AlInGaP         | 639                                              | 630                                                            | 120                                                                  | 155                                                         | 0.45                                                                              |
| Red Orange    | HSMJ-A10x   | AlInGaP         | 621                                              | 615                                                            | 120                                                                  | 240                                                         | 0.45                                                                              |
|               | HSMV-A100   | AlInGaP         | 623                                              | 617                                                            | 120                                                                  | 263                                                         | 0.45                                                                              |
| Orange        | HSMD-A100   | GaP             | 600                                              | 602                                                            | 120                                                                  | 380                                                         | 0.45                                                                              |
|               | HSML-A10x   | AlInGaP         | 609                                              | 605                                                            | 120                                                                  | 320                                                         | 0.45                                                                              |
| Amber         | HSMY-A100   | GaP             | 583                                              | 585                                                            | 120                                                                  | 520                                                         | 0.45                                                                              |
|               | HSMA-A10x   | AlInGaP         | 592                                              | 590                                                            | 120                                                                  | 480                                                         | 0.45                                                                              |
|               | HSMU-A100   | AlInGaP         | 594                                              | 592                                                            | 120                                                                  | 500                                                         | 0.45                                                                              |
| Yellow Green  | HSMG-A100   | GaP             | 565                                              | 569                                                            | 120                                                                  | 590                                                         | 0.45                                                                              |
|               | HSME-A100   | AlInGaP         | 575                                              | 570                                                            | 120                                                                  | 560                                                         | 0.45                                                                              |
| Emerald Green | HSMG-A100   | GaP             | 558                                              | 560                                                            | 120                                                                  | 650                                                         | 0.45                                                                              |
|               | HSME-A100   | AlInGaP         | 566                                              | 560                                                            | 120                                                                  | 610                                                         | 0.45                                                                              |
| Green         | HSMM-A10x   | InGaN           | 523                                              | 525                                                            | 120                                                                  | 500                                                         | 0.45                                                                              |
| Cyan          | HSMK-A10x   | InGaN           | 502                                              | 505                                                            | 120                                                                  | 300                                                         | 0.45                                                                              |
| Blue          | HSMB-A100   | GaN             | 428                                              | 462                                                            | 120                                                                  | 65                                                          | 0.45                                                                              |
|               | HSMN-A10x   | InGaN           | 468                                              | 470                                                            | 120                                                                  | 75                                                          | 0.45                                                                              |

**Notes:**

1. The dominant wavelength,  $\lambda_D$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.
2.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity.
3. Radiant intensity,  $I_e$  in watts/steradian, may be calculated from the equation  $I_e = I_V/\eta_V$ , where  $I_V$  is the luminous intensity in candelas and  $\eta_V$  is the luminous efficacy in lumens/watt.

**Electrical Characteristics (T<sub>A</sub> = 25°C)**

| Part Number  | Forward Voltage<br>V <sub>F</sub> (Volts) @ I <sub>F</sub> = 20 mA<br>Typ.                      Max. |      | Reverse Voltage<br>V <sub>R</sub> @ 100 $\mu$ A<br>Min. | Reverse Voltage<br>V <sub>R</sub> @ 10 $\mu$ A<br>Min. | Thermal Resistance<br>R $\theta_{JP}$ (°C/W) |
|--------------|------------------------------------------------------------------------------------------------------|------|---------------------------------------------------------|--------------------------------------------------------|----------------------------------------------|
| HSMS/D/Y/G   | 2.2                                                                                                  | 2.6  | 5                                                       | —                                                      | 180                                          |
| HSMH         | 1.9                                                                                                  | 2.6  | 5                                                       | —                                                      | 180                                          |
| HSMC/J/L/A/E | 1.9                                                                                                  | 2.4  | 5                                                       | —                                                      | 280                                          |
| HSMZ/V/U     | 2.2                                                                                                  | 2.6  | 5                                                       | —                                                      | 280                                          |
| HSMB         | 3.9                                                                                                  | 4.3  | —                                                       | 5                                                      | 280                                          |
| HSMM/K/N     | 3.4                                                                                                  | 4.05 | —                                                       | 5                                                      | 280                                          |

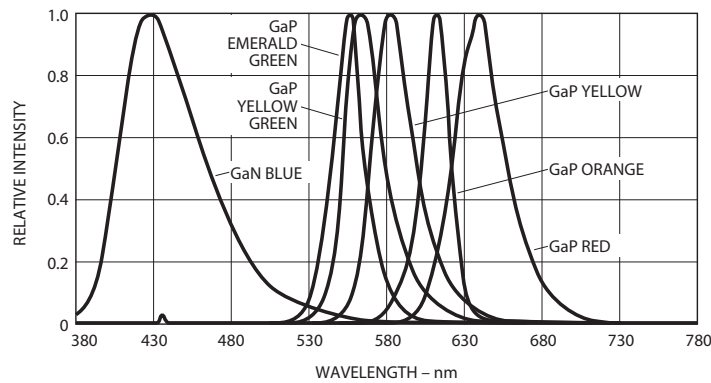
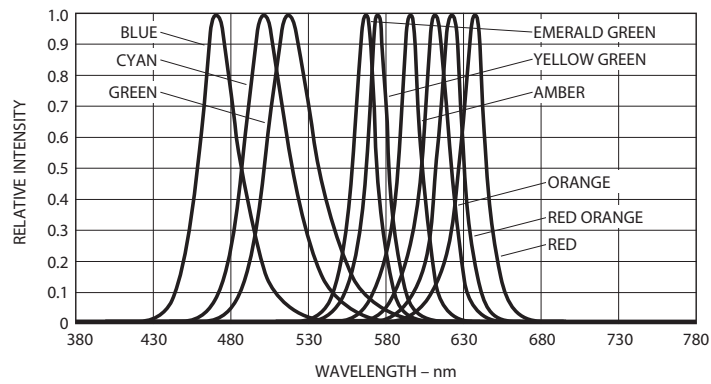


Figure 1. Relative intensity vs. wavelength.

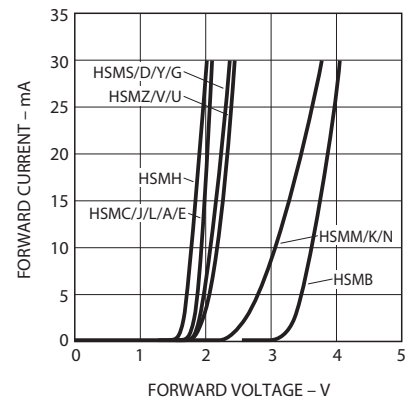


Figure 2. Forward current vs. forward voltage.

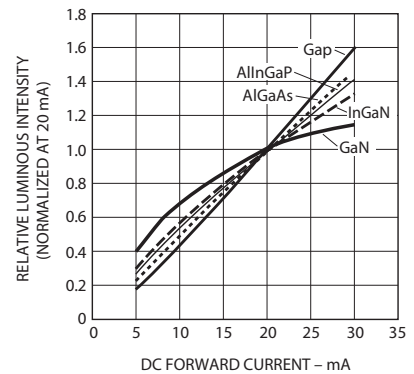


Figure 3. Relative intensity vs. forward current.

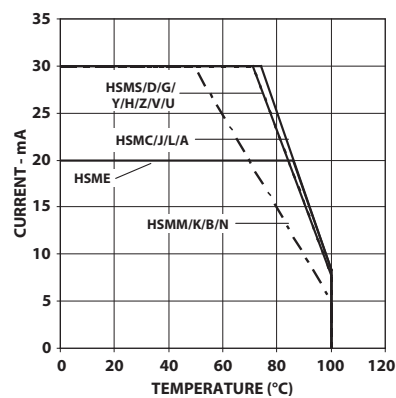


Figure 4. Maximum forward current vs. ambient temperature. Derated based on  $T_{JMAX} = 110^{\circ}C$ ,  $R\theta_{JA} = 500^{\circ}C/W$ .

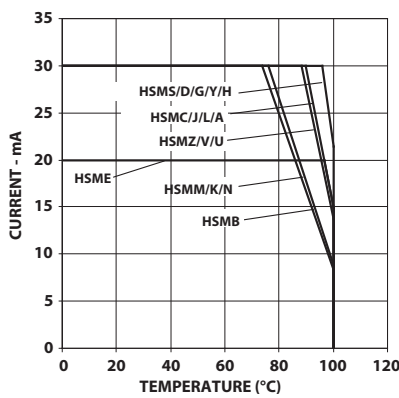


Figure 4b. Maximum Forward Current Vs. Solder Point Temperature. Derated based on  $T_{JMAX} = 110^{\circ}C$ ,  $R\theta_{JP} = 180^{\circ}C/W$  or  $280^{\circ}C/W$ .

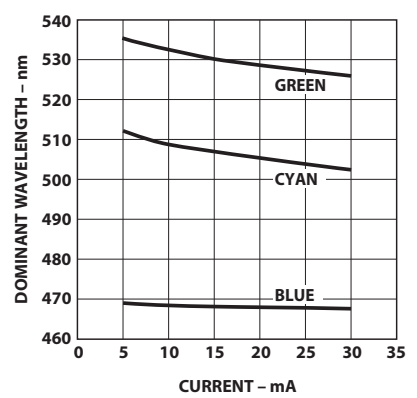


Figure 5. Dominant wavelength vs. forward current – InGaP devices.

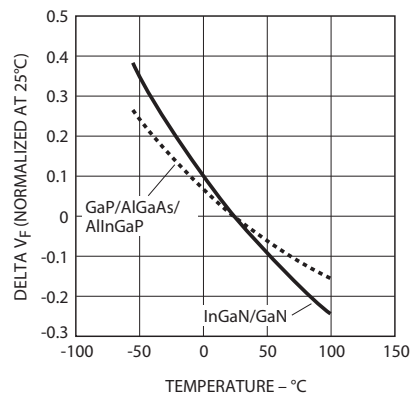


Figure 6. Forward voltage shift vs. temperature.

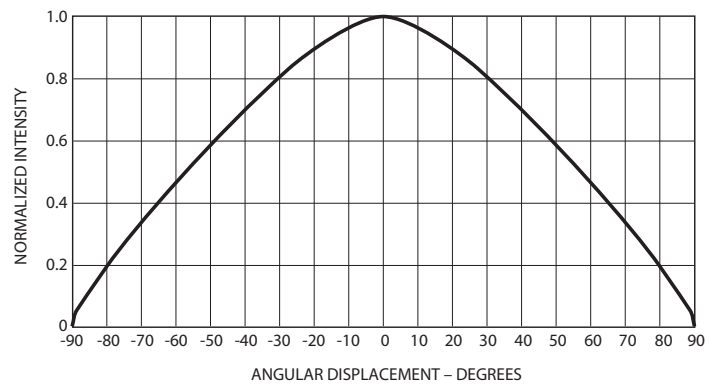


Figure 7. Radiation Pattern.


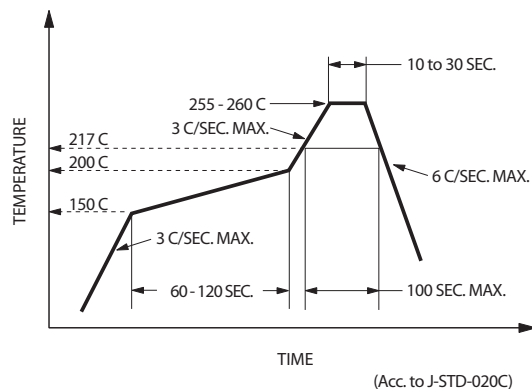




Figure 8. Recommended Pb-free reflow soldering profile.

Note: For detail information on reflow soldering of Avago surface mount LEDs, do refer to Avago Application Note AN 1060 Surface Mounting SMT LED Indicator Components.

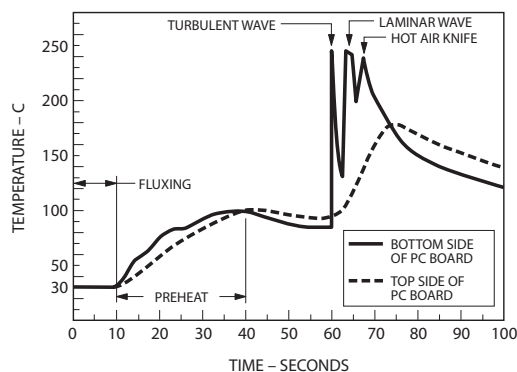

CONVEYOR SPEED = 1.83 M/MIN (6 FT/MIN)  
 PREHEAT SETTING = 150C (100C PCB)  
 SOLDER WAVE TEMPERATURE = 245C  
 AIR KNIFE AIR TEMPERATURE = 390C  
 AIR KNIFE DISTANCE = 1.91 mm (0.25 IN.)  
 AIR KNIFE ANGLE = 40  
 LEADED SOLDER: SN63; FLUX: RMA  
 LEAD-FREE SOLDER: 96.5 wt% SN, 3 wt% Ag, 0.5 wt% Cu  
 NOTE: ALLOW FOR BOARDS TO BE SUFFICIENTLY COOLED BEFORE EXERTING MECHANICAL FORCE.

Figure 9. Recommended wave soldering profile.

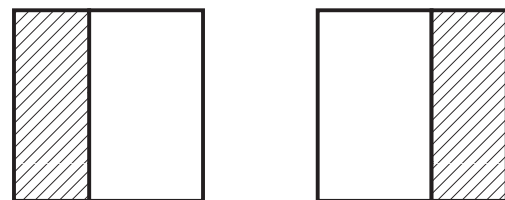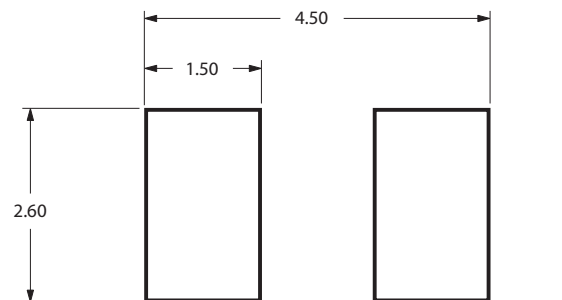

SOLDER RESIST

Figure 10. Recommended soldering pad pattern.

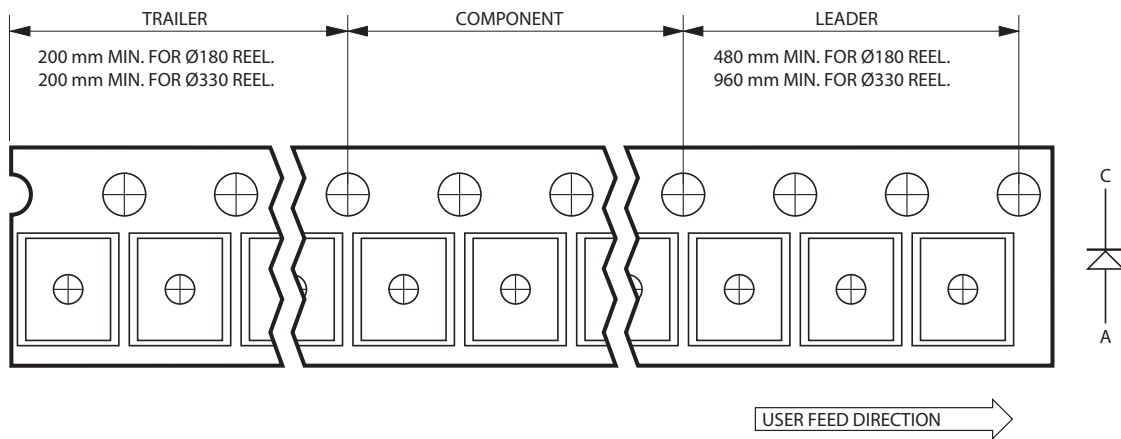


Figure 11. Tape leader and trailer dimensions.

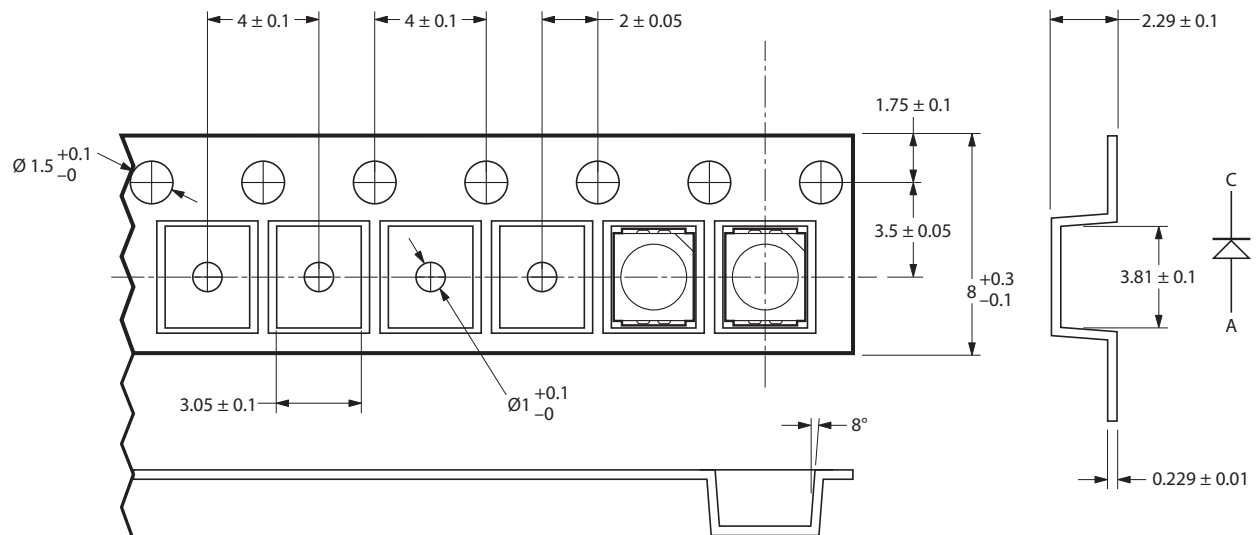
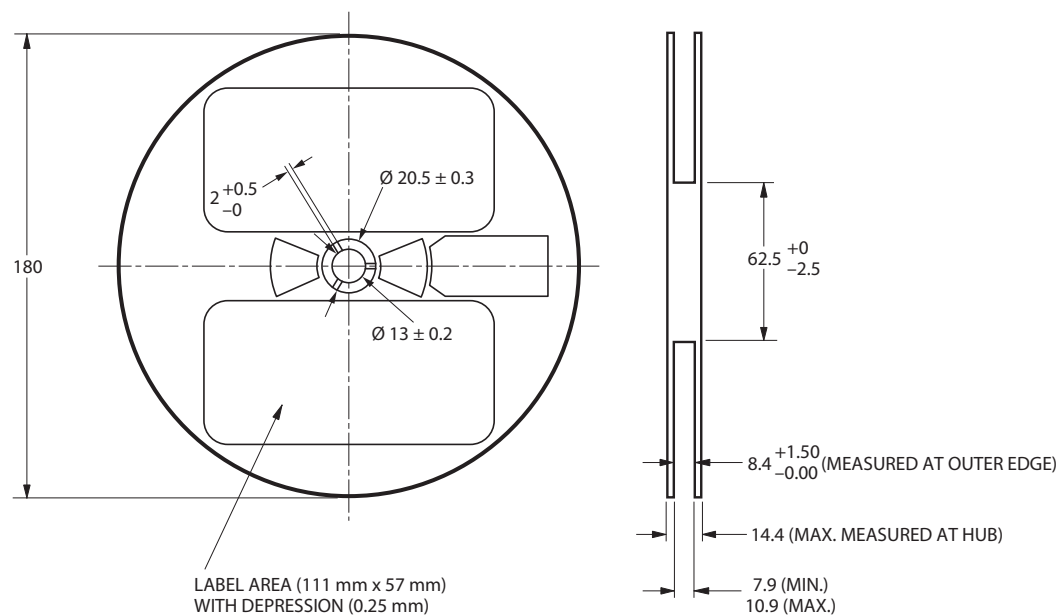
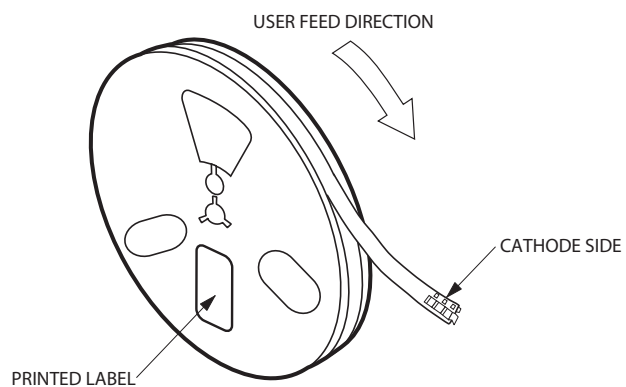


Figure 12. Tape dimensions.



**Figure 13. Reel dimensions.**



**Figure 14. Reeling orientation.**

**Intensity Bin Select ( $X_5X_6$ )**

Individual reel will contain parts from one half bin only.

| $X_5$ | Min $I_v$ Bin                    |
|-------|----------------------------------|
| $X_6$ |                                  |
| 0     | Full Distribution                |
| 2     | 2 half bins starting from $X_51$ |
| 3     | 3 half bins starting from $X_51$ |
| 4     | 4 half bins starting from $X_51$ |
| 5     | 5 half bins starting from $X_51$ |
| 6     | 2 half bins starting from $X_52$ |
| 7     | 3 half bins starting from $X_52$ |
| 8     | 4 half bins starting from $X_52$ |
| 9     | 5 half bins starting from $X_52$ |

**Intensity Bin Limits**

| Bin ID | Min. (mcd) | Max. (mcd) |
|--------|------------|------------|
| G1     | 1.80       | 2.24       |
| G2     | 2.24       | 2.80       |
| H1     | 2.80       | 3.55       |
| H2     | 3.55       | 4.50       |
| J1     | 4.50       | 5.60       |
| J2     | 5.60       | 7.20       |
| K1     | 7.20       | 9.00       |
| K2     | 9.00       | 11.20      |
| L1     | 11.20      | 14.00      |
| L2     | 14.00      | 18.00      |
| M1     | 18.00      | 22.40      |
| M2     | 22.40      | 28.50      |
| N1     | 28.50      | 35.50      |
| N2     | 35.50      | 45.00      |
| P1     | 45.00      | 56.00      |
| P2     | 56.00      | 71.50      |
| Q1     | 71.50      | 90.00      |
| Q2     | 90.00      | 112.50     |
| R1     | 112.50     | 140.00     |
| R2     | 140.00     | 180.00     |
| S1     | 180.00     | 224.00     |
| S2     | 224.00     | 285.00     |
| T1     | 285.00     | 355.00     |
| T2     | 355.00     | 450.00     |
| U1     | 450.00     | 560.00     |
| U2     | 560.00     | 715.00     |
| V1     | 715.00     | 900.00     |
| V2     | 900.00     | 1125.00    |
| W1     | 1125.00    | 1400.00    |
| W2     | 1400.00    | 1800.00    |
| X1     | 1800.00    | 2240.00    |
| X2     | 2240.00    | 2850.00    |

Tolerance of each bin limit =  $\pm 12\%$

**Color Bin Select (X<sub>7</sub>)**

Individual reel will contain parts from one full bin only.

**X<sub>7</sub>**

|   |                        |
|---|------------------------|
| 0 | Full Distribution      |
| Z | A and B only           |
| Y | B and C only           |
| W | C and D only           |
| V | D and E only           |
| U | E and F only           |
| T | F and G only           |
| S | G and H only           |
| Q | A, B, and C only       |
| P | B, C, and D only       |
| N | C, D, and E only       |
| M | D, E, and F only       |
| L | E, F, and G only       |
| K | F, G, and H only       |
| 1 | A, B, C, and D only    |
| 2 | E, F, G, and H only    |
| 3 | B, C, D, and E only    |
| 4 | C, D, E, and F only    |
| 5 | A, B, C, D, and E only |
| 6 | B, C, D, E, and F only |

**Color Bin Limits**

| Blue | Min. (nm) | Max. (nm) |
|------|-----------|-----------|
| A    | 460.0     | 465.0     |
| B    | 465.0     | 470.0     |
| C    | 470.0     | 475.0     |
| D    | 475.0     | 480.0     |

| Cyan | Min. (nm) | Max. (nm) |
|------|-----------|-----------|
| A    | 490.0     | 495.0     |
| B    | 495.0     | 500.0     |
| C    | 500.0     | 505.0     |
| D    | 505.0     | 510.0     |

| Green | Min. (nm) | Max. (nm) |
|-------|-----------|-----------|
| A     | 515.0     | 520.0     |
| B     | 520.0     | 525.0     |
| C     | 525.0     | 530.0     |
| D     | 530.0     | 535.0     |

**Emerald**

| Green | Min. (nm) | Max. (nm) |
|-------|-----------|-----------|
| A     | 552.5     | 555.5     |
| B     | 555.5     | 558.5     |
| C     | 558.5     | 561.5     |
| D     | 561.5     | 564.5     |

**Yellow**

| Green | Min. (nm) | Max. (nm) |
|-------|-----------|-----------|
| E     | 564.5     | 567.5     |
| F     | 567.5     | 570.5     |
| G     | 570.5     | 573.5     |
| H     | 573.5     | 576.5     |

**Color Bin Limits**

| Amber | Min. (nm) | Max. (nm) |
|-------|-----------|-----------|
| A     | 582.0     | 584.5     |
| B     | 584.5     | 587.0     |
| C     | 587.0     | 589.5     |
| D     | 589.5     | 592.0     |
| E     | 592.0     | 594.5     |
| F     | 594.5     | 597.0     |

| Orange | Min. (nm) | Max. (nm) |
|--------|-----------|-----------|
| A      | 597.0     | 600.0     |
| B      | 600.0     | 603.0     |
| C      | 603.0     | 606.0     |
| D      | 606.0     | 609.0     |
| E      | 609.0     | 612.0     |

| Red Orange | Min. (nm) | Max. (nm) |
|------------|-----------|-----------|
| A          | 611.0     | 616.0     |
| B          | 616.0     | 620.0     |

| Red               | Min. (nm) | Max. (nm) |
|-------------------|-----------|-----------|
| Full Distribution |           |           |

Tolerance of each bin limit =  $\pm 1$  nm.

**Packaging Option (X<sub>8</sub>X<sub>9</sub>)**

| Option | Test Current | Package Type  | Reel Size |
|--------|--------------|---------------|-----------|
| J1     | 20 mA        | Top Mount     | 7 inch    |
| J4     | 20 mA        | Top Mount     | 13 inch   |
| H1     | 20 mA        | Reverse Mount | 7 inch    |
| H4     | 20 mA        | Reverse Mount | 13 inch   |
| J2     | 10 mA        | Top Mount     | 7 inch    |
| J5     | 10 mA        | Top Mount     | 13 inch   |
| H2     | 10 mA        | Reverse Mount | 7 inch    |
| H5     | 10 mA        | Reverse Mount | 13 inch   |

**Moisture Sensitivity**

This product is qualified as Moisture Sensitive Level 2a per Jedec J-STD-020. Precautions when handling this moisture sensitive product is important to ensure the reliability of the product. Do refer to Avago Application Note AN5305 Handling of Moisture Sensitive Surface Mount Devices for details.

**A. Storage before use**

- Unopen moisture barrier bag (MBB) can be stored at <40°C/90%RH for 12 months. If the actual shelf life has exceeded 12 months and the HIC indicates that baking is not required, then it is safe to reflow the LEDs per the original MSL rating.
- It is not recommended to open the MBB prior to assembly (e.g. for IQC).

**B. Control after opening the MBB**

- The humidity indicator card (HIC) shall be read immediately upon opening of MBB.
- The LEDs must be kept at <30°C / 60%RH at all time and all high temperature related process including soldering, curing or rework need to be completed within 672 hours.

**C. Control for unfinished reel**

- For any unused LEDs, they need to be stored in sealed MBB with desiccant or desiccator at <5%RH.

**D. Control of assembled boards**

- If the PCB soldered with the LEDs is to be subjected to other high temperature processes, the PCB need to be stored in sealed MBB with desiccant or desiccator at <5%RH to ensure no LEDs have exceeded their floor life of 672 hours.

**E. Baking is required if:**

- "10%" is Not blue and "5%" HIC indicator turns pink.
- The LEDs are exposed to condition of >30°C / 60% RH at any time.
- The LEDs floor life exceeded 672 hours.

Recommended baking condition: 60±5°C for 20 hours.

For product information and a complete list of distributors, please go to our website: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.  
Data subject to change. Copyright © 2005-2012 Avago Technologies. All rights reserved. Obsoletes AV01-0040EN  
AV02-0198EN - October 3, 2012

**AVAGO**  
TECHNOLOGIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.