PICO512

Pico-ITX SBC with 7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, HDMI/LVDS and GbE LAN

Features

- 7th gen Intel® Core™ i7/i5/i3 & Celeron® processor
- 1 DDR4 SO-DIMM, up to 16GB
- PCI Express Mini Card slot with mSATA supported
- Intel® AMT 11 supported

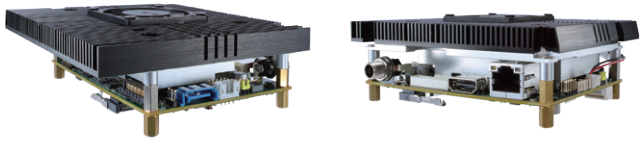

▲ Assembly view

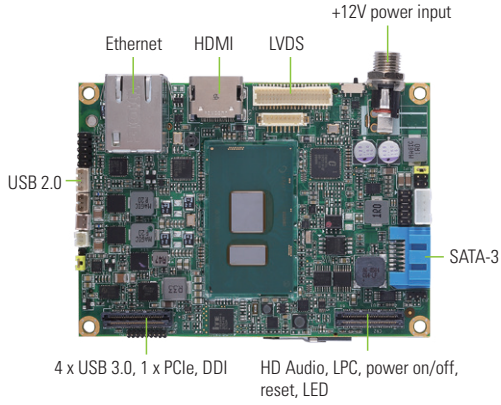

DDR4 | PCIe Mini | +12V | AiRD | Full Solid Cap Design

▲ Side view



▲ Rear view

Full-size PCI Express Mini Card slot with mSATA supported

Core System

CPU	7th gen Intel® i7/i5/i3 & Celeron® processor onboard
System Memory	1 x 260-pin DDR4-2133 SO-DIMM, up to 16GB
Chipset	N/A
BIOS	AMI
SSD	N/A
Watchdog Timer	65535 levels, 1 ~ 65535 sec.
Expansion Interface	1 x full-size PCI Express Mini Card slot with mSATA 1 x PCIe x1, 1 x LPC, 1 x DDI, 4 x USB 3.0, 1 x HD audio and 1 x SMBus (through expansion connector)
Battery Lithium	Lithium 3V/220mAH
Power Input	DC Jack +12V DC-in only AT Auto Power On function supported
Power Requirements	Intel® i7-7600U @ 2.8 GHz 16GB DDR4 max. RMS. +12V @ 2.5A Intel® i5-7300U @ 2.6 GHz 16GB DDR4 max. RMS. +12V @ 2.4A Intel® i3-7100U @ 2.4 GHz 16GB DDR4 max. RMS. +12V @ 2.2A Intel® Celeron®-3965U @ 2.2 GHz 16GB DDR4 max. RMS. +12V @ 1.7A
Size	100 x 72 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-4°F ~ +158°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	N/A
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	1 port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® i219LM
Audio	N/A
USB	1 x USB 2.0
SMBus/I²C	Yes, for advanced monitoring/control
Digital I/O	8 channels in/out programmable
TPM	ST ST33TPM12LPC with TPM 1.2 compliant

Display

Chipset	Intel® integrated Gfx graphic engine
Memory Size	Share system memory
Display Interface	1 x HDMI 1 x LVDS; 18/24-bit single/dual channel

Packing List

Standard
Quick installation guide, user's manual/utility CD and accessories

Accessories

Part Number	Description	Qty
59403208000E	SATA cable	1
594P8800600E	SATA power cable	1
59190400500E	Fan cable	1
594P8802810E	USB cable	1
5078H500000E	Heatspreader	1
5078H500100E	Cooler	1

Ordering Information

Standard	
PICO512HG-i7-7600U (P/N: E38H512100)	Pico-ITX SBC with Intel® Core™ i7-7600U processor (2.8 ~ 3.9 GHz, 4MB cache, 15W), HDMI/LVDS, 1 GbE LAN, 1 USB
PICO512HG-i5-7300U (P/N: E38H512101)	Pico-ITX SBC with Intel® Core™ i5-7300U processor (2.6 ~ 3.5 GHz, 3MB cache, 15W), HDMI/LVDS, 1 GbE LAN, 1 USB
PICO512HG-i3-7100U (P/N: E38H512102)	Pico-ITX SBC with Intel® Core™ i3-7100U processor (2.4 GHz, 3MB cache, 15W), HDMI/LVDS, 1 GbE LAN, 1 USB
PICO512HG-Celeron-3965U (P/N: E38H512103)	Pico-ITX SBC with Intel® Celeron® 3965U processor (2.2 GHz, 2MB cache, 15W), HDMI/LVDS, 1 GbE LAN, 1 USB

Optional

AX93A00 (P/N: E393A00100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x VGA, 1 x Audio
AX93A01 (P/N: E393A01100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x HDMI, 1 x GbE LAN
AX93A02 (P/N: E393A02100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x Audio
AX93A09 (P/N: E393A09100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 2.0, 1 x Audio

© 2018 Axiomtek Co., Ltd. All rights reserved.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.