

**SERIES:** VHB75W | **DESCRIPTION:** DC-DC CONVERTER

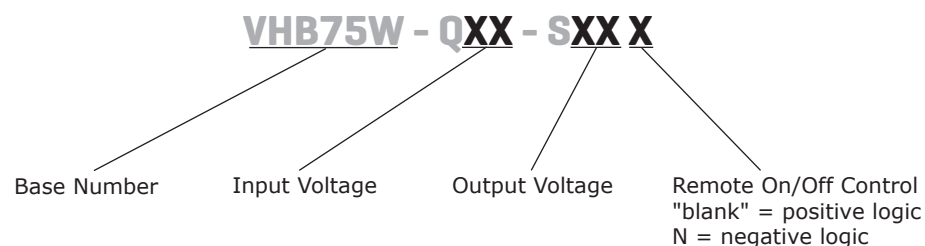
**FEATURES**

- up to 75 W isolated output
- industry standard half brick package
- 4:1 input range (9~36 V, 18~75 V)
- single output from 3.3~48 V
- 1,500 V isolation
- over current, over temperature, over voltage, and short circuit protections
- remote on/off
- efficiency up to 85%



| MODEL           | input<br>voltage<br>range<br>(Vdc) | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br>typ<br>(%) |
|-----------------|------------------------------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|--------------------------|
| VHB75W-Q24-S3R3 | 9 ~ 36                             | 3.3                        | 15                              | 50                            | 100                                                | 79                       |
| VHB75W-Q24-S5   | 9 ~ 36                             | 5                          | 15                              | 75                            | 100                                                | 82                       |
| VHB75W-Q24-S12  | 9 ~ 36                             | 12                         | 6.25                            | 75                            | 150                                                | 83                       |
| VHB75W-Q24-S15  | 9 ~ 36                             | 15                         | 5                               | 75                            | 150                                                | 84                       |
| VHB75W-Q24-S24  | 9 ~ 36                             | 24                         | 3.12                            | 75                            | 240                                                | 84                       |
| VHB75W-Q24-S48  | 9 ~ 36                             | 48                         | 1.56                            | 75                            | 480                                                | 82                       |
| VHB75W-Q48-S3R3 | 18 ~ 75                            | 3.3                        | 15                              | 50                            | 100                                                | 80                       |
| VHB75W-Q48-S5   | 18 ~ 75                            | 5                          | 15                              | 75                            | 100                                                | 83                       |
| VHB75W-Q48-S12  | 18 ~ 75                            | 12                         | 6.25                            | 75                            | 150                                                | 84                       |
| VHB75W-Q48-S15  | 18 ~ 75                            | 15                         | 5                               | 75                            | 150                                                | 85                       |
| VHB75W-Q48-S24  | 18 ~ 75                            | 24                         | 3.12                            | 75                            | 240                                                | 85                       |
| VHB75W-Q48-S48  | 18 ~ 75                            | 48                         | 1.56                            | 75                            | 480                                                | 84                       |

Notes: 1. ripple and noise are measured at 20 MHz BW with 10µF tantalum capacitor and 1µF ceramic capacitor across output

**PART NUMBER KEY**


## INPUT

| parameter                                 | conditions/description                                                                                              |            | min | typ | max | units |
|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------|------------|-----|-----|-----|-------|
| operating input voltage                   |                                                                                                                     |            | 9   | 24  | 36  | Vdc   |
|                                           |                                                                                                                     |            | 18  | 48  | 75  | Vdc   |
| under voltage lockout                     | power up                                                                                                            | 24 V input |     | 8.8 |     | Vdc   |
|                                           |                                                                                                                     | 48 V input |     | 17  |     | Vdc   |
|                                           | power down                                                                                                          | 24 V input |     | 8   |     | Vdc   |
|                                           |                                                                                                                     | 48 V input |     | 16  |     | Vdc   |
| positive logic remote on/off <sup>1</sup> |                                                                                                                     |            |     |     |     |       |
| filter                                    | PI type                                                                                                             |            |     |     |     |       |
| Notes:                                    | 1. logic compatibility, open collector ref to -input<br>Module ON, >3.5 Vdc or open circuit<br>Module OFF, <1.8 Vdc |            |     |     |     |       |

## OUTPUT

| parameter                  | conditions/description                                                                                                          |  | min | typ   | max  | units |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------|--|-----|-------|------|-------|
| line regulation            | measured from high line to low line                                                                                             |  |     |       | ±0.2 | %     |
| load regulation            | measured from full load to zero load                                                                                            |  |     |       | ±0.2 | %     |
| voltage accuracy           |                                                                                                                                 |  |     |       | ±1   | %     |
| transient response         | 25% step load change                                                                                                            |  |     |       | 500  | µs    |
| adjustability <sup>2</sup> |                                                                                                                                 |  |     | ±10   |      | %     |
| switching frequency        | 100% load, input voltage range                                                                                                  |  |     | 300   |      | kHz   |
| temperature coefficient    |                                                                                                                                 |  |     | ±0.03 |      | %/°C  |
| Notes:                     | 2. trim-up: connect a resistor between the trim pin and -Sense<br>trim-down: connect a resistor between the trim pin and +Sense |  |     |       |      |       |

## PROTECTIONS

| parameter                   | conditions/description   | min | typ | max | units |
|-----------------------------|--------------------------|-----|-----|-----|-------|
| over voltage protection     | %Vo                      | 115 |     | 140 | %     |
| short circuit protection    | continuous               |     |     |     |       |
| current limit               | % nominal output current | 110 |     | 160 | %     |
| thermal shutdown case temp. |                          |     | 100 |     | °C    |

## SAFETY AND COMPLIANCE

| parameter            | conditions/description | min   | typ | max | units |
|----------------------|------------------------|-------|-----|-----|-------|
| isolation voltage    | input to output        | 1,500 |     |     | Vdc   |
|                      | input to case          | 1,500 |     |     | Vdc   |
|                      | output to case         | 1,500 |     |     | Vdc   |
| isolation resistance |                        | 100   |     |     | MΩ    |
| safety approvals     | UL 60950-1             |       |     |     |       |
| RoHS compliant       | yes                    |       |     |     |       |

## ENVIRONMENTAL

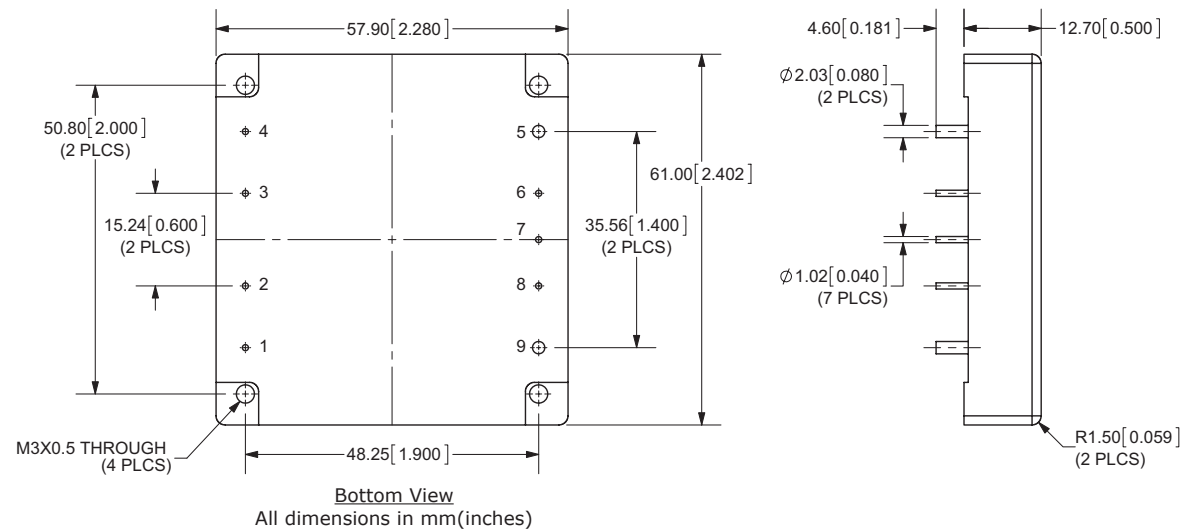
| parameter                  | conditions/description | min | typ | max | units |
|----------------------------|------------------------|-----|-----|-----|-------|
| case operating temperature |                        | -40 |     | 100 | °C    |
| storage temperature        |                        | -55 |     | 105 | °C    |
| humidity                   | non-condensing         |     |     | 95  | %     |

## MECHANICAL

| parameter     | conditions/description                      | min | typ | max | units |
|---------------|---------------------------------------------|-----|-----|-----|-------|
| dimensions    | 57.9 x 61.0 x 12.7 (2.28 x 2.40 x 0.5 inch) |     |     |     | mm    |
| case material | aluminum                                    |     |     |     |       |
| weight        |                                             |     | 94  |     | g     |

## MECHANICAL DRAWING

units: mm [inches]

tolerance:  $\pm 0.25$  [ $\pm 0.01$ ]

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | +Vin     |
| 2               | On/Off   |
| 3               | CASE     |
| 4               | -Vin     |
| 5               | -Vo      |
| 6               | -S       |
| 7               | TRIM     |
| 8               | +S       |
| 9               | +Vo      |

Note: All specifications measured at 25°C, nominal input voltage, and full load unless otherwise noted.

## REVISION HISTORY

| rev. | description                                                     | date       |
|------|-----------------------------------------------------------------|------------|
| 1.0  | initial release                                                 | 10/01/2008 |
| 1.01 | applied new spec template                                       | 09/28/2011 |
| 1.02 | add remote on/off control to the part number key                | 11/23/2011 |
| 1.03 | updated features                                                | 12/20/2011 |
| 1.04 | misc. updates and corrections                                   | 02/14/2012 |
| 1.05 | new template applied, updated trim note, updated pin references | 06/07/2012 |
| 1.06 | updated spec                                                    | 04/01/2013 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.