

# Features

## Regulated Converters

- 2:1 and 3:1 wide input voltage ranges
- 1kVDC, 2kVDC and 3kVDC isolation
- UL94V-0 package material
- Continuous short circuit protection
- Low ripple and noise
- CTRL On/Off
- Efficiency up to 83%

**RECOM**  
DC/DC Converter

## RS3-S(D)(Z)

**3 Watt**  
**SIP8**  
**Single and Dual**  
**Output**



**UL**  
E224736



UL60950-1 certified  
CAN/CSA C22.2 No. 60950-1-07 certified  
IEC/EN60950-1 certified  
IEC/EN60601-1 certified  
CB Report

## Description

Very high power density, 2:1 or 3:1 input voltage range and a wide operating temperature range -40°C to +71°C and extra features such as On/Off control are just some of the characteristics of this converter which is ideal for highly sophisticated industrial designs. The RS3 is available with 2kV or 3kV isolation options (1kVDC is standard).

## Selection Guide

| Part Number | nom. Input Voltage [VDC]    | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. [%] | max. Capacitive Load <sup>(1)</sup> [μF] |
|-------------|-----------------------------|----------------------|---------------------|---------------------|------------------------------------------|
| RS3-xx3.3S  | 4.5-9, 9-18<br>18-36, 36-72 | 3.3                  | 600                 | 73-75<br>77-78      | 4700                                     |
| RS3-xx05S   | 4.5-9, 9-18<br>18-36, 36-72 | 5                    | 600                 | 76-79<br>80-81      | 4700                                     |
| RS3-xx09S   | 4.5-9, 9-18<br>18-36, 36-72 | 9                    | 333                 | 77-80<br>81-82      | 3300                                     |
| RS3-xx12S   | 4.5-9, 9-18<br>18-36, 36-72 | 12                   | 250                 | 80-81<br>83         | 2200                                     |
| RS3-xx15S   | 4.5-9, 9-18<br>18-36, 36-72 | 15                   | 200                 | 80-81<br>83         | 2200                                     |
| RS3-xx3.3D  | 4.5-9, 9-18<br>18-36, 36-72 | ±3.3                 | ±300                | 73-75<br>75         | ±2200                                    |
| RS3-xx05D   | 4.5-9, 9-18<br>18-36, 36-72 | ±5                   | ±300                | 76-80<br>80-81      | ±2200                                    |
| RS3-xx09D   | 4.5-9, 9-18<br>18-36, 36-72 | ±9                   | ±167                | 77-81<br>81         | ±2200                                    |
| RS3-xx12D   | 4.5-9, 9-18<br>18-36, 36-72 | ±12                  | ±125                | 78-83<br>83         | ±1000                                    |
| RS3-xx15D   | 4.5-9, 9-18<br>18-36, 36-72 | ±15                  | ±100                | 79-83<br>83         | ±1000                                    |
| RS3-xx3.3SZ | 9-27<br>20-60               | 3.3                  | 600                 | 73<br>74            | 4700                                     |
| RS3-xx05SZ  | 9-27<br>20-60               | 5                    | 600                 | 76-79<br>78         | 4700                                     |
| RS3-xx09SZ  | 9-27<br>20-60               | 9                    | 333                 | 77<br>79            | 3300                                     |
| RS3-xx12SZ  | 9-27<br>20-60               | 12                   | 250                 | 80<br>80            | 2200                                     |
| RS3-xx15SZ  | 9-27<br>20-60               | 15                   | 200                 | 80<br>80            | 2200                                     |
| RS3-xx3.3DZ | 9-27<br>20-60               | ±3.3                 | ±300                | 73<br>74            | ±2200                                    |
| RS3-xx05DZ  | 9-27<br>20-60               | ±5                   | ±300                | 77<br>78            | ±2200                                    |
| RS3-xx09DZ  | 9-27<br>20-60               | ±9                   | ±167                | 79<br>79            | ±2200                                    |
| RS3-xx12DZ  | 9-27<br>20-60               | ±12                  | ±125                | 80<br>80            | ±1000                                    |
| RS3-xx15DZ  | 9-27<br>20-60               | ±15                  | ±100                | 80<br>80            | ±1000                                    |

### Notes:

Note1: Maximum capacitive load is defined as the capacitive load that will allow start up in under 1 second without damage on the converter

### Model Numbering



#### Notes:

Note2: add „Z“ for 3:1 Input Voltage (24= 9-27VDC or 48= 20-60VDC)

Note3: add suffix „H2“ for 2kVDC isolation or „H3“ for 3kVDC isolation, without suffix = standard 1kVDC isolation

#### Ordering Examples:

|              |          |         |        |                   |                 |
|--------------|----------|---------|--------|-------------------|-----------------|
| RS3-053.3S   | 4.5-9Vin | 3.3Vout | Single | 2:1 Input Voltage | 1kVDC Isolation |
| RS3-1212D/H2 | 9-18Vin  | ±12Vout | Dual   | 2:1 Input Voltage | 2kVDC Isolation |
| RS3-2415D/H3 | 9-27Vin  | ±15Vout | Dual   | 3:1 Input Voltage | 3kVDC Isolation |

### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)


#### BASIC CHARACTERISTICS

| Parameter                    | Condition             |                 | Min.                                                                                     | Typ.   | Max.    |
|------------------------------|-----------------------|-----------------|------------------------------------------------------------------------------------------|--------|---------|
| Input Voltage Range          | 2:1 Input             | 5VDC            | 4.5VDC                                                                                   |        | 9VDC    |
|                              |                       | nom. Vin= 12VDC | 9VDC                                                                                     |        | 18VDC   |
|                              | 3:1 Input             | 24VDC           | 18VDC                                                                                    |        | 36VDC   |
|                              |                       | 48VDC           | 36VDC                                                                                    |        | 72VDC   |
| Quiescent Current            | nom. Vin=             | 24VDC           | 9VDC                                                                                     |        | 27VDC   |
|                              |                       | 48VDC           | 20VDC                                                                                    |        | 60VDC   |
| Quiescent Current            | nom. Vin=             | 5VDC            |                                                                                          | 35mA   |         |
|                              |                       | 12VDC           |                                                                                          | 25mA   |         |
|                              | nom. Vin=             | 24VDC           |                                                                                          | 20mA   |         |
|                              |                       | 48VDC           |                                                                                          | 10mA   |         |
| Minimum Load <sup>(4)</sup>  |                       |                 | 10%                                                                                      |        |         |
| ON/OFF CTRL                  | DC-DC ON<br>DC-DC OFF |                 | open or high impedance<br>external V <sub>CTRL</sub> = 5-12VDC + 1N4148 and 68Ω resistor |        |         |
| Internal Operating Frequency | 20% to 100% full load |                 |                                                                                          | 200kHz |         |
| Output Ripple and Noise      | 20MHz BW              |                 |                                                                                          |        | 50mVp-p |

#### Notes:

Note4: Operation below 10% load won't harm the converter, but specifications may not be met


#### Efficiency vs. Load

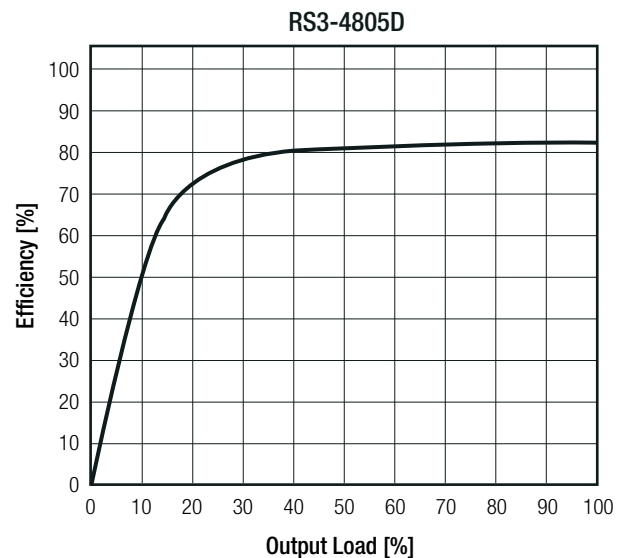

continued on next page


**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom.  $V_{in}$ , full load and after warm-up unless otherwise stated)

### ON/OFF CTRL

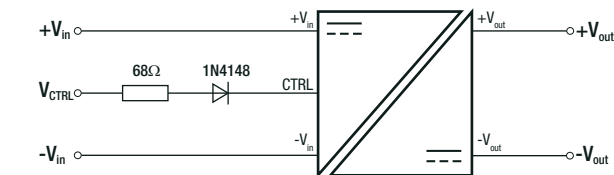

**DC-DC ON:** Open or high impedance

**DC-DC OFF:**  $V_{CTRL} = 5-12\text{VDC} + 1\text{N4148}$  and  $68\Omega$  resistor

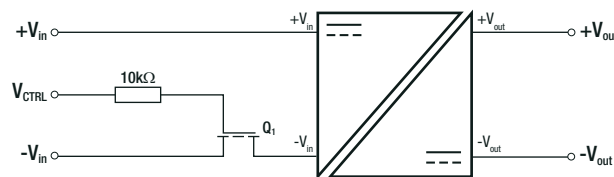

### REGULATIONS

| Parameter       | Condition                        | Value            |
|-----------------|----------------------------------|------------------|
| Output Accuracy |                                  | $\pm 2.0\%$ typ. |
| Line Regulation | low line to high line, full load | $\pm 0.5\%$ max. |
| Load Regulation | 20% to 100% load                 | 0.5% typ.        |

### PROTECTIONS

| Parameter                        | Type                                                   | Value                                                              |
|----------------------------------|--------------------------------------------------------|--------------------------------------------------------------------|
| Short Circuit Protection (SCP)   | below $100\text{m}\Omega$                              | continuous, auto recovery                                          |
| Isolation Voltage <sup>(5)</sup> | standard without suffix                                | tested for 1 second<br>rated for 1 minute<br>1kVDC<br>500VAC/60Hz  |
|                                  | /H2 version                                            | tested for 1 second<br>rated for 1 minute<br>2kVDC<br>1kVAC/60Hz   |
|                                  | /H3 version                                            | tested for 1 second<br>rated for 1 minute<br>3kVDC<br>1.5kVAC/60Hz |
| Isolation Resistance             |                                                        | $1\text{G}\Omega$ min.                                             |
| Isolation Capacitance            | standard version without suffix<br>/H2 and /H3 version | 200pF max.<br>30pF max.                                            |
| Insulation Grade                 |                                                        | functional (CB-IEC/EN60601-1)<br>basic (CB-IEC/EN60950-1)          |

### Protection Circuit



#### Notes:

Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note6: To protect the converter under all fault conditions, an input fuse is required. Quick-fuses should be rated at 2x-3x the nominal input current, time -delay fuses at 1.5x the nominal input current

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

### ENVIRONMENTAL

| Parameter                   | Condition                                   |       | Value                        |
|-----------------------------|---------------------------------------------|-------|------------------------------|
| Operating Temperature Range | full load @ free air convection (see graph) |       | -40°C to +71°C               |
| Operating Altitude          |                                             |       | 5000m                        |
| Operating Humidity          | non-condensing                              |       | 95% RH max.                  |
| Pollution Degree            |                                             |       | PD2                          |
| MTBF                        | according to MIL-HDBK-217F, G.B.            | +25°C | 3303 x 10 <sup>3</sup> hours |
|                             |                                             | +71°C | 745 x 10 <sup>3</sup> hours  |

### Derating Graph

(@ Chamber and free air convection)



### SAFETY AND CERTIFICATIONS


| Certificate Type (Safety)                                                             | Report / File Number | Standard                                                                                |
|---------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------|
| Information Technology Equipment, General Requirements for Safety (LVD)               | SPCLVD1605077-10     | IEC60950-1, 2nd Edition, AM2: 2013<br>EN60950-1, 2nd Edition, A2:2013                   |
| Information Technology Equipment, General Requirements for Safety (CB)                | L0339L49-CB-1-B1     | IEC60950-1:2005, 2nd Edition + A2:2013                                                  |
| Information Technology Equipment, General Requirements for Safety                     | E224736-A33-UL       | UL60950-1, 2nd Edition, 2014<br>CAN/CSA C22.2 No. 60950-1-07                            |
| Medical Electric Equipment, General Requirements for Safety and Essential Performance | WD-SE-R-180675-A0    | IEC60601-1:2005 + C2:2007 + A1:2012, 3rd Edition<br>EN60601-1:2006 + A1:2013 + A12:2014 |
| EAC                                                                                   | RU-AT.AB49.B.09571   | TP TC 004/2011                                                                          |
| RoHS2                                                                                 |                      | RoHS 2011/65/EU + AM2015/863                                                            |

| EMC Compliance                                                                               | Condition                                             | Standard / Criterion                 |
|----------------------------------------------------------------------------------------------|-------------------------------------------------------|--------------------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements <sup>(7)</sup> | with external filter<br>(see filter suggestion below) | EN55032, Class A<br>EN55032, Class B |

continued on next page

### Specifications (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

#### EMC Filtering Suggestions according to EN55032

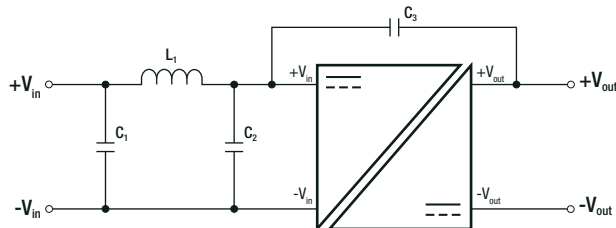

#### Notes:

Note8: Filter suggestions are valid for indicated part numbers only.  
For other part numbers, please contact RECOM tech support for advice.

#### Component List Class A

| MODEL      | C1   | C2, C3 | L1                                  |
|------------|------|--------|-------------------------------------|
| RS3-0505S  | 10µF | N/A    | <a href="#">3.9µH choke RLS-397</a> |
| RS3-0512S  |      |        |                                     |
| RS3-243.3S |      |        |                                     |
| RS3-4805S  |      |        |                                     |



#### Component List Class B

| MODEL      | C1   | C2   | C3    | L1                                  |
|------------|------|------|-------|-------------------------------------|
| RS3-0505S  | 10μF | N/A  | N/A   | <a href="#">5.6μH choke RLS-567</a> |
| RS3-0512S  |      |      |       |                                     |
| RS3-243.3S |      | 10μF | 330pF |                                     |
| RS3-4805S  |      |      |       |                                     |


### DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter         | Type                   | Value                                                                         |
|-------------------|------------------------|-------------------------------------------------------------------------------|
| Material          | case<br>potting<br>PCB | non-conductive black plastic, (UL94V-0)<br>epoxy, (UL94V-0)<br>FR4, (UL94V-0) |
| Dimension (LxWxH) |                        | 21.8 x 9.2 x 11.1mm                                                           |
| Weight            |                        | 4.7g typ.                                                                     |

#### Dimension Drawing (mm)

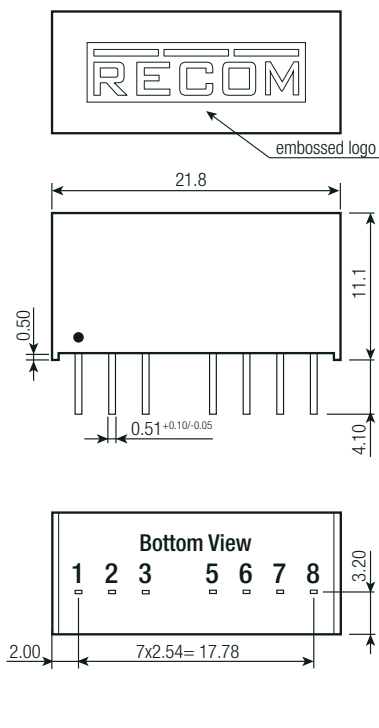

#### Recommended Footprint Details

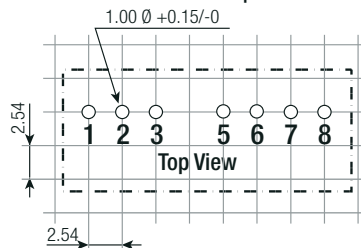

#### Pinning information

| Pin # | Single              | Dual                |
|-------|---------------------|---------------------|
| 1     | -Vin                | -Vin                |
| 2     | +Vin                | +Vin                |
| 3     | CTRL <sup>(8)</sup> | CTRL <sup>(8)</sup> |
| 5     | NC                  | NC                  |
| 6     | +Vout               | +Vout               |
| 7     | -Vout               | Com                 |
| 8     | NC <sup>(9)</sup>   | -Vout               |

NC= No Connection

Tolerances: xx.x ±0.5mm

xx.xx ±0.25mm

#### Notes:

Note8: This pin provides an Off function which puts the converter into a low power mode. When the pin is 'high' the converter is OFF and when the pin is open the converter is ON. There is no allowed low state for this pin. (refer to „ON/OFF CTRL“ on page 3)

Note9: This pin is used internally. No external connection allowed

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load and after warm-up unless otherwise stated)

**PACKAGING INFORMATION**

| Parameter                   | Type           | Value                 |
|-----------------------------|----------------|-----------------------|
| Packaging Dimension (LxWxH) | tube           | 520.0 x 17.0 x 10.0mm |
| Packaging Quantity          | tube           | 22pcs                 |
| Storage Temperature Range   |                | -55°C to +125°C       |
| Storage Humidity            | non-condensing | 95% RH max.           |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.