

## New! Fluke 233 Remote Display Multimeter

### Technical Data



The **NEW** Fluke 233 True-rms Remote Display Digital Multimeter allows you to be in two places at once.

- Removable display gives the user ultimate flexibility in unusual measurement scenarios
- Place the display where you can see it and then put the meter where it is convenient for you—no more juggling of leads and the meter while stretching into a tight spot
- Removes the dilemma of trying to take measurements in hard-to-reach places, or making measurements in machines or panels that are physically separated from a limit or isolator switch
- Can be used in areas where the operator can't be close to the active measurement point, like clean rooms or hazardous areas



- True-rms ac voltage and current for accurate measurements on non-linear signals
- Measure up to 1000 V ac and dc
- Measure up to 10 A (20 A for 30 seconds)
- 10,000  $\mu$ F capacitance range
- Frequency to 50 kHz
- Built in thermometer conveniently allows you to take temperature readings without having to carry a separate instrument
- Resistance, continuity and diode test

#### Features

- Low power wireless technology allows the display to be carried up to 10 meters (33 ft) away from the point of measurement for added flexibility. No interference with measurements

- The removable magnetic display can be conveniently mounted where it is easily seen
- Make measurements without holding the meter to improve visual focus on probes and augment safe electrical measurements
- Use as a conventional multimeter when the display is connected
- Radio transmitter automatically turns off when the display is connected to the meter
- Auto power off maximizes battery life
- Min/Max and Average recording to capture variations automatically
- Test continuity and diodes
- Easy to read display with large digits and bright backlight
- Battery life approximately 400 hours



## Accuracy specifications

DC voltage	Max. resolution	0.1 mV to 1000 V
	Accuracy	0.25 % + 2
AC voltage	Max. resolution	0.1 mV to 1000 V
	Accuracy	1.0 % + 3
DC current	Max. resolution	0.1 mA to 10 A
	Accuracy	1.0 % + 3
AC current	Max. resolution	0.1 mA to 10 A
	Accuracy	1.5 % + 3
Resistance	Max. resolution	0.1 Ω to 40 MΩ
Counts		6000
Capacitance		1000 nF to 9999 μF
Frequency		0.1 Hz to 50.00 kHz
Temperature		-40 °C to +400 °C
Power		AA batteries: Three for main body; two for display
Battery life		400 hours
Wireless frequency		2.4 GHz ISM Band 10 meter range
Safety rating		CAT IV 600 V , CAT III 1000 V

## General specifications

Basic features	
AC true-rms	Yes
Ranging	Auto/Manual
Display	
Backlight	Yes
Data storage	
Min/Max/Avg	Yes
Other features	
Battery type	AA alkaline
Removable display	Yes
Warranty and protection	
Safety rating	CAT IV 600 V/CAT III 1000 V
External protection	Rubber overmold
Warranty	Three-years
Size (H x W x L)	5.3 cm x 5.3 cm x 19.3 cm (2.08 in x 2.08 in x 7.6 in)
Weight	604 g (1.3 lb)

## Ordering information:

233 Remote Display Multimeter

**Includes:** Test leads, alligator clips, 80BK-A temperature probe, manual, CD-ROM, and AA batteries

### Optional accessories

TPak Magnetic Hanging Kit  
 i410 AC/DC Current Clamp  
 80PK-9 General Purpose Probe (Type K)  
 80AK-A Thermocouple Adapter  
 C35 Soft Carry Case



**Fluke.** Keeping your world up and running.®


**Fluke Corporation**  
 PO Box 9090, Everett, WA 98206 U.S.A.

**Fluke Europe B.V.**  
 PO Box 1186, 5602 BD Eindhoven, The Netherlands

**For more information call:**  
 In the U.S.A. (800) 443-5853 or Fax (425) 446-5116  
 In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222  
 In Canada (800)-36-FLUKE or Fax (905) 890-6866  
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116  
 Web access: <http://www.fluke.com>

©2009 Fluke Corporation.  
 Specifications subject to change without notice.  
 Printed in U.S.A. 8/2009 3476728A D-EN-N

**Modification of this document is not permitted without written permission from Fluke Corporation.**

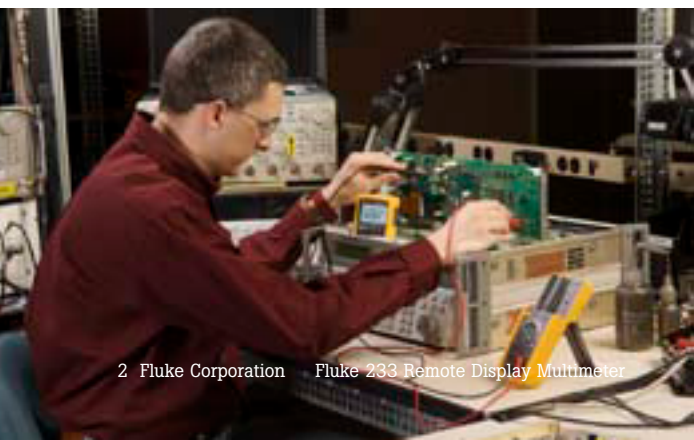



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.