

### Features

- ◆ Very compact power modules with screw terminal connection
- ◆ Active PFC, power factor >0.95 (230VAC), >0.99 (115 VAC)
- ◆ High efficiency up to 93% typ.
- ◆ Remote On/Off input
- ◆ Adjustable output voltage  $\pm 5\%$
- ◆ LED output indicator
- ◆ Universal input 100-240 VAC nominal
- ◆ Low leakage current
- ◆ EMI meets EN 55032, class B
- ◆ Protection class II prepared



The TML 100C series modules are very compact 85–100 Watt power supplies in a fully encapsulated plastic case. Active power factor correction and high efficiency across full load range qualify these modules for installation in energy related products. They feature screw terminals for easy installation. The TML 100C series is accompanied by an international safety approval package for worldwide markets.

### Models

| Order code   | Output power max. | Output voltage | Output current max. | Efficiency |
|--------------|-------------------|----------------|---------------------|------------|
| TML 100-112C | 85                | 12 VDC         | 7080 mA             | 90 %       |
| TML 100-115C | 85                | 15 VDC         | 5660 mA             | 90 %       |
| TML 100-124C | 100               | 24 VDC         | 4200 mA             | 92 %       |
| TML 100-148C | 100               | 48 VDC         | 2100 mA             | 93 %       |

### Full TML and TMLM Series Model Range

| Series  | Description   | Datasheet  |
|---------|---|--|
| TMLM 04 | 4 Watt, PCB mount, single and dual output models                    | <a href="http://www.tracopower.com/products/tmlm.pdf">www.tracopower.com/products/tmlm.pdf</a> |
| TMLM 05 | 5 Watt, PCB mount, single output models                             |  |
| TMLM 10 | 10 Watt, PCB mount, single output models                            |  |
| TMLM 20 | 20 Watt, PCB mount, single output models (compact design)           |  |
| TML 20  | 20 Watt, PCB & chassis mount, single, dual and triple output models | <a href="http://www.tracopower.com/products/tml.pdf">www.tracopower.com/products/tml.pdf</a>   |
| TML 40  | 40 Watt, PCB & chassis mount, single, dual and triple output models |  |

### Input Specifications

|  |  |  |
|--|--|--|
| Input voltage ranges   | <ul style="list-style-type: none"> <li>- nominal</li> <li>- AC full range</li> <li>- DC Input</li> </ul> | 100 – 240 VAC (universal input)<br>90 – 264 VAC<br>120 – 370 VDC |
| Input frequency  |  | 47 – 63 Hz   |
| Input current at full load (115 VAC / 230 VAC nominal input) |  | < 2.0 A / < 1.0 A max.   |
| Leakage current  |  | 0.5 mA max.  |
| Harmonic limits  | <ul style="list-style-type: none"> <li>- Power factor</li> </ul>   | EN 61000-3-2, Class A<br>>0.99 at 115 VAC, >0.95 at 230 VAC      |

### Output Specifications

|                                     |  |  |
|-------------------------------------|--|--|
| Voltage set accuracy                |  | ±2 %   |
| Output voltage adjustment range     |  | ±5% (see page 3)   |
| Minimum load                        |  | 3% of rated max current (operation at lower load condition is safe but a higher output ripple will be experienced) |
| Ripple and noise (20 MHz bandwidth) | <ul style="list-style-type: none"> <li>12 VDC model:</li> <li>15 VDC model:</li> <li>24 VDC model:</li> <li>48 VDC model:</li> </ul> | 120 mV max.<br>150 mV max.<br>200 mV max.<br>240 mV max.   |
| Regulation                          | <ul style="list-style-type: none"> <li>- input variation</li> <li>- load variation</li> </ul>  | ±1%<br>±1%   |
| Current limitation                  |  | 105% – 180% of rated output power.<br>(automatic recovery)   |
| Overvoltage protection              |  | by Zener diode   |
| Short circuit protection            |  | indefinite (hiccup, automatic recovery)  |
| Hold-up time                        |  | 10 ms min. (110VAC)  |
| Max. capacitive load                | <ul style="list-style-type: none"> <li>12 VDC model:</li> <li>15 VDC model:</li> <li>24 VDC model:</li> <li>48 VDC model:</li> </ul> | 50'000 µF<br>40'000 µF<br>6'000 µF<br>560 µF   |

### General Specifications

|   |   |   |
|---|---|---|
| Temperature ranges  | <ul style="list-style-type: none"> <li>- Operating</li> <li>- Power derating above +50°C</li> <li>- Case max.</li> <li>- Storage (non operating)</li> </ul> | -25°C to +70°C<br>3.75 %/K<br>+95°C<br>-25°C to +85°C   |
| Temperature coefficient   |   | 0.03 %/K  |
| Efficiency  |   | see model table   |
| Remote On/Off control   |   | On: open or connection to -Vout<br>Off: external +5VDC  |
| Humidity (non condensing)   |   | 95 % rel max.   |
| Switching frequency (pulse width modulation PWM)                      |   | 100–133 kHz   |
| Isolation voltage   | <ul style="list-style-type: none"> <li>- Input/Output</li> </ul>  | 3'000 VAC   |
| Reliability /calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign) |   | >250'000 h  |
| Environmental compliance  | <ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> </ul>   | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a><br>RoHS directive 2011/65/EU |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**General Specifications**


|  |   |
|--|---|
| Electromagnetic compatibility (EMC), Emissions | EN 61000-3-2:2006+A1:2009+A2:2009<br>EN 61000-3-3:2008<br>EN 55032, class B   |
| Electromagnetic compatibility (EMC), Immunity  | EN 55024 : 2010<br>EN 61000-4-2 ±2 kV / ±4 kV, criteria A<br>EN 61000-4-3 3 V/m, criteria A<br>EN 61000-4-4 ±1 kV, criteria A<br>EN 61000-4-5, ±1 kV, criteria A<br>EN 61000-4-5 ±2 kV, criteria A<br>EN 61000-4-6 3 V, criteria A<br>EN 61000-4-8 1 A/m, criteria A<br>EN 61000-4-11 30 % 500 ms, criteria A<br>95 % 10 ms, criteria A<br>95 % 2500 ms, criteria C |
| Protection class                               | class I and class II prepared   |
| Safety standards                               | IEC 60950-1 2nd ed +Am1<br>EN 60950-1:2006/A11:2009/A1:2010/A12:2011<br>UL 60950-1 2nd ed +Am1  |
| Safety approvals                               | CB certificate for IEC/EN 60950-1<br><a href="http://www.ul.com">www.ul.com</a> File e188913<br><a href="http://www.tracopower.com/overview/tml100c">www.tracopower.com/overview/tml100c</a>  |
| Casing material                                | plastic resin + fiberglass (UL 94V-0 rated)   |

**Output voltage adjustment (Trim resistor [KOhm])**

Trim up: Resistor from Trim to -Vout (conection 7-6)  
Trim down: Resistor from Trim to +Vout (conection 7-5)

|                |        |        |        |        |
|----------------|--------|--------|--------|--------|
| output voltage | 12 VDC | 15 VDC | 24 VDC | 48 VDC |
| +5%            | 85     | 95     | 90     | 85     |
| nominal        | open   | open   | open   | open   |
| -5%            | 220    | 300    | 600    | 1500   |

**Outline Dimensions**

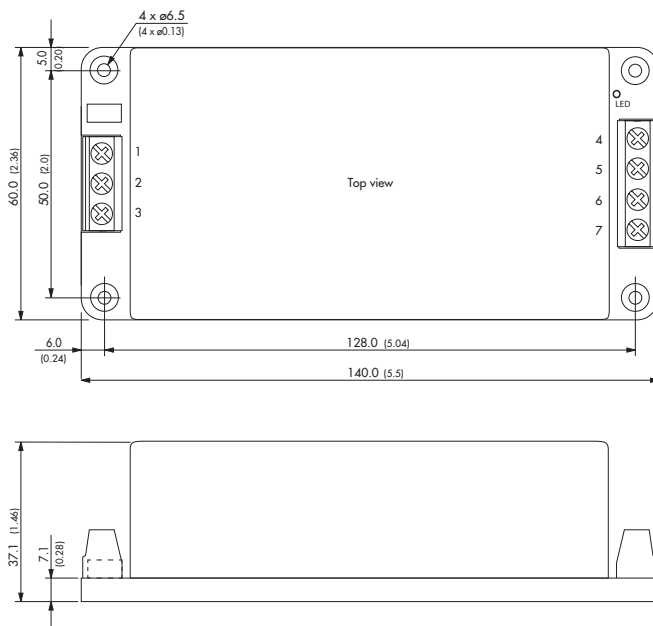

| Connection |               |
|------------|---------------|
| con.       | Output        |
| 1          | AC in (L)     |
| 2          | AC in (N)     |
| 3          | FG            |
| 4          | Remote On/Off |
| 5          | +Vout         |
| 6          | -Vout         |
| 7          | Trim          |

**Weight : 440 g (15.5 oz)**

Dimensions in[mm], ( ) = Inches  
Tolerances = 0.5mm (0.02)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.