

### Features

- ◆ Very compact power modules with screw terminal connection
- ◆ Active PFC, power factor >0.95 (230VAC), >0.99 (115 VAC)
- ◆ High efficiency up to 93% typ.
- ◆ Remote On/Off input
- ◆ Adjustable output voltage  $\pm 5\%$
- ◆ LED output indicator
- ◆ Universal input 100-240 VAC nominal
- ◆ Low leakage current
- ◆ EMI meets EN 55032, class B
- ◆ Protection class II prepared



The TML 100C series modules are very compact 85–100 Watt power supplies in a fully encapsulated plastic case. Active power factor correction and high efficiency across full load range qualify these modules for installation in energy related products. They feature screw terminals for easy installation. The TML 100C series is accompanied by an international safety approval package for worldwide markets.

### Models

Order code	Output power max.	Output voltage	Output current max.	Efficiency
TML 100-112C	85	12 VDC	7080 mA	90 %
TML 100-115C	85	15 VDC	5660 mA	90 %
TML 100-124C	100	24 VDC	4200 mA	92 %
TML 100-148C	100	48 VDC	2100 mA	93 %

### Full TML and TMLM Series Model Range

Series	Description	Datasheet
TMLM 04	4 Watt, PCB mount, single and dual output models	<a href="http://www.tracopower.com/products/tmlm.pdf">www.tracopower.com/products/tmlm.pdf</a>
TMLM 05	5 Watt, PCB mount, single output models	
TMLM 10	10 Watt, PCB mount, single output models	
TMLM 20	20 Watt, PCB mount, single output models (compact design)	
TML 20	20 Watt, PCB & chassis mount, single, dual and triple output models	<a href="http://www.tracopower.com/products/tml.pdf">www.tracopower.com/products/tml.pdf</a>
TML 40	40 Watt, PCB & chassis mount, single, dual and triple output models	

### Input Specifications

Input voltage ranges	<ul style="list-style-type: none"> <li>- nominal</li> <li>- AC full range</li> <li>- DC Input</li> </ul>	100 – 240 VAC (universal input) 90 – 264 VAC 120 – 370 VDC
Input frequency		47 – 63 Hz
Input current at full load (115 VAC / 230 VAC nominal input)		< 2.0 A / < 1.0 A max.
Leakage current		0.5 mA max.
Harmonic limits	<ul style="list-style-type: none"> <li>- Power factor</li> </ul>	EN 61000-3-2, Class A >0.99 at 115 VAC, >0.95 at 230 VAC

### Output Specifications

Voltage set accuracy		±2 %
Output voltage adjustment range		±5% (see page 3)
Minimum load		3% of rated max current (operation at lower load condition is safe but a higher output ripple will be experienced)
Ripple and noise (20 MHz bandwidth)	<ul style="list-style-type: none"> <li>12 VDC model:</li> <li>15 VDC model:</li> <li>24 VDC model:</li> <li>48 VDC model:</li> </ul>	120 mV max. 150 mV max. 200 mV max. 240 mV max.
Regulation	<ul style="list-style-type: none"> <li>- input variation</li> <li>- load variation</li> </ul>	±1% ±1%
Current limitation		105% – 180% of rated output power. (automatic recovery)
Overvoltage protection		by Zener diode
Short circuit protection		indefinite (hiccup, automatic recovery)
Hold-up time		10 ms min. (110VAC)
Max. capacitive load	<ul style="list-style-type: none"> <li>12 VDC model:</li> <li>15 VDC model:</li> <li>24 VDC model:</li> <li>48 VDC model:</li> </ul>	50'000 µF 40'000 µF 6'000 µF 560 µF

### General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>- Operating</li> <li>- Power derating above +50°C</li> <li>- Case max.</li> <li>- Storage (non operating)</li> </ul>	-25°C to +70°C 3.75 %/K +95°C -25°C to +85°C
Temperature coefficient		0.03 %/K
Efficiency		see model table
Remote On/Off control		On: open or connection to -Vout Off: external +5VDC
Humidity (non condensing)		95 % rel max.
Switching frequency (pulse width modulation PWM)		100–133 kHz
Isolation voltage	<ul style="list-style-type: none"> <li>- Input/Output</li> </ul>	3'000 VAC
Reliability /calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>250'000 h
Environmental compliance	<ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> </ul>	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> RoHS directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**General Specifications**


Electromagnetic compatibility (EMC), Emissions	EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2008 EN 55032, class B
Electromagnetic compatibility (EMC), Immunity	EN 55024 : 2010 EN 61000-4-2 ±2 kV / ±4 kV, criteria A EN 61000-4-3 3 V/m, criteria A EN 61000-4-4 ±1 kV, criteria A EN 61000-4-5, ±1 kV, criteria A EN 61000-4-5 ±2 kV, criteria A EN 61000-4-6 3 V, criteria A EN 61000-4-8 1 A/m, criteria A EN 61000-4-11 30 % 500 ms, criteria A 95 % 10 ms, criteria A 95 % 2500 ms, criteria C
Protection class	class I and class II prepared
Safety standards	IEC 60950-1 2nd ed +Am1 EN 60950-1:2006/A11:2009/A1:2010/A12:2011 UL 60950-1 2nd ed +Am1
Safety approvals	CB certificate for IEC/EN 60950-1 <a href="http://www.ul.com">www.ul.com</a> File e188913 <a href="http://www.tracopower.com/overview/tml100c">www.tracopower.com/overview/tml100c</a>
Casing material	plastic resin + fiberglass (UL 94V-0 rated)

**Output voltage adjustment (Trim resistor [KOhm])**

Trim up: Resistor from Trim to -Vout (conection 7-6)  
Trim down: Resistor from Trim to +Vout (conection 7-5)

output voltage	12 VDC	15 VDC	24 VDC	48 VDC
+5%	85	95	90	85
nominal	open	open	open	open
-5%	220	300	600	1500

**Outline Dimensions**

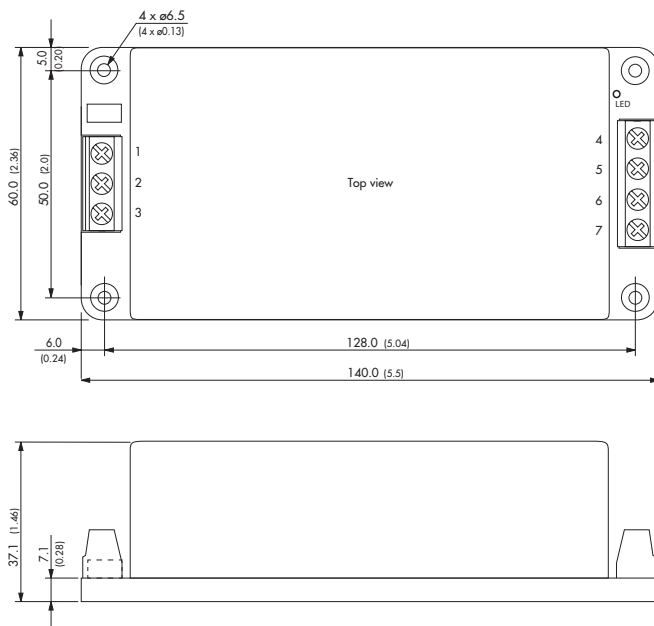

Connection	
con.	Output
1	AC in (L)
2	AC in (N)
3	FG
4	Remote On/Off
5	+Vout
6	-Vout
7	Trim

**Weight : 440 g (15.5 oz)**

Dimensions in[mm], ( ) = Inches  
Tolerances = 0.5mm (0.02)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.