

## Network cable - NBC-FSD/10,0-93B/R4RC SCO - 1407547

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid  
(<http://download.phoenixcontact.com>)



Network cable, PROFINET CAT5 (100 Mbps), PROFINET CAT5e (100 Mbps), 4-position, PVC/PVC, Green RAL 6018, shielded, Plug Straight RJ45 Push Pull / IP67, on Socket Straight M12 SPEEDCON / IP67, Coding: D, Cable length: 10 m



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85444210 |
| Country of origin    | Poland   |

### Technical data

#### Dimensions

|                 |      |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

#### Ambient conditions

|                      |                       |
|----------------------|-----------------------|
| Degree of protection | IP65 (M12 connector)  |
|                      | IP67 (M12 connector)  |
|                      | IP67 (RJ45 connector) |

#### General data

|                       |                                                                                                                                                                                                                      |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note                  | This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) |
| Rated current at 40°C | 1 A                                                                                                                                                                                                                  |
| Rated voltage         | 50 V                                                                                                                                                                                                                 |
| Number of positions   | 4                                                                                                                                                                                                                    |
| Signal type/category  | PROFINET CAT5 (IEC 11801:2002), 100 Mbps                                                                                                                                                                             |
|                       | PROFINET CAT5e (TIA 568B:2001), 100 Mbps                                                                                                                                                                             |
| Standards/regulations | M12 connector IEC 61076-2-101                                                                                                                                                                                        |

## Network cable - NBC-FSD/10,0-93B/R4RC SCO - 1407547

### Technical data

#### Characteristics head 1

|                                          |                                        |
|------------------------------------------|----------------------------------------|
| Head type                                | Plug Straight RJ45 Push Pull / IP67    |
| No. of positions (pin connector pattern) | 4 (8)                                  |
| Color                                    | silver                                 |
| Material (component)                     | CuSn (Contact)                         |
|                                          | Ni/Au (Contact surface)                |
|                                          | PC (Contact carriers)                  |
|                                          | Zinc die-cast, nickel-plated (Housing) |
| Insertion/withdrawal cycles              | ≥ 750                                  |
| Ambient temperature (operation)          | -40 °C ... 70 °C                       |

#### Characteristics head 2

|                                          |                                                    |
|------------------------------------------|----------------------------------------------------|
| Head type                                | Socket Straight M12 SPEEDCON / IP67                |
| No. of positions (pin connector pattern) | 4                                                  |
| Coding                                   | D (Data)                                           |
| Color                                    | black                                              |
| Material (component)                     | CuSn (Contact)                                     |
|                                          | Ni/Au (Contact surface)                            |
|                                          | TPU GF (Contact carriers)                          |
|                                          | TPU, hardly inflammable, self-extinguishing (Grip) |
|                                          | Zinc die-cast, nickel-plated (Screw connection)    |
| Contact resistance                       | ≤ 5 mΩ                                             |
| Insulation resistance                    | ≥ 100 MΩ                                           |
| Insertion/withdrawal cycles              | ≥ 100                                              |
| Torque                                   | 0.4 Nm                                             |
| Ambient temperature (operation)          | -25 °C ... 90 °C                                   |

#### Cable

|                                    |                                          |
|------------------------------------|------------------------------------------|
| Cable type                         | PROFINET PVC stranded CAT5e              |
| Cable type (abbreviation)          | 93B                                      |
| UL AWM style                       | 21694                                    |
| Signal type/category               | PROFINET CAT5 (IEC 11801:2002), 100 Mbps |
|                                    | PROFINET CAT5e (TIA 568B:2001), 100 bps  |
| Cable structure                    | 1x4xAWG22/7; SF/TQ                       |
| Conductor cross section            | 4x 0.34 mm <sup>2</sup>                  |
| AWG signal line                    | 22                                       |
| Conductor structure signal line    | 7x 0.25 mm                               |
| Core diameter including insulation | approx. 1.5 mm                           |
| Wire colors                        | White, yellow, blue, orange              |

## Network cable - NBC-FSD/10,0-93B/R4RC SCO - 1407547

### Technical data

#### Cable

|                                               |                                                    |
|-----------------------------------------------|----------------------------------------------------|
| Overall twist                                 | Star quad                                          |
| Shielding                                     | Aluminum-coated foil, tinned copper braided shield |
| Optical shield covering                       | 85 %                                               |
| External sheath, color                        | Green RAL 6018                                     |
| Outer sheath thickness                        | approx. 0.9 mm                                     |
| External cable diameter D                     | 6.5 mm $\pm$ 0.2 mm                                |
| Minimum bending radius, fixed installation    | 3 x D                                              |
| Minimum bending radius, flexible installation | 7 x D                                              |
| Torsion force                                 | $\pm$ 180 °/m (30,000 torsion cycles)              |
| Cable weight                                  | 67 kg/km                                           |
| Outer sheath, material                        | PVC                                                |
| Material, inner sheath                        | PVC                                                |
| Material conductor insulation                 | PE                                                 |
| Conductor material                            | Tin-plated Cu litz wires                           |
| Insulation resistance                         | $\geq$ 500 M $\Omega$ *km                          |
| Loop resistance                               | $\leq$ 120 $\Omega$ (per kilometer)                |
| Working capacitance                           | 52 pF                                              |
| Wave impedance                                | 100 $\Omega$ $\pm$ 15 $\Omega$ (at 100 MHz)        |
| Signal runtime                                | 5.3 ns/m                                           |
| Coupling resistance                           | $\leq$ 20.00 m $\Omega$ /m                         |
| Nominal voltage, cable                        | 600 V                                              |
| Test voltage Core/Core                        | 2000 V (50 Hz, 1 min.)                             |
| Test voltage Core/Shield                      | 2000 V (50 Hz, 1 min.)                             |
| Flame resistance                              | According to UL 1685 (CSA FT 4)                    |
| Resistance to oil                             | Resistant to oil to a limited extent               |
| Other resistance                              | UV resistant According to UL 1581, Section 1200    |
| Ambient temperature (operation)               | -40 °C ... 70 °C (cable, fixed installation)       |
|                                               | -40 °C ... 70 °C (cable, flexible installation)    |
| Ambient temperature (installation)            | -20 °C ... 60 °C                                   |
| Ambient temperature (storage/transport)       | -50 °C ... 70 °C                                   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060307 |
| eCl@ss 4.1 | 27060307 |
| eCl@ss 5.0 | 27060307 |

# Network cable - NBC-FSD/10,0-93B/R4RC SCO - 1407547

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27060307 |
| eCl@ss 7.0 | 27060307 |
| eCl@ss 8.0 | 27060307 |

### ETIM


|          |          |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11     | 31261501 |
| UNSPSC 12.01  | 31261501 |
| UNSPSC 13.2   | 31261501 |


## Drawings

Schematic diagram



Pin assignment M12 socket, 4-pos., D-coded, female side

Schematic diagram




Connector pin assignment plug RJ45

Cable cross section



PROFINET PVC stranded CAT5e [93B]


Circuit diagram

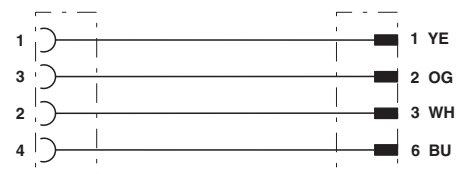

Contact assignment of the M12 socket and the RJ45 plug


## Network cable - NBC-FSD/10,0-93B/R4RC SCO - 1407547

Dimensioned drawing

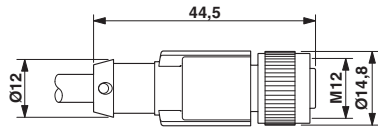

M12 x 1 socket, straight, shielded

Dimensioned drawing



RJ45 Push-Pull connector, IP67



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.