








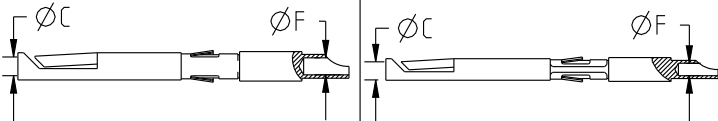
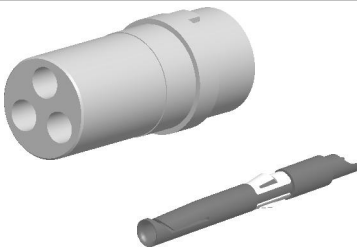
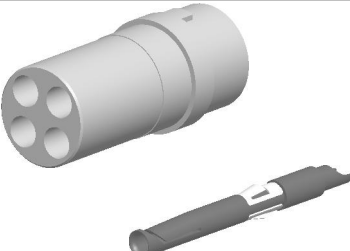
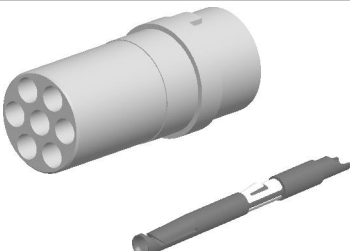



THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC.
IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE
DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.
JBX3INSFSC

FEMALE INSULATOR, SOLDER CONTACT


CONTACT LAYOUT		03	04	07	08
CONTACT	FRONT SIDE VIEW				
	REAR SIDE VIEW				
	CONTACT				
	ISO VIEW				
CONTACT	ØC	2	2	1.6	1.3
	ØF	1.9	1.9	1.5	1.1
	MAX. AWG	16	16	18	20
	MAX. CURRENT RATING (A)	30	30	17	15
	CONTACT RESISTANCE (mΩ)	2.5	2.5	2.5	3
INSULATOR	NUMBER OF CAVITY	3	4	7	8
	MAX. CURRENT RATING	25	25	15	12
	TEST VOLTAGE (Vrms)	3600	2500	2200	2000
	WORKING VOLTAGE (Vdc/Vrms)	1600/1200	1100/830	1000/700	830/560

ORIGIN	COUNTRY	JURISDICTION	CLASSIFICATION
X	FR	Not listed	N/A
	US	EAR	ECCN =EAR99
These commodities, technology or software are exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to U.S. law is prohibited			

LINEAR MEASURE: mm (INCH)	
THIRD ANGLE PROJECTION	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
No. OF PLACES	mm [INCH]
ONE PLACE	±3 [±.1]
TWO PLACES	±0.5 [±.02]
THREE PLACES	±0.25 [±.010]
ANGLES±1°	

CONTACT TYPE : F (FEMALE)
CONTACT TERMINATION : S (SOLDER)

MATERIAL :
CONTACT: CUPRO-NICKEL
CLIP: COPPER ALLOY
INSULATOR: PEEK
FINISH:
CONTACTS : GOLD



CATALOG NUMBER DESCRIPTION	
JBXXX 3 X YY F S XXXX	
BASIC SERIES	OPTION
SHELL TYPE	INSERT MATERIAL
SHELL SIZE	COLLET OPTION
KEYING	SURFACE PLATING
CONTACT LAYOUT	CONTACT TERMINATION
	CONTACT TYPE

B	REVISED PER ECN 12286	RSK 06-10-15	EV 06-10-15
A	RELEASED PER ECN 12264	TJS 03-10-15	EV 03-10-15
REV	DESCRIPTION	BY DATE	CHKD DATE

DRAWING TITLE				
JBX, SIZE 3, FEMALE INSULATOR, SOLDER CONTACT				
CAT NO.				
JBX3INSFS				
CAGE NO: 09922	SIZE: B			
CUSTOMER	SOURIAU	APPROVAL	DRAWN: TJS	02-04-15
			CHKD : EV	02-04-15
DSGN : EV			02-04-15	
MFG : DH			02-04-15	
QC : BB			02-04-15	
DRAWING SCALE: NA				
DRAWING NO.		REV		
INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.	WWW.SOURIAU.COM	JBX3INSFSC		B
		1 OF 2		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR SOURIAU USA, INC.
IT IS SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT THE DOCUMENT CONTROL CENTER FOR THE LATEST REVISION.

THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND MAY NOT BE
DISCLOSED WITHOUT WRITTEN CONSENT FROM SOURIAU USA, INC.

DWG. NO.
JBX3INSFSC

CONTACT LAYOUT		10	14	18	22	30
FRONT SIDE VIEW						
REAR SIDE VIEW						
CONTACT						
ISO VIEW						
CONTACT	ØC	1.3	0.9	0.9	0.7	0.7
	ØF	1.1	0.8	0.8	0.81	0.81
	MAX. AWG	20	24	24	22	22
	MAX. CURRENT RATING (A)	15	10	10	7	7
	CONTACT RESISTANCE (mΩ)	3	3.5	3.5	5	5
	NUMBER OF CAVITY	10	14	18	22	30
	MAX. CURRENT RATING	12	9	7	5.5	3.5
	TEST VOLTAGE (Vrms)	1400	1700	1400	1200	800
INSULATOR	WORKING VOLTAGE (Vdc/Vrms)	600/420	830/560	660/460	560/400	400/260

ORIGIN	COUNTRY	JURISDICTION	CLASSIFICATION
X	FR	Not listed	N/A
	US	EAR	ECCN =EAR99
These commodities, technology or software are exported from the United States in accordance with the Export Administration Regulations. Diversion contrary to U.S. law is prohibited			

LINEAR MEASURE:			mm (INCH)
THIRD ANGLE PROJECTION			
TOLERANCES UNLESS OTHERWISE SPECIFIED			
No. OF PLACES	mm [INCH]		
ONE PLACE	±3 [±.1]		
TWO PLACES	±0.5 [±.02]		
THREE PLACES	±0.25 [±.010]		
ANGLES ±1°			

DRAWING TITLE						
JBX, SIZE 3, FEMALE INSULATOR, SOLDER CONTACT						
CAT NO.						
JBX3INSFS						
CAGE NO: 09922	SIZE: B		APPROVAL	DRAWN: TJS	02-04-15	
CUSTOMER		SOURIAU		CHKD :	EV	02-04-15
				DSGN :	EV	02-04-15
				MFG :	DH	02-04-15
				QC :	BB	02-04-15
				DRAWING SCALE: NA		
DRAWING NO.				REV		
JBX3INSFSC				B		
2 OF 2						
INTERPRET THIS DRAWING IN ACCORDANCE WITH ASME Y14.5M - 1994.				WWW.SOURIAU.COM		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Souriau:](#)

[JBXER3G07FSSDSR](#) [JBXER3G03FSSDSR](#) [JBXER3G04FSSDSR](#) [JBXER3G10FSSDSR](#) [JBXER3G14FSSDSR](#)
[JBXER3G18FSSDSR](#) [JBXER3G22FSSDSR](#) [JBXER3G30FSSDSR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.