


PCE-5029

LGA1151 6th and 7th Generation Intel® Core™ i7/i5/i3/Pentium/Celeron System Host Board with DDR4, SATA 3.0, USB 3.0, Dual GbE, and Dual Displays

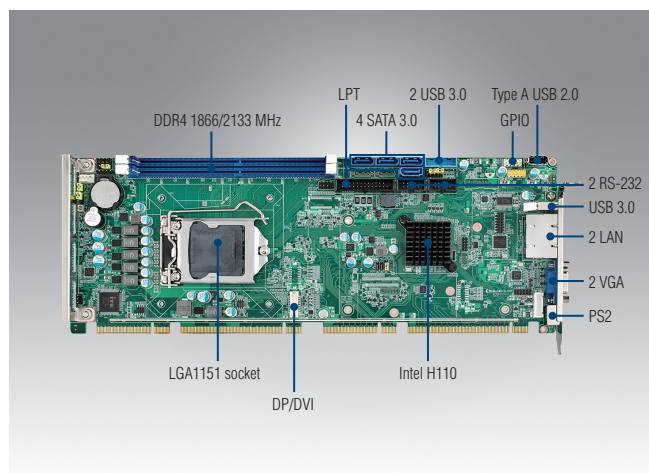

CE FCC

Features


- Intel® Core™ i7/i5/i3 LGA1151 processor with H110 chipset
- Up to 32 GB of dual-channel (non-ECC) DDR4 1866/2133 MHz
- PCIe 3.0, USB 3.0, and SATA 3.0 slots
- Supports CRT and DVI-D/DP display (with optional cable)
- Supports Advantech's LPC modules, SUSIAccess, and embedded software APIs

Note 1: Intel 7th generation processors only support Windows 10 (64-bit).

Specifications

		i7-7700	i7-7700T	i7-6700	i7-6700TE	i5-7500	i5-7500T	i5-6500	i5-6500TE	i3-7101E	i3-7101TE	i3-6100	i3-6100TE	G4400	G4400TE	G3900	G3900TE
Processor System	CPU	i7-7700	i7-7700T	i7-6700	i7-6700TE	i5-7500	i5-7500T	i5-6500	i5-6500TE	i3-7101E	i3-7101TE	i3-6100	i3-6100TE	G4400	G4400TE	G3900	G3900TE
	Speed	3.6GHz	2.9GHz	3.4 GHz	2.4 GHz	3.4GHz	2.7GHz	3.2 GHz	2.3 GHz	3.9GHz	3.4GHz	3.7 GHz	2.7 GHz	3.3 GHz	2.9 GHz	2.8 GHz	2.6 GHz
	Cache	8MB	8MB	8 MB	8 MB	6MB	6MB	6 MB	6 MB	3MB	3MB	4 MB	4 MB	3 MB	3 MB	2 MB	2 MB
	Socket	LGA 1151															
	Chipset	Intel H110															
Bus	BIOS	AMI 128Mbit SPI Flash															
	PCI-Express	1 x PCIe x16 and 1 x PCIe x4 to backplane															
Memory	PCI	4 x PCI master to backplane, 32-bit, 33 MHz															
	Technology	Dual-channel (non-ECC) U-DIMM DDR4 1866/2133 MHz															
	Max. Capacity	32 GB (16 GB per DIMM)															
Graphics	Socket	2 x DDR4 288-pin DIMM															
	Controller	Chipset integrated with Intel® HD Graphics															
	VRAM	Shared system memory is subject to OS															
	CRT	Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz															
	DVI-D	Supports resolutions of up to 1920 x 1200 pixel @ 60 MHz															
Ethernet	Display Port	Supports resolutions of up to 1920 x 1080 pixel @ 60 Hz															
	Dual Display	CRT+DP/CRT+DVI															
	Interface	10/100/1000 Mbps															
Rear I/O	Controller	LAN 1: Intel® I219-V LAN 2: Intel® I211-AT															
	Connector with LED	RJ45 x 2															
	USB 3.0	1 (G2 SKU)															
	Ethernet	1 (VG SKU); 2 (G2 SKU)															
	VGA	1															
Internal Connector	Serial	1 (VG SKU)															
	PS/2	1 (PS/2 Y cable supports 1 x keyboard and 1 x mouse)															
	USB	7 x USB 2.0 (pin header*2 + USB Type A*1 + 4 on backplane) 2 x USB 3.0 (pin header)															
	SATA	4															
	DP/DVI-D	1 (Pin header)															
	COM	2 (G2 SKU) 1 (VG SKU)															
	Parallel	1															
Watchdog Timer	GPIO	8 bits															
	Output	System reset															
Miscellaneous	Interval	Programmable 1-255 sec															
	Audio	Intel® High Definition audio interface (requires audio extension module PCA-AUDIO-HDB1E)															
Power Requirement	Test Environment	i7-6700, 3.4 GHz, 65 W, with 2 x 8-GB DDR4 2133															
	Voltage	+12V +5V +3.3V +5Vsb															
	Current	2.64A 1.23A 0.19A 0.09A															
Environment	Operating																
	Temperature	0 ~ 60 °C (dependent on CPU and cooler solution)															
	Humidity	40 °C @ 85% relative humidity (non-condensing)															
Physical	Non-operating																
	Temperature	-40 ~ 85 °C															
	Humidity	60 °C @ 95% relative humidity (non-condensing)															
Physical	Dimensions (L x H)	338 x 122 mm (13.3" x 4.8")															

Block Diagram

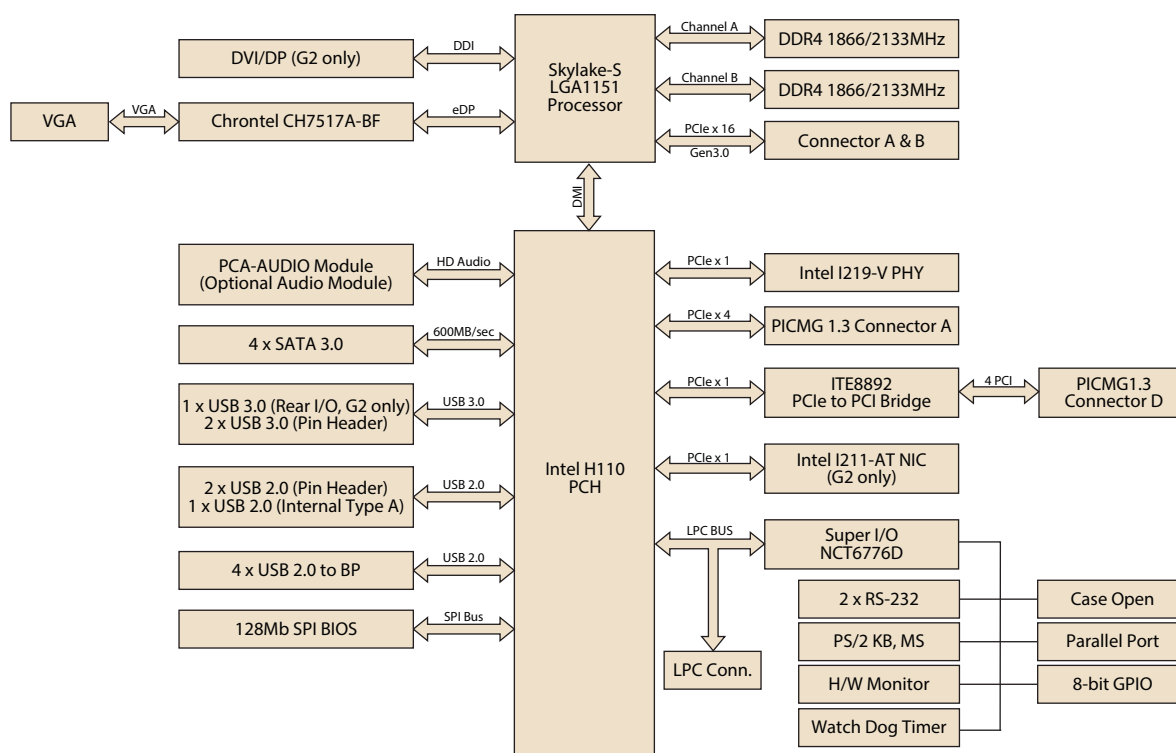

Ordering Information

Part Number	Chipset	Memory	Backplane	Display	USB 3.0	USB 2.0	COM	GbE LAN	AMT	SATA	SW RAID	Intelligent System Module Support
PCE-5029G2-00A1E	H110	Non-ECC	PCE-5BXX	VGA + DVI/DP*	3	7	2	2	No	4	No	Yes
PCE-5029VG-00A1E	H110	Non-ECC	PCE-5BXX	VGA	2	7	2	1	No	4	No	No

*Note: DP cable (P/N: PCE-DP10-00A1E) and DVI-D

Packing List

Part Number	Description	Quantity
1700003194	Serial ATA HDD data cable	x2
1700022749-11	Serial ATA HDD power cable	x1
1701260305	COM + printer ports cable kit	x1
1700060202	Keyboard and mouse Y-cable	x1
1700002204	2-port USB cable kit	x1
9689000068	Jumper package	x1
2190000902	Warranty card	x1
2001512910	Startup manual	x1
2061512900	Utility CD	x1

Optional Accessories

Part Number	Description
1700020277-01	2-port USB 3.0 cable w/ BKT (30 cm)
1700002204	2-port USB 2.0 cable w/ BKT (27 cm)
1700021831-01	DP to DVI-D cable w/ BKT for G2 SKU
1701090401	Single COM cable (40 cm)
1701092300	Dual COM cable (28.5 cm)
196004783N001	CPU cooler for 2U, 4U, and wallmount chassis
1960049408N001	CPU cooler for 1U chassis
PCA-TPM-00A1E	TPM module
PCA-COM485-00A1E	4-port RS-422/485 LPC module
PCA-COM232-00A1E	4-port RS-232 LPC module
PCE-DP10-00A1E	DP redriver board (25 cm) for G2 SKU
PCA-AUDIO-HDB1E	Extension module for HD audio
PCA-TPM-00B1E	TPM 2.0 Module

I/O View



PCE-5029G2-00A1E



PCE-5029VG-00A1E



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.