

**M****4AV SERIES  
CHART 4****MECHANICAL CHARACTERISTICS**





SUPPLY VOLTAGE	OPERATING TEMPERATURE °C	LEFT		RIGHT		DIFFERENTIAL LEFT OP TO R REL RIGHT OP TO L REL
		OPERATE	RELEASE	OPERATE	RELEASE	
4.5 TO 24.0	25°C	±.006	±.006	±.006	±.006	±.010
12.0	25°C	.213±.025	.237±.025	.337±.025	.313±.025	.10 ±.01
4.5 TO 24.0	-40°C TO +85°C	±.024	±.018	±.024	±.018	
4.5 TO 24.0	-40°C TO +125°C	±.040	±.030	±.040	±.030	±.070

**ELECTRICAL CHARACTERISTICS (OPERATING CONDITION)**

SUPPLY VOLTAGE	V <sub>cc</sub>	4.5 TO 26.5 Vdc
SUPPLY CURRENT "ON"	I <sub>cc</sub>	5 TO 18.5 mA
OUTPUT VOLTAGE "ON"	V <sub>sat</sub>	0 TO 0.4 Vdc (SINKING 20 mA)
OUTPUT VOLTAGE "ON"	V <sub>sat</sub>	0 TO 0.5 Vdc (SINKING 40mA)
OUTPUT CURRENT "OFF"	I <sub>leak</sub>	0 TO 10μA (PULLED UP TO 24 Vdc MAX)
OUTPUT SWITCHING RISE TIME	t <sub>r</sub>	0 TO 1.5μS (V <sub>cc</sub> 12V, R <sub>load</sub> 1K OHM, C <sub>load</sub> 20pF MAX 25°C)
OUTPUT SWITCHING FALL TIME	t <sub>f</sub>	0 TO 1.0μS (V <sub>cc</sub> 12V, R <sub>load</sub> 1K OHM, C <sub>load</sub> 20pF MAX 25°C)
REVERSE SUPPLY VOLTAGE CURRENT	I <sub>ccr</sub>	-2.5 TO 0 mA (-30 VOLT SUPPLY, 0 VOLT OUTPUT APPLIED)

**ABSOLUTE MAXIMUM RATINGS**





SUPPLY VOLTAGE	±30 VDC
VOLTAGE APPLIED TO OUTPUT	-0.5VDC TO +30VDC
OUTPUT CURRENT	±50mA
TEMPERATURE	-40°C TO +150°C
TRANSIENT SUPPLY CURRENT	±0.5 AMP 15μS MAX
TRANSIENT OUTPUT CURRENT	±0.5 AMP 15μS MAX

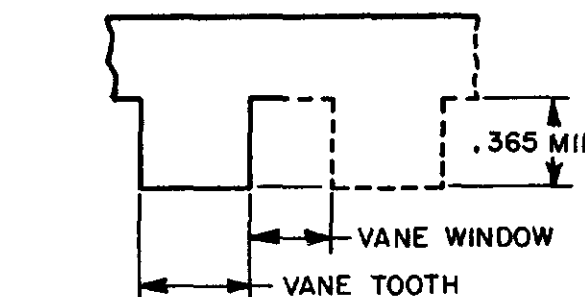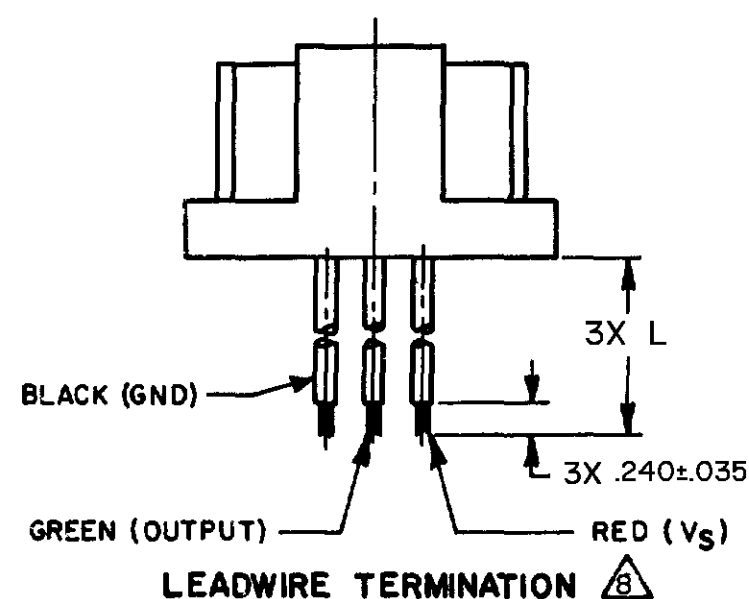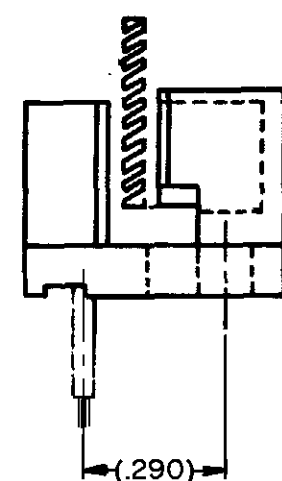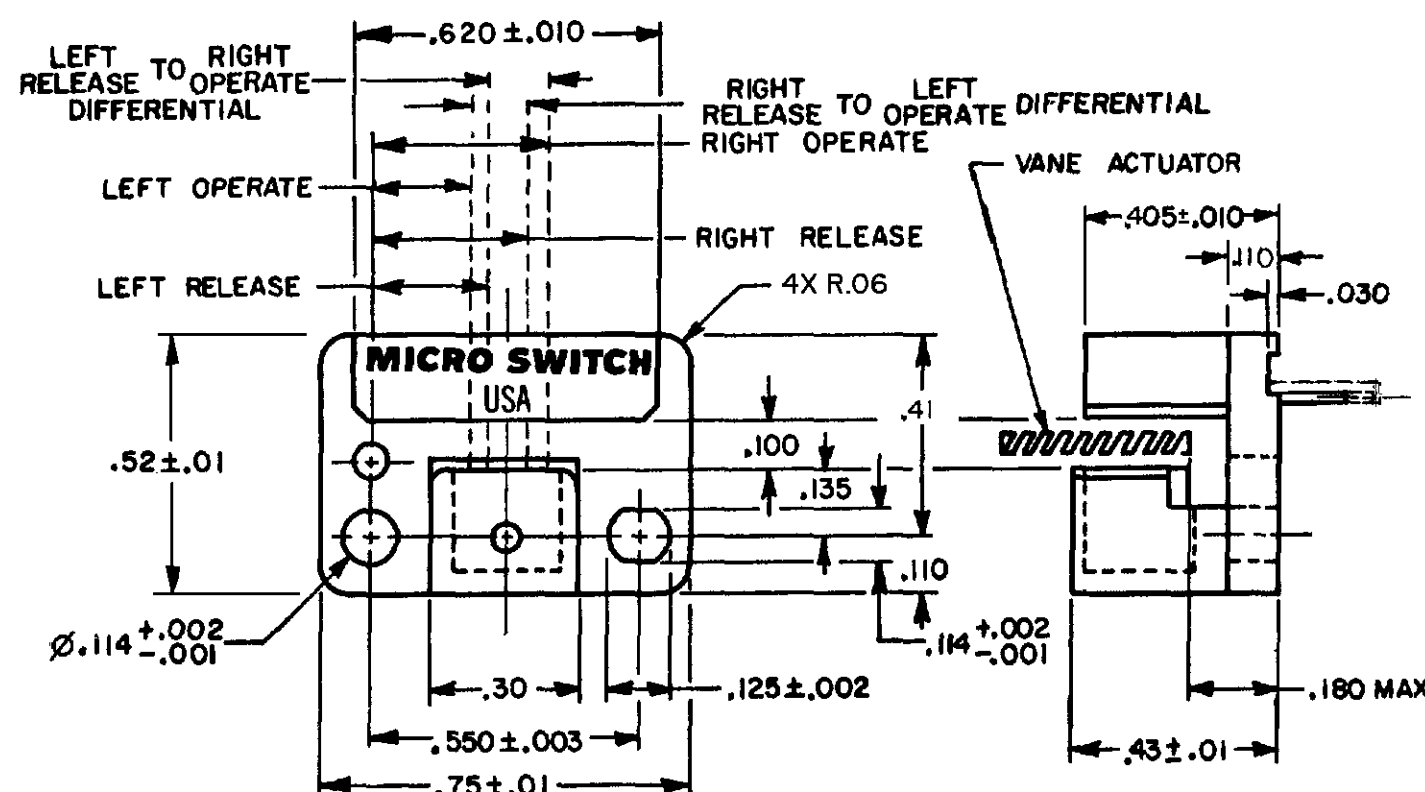

ACTUATOR THICKNESS	MINIMUM WINDOW	MINIMUM TOOTH
.040	.400	.400
.062	.400	.250

**VANE ACTUATOR**

(MATERIAL TO BE ANNEALED 1010-1018 COLD ROLLED STEEL OR LOWER IN CARBON)

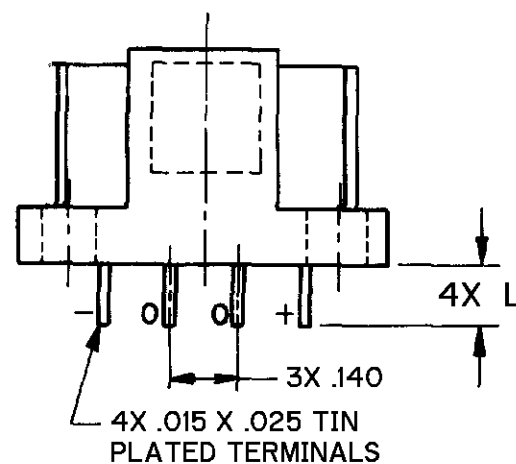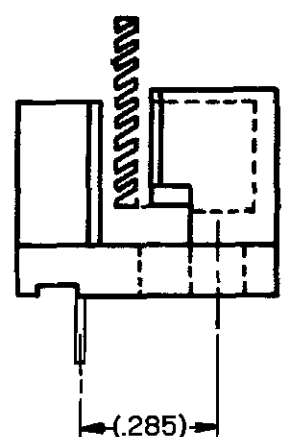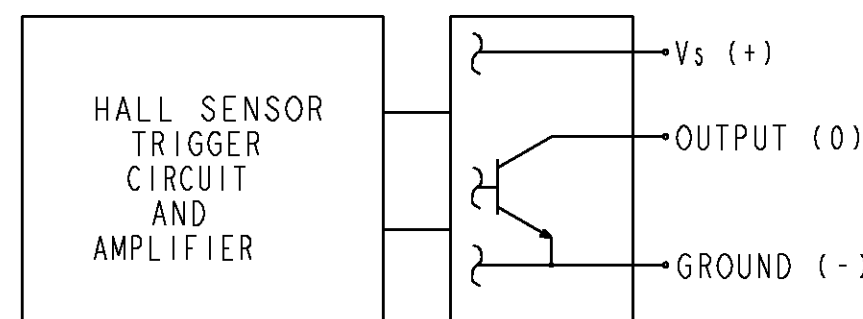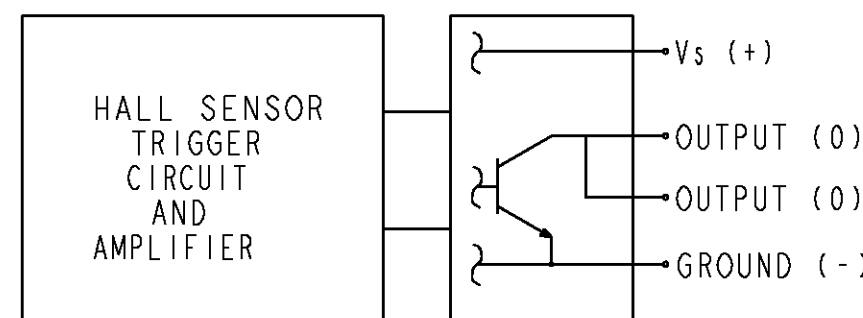**PC BOARD TERMINATION****SINGLE OUTPUT****DOUBLE OUTPUT**

BLOCK DIAGRAM SHOWING CURRENT SINKING OUTPUT

CATALOG LISTING	OUTPUT STYLE	TERMINAL STYLE	DIM. L
4AV15F	SINGLE	LEADWIRE	5.50±.25
4AV16F	SINGLE	LEADWIRE	7.45±.25
4AV17F	SINGLE	LEADWIRE	13.15±.50
4AV18F	SINGLE	LEADWIRE	18.15±.50
4AV19F	SINGLE	LEADWIRE	22.0±.5
4AV20F	DOUBLE	PCB	.140±.035
4AV20F-T1	AMP	TERMINAL	
4AV20F-T2	MOLEX	TERMINAL	

**TRANSIENT CHARACTERISTICS (REFERENCE ISO 7637-1, 25°C)**

INDUCTIVE LOAD OPENING	PULSE 1	DURATION <0.2ms	-110 VOLTS
INDUCTIVE LOAD OPENING	PULSE 1	DURATION <2ms	-100 VOLTS
SERIES CURRENT INTERRUPT	PULSE 2	DURATION <200ms	+150 VOLTS
LOAD DUMP	PULSE 5	DURATION <400ms	+120 VOLTS
FIELD DECAY	PULSE 36	DURATION <100ns	+200 VOLTS
NEGATIVE TRANSIENT	PULSE 39	DURATION <100ns	-200 VOLTS
RFI	1 MHz THROUGH 1000 MHz		> 40 V/M

**NOTES**

- ELECTRICAL CHARACTERISTICS SPECIFIED OVER VOLTAGE AND TEMPERATURE RANGE USING AN ACTUATOR .040 THICK WITH A .400 TOOTH AND WINDOW PASSING THROUGH THE CENTER OF THE AIR GAP
- SWITCH IS OFF (RELEASE CONDITION) WHEN VANE ACTUATOR TOOTH IS IN THE AIR GAP
- THE OUTPUT CURRENT MAXIMUM IS TOTAL OF OUTPUT SINKING CURRENTS
- ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE. HOWEVER, THE ELECTRICAL AND MECHANICAL CHARACTERISTICS ARE NOT GUARANTEED ABOVE THE RECOMMENDED OPERATING CONDITIONS NOR WILL THE DEVICE NECESSARILY FUNCTION. RATINGS ARE TO BE CONSIDERED INDIVIDUALLY, NOT COMBINED
- MAXIMUM CHANGE IN VANE TRAVEL MECHANICAL CHARACTERISTICS SWITCHING POINT REFERENCING 25°C AND 12Vdc INITIAL CONDITION
- PRODUCT PERFORMANCE EVALUATED PER TS 060 192
- WHEN HAND SOLDERING PRINTED CIRCUIT, BOARD TERMINATIONS, USE A Ø.125 THERMISTATICALLY CONTROLLED TIP OF 550°F AND APPLY TO THE TERMINALS NO LONGER THAN 6 SECONDS
- LEADWIRES ARE 24 AWG WITH CROSSLINK POLYETHYLENE INSULATION OF Ø.060 MAX O.D.
- MOLEX TERMINAL 22-05-3041 LOCKING FEATURE ON T2 LISTINGS MATE WITH MOLEX HOUSING 2695/6471
- WILL MATE WITH AMP HOUSING NO.87499-B ON T1 LISTINGS ONLY
- AMP TERMINALS 103323-4
- LISTINGS 4AV20F-T1 AND 4AV20F-T2 HAVE A MAXIMUM TEMPERATURE RATING OF 85° C DUE TO TERMINAL BLOCK LIMITATIONS

ANSI Y14.5M 1982 APPLIES  
MASTER REDUCED

**MICRO SWITCH**  
a Honeywell Division

**SOLID STATE  
VANE SWITCH**

CATALOG LISTING  
**4AV SERIES  
CHART 4**

THIRD ANGLE PROJECTION

SCALE **3:1**

DO NOT SCALE PRINT  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES ARE

ONE PLACE (.0) ±.030  
TWO PLACES (.00) ±.015  
THREE PLACES (.000) ±.005  
ANGLES ±

WEIGHT

DRAWING NUMBER  
**4AV SERIES CHART 4**  
PAGE 1 OF 2

ISSUE  
**5**




REVISIONS  
A CO-93446  
8 J W  
22 SEP 98  
B PR-23514  
DL T  
2 OCT 98  
C CO93789  
DL T  
26 OCT 98  
D CO-94108-A  
19 FEB 99

CHECK  
J A F 11 MAY 98  
J J A 11 MAY 98  
DRAWN  
J J A 11 MAY 98  
FORMTEK


RELEASE NO.  
X102209-AV

REPLACES  
DR-5009

FED. MFG. CODE 91929

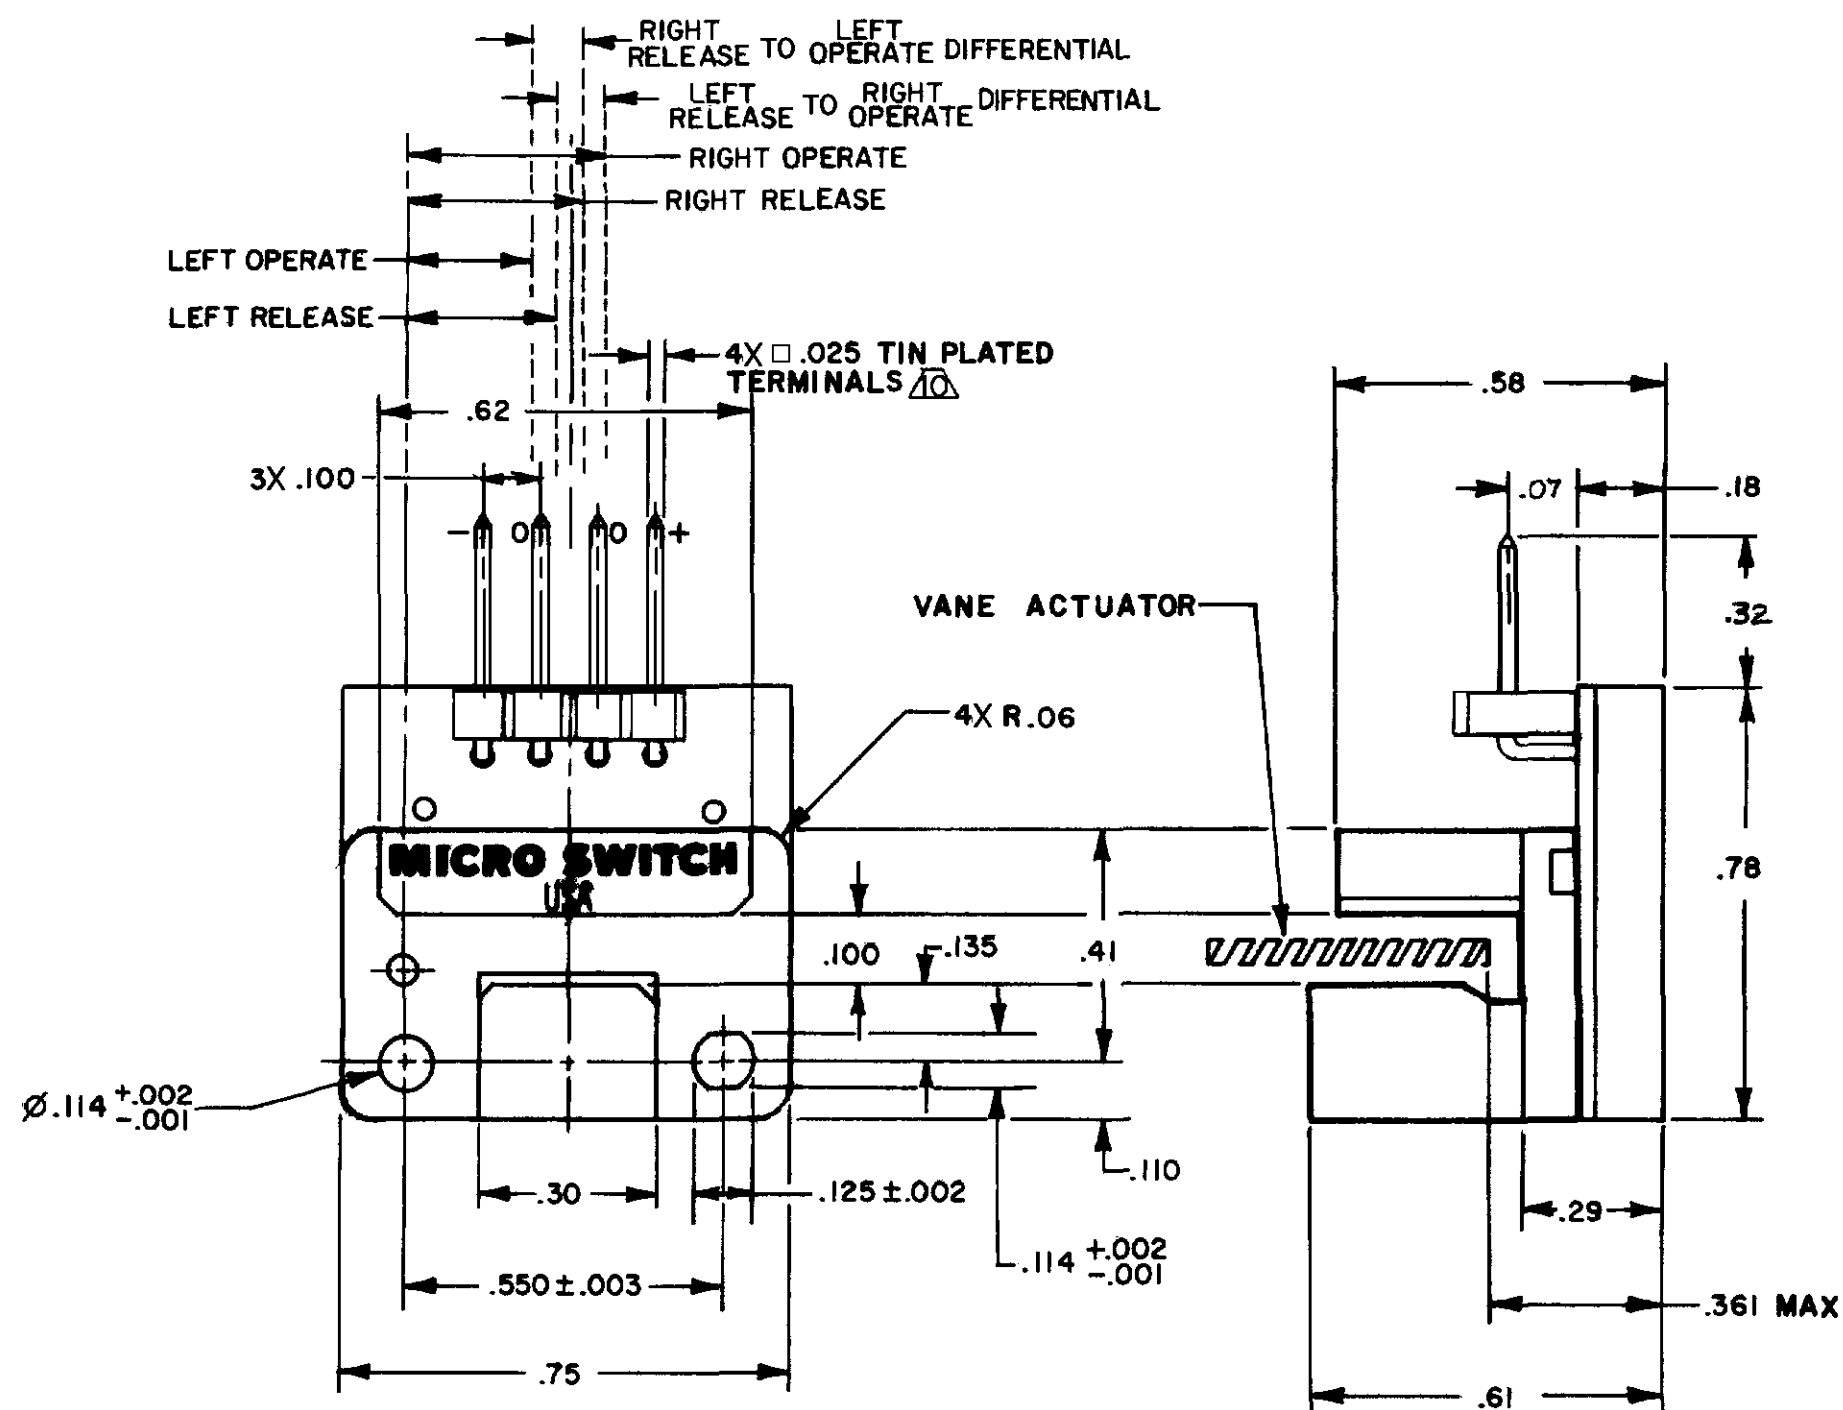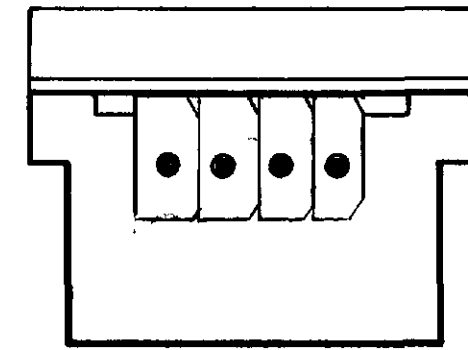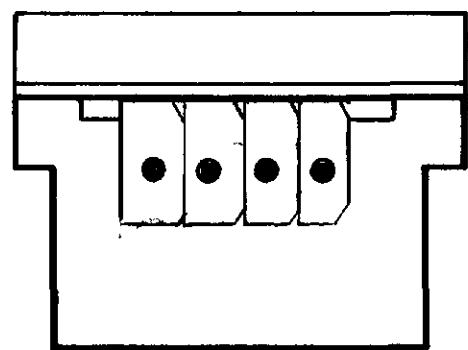

STYLE T1

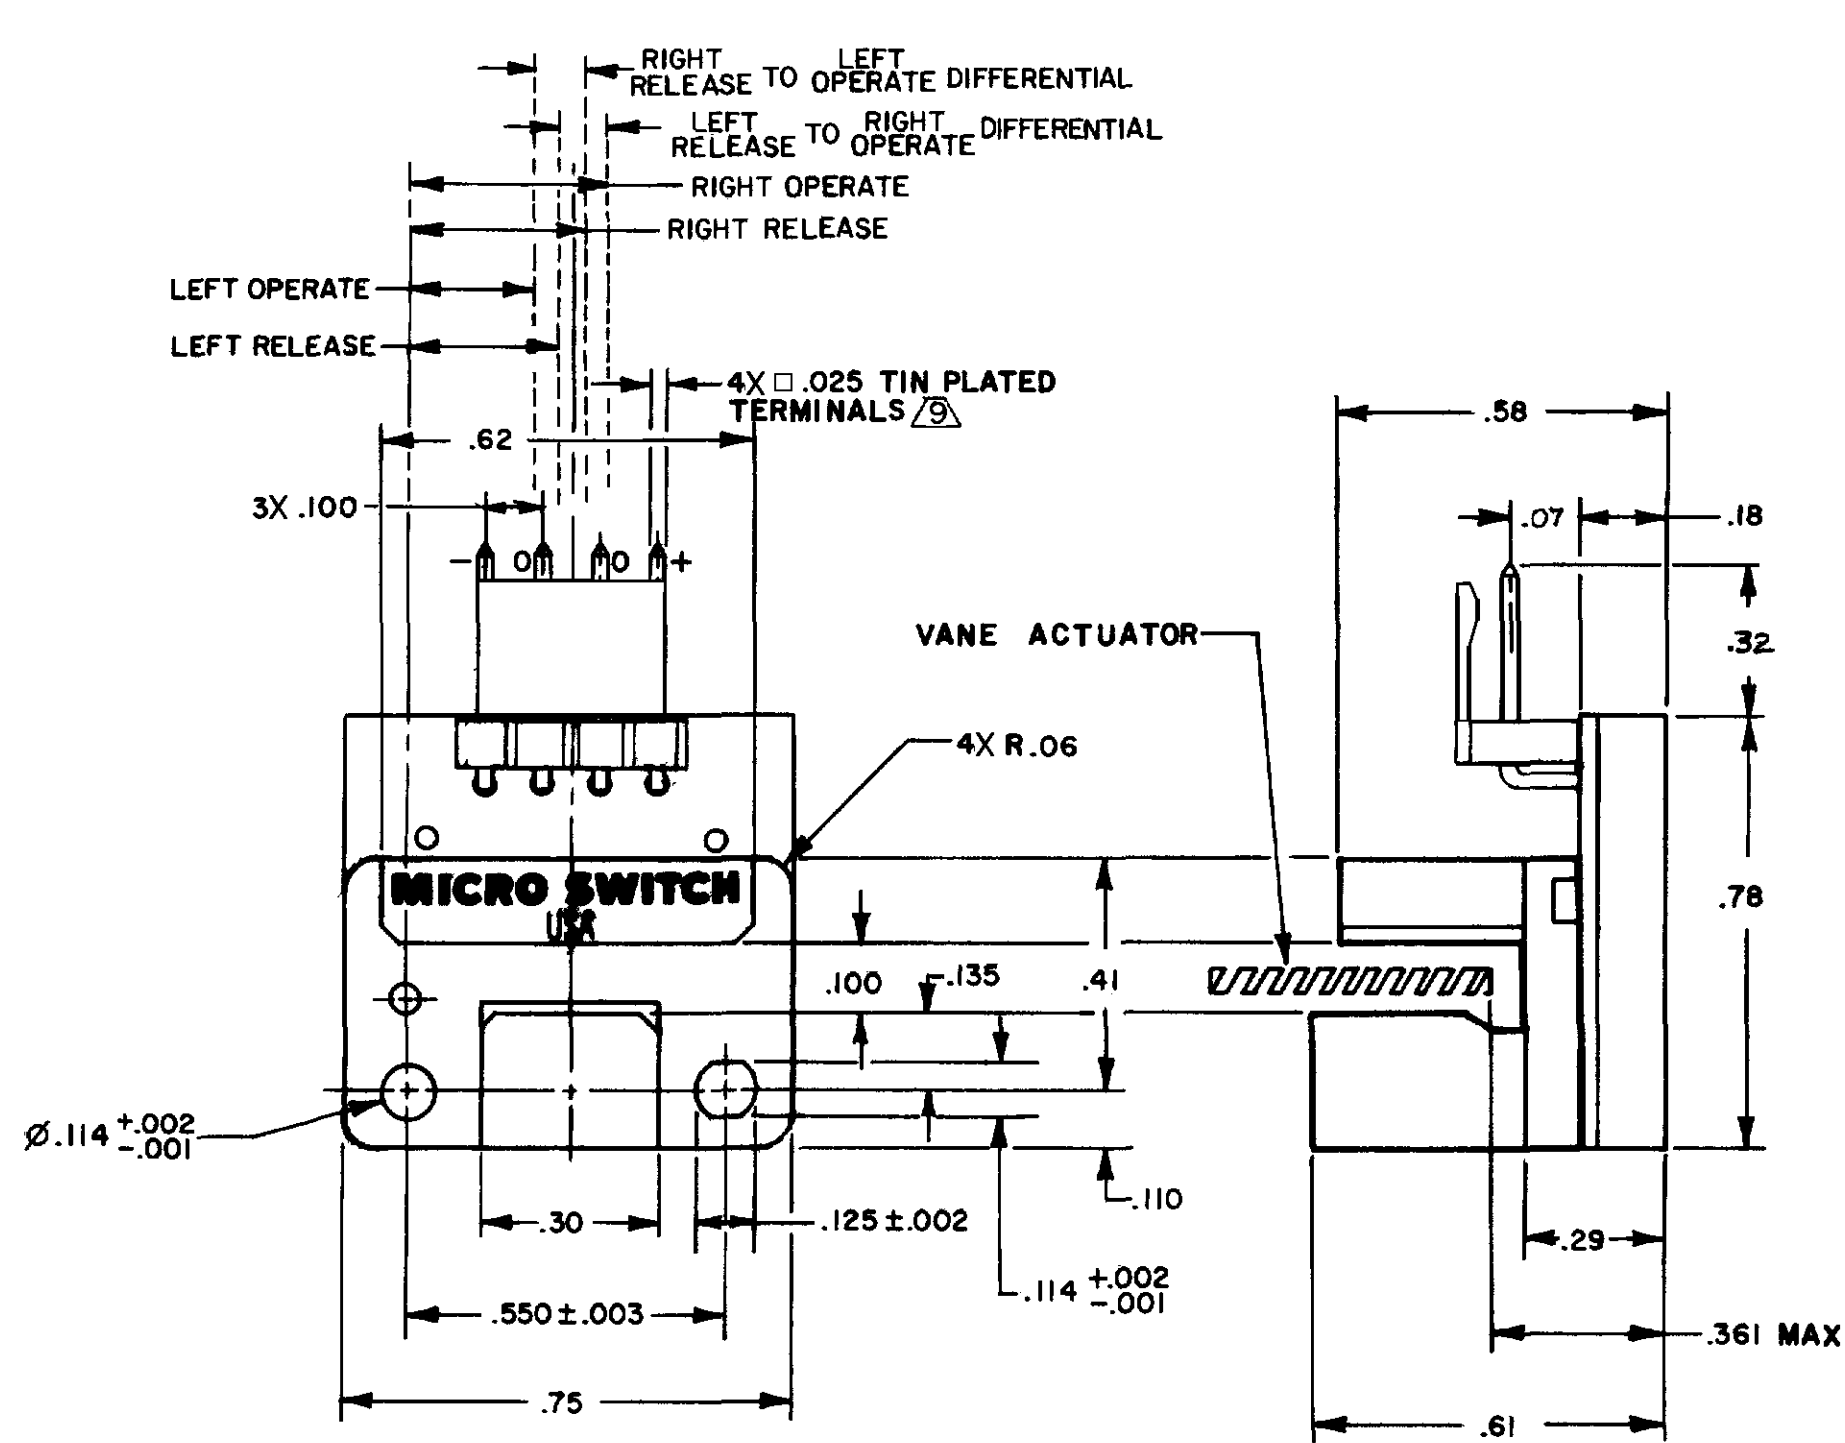

STYLE T2

DRAWING NUMBER: 4AV SERIES CHART 4  
 PAGE 2 OF 2  
 ISSUE 5  
 X102209-AV  
 REPLACES DR-5009  
 CHECK  
 REVISIONS:  
 A PR-23514 017 2 OCT 98  
 B C093789 017 26 OCT 98  
 C C094108-A 017 19 FEB 99  
 DRAWN: JJA 11 MAY 98  
 CHECK: JJA 11 MAY 98  
 FORMTEK

ANSI Y14.5M 1982 APPLIES  
MASTER REDUCED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

<b>MICRO SWITCH</b> a Honeywell Division	SOLID STATE VANE SWITCH	CATALOG LISTING
		<b>4AV SERIES</b> CHART 4

FED. MFG. CODE 91929

THIRD ANGLE PROJECTION		
SCALE 3:1		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±
WEIGHT		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.