

### General Description

The 932SQL450 is a low power version of the CK420BQ synthesizer for Intel-based server platforms. It has 85-ohm LP-HCSL outputs allowing for direct connection to 85-ohm transmission lines. The 932SQL450 is driven with a 25MHz crystal for maximum performance. It generates CPU outputs of 100MHz. This device has a “low-drift” non-spread SAS/SRC PLL for use in systems that need to communicate across PCIe domains.

### Recommended Application

Low Power CK420BQ w/Zout=85ohms or PCIe Common Clocked Systems (CC)

### Key Specifications

- CPU, SRC, NS\_SRC and NS\_SAS cycle-cycle jitter <50ps
- Output to output skew <50ps
- Phase jitter: PCIe Gen2 <2.5ps rms
- Phase jitter: PCIe Gen3 <0.6ps rms
- Phase jitter: QPI <0.3ps rms
- Phase jitter: NS-SAS <1.3ps rms using long period phase jitter method

### Pin Configurations

|                                  |    |    |              |
|----------------------------------|----|----|--------------|
| SMBCLK                           | 1  | 64 | SMBDAT       |
| GND14                            | 2  | 63 | VDDCPU       |
| AVDD14                           | 3  | 62 | CPU3_Z85T    |
| VDD14                            | 4  | 61 | CPU3_Z85C    |
| <sup>v</sup> REF14_2x/TEST_SELLV | 5  | 60 | CPU2_Z85T    |
| GND14                            | 6  | 59 | CPU2_Z85C    |
| GNDXTAL                          | 7  | 58 | GNDCPU       |
| X1_25                            | 8  | 57 | VDDCPU       |
| X2_25                            | 9  | 56 | CPU1_Z85T    |
| VDDXTAL                          | 10 | 55 | CPU1_Z85C    |
| GNDPCI                           | 11 | 54 | CPU0_Z85T    |
| VDDPCI                           | 12 | 53 | CPU0_Z85C    |
| PCI4_2x                          | 13 | 52 | GNDNS        |
| PCI3_2x                          | 14 | 51 | AVDD_NS_SAS  |
| PCI2_2x                          | 15 | 50 | NS_SAS1_Z85T |
| PCI1_2x                          | 16 | 49 | NS_SAS1_Z85C |
| PCI0_2x                          | 17 | 48 | NS_SAS0_Z85T |
| GNDPCI                           | 18 | 47 | NS_SAS0_Z85C |
| VDDPCI                           | 19 | 46 | GNDNS        |
| VDD48                            | 20 | 45 | VDDNS        |
| 48M_2x                           | 21 | 44 | NS_SRC1_Z85T |
| GND48                            | 22 | 43 | NS_SRC1_Z85C |
| GND96                            | 23 | 42 | NS_SRC0_Z85T |
| DOT96_Z85T                       | 24 | 41 | NS_SRC0_Z85C |
| DOT96_Z85C                       | 25 | 40 | NC           |
| AVDD96                           | 26 | 39 | GNDSRC       |
| TEST_MODE                        | 27 | 38 | AVDD_SRC     |
| CKPWRGD#/PD                      | 28 | 37 | VDDSRC       |
| VDDSRC                           | 29 | 36 | SRC2_Z85T    |
| SRC0_Z85T                        | 30 | 35 | SRC2_Z85C    |
| SRC0_Z85C                        | 31 | 34 | SRC1_Z85T    |
| GNDSRC                           | 32 | 33 | SRC1_Z85C    |

**64-TSSOP**


Note: Pins with ^ prefix have internal 120K pullup  
Pins with v prefix have internal 120K pulldown

### Features/Benefits

- Integrated 85 ohm differential terminations; saves 48 resistors and 82mm<sup>2</sup> area
- LP-HCSL output drivers; 40% typical power savings over 932SQ420
- 0.5% down spread capable on CPU, SRC and PCI outputs; reduce EMI
- Additional down spread amounts selectable via SMBus; maximal system flexibility
- 64-pin TSSOP and VFQFPN packages; smallest board footprint

### Output Features

- 4 - Low-Power HCSL-compatible (LP-HCSL) CPU outputs
- 2 - LP-HCSL NS\_SAS outputs
- 2 - LP-HCSL NS\_SRC outputs
- 3 - LP-HCSL SRC outputs
- 1 - LP-HCSL DOT96 output
- 1 - 3.3V 48M output
- 5 - 3.3V PCI outputs
- 1 - 3.3V 14.318M output

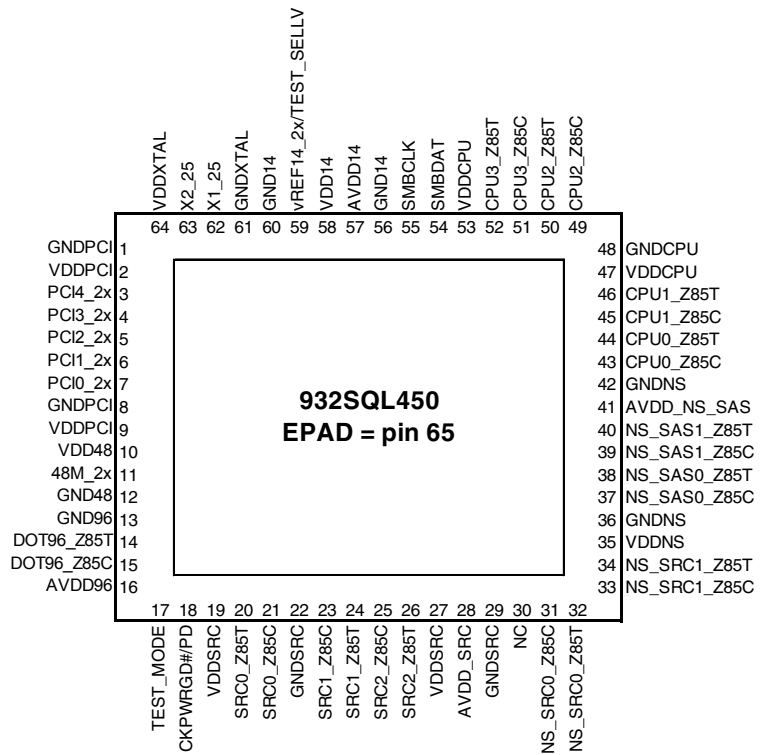

**64-Pin VFQFPN**

Note: Pins with ^ prefix have internal 120K pullup  
Pins with v prefix have internal 120K pulldown

## 64TSSOP Pin Descriptions

| PIN # | PIN NAME             | TYPE | DESCRIPTION  |
|-------|----------------------|------|--|
| 1     | SMBCLK               | IN   | Clock pin of SMBUS circuitry, 5V tolerant  |
| 2     | GND14                | PWR  | Ground pin for 14MHz output and logic.   |
| 3     | AVDD14               | PWR  | Analog power pin for 14MHz PLL   |
| 4     | VDD14                | PWR  | Power pin for 14MHz output and logic   |
| 5     | vREF14_2x/TEST_SELLV | I/O  | 14.318 MHz reference clock capable of driving 2 loads/ TEST_SEL latched input to enable test mode. The TEST_SEL input is a low threshold input. See the Electrical Tables and the Test Clarification Table. This pin has a weak (~120Kohm) internal pull down. |
| 6     | GND14                | PWR  | Ground pin for 14MHz output and logic.   |
| 7     | GNDXTAL              | PWR  | Ground pin for Crystal Oscillator.   |
| 8     | X1_25                | IN   | Crystal input, Nominally 25.00MHz.   |
| 9     | X2_25                | OUT  | Crystal output, Nominally 25.00MHz.  |
| 10    | VDDXTAL              | PWR  | 3.3V power for the crystal oscillator.   |
| 11    | GNDPCI               | PWR  | Ground pin for PCI outputs and logic.  |
| 12    | VDDPCI               | PWR  | 3.3V power for the PCI outputs and logic   |
| 13    | PCI4_2x              | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 14    | PCI3_2x              | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 15    | PCI2_2x              | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 16    | PCI1_2x              | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 17    | PCI0_2x              | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 18    | GNDPCI               | PWR  | Ground pin for PCI outputs and logic.  |
| 19    | VDDPCI               | PWR  | 3.3V power for the PCI outputs and logic   |
| 20    | VDD48                | PWR  | 3.3V power for the 48MHz output and logic  |
| 21    | 48M_2x               | OUT  | 3.3V 48MHz output capable of driving 2 loads.  |
| 22    | GND48                | PWR  | Ground pin for 48MHz output and logic.   |
| 23    | GND96                | PWR  | Ground pin for DOT96 output and logic.   |
| 24    | DOT96_Z85T           | OUT  | True clock of low-power push-pull differential 96MHz output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 25    | DOT96_Z85C           | OUT  | Complementary clock of low-power push-pull differential 96MHz output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 26    | AVDD96               | PWR  | 3.3V power for the 48/96MHz PLL and the 96MHz output and logic   |
| 27    | TEST_MODE            | IN   | TEST_MODE is a real time input to select between Hi-Z and REF/N divider mode while in test mode. Refer to Test Clarification Table.  |
| 28    | CKPWRGD#/PD          | IN   | CKPWRGD# is an active low input used to sample latched inputs and allow the device to Power Up. PD is an asynchronous active high input pin used to put the device into a low power state. The internal clocks and PLLs are stopped.                           |
| 29    | VDDSRC               | PWR  | 3.3V power for the SRC outputs and logic   |
| 30    | SRC0_Z85T            | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 31    | SRC0_Z85C            | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 32    | GNDSRC               | PWR  | Ground pin for SRC outputs and logic.  |
| 33    | SRC1_Z85C            | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 34    | SRC1_Z85T            | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 35    | SRC2_Z85C            | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 36    | SRC2_Z85T            | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 37    | VDDSRC               | PWR  | 3.3V power for the SRC outputs and logic   |
| 38    | AVDD_SRC             | PWR  | 3.3V power for the SRC PLL analog circuits   |
| 39    | GNDSRC               | PWR  | Ground pin for SRC outputs and logic.  |
| 40    | NC                   | N/A  | No Connection.   |

## 64TSSOP Pin Descriptions (cont.)

| PIN # | PIN NAME     | TYPE | DESCRIPTION  |
|-------|--------------|------|--|
| 41    | NS_SRC0_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components. |
| 42    | NS_SRC0_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.          |
| 43    | NS_SRC1_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components. |
| 44    | NS_SRC1_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.          |
| 45    | VDDNS        | PWR  | 3.3V power for the Non-Spreading differential outputs outputs and logic  |
| 46    | GNDNS        | PWR  | Ground pin for non-spreading differential outputs and logic.   |
| 47    | NS_SAS0_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components. |
| 48    | NS_SAS0_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components.          |
| 49    | NS_SAS1_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components. |
| 50    | NS_SAS1_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components.          |
| 51    | AVDD_NS_SAS  | PWR  | 3.3V power for the non-spreading SAS/SRC PLL analog circuits.  |
| 52    | GNDNS        | PWR  | Ground pin for non-spreading differential outputs and logic.   |
| 53    | CPU0_Z85C    | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.               |
| 54    | CPU0_Z85T    | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.                        |
| 55    | CPU1_Z85C    | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.               |
| 56    | CPU1_Z85T    | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.                        |
| 57    | VDDCPU       | PWR  | 3.3V power for the CPU outputs and logic   |
| 58    | GNDCPU       | PWR  | Ground pin for CPU outputs and logic.  |
| 59    | CPU2_Z85C    | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.               |
| 60    | CPU2_Z85T    | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.                        |
| 61    | CPU3_Z85C    | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.               |
| 62    | CPU3_Z85T    | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.                        |
| 63    | VDDCPU       | PWR  | 3.3V power for the CPU outputs and logic   |
| 64    | SMBDAT       | I/O  | Data pin of SMBUS circuitry, 5V tolerant   |


## 64VFQFPN Pin Descriptions

| PIN # | PIN NAME     | TYPE | DESCRIPTION  |
|-------|--------------|------|--|
| 1     | GNDPCI       | PWR  | Ground pin for PCI outputs and logic.  |
| 2     | VDDPCI       | PWR  | 3.3V power for the PCI outputs and logic   |
| 3     | PCI4_2x      | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 4     | PCI3_2x      | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 5     | PCI2_2x      | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 6     | PCI1_2x      | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 7     | PCI0_2x      | OUT  | 3.3V PCI clock output capable of driving two loads.  |
| 8     | GNDPCI       | PWR  | Ground pin for PCI outputs and logic.  |
| 9     | VDDPCI       | PWR  | 3.3V power for the PCI outputs and logic   |
| 10    | VDD48        | PWR  | 3.3V power for the 48MHz output and logic  |
| 11    | 48M_2x       | OUT  | 3.3V 48MHz output capable of driving 2 loads.  |
| 12    | GND48        | PWR  | Ground pin for 48MHz output and logic.   |
| 13    | GND96        | PWR  | Ground pin for DOT96 output and logic.   |
| 14    | DOT96_Z85T   | OUT  | True clock of low-power push-pull differential 96MHz output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 15    | DOT96_Z85C   | OUT  | Complementary clock of low-power push-pull differential 96MHz output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 16    | AVDD96       | PWR  | 3.3V power for the 48/96MHz PLL and the 96MHz output and logic   |
| 17    | TEST_MODE    | IN   | TEST_MODE is a real time input to select between Hi-Z and REF/N divider mode while in test mode. Refer to Test Clarification Table.  |
| 18    | CKPWRGD#/PD  | IN   | CKPWRGD# is an active low input used to sample latched inputs and allow the device to Power Up. PD is an asynchronous active high input pin used to put the device into a low power state. The internal clocks and PLLs are stopped. |
| 19    | VDDSRC       | PWR  | 3.3V power for the SRC outputs and logic   |
| 20    | SRC0_Z85T    | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 21    | SRC0_Z85C    | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 22    | GNDSRC       | PWR  | Ground pin for SRC outputs and logic.  |
| 23    | SRC1_Z85C    | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 24    | SRC1_Z85T    | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 25    | SRC2_Z85C    | OUT  | Complementary clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 26    | SRC2_Z85T    | OUT  | True clock of low-power push-pull differential SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 27    | VDDSRC       | PWR  | 3.3V power for the SRC outputs and logic   |
| 28    | AVDD_SRC     | PWR  | 3.3V power for the SRC PLL analog circuits   |
| 29    | GNDSRC       | PWR  | Ground pin for SRC outputs and logic.  |
| 30    | NC           | N/A  | No Connection.   |
| 31    | NS_SRC0_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 32    | NS_SRC0_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 33    | NS_SRC1_Z85C | OUT  | Complementary clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 34    | NS_SRC1_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SRC output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 35    | VDDNS        | PWR  | 3.3V power for the Non-Spreading differential outputs outputs and logic  |
| 36    | GNDNS        | PWR  | Ground pin for non-spreading differential outputs and logic.   |
| 38    | NS_SAS0_Z85T | OUT  | True clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components.  |

## 64VFQFPN Pin Descriptions (cont.)

| PIN # | PIN NAME             | TYPE | DESCRIPTION  |
|-------|----------------------|------|--|
| 39    | NS_SAS1_Z85C         | OUT  | Complementary clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 40    | NS_SAS1_Z85T         | OUT  | True clock of low-power push-pull differential non-spreading SAS output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 41    | AVDD_NS_SAS          | PWR  | 3.3V power for the non-spreading SAS/SRC PLL analog circuits.  |
| 42    | GNDNS                | PWR  | Ground pin for non-spreading differential outputs and logic.   |
| 43    | CPU0_Z85C            | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 44    | CPU0_Z85T            | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 45    | CPU1_Z85C            | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 46    | CPU1_Z85T            | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 47    | VDDCPU               | PWR  | 3.3V power for the CPU outputs and logic   |
| 48    | GNDCPU               | PWR  | Ground pin for CPU outputs and logic.  |
| 49    | CPU2_Z85C            | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 50    | CPU2_Z85T            | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 51    | CPU3_Z85C            | OUT  | Complementary clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.   |
| 52    | CPU3_Z85T            | OUT  | True clock of low-power push-pull differential CPU output. Internally terminated to drive 85ohm transmission lines with no external components.  |
| 53    | VDDCPU               | PWR  | 3.3V power for the CPU outputs and logic   |
| 54    | SMBDAT               | I/O  | Data pin of SMBUS circuitry, 5V tolerant   |
| 55    | SMBCLK               | IN   | Clock pin of SMBUS circuitry, 5V tolerant  |
| 56    | GND14                | PWR  | Ground pin for 14MHz output and logic.   |
| 57    | AVDD14               | PWR  | Analog power pin for 14MHz PLL   |
| 58    | VDD14                | PWR  | Power pin for 14MHz output and logic   |
| 59    | vREF14_2x/TEST_SELLV | I/O  | 14.318 MHz reference clock capable of driving 2 loads/ TEST_SEL latched input to enable test mode. The TEST_SEL input is a low threshold input. See the Electrical Tables and the Test Clarification Table. This pin has a weak (~120Kohm) internal pull down. |
| 60    | GND14                | PWR  | Ground pin for 14MHz output and logic.   |
| 61    | GNDXTAL              | PWR  | Ground pin for Crystal Oscillator.   |
| 62    | X1_25                | IN   | Crystal input, Nominally 25.00MHz.   |
| 63    | X2_25                | OUT  | Crystal output, Nominally 25.00MHz.  |
| 64    | VDDXTAL              | PWR  | 3.3V power for the crystal oscillator.   |
| 65    | EPAD                 | GND  | Epad should be connected to ground.  |



# Block Diagram

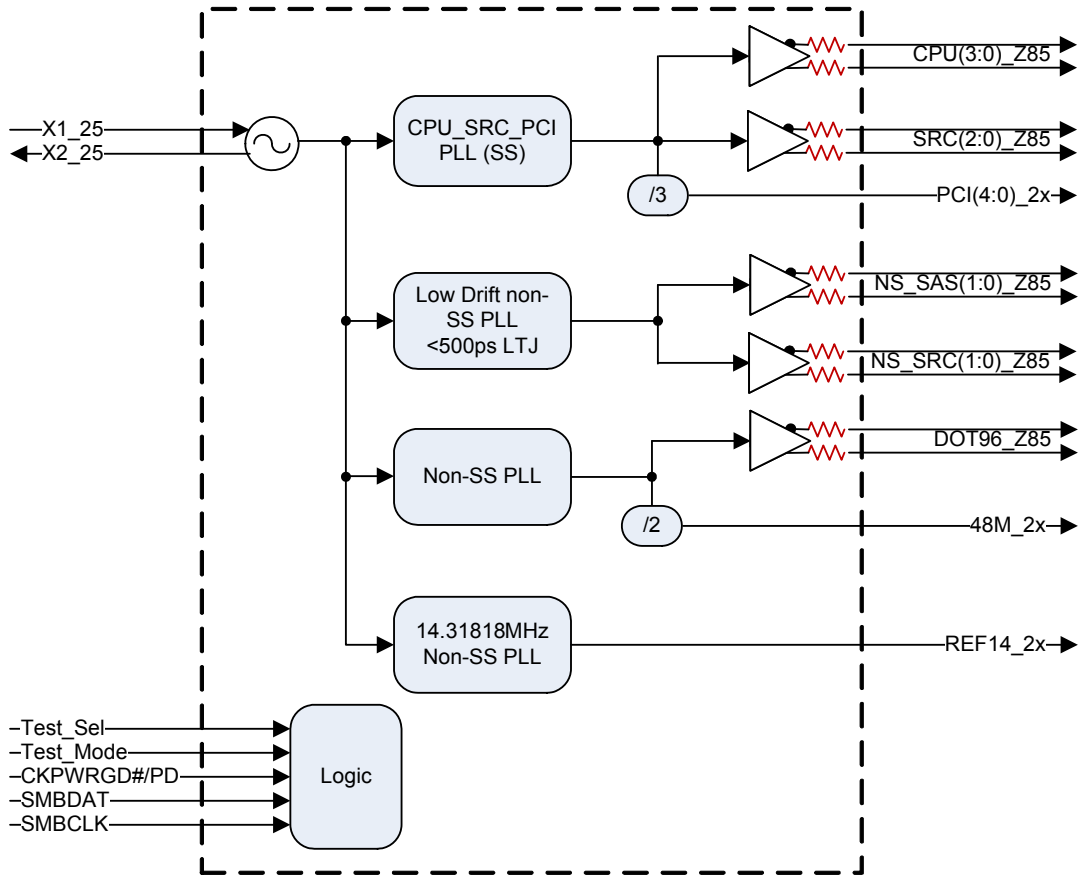



## Power Supply and Test Loads

### Power Group Pin Numbers

| VFQFPN |      | TSSOP  |        | Description                                |
|--------|------|--------|--------|--|
| VDD    | GND  | VDD    | GND    |  |
| 57     | 56   | 3      | 2      | 14MHz PLL Analog                           |
| 58     | 60   | 4      | 6      | REF14M Output and Logic                    |
| 64     | 61   | 10     | 7      | 25MHz XTAL                                 |
| 2, 9   | 1, 8 | 12, 19 | 11, 18 | PCI Outputs and Logic                      |
| 10     | 12   | 20     | 22     | 48MHz Output and Logic                     |
| 16     | 13   | 26     | 23     | 96MHz PLL Analog, Output and Logic         |
| 19, 27 | 22   | 29, 37 | 32     | SRC Outputs and Logic                      |
| 28     | 29   | 38     | 39     | SRC PLL Analog                             |
| 35     | 36   | 45     | 46     | Non-Spreading Differential Outputs & Logic |
| 41     | 42   | 51     | 52     | NS-SAS/SRC PLL Analog                      |
| 47, 53 | 48   | 57,63  | 58     | CPU Outputs and Logic                      |

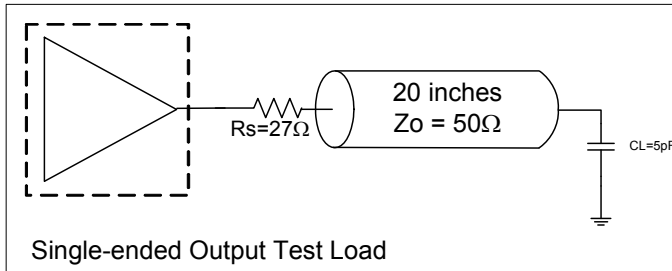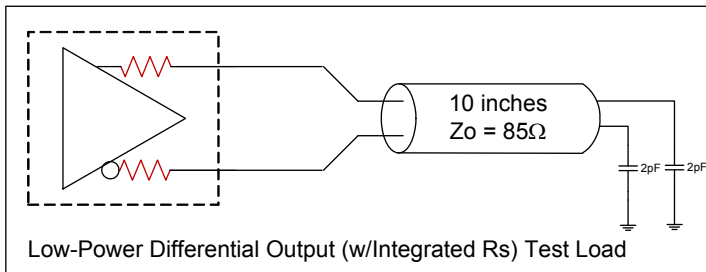

## Alternate Terminations

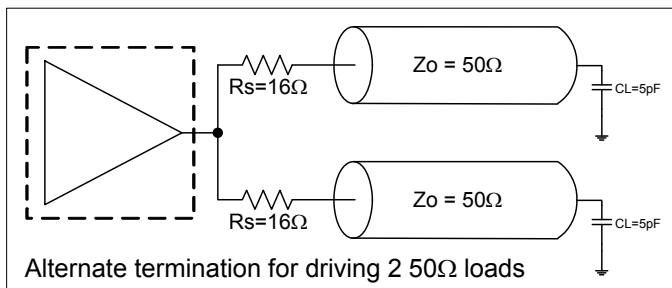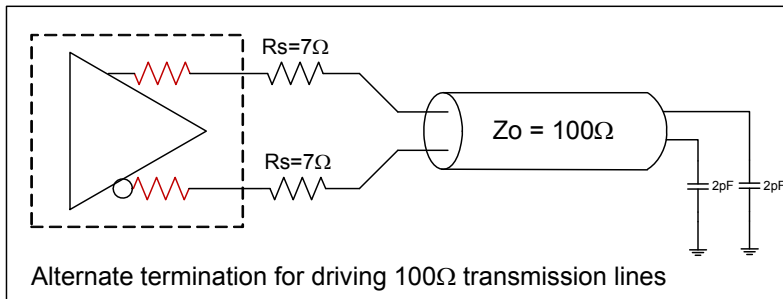



## Functionality and CPU SAS Frequency Tables

### 932SQL450 Functionality

| CPU | SRC | PCI   | REF    | NS_SAS<br>NS_SRC | DOT96 | USB   |     |
|-----|-----|-------|--------|------------------|-------|-------|-----|
| 100 | 100 | 33.33 | 14.318 | 100.00           | 96.00 | 48.00 | MHz |

### Spread Spectrum Control Functionality

| SS_Enable<br>(B1b0) | CPU, SRC &<br>PCI |
|---------------------|-------------------|
| 0                   | OFF               |
| 1                   | -0.50%            |

### 932SQL450 Power Down Functionality

| CKPWRGD#/PD | Differential<br>Outputs | Single-<br>ended<br>Outputs | Single-<br>ended<br>Outputs<br>w/Latch |
|-------------|-------------------------|-----------------------------|--|
| 1           | Low/Low                 | Low                         | Low <sup>1</sup>                       |
| 0           | Running                 |                             |  |

1. Single-ended outputs with a Latch will be Hi-Z until the first application of CKPWRGD#.

### CPU/SRC/PCI Margining Table

| Line | Byte6<br>Bit2<br>FS2 | Byte6<br>Bit1<br>FS1 | Byte6<br>Bit0<br>FS0 | CPU<br>Speed<br>(MHz) | SRC<br>(MHz) | PCI<br>(MHz) |
|------|----------------------|----------------------|----------------------|-----------------------|--------------|--------------|
| 0    | 0                    | 0                    | 0                    | 97.00                 | 97.00        | 32.33        |
| 1    | 0                    | 0                    | 1                    | 98.00                 | 98.00        | 32.67        |
| 2    | 0                    | 1                    | 0                    | 99.00                 | 99.00        | 33.00        |
| 3    | 0                    | 1                    | 1                    | 100.00                | 100.00       | 33.33        |
| 4    | 1                    | 0                    | 0                    | 101.00                | 101.00       | 33.67        |
| 5    | 1                    | 0                    | 1                    | 102.00                | 102.00       | 34.00        |
| 6    | 1                    | 1                    | 0                    | 103.00                | 103.00       | 34.33        |
| 7    | 1                    | 1                    | 1                    | 104.00                | 104.00       | 34.67        |

Default for 100MHz

### NS\_SAS Margining Table

| Line | Byte5<br>Bit3<br>FS3 | Byte5<br>Bit2<br>FS2 | Byte5<br>Bit1<br>FS1 | Byte5<br>Bit0<br>FS0 | NS_xxx<br>(MHz) |
|------|----------------------|----------------------|----------------------|----------------------|-----------------|
| 0    | 0                    | 0                    | 0                    | 0                    | 82.5            |
| 1    | 0                    | 0                    | 0                    | 1                    | 85.0            |
| 2    | 0                    | 0                    | 1                    | 0                    | 87.5            |
| 3    | 0                    | 0                    | 1                    | 1                    | 90.0            |
| 4    | 0                    | 1                    | 0                    | 0                    | 92.5            |
| 5    | 0                    | 1                    | 0                    | 1                    | 95.0            |
| 6    | 0                    | 1                    | 1                    | 0                    | 97.5            |
| 7    | 0                    | 1                    | 1                    | 1                    | 100.0           |
| 8    | 1                    | 0                    | 0                    | 0                    | 102.5           |
| 9    | 1                    | 0                    | 0                    | 1                    | 105.0           |
| 10   | 1                    | 0                    | 1                    | 0                    | 107.5           |
| 11   | 1                    | 0                    | 1                    | 1                    | 110.0           |
| 12   | 1                    | 1                    | 0                    | 0                    | 112.5           |
| 13   | 1                    | 1                    | 0                    | 1                    | 115.0           |
| 14   | 1                    | 1                    | 1                    | 0                    | 117.5           |
| 15   | 1                    | 1                    | 1                    | 1                    | 120.0           |

NOTE: Operation at other than the default entry is not guaranteed. These values are for margining purposes only.



## Clock AC Tolerances

|                              | CPU, SRC | NS_SAS,<br>NS_SRC | PCI    | DOT96 | 48MHz | REF   |            |
|------------------------------|----------|-------------------|--------|-------|-------|-------|------------|
| <b>PPM tolerance</b>         | 100      | 100               | 100    | 100   | 100   | 100   | <b>ppm</b> |
| <b>Cycle to Cycle Jitter</b> | 50       | 50                | 500    | 250   | 350   | 1000  | <b>ps</b>  |
| <b>Spread</b>                | -0.50%   | 0.00%             | -0.50% | 0     | 0.00% | 0.00% | <b>%</b>   |

## Clock Periods–Outputs with Spread Spectrum Disabled

| SSC OFF                   | Center Freq. MHz | Measurement Window           |                                      |                                      |                            |                                      |                                      |                              | Units | Notes |
|---------------------------|------------------|------------------------------|--------------------------------------|--------------------------------------|----------------------------|--------------------------------------|--------------------------------------|------------------------------|-------|-------|
|                           |                  | 1 Clock                      | 1us                                  | 0.1s                                 | 0.1s                       | 0.1s                                 | 1us                                  | 1 Clock                      |       |       |
|                           |                  | -c2c jitter<br>AbsPer<br>Min | -SSC<br>Short-Term<br>Average<br>Min | - ppm<br>Long-Term<br>Average<br>Min | 0 ppm<br>Period<br>Nominal | + ppm<br>Long-Term<br>Average<br>Max | +SSC<br>Short-Term<br>Average<br>Max | +c2c jitter<br>AbsPer<br>Max |       |       |
| CPU                       | 100.000          | 9.94900                      |                                      | 9.99900                              | 10.00000                   | 10.00100                             |                                      | 10.05100                     | ns    | 1,2   |
| SRC,<br>NS_SAS,<br>NS_SRC | 100.000          | 9.94900                      |                                      | 9.99900                              | 10.00000                   | 10.00100                             |                                      | 10.05100                     | ns    | 1,2   |
| PCI                       | 33.333           | 29.49700                     |                                      | 29.99700                             | 30.00000                   | 30.00300                             |                                      | 30.50300                     | ns    | 1,2   |
| DOT96                     | 96.000           | 10.16563                     |                                      | 10.41563                             | 10.41667                   | 10.41771                             |                                      | 10.66771                     | ns    | 1,2   |
| 48MHz                     | 48.000           | 20.48125                     |                                      | 20.83125                             | 20.83333                   | 20.83542                             |                                      | 21.18542                     | ns    | 1,2   |
| REF                       | 14.318           | 69.78429                     |                                      | 69.83429                             | 69.84128                   | 69.84826                             |                                      | 69.89826                     | ns    | 1,2   |

## Clock Periods–Outputs with Spread Spectrum Enabled

| SSC ON | Center Freq. MHz | Measurement Window           |                                      |                                      |                            |                                      |                                      |                              | Units | Notes |
|--------|------------------|------------------------------|--------------------------------------|--------------------------------------|----------------------------|--------------------------------------|--------------------------------------|------------------------------|-------|-------|
|        |                  | 1 Clock                      | 1us                                  | 0.1s                                 | 0.1s                       | 0.1s                                 | 1us                                  | 1 Clock                      |       |       |
|        |                  | -c2c jitter<br>AbsPer<br>Min | -SSC<br>Short-Term<br>Average<br>Min | - ppm<br>Long-Term<br>Average<br>Min | 0 ppm<br>Period<br>Nominal | + ppm<br>Long-Term<br>Average<br>Max | +SSC<br>Short-Term<br>Average<br>Max | +c2c jitter<br>AbsPer<br>Max |       |       |
| CPU    | 99.75            | 9.94906                      | 9.99906                              | 10.02406                             | 10.02506                   | 10.02607                             | 10.05107                             | 10.10107                     | ns    | 1,2   |
| PCI    | 33.25            | 29.49718                     | 29.99718                             | 30.07218                             | 30.07519                   | 30.07820                             | 30.15320                             | 30.65320                     | ns    | 1,2   |
| SRC    | 99.75            | 9.94906                      | 9.99906                              | 10.02406                             | 10.02506                   | 10.02607                             | 10.05107                             | 10.10107                     | ns    | 1,2   |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup> All Long Term Accuracy specifications are guaranteed with the assumption that the REF output is tuned to exactly 14.31818MHz.

## General SMBus Serial Interface Information for 932SQL450

### How to Write

- Controller (host) sends a start bit
- Controller (host) sends the write address
- IDT clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- IDT clock will **acknowledge**
- Controller (host) sends the byte count = X
- IDT clock will **acknowledge**
- Controller (host) starts sending Byte N through Byte N+X-1
- IDT clock will **acknowledge** each byte **one at a time**
- Controller (host) sends a Stop bit

| Index Block Write Operation     |           |                      |
|---------------------------------|-----------|----------------------|
| Controller (Host)               |           | IDT (Slave/Receiver) |
| T                               | starT bit |                      |
| Slave Address D2 <sub>(H)</sub> |           |                      |
| WR                              | WRite     |                      |
|                                 |           | ACK                  |
| Beginning Byte = N              |           |                      |
|                                 |           | ACK                  |
| Data Byte Count = X             |           |                      |
|                                 |           | ACK                  |
| Beginning Byte N                |           |                      |
|                                 |           | ACK                  |
| O                               |           |                      |
| O                               |           | O                    |
| O                               |           | O                    |
|                                 |           | O                    |
| Byte N + X - 1                  |           |                      |
|                                 |           | ACK                  |
| P                               | stoP bit  |                      |

| Read Address      | Write Address     |
|-------------------|-------------------|
| D3 <sub>(H)</sub> | D2 <sub>(H)</sub> |

### How to Read

- Controller (host) will send a start bit
- Controller (host) sends the write address
- IDT clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- IDT clock will **acknowledge**
- Controller (host) will send a separate start bit
- Controller (host) sends the read address
- IDT clock will **acknowledge**
- IDT clock will send the data byte count = X
- IDT clock sends Byte N+X-1
- IDT clock sends **Byte 0 through Byte X (if X<sub>(H)</sub> was written to Byte 8)**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a not acknowledge bit
- Controller (host) will send a stop bit

| Index Block Read Operation      |                 |                      |
|---------------------------------|-----------------|----------------------|
| Controller (Host)               |                 | IDT (Slave/Receiver) |
| T                               | starT bit       |                      |
| Slave Address D2 <sub>(H)</sub> |                 |                      |
| WR                              | WRite           |                      |
|                                 |                 | ACK                  |
| Beginning Byte = N              |                 |                      |
|                                 |                 | ACK                  |
| RT                              | Repeat starT    |                      |
| Slave Address D3 <sub>(H)</sub> |                 |                      |
| RD                              | ReaD            |                      |
|                                 |                 | ACK                  |
|                                 |                 | Data Byte Count=X    |
| ACK                             |                 |                      |
|                                 |                 | Beginning Byte N     |
| ACK                             |                 |                      |
| O                               |                 | O                    |
| O                               |                 | O                    |
| O                               |                 | O                    |
|                                 |                 | Byte N + X - 1       |
| N                               | Not acknowledge |                      |
| P                               | stoP bit        |                      |

**NOTE: Pin numbers refer to TSSOP**

**SMBus Table: Output Enable Register**

| Byte 0 | Pin # | Name           | Control Function | Type | 0               | 1      | Default |
|--------|-------|----------------|------------------|------|-----------------|--------|---------|
| Bit 7  | 24/25 | DOT96 Enable   | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 6  | 50/49 | NS_SAS1 Enable | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 5  | 48/47 | NS_SAS0 Enable | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 4  | 44/43 | NS_SRC1 Enable | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 3  | 42/41 | NS_SRC0 Enable | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 2  | 36/35 | SRC2 Enable    | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 1  | 34/33 | SRC1 Enable    | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |
| Bit 0  | 30/31 | SRC0 Enable    | Output Enable    | RW   | Disable-Low/Low | Enable | 1       |

**SMBus Table: Output Enable Register**

| Byte 1 | Pin #           | Name                   | Control Function | Type | 0               | 1         | Default |
|--------|-----------------|------------------------|------------------|------|-----------------|-----------|---------|
| Bit 7  | 5               | REF14_3x Enable        | Output Enable    | RW   | Disable-Low     | Enable    | 1       |
| Bit 6  |                 | RESERVED               |                  |      |                 |           | 0       |
| Bit 5  |                 | RESERVED               |                  |      |                 |           | 0       |
| Bit 4  | 62/61           | CPU3                   | Output Enable    | RW   | Disable-Low/Low | Enable    | 1       |
| Bit 3  | 60/59           | CPU2                   | Output Enable    | RW   | Disable-Low/Low | Enable    | 1       |
| Bit 2  | 56/55           | CPU1                   | Output Enable    | RW   | Disable-Low/Low | Enable    | 1       |
| Bit 1  | 54/53           | CPU0                   | Output Enable    | RW   | Disable-Low/Low | Enable    | 1       |
| Bit 0  | CPU/SRC/<br>PCI | Spread Spectrum Enable | Spread Off/On    | RW   | Spread Off      | Spread On | 0       |

**SMBus Table: Output Enable Register**

| Byte 2 | Pin # | Name         | Control Function | Type | 0           | 1      | Default |
|--------|-------|--------------|------------------|------|-------------|--------|---------|
| Bit 7  |       | RESERVED     |                  |      |             |        | 0       |
| Bit 6  |       | RESERVED     |                  |      |             |        | 0       |
| Bit 5  | 13    | PCI4 Enable  | Output Enable    | RW   | Disable-Low | Enable | 1       |
| Bit 4  | 14    | PCI3 Enable  | Output Enable    | RW   | Disable-Low | Enable | 1       |
| Bit 3  | 15    | PCI2 Enable  | Output Enable    | RW   | Disable-Low | Enable | 1       |
| Bit 2  | 16    | PCI1 Enable  | Output Enable    | RW   | Disable-Low | Enable | 1       |
| Bit 1  | 17    | PCI0 Enable  | Output Enable    | RW   | Disable-Low | Enable | 1       |
| Bit 0  | 21    | 48MHz Enable | Output Enable    | RW   | Disable-Low | Enable | 1       |

**SMBus Table: Differential Amplitude Control**

| Byte 3 | Pin # | Name                   | Control Function | Type | 0          | 1           | Default |
|--------|-------|------------------------|------------------|------|------------|-------------|---------|
| Bit 7  |       | CPU AMPLITUDE 1        | CPU Vhigh        | RW   | 00 = 700mV | 01 = 800mV  | 0       |
| Bit 6  |       | CPU AMPLITUDE 0        |                  | RW   | 10 = 900mV | 11 = 1000mV | 1       |
| Bit 5  |       | SRC AMPLITUDE 1        | SRC Vhigh        | RW   | 00 = 700mV | 01 = 800mV  | 0       |
| Bit 4  |       | SRC AMPLITUDE 0        |                  | RW   | 10 = 900mV | 11 = 1000mV | 1       |
| Bit 3  |       | DOT96 AMPLITUDE 1      | DOT96 Vhigh      | RW   | 00 = 700mV | 01 = 800mV  | 0       |
| Bit 2  |       | DOT96 AMPLITUDE 0      |                  | RW   | 10 = 900mV | 11 = 1000mV | 1       |
| Bit 1  |       | NS-SAS/SRC AMPLITUDE 1 | NS-SAS/SRC Vhigh | RW   | 00 = 700mV | 01 = 800mV  | 0       |
| Bit 0  |       | NS-SAS/SRC AMPLITUDE 0 |                  | RW   | 10 = 900mV | 11 = 1000mV | 1       |

**SMBus Table: Spread Amount Register**

| Byte 4 | Pin # | Name         | Control Function                                | Type | 0         | 1         | Default |
|--------|-------|--------------|---|------|-----------|-----------|---------|
| Bit 7  |       | RESERVED     |   |      |           |           | 0       |
| Bit 6  |       | RESERVED     |   |      |           |           | 0       |
| Bit 5  |       | RESERVED     |   |      |           |           | 0       |
| Bit 4  |       | RESERVED     |   |      |           |           | 0       |
| Bit 3  |       | RESERVED     |   |      |           |           | 0       |
| Bit 2  |       | RESERVED     |   |      |           |           | 0       |
| Bit 1  |       | SS AMOUNT[1] | Spread Amount (note<br>B1b0 must be set to '1') | RW   | 00= -0.2% | 10= -0.4% | 1       |
| Bit 0  |       | SS AMOUNT[0] |   | RW   | 01= -0.3% | 11= -0.5% | 1       |

**SMBus Table: NS\_SAS/NS\_SRC Frequency Margining Table**

| Byte 5 | Pin # | Name | Control Function | Type | 0                                  | 1 | Default |
|--------|-------|------|------------------|------|------------------------------------|---|---------|
| Bit 7  |       |      |                  |      | RESERVED                           |   | 0       |
| Bit 6  |       |      |                  |      | RESERVED                           |   | 0       |
| Bit 5  |       |      |                  |      | RESERVED                           |   | 0       |
| Bit 4  |       |      |                  |      | RESERVED                           |   | 0       |
| Bit 3  | -     | FS3  | Freq. Sel 3      | RW   | See NS_SAS/NS_SRC Frequency Table. |   | 0       |
| Bit 2  | -     | FS2  | Freq. Sel 2      | RW   |                                    |   | 1       |
| Bit 1  | -     | FS1  | Freq. Sel 1      | RW   |                                    |   | 1       |
| Bit 0  | -     | FS0  | Freq. Sel 0      | RW   |                                    |   | 1       |

**SMBus Table: Test Mode and CPU/SRC/PCI Frequency Select Register**

| Byte 6 | Pin # | Name        | Control Function | Type | 0                                      | 1      | Default |
|--------|-------|-------------|------------------|------|--|--------|---------|
| Bit 7  | -     | Test Mode   | Test Mode Type   | RW   | Hi-Z                                   | REF/N  | 0       |
| Bit 6  | -     | Test Select | Select Test Mode | RW   | Disable                                | Enable | 0       |
| Bit 5  | -     |             |                  |      | RESERVED                               |        | 0       |
| Bit 4  | -     |             |                  |      | RESERVED                               |        | 1       |
| Bit 3  | -     |             |                  |      | RESERVED                               |        | 0       |
| Bit 2  | -     | FS2         | Freq. Sel 2      | RW   | See CPU/SRC/PCI Frequency Select Table |        | 0       |
| Bit 1  | -     | FS1         | Freq. Sel 1      | RW   |  |        | 1       |
| Bit 0  | -     | FS0         | Freq. Sel 0      | RW   |  |        | 1       |

Note: Internal Pull up on 100M\_133M# pin will result in default CPU frequency of 100 MHz.

**SMBus Table: Vendor & Revision ID Register**

| Byte 7 | Pin # | Name | Control Function              | Type | 0                | 1 | Default |
|--------|-------|------|-------------------------------|------|------------------|---|---------|
| Bit 7  | -     | RID3 | REVISION ID<br>(1h for B rev) | R    | 1 for B rev      |   | 0       |
| Bit 6  | -     | RID2 |                               | R    |                  |   | 0       |
| Bit 5  | -     | RID1 |                               | R    |                  |   | 0       |
| Bit 4  | -     | RID0 |                               | R    |                  |   | 1       |
| Bit 3  | -     | VID3 | VENDOR ID                     | R    | 0001 for ICS/IDT |   | 0       |
| Bit 2  | -     | VID2 |                               | R    |                  |   | 0       |
| Bit 1  | -     | VID1 |                               | R    |                  |   | 0       |
| Bit 0  | -     | VID0 |                               | R    |                  |   | 1       |

**SMBus Table: Byte Count Register**

| Byte 8 | Pin # | Name | Control Function                 | Type | 0   | 1 | Default |
|--------|-------|------|----------------------------------|------|---|---|---------|
| Bit 7  | -     | BC7  | Byte Count<br>Programming b(7:0) | RW   | Writing to this register will configure how many bytes will be read back, default is A bytes.<br>(0 to 9) |   | 0       |
| Bit 6  | -     | BC6  |                                  | RW   |   |   | 0       |
| Bit 5  | -     | BC5  |                                  | RW   |   |   | 0       |
| Bit 4  | -     | BC4  |                                  | RW   |   |   | 0       |
| Bit 3  | -     | BC3  |                                  | RW   |   |   | 0       |
| Bit 2  | -     | BC2  |                                  | RW   |   |   | 0       |
| Bit 1  | -     | BC1  |                                  | RW   |   |   | 0       |
| Bit 0  | -     | BC0  |                                  | RW   |   |   | 1       |

**SMBus Table: Device ID Register**

| Byte 9 | Pin # | Name | Control Function      | Type | 0 | 1 | Default |
|--------|-------|------|-----------------------|------|---|---|---------|
| Bit 7  |       | DID7 | Device ID<br>(45 hex) | R    | - | - | 0       |
| Bit 6  |       | DID6 |                       | R    | - | - | 1       |
| Bit 5  |       | DID5 |                       | R    | - | - | 0       |
| Bit 4  |       | DID4 |                       | R    | - | - | 0       |
| Bit 3  |       | DID3 |                       | R    | - | - | 0       |
| Bit 2  |       | DID2 |                       | R    | - | - | 1       |
| Bit 1  |       | DID1 |                       | R    | - | - | 0       |
| Bit 0  |       | DID0 |                       | R    | - | - | 1       |

## Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the 932SQL450. These ratings, which are standard values for IDT commercially rated parts, are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

| PARAMETER                 | SYMBOL             | CONDITIONS                 | MIN     | TYP | MAX                   | UNITS | NOTES |
|---------------------------|--------------------|----------------------------|---------|-----|-----------------------|-------|-------|
| 3.3V Core Supply Voltage  | VDDA               |                            |         |     | 4.6                   | V     | 1,2   |
| 3.3V Logic Supply Voltage | VDD                |                            |         |     | 4.6                   | V     | 1,2   |
| Input Low Voltage         | V <sub>IL</sub>    |                            | GND-0.5 |     |                       | V     | 1     |
| Input High Voltage        | V <sub>IH</sub>    | Except for SMBus interface |         |     | V <sub>DD</sub> +0.5V | V     | 1     |
| Input High Voltage        | V <sub>IHSMB</sub> | SMBus clock and data pins  |         |     | 5.5V                  | V     | 1     |
| Storage Temperature       | T <sub>s</sub>     |                            | -65     |     | 150                   | °C    | 1     |
| Junction Temperature      | T <sub>j</sub>     |                            |         |     | 125                   | °C    | 1     |
| Case Temperature          | T <sub>c</sub>     |                            |         |     | 110                   | °C    | 1     |
| Input ESD protection      | ESD prot           | Human Body Model           | 2000    |     |                       | V     | 1     |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>Operation under these conditions is neither implied nor guaranteed.

## Electrical Characteristics—Current Consumption

T<sub>A</sub> = T<sub>COM</sub>; Supply Voltage VDD = 3.3 V +/-5%

| PARAMETER                | SYMBOL                | CONDITIONS  | MIN | TYP | MAX | UNITS | NOTES |
|--------------------------|-----------------------|---|-----|-----|-----|-------|-------|
| Operating Supply Current | I <sub>DD3.3OP</sub>  | All outputs active CPU@100MHz,<br>See Test Loads. |     | 233 | 265 | mA    |       |
| Powerdown Current        | I <sub>DD3.3PDZ</sub> |   |     | 6   | 10  | mA    |       |

## AC Electrical Characteristics—Differential LP-HCSL Outputs (CPU, SRC, NS\_SAS, NS\_SRC, DOT96)

T<sub>A</sub> = T<sub>COM</sub>; Supply Voltage VDD = 3.3 V +/-5%

| PARAMETER              | SYMBOL               | CONDITIONS                                      | MIN | TYP  | MAX | UNITS | NOTES |
|------------------------|----------------------|---|-----|------|-----|-------|-------|
| Duty Cycle             | t <sub>DC</sub>      | Measured differentially, PLL Mode               | 45  | 49.9 | 55  | %     | 1     |
| Skew, Output to Output | t <sub>sk3SRC</sub>  | Across all SRC outputs,<br>V <sub>T</sub> = 50% |     | 40   | 50  | ps    | 1     |
| Skew, Output to Output | t <sub>sk3CPU</sub>  | Across all CPU outputs,<br>V <sub>T</sub> = 50% |     | 19   | 50  | ps    | 1     |
| Jitter, Cycle to cycle | t <sub>jcy-cyc</sub> | CPU, SRC, NS_SAS outputs                        |     | 15   | 50  | ps    | 1,3   |
|                        |                      | DOT96 output                                    |     | 16   | 250 | ps    | 1,3   |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>Z<sub>o</sub>=85Ω (differential impedance).

<sup>3</sup>Measured from differential waveform

## Electrical Characteristics–Input/Supply/Common Parameters

TA = T<sub>COM</sub>; Supply Voltage VDD = 3.3 V +/-5%

| PARAMETER                        | SYMBOL              | CONDITIONS  | MIN                   | TYP   | MAX                   | UNITS | NOTES |
|----------------------------------|---------------------|---|-----------------------|-------|-----------------------|-------|-------|
| Ambient Operating Temperature    | T <sub>COM</sub>    | Commercial range  | 0                     |       | 70                    | °C    |       |
| Input High Voltage               | V <sub>IH</sub>     | Single-ended inputs, except SMBus, low threshold and tri-level inputs   | 2                     |       | V <sub>DD</sub> + 0.3 | V     |       |
| Input Low Voltage                | V <sub>IL</sub>     | Single-ended inputs, except SMBus, low threshold and tri-level inputs   | GND - 0.3             |       | 0.8                   | V     |       |
| Low Threshold Input-High Voltage | V <sub>IH_FS</sub>  | 3.3 V +/-5%   | 0.7                   |       | V <sub>DD</sub> + 0.3 | V     |       |
| Low Threshold Input-Low Voltage  | V <sub>IL_FS</sub>  | 3.3 V +/-5%   | V <sub>SS</sub> - 0.3 |       | 0.35                  | V     |       |
| Input Current                    | I <sub>IN</sub>     | Single-ended inputs, V <sub>IN</sub> = GND, V <sub>IN</sub> = VDD   | -5                    |       | 5                     | uA    |       |
|                                  | I <sub>INP</sub>    | Single-ended inputs. V <sub>IN</sub> = 0 V; Inputs with internal pull-up resistors<br>V <sub>IN</sub> = VDD; Inputs with internal pull-down resistors | -200                  |       | 200                   | uA    |       |
| Input Frequency                  | F <sub>I</sub>      |   |                       | 25.00 |                       | MHz   | 2     |
| Pin Inductance                   | L <sub>pin</sub>    |   |                       |       | 7                     | nH    | 1     |
| Capacitance                      | C <sub>IN</sub>     | Logic Inputs  |                       |       | 5                     | pF    | 1     |
|                                  | C <sub>OUT</sub>    | Output pin capacitance  |                       |       | 5                     | pF    | 1     |
|                                  | C <sub>INX</sub>    | X1 & X2 pins  |                       |       | 5                     | pF    | 1     |
| Clk Stabilization                | T <sub>STAB</sub>   | From V <sub>DD</sub> Power-Up and after input clock stabilization or de-assertion of PD# to 1st clock   |                       | 0.4   | 1.8                   | ms    | 1,2   |
| SS Modulation Frequency          | f <sub>MODIN</sub>  | Allowable Frequency (Triangular Modulation)   | 30                    | 31.5  | 33                    | kHz   | 1     |
| Tdrive_PD#                       | t <sub>DRVPD</sub>  | Differential output enable after PD# de-assertion   |                       | 98    | 300                   | us    | 1,3   |
| Tfall                            | t <sub>F</sub>      | Fall time of control inputs   |                       |       | 5                     | ns    | 1,2   |
| Trise                            | t <sub>R</sub>      | Rise time of control inputs   |                       |       | 5                     | ns    | 1,2   |
| SMBus Input Low Voltage          | V <sub>ILSMB</sub>  |   |                       |       | 0.8                   | V     |       |
| SMBus Input High Voltage         | V <sub>IHSMB</sub>  |   | 2.1                   |       | V <sub>DD</sub> SMB   | V     |       |
| SMBus Output Low Voltage         | V <sub>OLSMB</sub>  | @ I <sub>PULLUP</sub>   |                       |       | 0.4                   | V     |       |
| SMBus Sink Current               | I <sub>PULLUP</sub> | @ V <sub>OL</sub>   | 4                     |       |                       | mA    |       |
| Nominal Bus Voltage              | V <sub>DD</sub> SMB | 3V to 5V +/- 10%  | 2.7                   |       | 5.5                   | V     |       |
| SCLK/SDATA Rise Time             | t <sub>RSMB</sub>   | (Max V <sub>IL</sub> - 0.15) to (Min V <sub>IH</sub> + 0.15)  |                       |       | 1000                  | ns    | 1     |
| SCLK/SDATA Fall Time             | t <sub>FSMB</sub>   | (Min V <sub>IH</sub> + 0.15) to (Max V <sub>IL</sub> - 0.15)  |                       |       | 300                   | ns    | 1     |
| SMBus Operating Frequency        | f <sub>MAXSMB</sub> | Maximum SMBus operating frequency   |                       |       | 100                   | kHz   |       |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>Control input must be monotonic from 20% to 80% of input swing.

<sup>3</sup>Time from deassertion until outputs are >200 mV

## DC Electrical Characteristics–Differential LP-HCSL Outputs (CPU, SRC, NS\_SAS, NS\_SRC, DOT96)

$T_A = T_{COM}$ ; Supply Voltage  $V_{DD} = 3.3\text{ V} \pm 5\%$

| PARAMETER              | SYMBOL           | CONDITIONS  | MIN  | TYP  | MAX  | UNITS | NOTES |
|------------------------|------------------|---|------|------|------|-------|-------|
| Slew rate              | dV/dt            | Scope averaging on  | 1.5  | 2.9  | 4    | V/ns  | 1,2,3 |
| Slew rate matching     | $\Delta dV/dt$   | Slew rate matching, Scope averaging on  |      | 5    | 20   | %     | 1,2,4 |
| Voltage High           | VHigh            | Statistical measurement on single-ended signal using oscilloscope math function. (Scope averaging on) | 660  | 774  | 850  | mV    |       |
| Voltage Low            | VLow             |   | -150 | 83   | 150  |       |       |
| Max Voltage            | Vmax             | Measurement on single ended signal using absolute value. (Scope                                       |      | 918  | 1150 | mV    | 7     |
| Min Voltage            | Vmin             |   | -300 | -3   |      |       | 7     |
| Vswing                 | Vswing           | Scope averaging off   | 300  | 1359 |      | mV    | 1,2   |
| Crossing Voltage (abs) | Vcross_abs       | Scope averaging off   | 250  | 432  | 550  | mV    | 1,5   |
| Crossing Voltage (var) | $\Delta$ -Vcross | Scope averaging off   |      | 14   | 140  | mV    | 1,6   |

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.  $Z_O=85\Omega$  (differential impedance).

<sup>2</sup> Measured from differential waveform

<sup>3</sup> Slew rate is measured through the Vswing voltage range centered around differential 0V. This results in a +/-150mV window around differential 0V.

<sup>4</sup> Matching applies to rising edge rate for Clock and falling edge rate for Clock#. It is measured using a +/-75mV window centered on the average cross point where Clock rising meets Clock# falling. The median cross point is used to calculate the voltage thresholds the oscilloscope is to use for the edge rate calculations.

<sup>5</sup> Vcross is defined as voltage where Clock = Clock# measured on a component test board and only applies to the differential rising edge (i.e. Clock rising and Clock# falling).

<sup>6</sup> The total variation of all Vcross measurements in any particular system. Note that this is a subset of V\_cross\_min/max (V\_cross absolute) allowed. The intent is to limit Vcross induced modulation by setting V\_cross\_delta to be smaller than

<sup>7</sup> Includes overshoot and undershoot.

<sup>8</sup> Measured from single-ended waveform

<sup>9</sup> Measured with scope averaging off, using statistics function. Variation is difference between min and max.

## Electrical Characteristics–48MHz

$T_A = 0 - 70^\circ\text{C}$ ; Supply Voltage  $V_{DD}/V_{DDA} = 3.3\text{ V} \pm 5\%$ ,

| PARAMETER              | SYMBOL            | CONDITIONS               | MIN   | TYP  | MAX    | UNITS    | NOTES |
|------------------------|-------------------|--------------------------|-------|------|--------|----------|-------|
| Output Impedance       | $R_{DSP}$         | $V_O = V_{DD}*(0.5)$     | 12    | 21.7 | 55     | $\Omega$ | 1     |
| Output High Voltage    | $V_{OH}$          | $I_{OH} = -1\text{ mA}$  | 2.4   |      |        | V        |       |
| Output Low Voltage     | $V_{OL}$          | $I_{OL} = 1\text{ mA}$   |       |      | 0.55   | V        |       |
| Clock High Time        | $T_{HIGH}$        | 1.5V                     | 8.094 |      | 10.036 | ns       | 1     |
| Clock Low Time         | $T_{LOW}$         | 1.5V                     | 7.694 |      | 9.836  | ns       | 1     |
| Edge Rate              | $t_{slew/f\ USB}$ | Rising/Falling edge rate | 1     |      | 2.3    | V/ns     | 1,2   |
| Duty Cycle             | $d_{t1}$          | $V_T = 1.5\text{ V}$     | 45    | 50.4 | 55     | %        | 1     |
| Jitter, Cycle to cycle | $t_{jyc-cyc}$     | $V_T = 1.5\text{ V}$     |       |      | 350    | ps       | 1     |

See "Power Supply and Test Loads" page for termination circuits

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup> Measured between 0.8V and 2.0V



## Electrical Characteristics–Phase Jitter Parameters

$T_A = 0 - 70^\circ\text{C}$ ; Supply Voltage  $V_{DD}/V_{DDA} = 3.3\text{ V} \pm 5\%$ ,

| PARAMETER    | SYMBOL            | CONDITIONS  | MIN | TYP  | MAX  | INDUST. LIMIT | UNITS    | Notes   |
|--------------|-------------------|---|-----|------|------|---------------|----------|---------|
| Phase Jitter | $t_{jphPCleG1}$   | PCIe Gen 1  |     | 35   | 39   | 86            | ps (p-p) | 1,2,3,6 |
|              | $t_{jphPCleG2}$   | PCIe Gen 2 Lo Band<br>$10\text{kHz} < f < 1.5\text{MHz}$                    |     | 1.52 | 1.84 | 3             | ps (rms) | 1,2,6   |
|              |                   | PCIe Gen 2 High Band<br>$1.5\text{MHz} < f < \text{Nyquist} (50\text{MHz})$ |     | 2.19 | 2.42 | 3.1           | ps (rms) | 1,2,6   |
|              | $t_{jphPCleG3}$   | PCIe Gen 3<br>(PLL BW of 2-4MHz, CDR = 10MHz)                               |     | 0.51 | 0.59 | 1             | ps (rms) | 1,2,4,6 |
|              | $t_{jphQPI\_SMI}$ | QPI & SMI<br>(100MHz, 4.8Gb/s, 6.4Gb/s 12UI)                                |     | 0.25 | 0.37 | 0.5           | ps (rms) | 1,5,7   |
|              |                   | QPI & SMI<br>(100MHz, 8.0Gb/s, 12UI)  |     | 0.18 | 0.23 | 0.3           | ps (rms) | 1,5,7   |
|              |                   | QPI & SMI<br>(100MHz, 9.6Gb/s, 12UI)  |     | 0.15 | 0.19 | 0.2           | ps (rms) | 1,5,7   |
|              | $t_{jphSAS12G}$   | SAS 12G   |     | 1.15 | 1.27 | 1.3           | ps (rms) | 1,5,8   |

<sup>1</sup> Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup> See <http://www.pcisig.com> for complete specs

<sup>3</sup> Sample size of at least 100K cycles. This figures extrapolates to 108ps pk-pk @ 1M cycles for a BER of 1-12.

<sup>4</sup> Subject to final radification by PCI SIG.

<sup>5</sup> Calculated from Intel-supplied Clock Jitter Tool v 1.6.6

<sup>6</sup> Applied to SRC outputs

<sup>7</sup> Applies to CPU outputs

<sup>8</sup> Applies to NS\_SAS, NS\_SRC outputs, Spread Off

## Electrical Characteristics–PCI

$T_A = 0 - 70^\circ\text{C}$ ; Supply Voltage  $V_{DD}/V_{DDA} = 3.3\text{ V} \pm 5\%$ ,

| PARAMETER              | SYMBOL        | CONDITIONS               | MIN | TYP   | MAX  | UNITS    | NOTES |
|------------------------|---------------|--------------------------|-----|-------|------|----------|-------|
| Output Impedance       | $R_{DSP}$     | $V_O = V_{DD}*(0.5)$     | 12  | 22    | 55   | $\Omega$ | 1     |
| Output High Voltage    | $V_{OH}$      | $I_{OH} = -1\text{ mA}$  | 2.4 |       |      | V        |       |
| Output Low Voltage     | $V_{OL}$      | $I_{OL} = 1\text{ mA}$   |     |       | 0.55 | V        |       |
| Clock High Time        | $T_{HIGH}$    | 1.5V                     | 12  |       |      | ns       | 1     |
| Clock Low Time         | $T_{LOW}$     | 1.5V                     | 12  |       |      | ns       | 1     |
| Edge Rate              | $t_{slewr/f}$ | Rising/Falling edge rate | 1   | 1.7   | 4    | V/ns     | 1,2   |
| Duty Cycle             | $d_{t1}$      | $V_T = 1.5\text{ V}$     | 45  | 50.4  | 55   | %        | 1     |
| Group Skew             | $t_{skew}$    | $V_T = 1.5\text{ V}$     |     | 197   | 500  | ps       | 1     |
| Jitter, Cycle to cycle | $t_{jcc-cyc}$ | $V_T = 1.5\text{ V}$     |     | 45.52 | 500  | ps       | 1     |

See "Power Supply and Test Loads" page for termination circuits

<sup>1</sup> Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup> Measured between 0.8V and 2.0V

## Electrical Characteristics–REF14M

$T_A = 0 - 70^\circ\text{C}$ ; Supply Voltage  $V_{DD}/V_{DDA} = 3.3\text{ V} \pm 5\%$ ,

| PARAMETER              | SYMBOL        | CONDITIONS               | MIN  | TYP  | MAX  | UNITS    | Notes |
|------------------------|---------------|--------------------------|------|------|------|----------|-------|
| Output Impedance       | $R_{DSP}$     | $V_O = V_{DD}*(0.5)$     | 12   | 21.7 | 55   | $\Omega$ | 1     |
| Output High Voltage    | $V_{OH}$      | $I_{OH} = -1\text{ mA}$  | 2.4  |      |      | V        |       |
| Output Low Voltage     | $V_{OL}$      | $I_{OL} = 1\text{ mA}$   |      |      | 0.55 | V        |       |
| Clock High Time        | $T_{HIGH}$    | 1.5V                     | 27.5 |      |      | ns       | 1     |
| Clock Low Time         | $T_{LOW}$     | 1.5V                     | 27.5 |      |      | ns       | 1     |
| Edge Rate              | $t_{slew/f}$  | Rising/Falling edge rate | 1    | 1.9  | 4    | V/ns     | 1,2   |
| Duty Cycle             | $d_{t1}$      | $V_T = 1.5\text{ V}$     | 45   | 50.1 | 55   | %        | 1     |
| Jitter, Cycle to cycle | $t_{jyc-cyc}$ | $V_T = 1.5\text{ V}$     |      | 42   | 1000 | ps       | 1     |

See "Power Supply and Test Loads" page for termination circuits

<sup>1</sup>Guaranteed by design and characterization, not 100% tested in production.

<sup>2</sup>Measured between 0.8V and 2.0V

## Test Clarification Table

| Comments  | HW                 |                     | SW                        |                          | OUTPUT |
|---|--------------------|---------------------|---------------------------|--------------------------|--------|
|   | TEST_SEL<br>HW PIN | TEST_MODE<br>HW PIN | TEST<br>ENTRY BIT<br>B6b6 | REF/N or<br>HI-Z<br>B6b7 |        |
|   | 0                  | X                   | 0                         | X                        |        |
| Power-up w/ TEST_SEL = 1 (>0.7V) to enter test mode. Cycle power to disable test mode.  | 1                  | 0                   | X                         | 0                        | HI-Z   |
|   | 1                  | 0                   | X                         | 1                        | REF/N  |
|   | 1                  | 1                   | X                         | 0                        | REF/N  |
|   | 1                  | 1                   | X                         | 1                        | REF/N  |
| If TEST_SEL HW pin is 0 during power-up, test mode can be selected through B6b6. If test mode is selected by B6b6, then B6b7 is used to select HI-Z or REF/N. FS_B/TEST_Mode pin is not used. Cycle power to disable test mode. | 0                  | X                   | 1                         | 0                        | HI-Z   |
|   | 0                  | X                   | 1                         | 1                        | REF/N  |

B6b6: 1= ENTER TEST MODE, Default = 0 (NORMAL OPERATION)

B6b7: 1= REF/N, Default = 0 (HI-Z)

## Recommended Crystal Characteristics (3225 package)

| PARAMETER  | VALUE       | UNITS   | NOTES |
|--|-------------|---------|-------|
| Frequency  | 25          | MHz     | 1     |
| Resonance Mode   | Fundamental | -       | 1     |
| Frequency Tolerance @ 25°C                                       | ±20         | PPM Max | 1     |
| Frequency Stability, ref @ 25°C Over Operating Temperature Range | ±20         | PPM Max | 1     |
| Temperature Range (commercial)                                   | 0~70        | °C      | 1     |
| Temperature Range (industrial)                                   | -40~85      | °C      | 2     |
| Equivalent Series Resistance (ESR)                               | 50          | Ω Max   | 1     |
| Shunt Capacitance (C <sub>0</sub> )                              | 7           | pF Max  | 1     |
| Load Capacitance (C <sub>L</sub> )                               | 8           | pF Max  | 1     |
| Drive Level  | 0.3         | mW Max  | 1     |
| Aging per year   | ±5          | PPM Max | 1     |


### Notes:

1. Fox Electronics 603-25-150 or equivalent
2. For I-temp, contact Fox Electronics at Foxonline.com

## Marking Diagrams



64TSSOP




64VFQFPN

### Notes:


1. "L" denotes Pb-free, RoHS compliant.
2. "LOT" denotes the lot number.
3. "YYWW" denotes the last two digits and week the part was assembled.
4. "COO" denotes the country of origin.
5. "B" denotes the device revision designator.
6. Bottom marking (TSSOP only): country of origin.

### Package Outline and Package Dimensions (64-pin TSSOP)

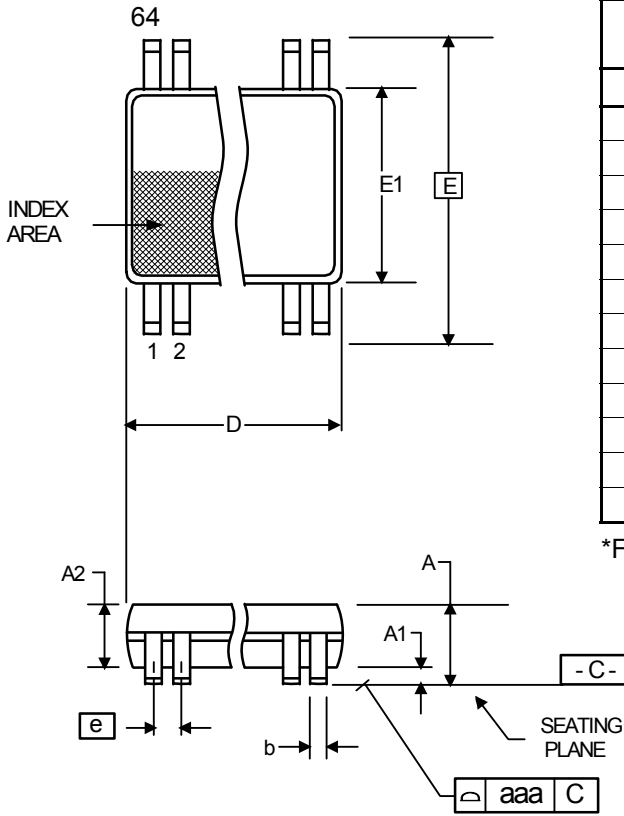


| Symbol | Millimeters |       | Inches*     |      |
|--------|-------------|-------|-------------|------|
|        | Min         | Max   | Min         | Max  |
| A      | -           | 1.20  | -           | .047 |
| A1     | 0.05        | 0.15  | .002        | .006 |
| A2     | 0.80        | 1.05  | 0.32        | 0.41 |
| b      | 0.17        | 0.27  | .007        | .011 |
| c      | 0.09        | 0.20  | .0035       | .008 |
| D      | 16.90       | 17.10 | .665        | .673 |
| E      | 8.10 BASIC  |       | 0.319 BASIC |      |
| E1     | 6.00        | 6.20  | .236        | .244 |
| e      | 0.50 BASIC  |       | 0.020 BASIC |      |
| aaa    | -           | 0.10  | -           | .004 |
| L      | 0.45        | 0.75  | .018        | .030 |
| a      | 0°          | 8°    | 0°          | 8°   |

\*For reference only. Controlling dimensions in mm.

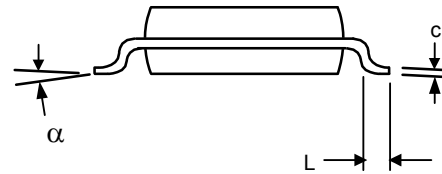

# Package Outline and Package Dimensions (64-pin VFQFPN)

## PUNCH VERSION

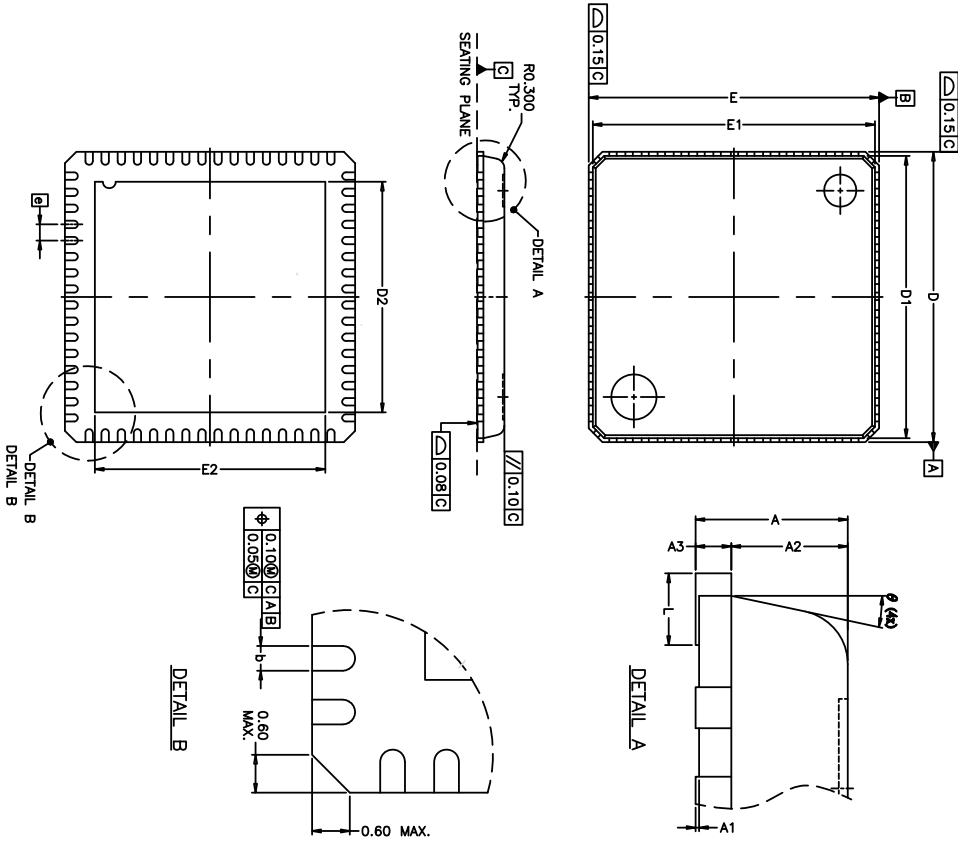

NOTE :


1. REFER TO JEDEC STD. MO-220.
2. DIMENSION "a" APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15MM AND 0.30MM FROM THE TERMINAL TIP. IF THE TERMINAL HAS OPTIONAL RADII ON THE OTHER END OF THE TERMINAL, THE DIMENSION B SHOULD NOT BE MEASURED IN THAT RADII AREA.

| SYMBOL | DIMENSION (MM) |      |      | DIMENSION (MIL) |      |      |
|--------|----------------|------|------|-----------------|------|------|
|        | MIN.           | NOM. | MAX. | MIN.            | NOM. | MAX. |
| A      | 0.80           | 0.85 | 1.00 | 31              | 33   | 39   |
| A1     | 0.00           | 0.02 | 0.05 | 0               | 1    | 2    |
| A2     | -              | 0.65 | 1.00 | -               | 26   | 39   |
| A3     | -              | 0.20 | -    | -               | 8    | -    |
| b      | 0.18           | 0.25 | 0.30 | 7               | 10   | 12   |
| D      | 9.00           | BSC  |      |                 | 354  | BSC  |
| D1     | 8.75           | BSC  |      |                 | 344  | BSC  |
| D2     | 6.0            | 6.15 | 6.25 | 236             | 242  | 246  |
| E      | 9.00           | BSC  |      |                 | 354  | BSC  |
| E1     | 8.75           | BSC  |      |                 | 344  | BSC  |
| E2     | 6.0            | 6.15 | 6.25 | 236             | 242  | 246  |
| e      | 0.50           | BSC  |      |                 | 20   | BSC  |
| L      | 0.30           | 0.40 | 0.50 | 12              | 16   | 20   |
| θ      | 0°             | -    | 14°  | 0°              | -    | 14°  |

| REVISIONS |   |          |          |
|-----------|---|----------|----------|
| REV       | DESCRIPTION   | DATE     | APPROVED |
| 00        | INITIAL RELEASE   | 01/12/05 | PKP      |
| 01        | CHANGE D2 AND E2 TO FOLLOW JEDEC GUIDELINE                                | 09/18/06 | TU VU    |
| 02        | ADD OPTION 2  | 09/03/08 | R. TOR   |
| 03        | ADD PUNCH VERSION PAGE 3  | 01/07/09 | R. TOR   |
| 04        | PAGE 1, OPTION 2 PAGE 3   | 4/14/09  | R. TOR   |
| 05        | ADD OPTION 3, PAGE 1, OPTION 2 PAGE 3                                     | 5/20/09  | R. TOR   |
| 06        | NOTE THAT OPTION 1 AND OPTION 2 HAVE MORE DIMENSIONS AND PATENT IN PAGE 2 | 7/11/13  | KS       |
| 07        | ADD OPTION 5 IN PAGE 2  | 05/20/14 | CK LEE   |

|                             |             |                                 |  |
|-----------------------------|-------------|---------------------------------|--|
| TOLERANCES UNLESS SPECIFIED |             | 6024 SILVER CREEK               |  |
| DECIMAL                     | ANGULAR     | VALLEY ROAD, SAN JOSE, CA 95138 |  |
| XX.X                        | .10         | PHONE: (408) 284-8200           |  |
| XXX.X                       | .030        | FAX: (408) 284-3572             |  |
| APPROVALS                   | DATE        | TITLE                           |  |
| DRAWN: PKP                  | 11/04/04    | NL/NLG PACKAGE OUTLINE          |  |
| CHECKED                     |             | 9.0 x 9.0 mm BODY               |  |
|                             |             | VFQFP-N                         |  |
| SIZE                        | DRAWING No. | REV                             |  |
| C                           | PSC-4147    | 07                              |  |
| DO NOT SCALE DRAWING        |             | SHEET 3 OF 4                    |  |

# Package Outline and Package Dimensions (64-pin VFQFPN), cont.



- NOTES:
1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
  2. TOP DOWN VIEW, AS VIEWED ON PCB.
  3. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
  4. LAND PATTERN RECOMMENDATION PER IPC-7351B LP CALCULATOR.

| REVISIONS |  |          |          |
|-----------|--|----------|----------|
| REV       | DESCRIPTION  | DATE     | APPROVED |
| 00        | INITIAL RELEASE  | 01/12/05 | PKP      |
| 01        | CHANGE D2 AND E2 TO FOLLOW JEDEC GUIDELINE   | 08/18/06 | TU VU    |
| 02        | ADD OPTION 2   | 09/03/08 | R. TOR   |
| 03        | ADD PUNCH VERSION PAGE 3   | 01/07/09 | R. TOR   |
| 04        | PAGE 1, OPTION 2 PAGE 3  | 4/14/09  | R. TOR   |
| 05        | ADD OPTION 3 PAGE 1, OPTION 2 PAGE 3   | 5/20/09  | R. TOR   |
| 06        | COR DIM L OPTION ADD OPTION 4 EPAD MOVE DIMENSION OPTION 12.3 TO PAGE 2 ADD LAND PATTERN | 7/11/13  | KS       |
| 07        | ADD OPTION 5 IN PAGE 2   | 05/20/14 | OK LEE   |

|                             |             |                                |  |
|-----------------------------|-------------|--------------------------------|--|
| TOLERANCES UNLESS SPECIFIED |             | 6024 SILVER CREEK              |  |
| DECIMAL                     | ANGULAR     | VALEY ROAD, SAN JOSE, CA 95138 |  |
| XX.X                        | .05         | PHONE: (408) 284-8200          |  |
| XXX.X                       | .030        | FAX: (408) 284-3572            |  |
| APPROVALS                   | DATE        | TITLE                          |  |
| DRAWN: <i>gpc/p</i>         | 11/04/04    | NL/NLG PACKAGE OUTLINE         |  |
| CHECKED                     |             | VFQFP-N                        |  |
| SIZE                        | DRAWING No. | REV                            |  |
| C                           | PSC-4147    | 07                             |  |
| DO NOT SCALE DRAWING        |             | SHEET 4 OF 4                   |  |

## Ordering Information

| Part / Order Number | Shipping Packaging | Package       | Temperature |
|---------------------|--------------------|---------------|-------------|
| 932SQL450BGLF       | Tubes              | 64-pin TSSOP  | 0 to +70° C |
| 932SQL450BGLFT      | Tape and Reel      | 64-pin TSSOP  | 0 to +70° C |
| 932SQL450BKLF       | Tray               | 64-pin VFQFPN | 0 to +70° C |
| 932SQL450BKLFT      | Tape and Reel      | 64-pin VFQFPN | 0 to +70° C |

"LF" suffix to the part number are the Pb-Free configuration and are RoHS compliant.

"B" is the device revision designator (will not correlate with the datasheet revision).

## Revision History

| Rev. | Issue Date | Who | Description   | Page #  |
|------|------------|-----|---|---------|
| A    | 3/5/2014   | RDW | <ol style="list-style-type: none"> <li>1. Updated electrical table format and data to final.</li> <li>2. Updated TEST_SEL pin description and TEST CLARIFICATION TABLE to indicate that this input is a low threshold input.</li> <li>3. Updated TEST LOADS and added ALTERNATE TERMINATIONS diagrams.</li> <li>4. Updated block diagram to latest format and updated pin names to match the pinout.</li> <li>5. Updated front page text to latest format</li> <li>6. Move to Final.</li> </ol> | Various |
| B    | 3/6/2015   | RDW | <ol style="list-style-type: none"> <li>1. Corrected typo in Powerdown Current max limit. Max limit changed from 9mA to 10mA.</li> </ol>   | 13      |





**Corporate Headquarters**  
6024 Silver Creek Valley Road  
San Jose, CA 95138 USA

**Sales**  
1-800-345-7015 or 408-284-8200  
Fax: 408-284-2775  
www.IDT.com

**Tech Support**  
email: [clocks@idt.com](mailto:clocks@idt.com)

DISCLAIMER Integrated Device Technology, Inc. (IDT) and its subsidiaries reserve the right to modify the products and/or specifications described herein at any time and at IDT's sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are registered trademarks of IDT. Product specification subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of IDT or their respective third party owners.

Copyright ©2015 Integrated Device Technology, Inc.. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IDT \(Integrated Device Technology\):](#)

[932SQL450BGLF](#) [932SQL450BGLFT](#) [932SQL450BKLF](#) [932SQL450BKLFT](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.