


Applications

- For Band 40 TD-LTE applications

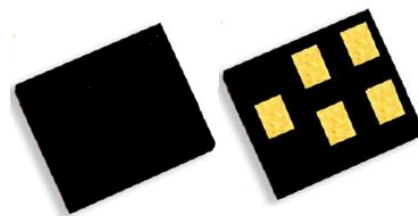


1.1 x 0.9 x 0.50 mm

Product Features

- Highly selective BAW filter achieving low insertion loss over full bandwidth and operating conditions
- Excellent WiFi Rejection
- Performance -20 to +90 °C
- RoHS Compliant, Pb-free Module Package

Functional Block Diagram

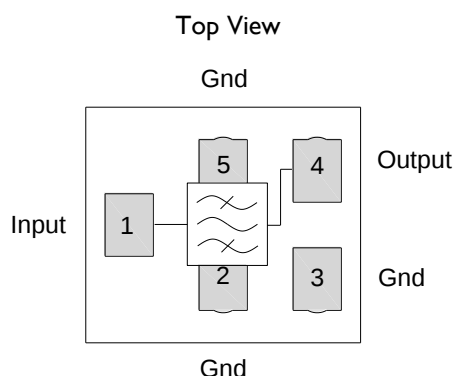

General Description

The 885075 is a high-performance, high power Bulk Acoustic Wave (BAW) Tx/Rx filter designed to meet the strict LTE rejection requirements for use in B40.

The 885075 is specifically designed to meet the high performance expectations of insertion loss and rejection for LTE transmit systems under all operating conditions.

The 885075 uses common module packaging techniques to achieve the industry standard 1.1 x 0.9 x 0.50 mm footprint. The filter exhibits excellent power handling capabilities.

Pin Configuration

Pin No.	Label
1	B40 Tx Input / Rx Output
4	B40 Ant
2,3,5	Ground

Ordering Information

Part No.	Description
885075	Packaged part
885075-EVB	Evaluation board
Standard T/R size = 15,000 units/reel	

Absolute Maximum Ratings

Parameter	Rating
Operable Temperature	-20 to +90 °C
Storage Temperature	-40 to +90 °C
RF Input Power (pin 1) CW, +55 °C for 5K hours	+29 dBm
Peak RF Input Power (pin 1), max duration of 0.5 sec.	+37 dBm

Notes:

1. Operation of this device outside the parameter ranges given may cause permanent damage.



Electrical Specifications ⁽¹⁾

Parameter	Conditions	Min	Typ	Max	Unit
Insertion Loss	2300 – 2395 MHz	-	1.2 ⁽²⁾	2.6	dB
	2300 – 2395 MHz Integrated over 5 MHz		2.2		dB
	2395 – 2400 MHz	-	2.0 ⁽²⁾	3.0	dB
VSWR (ANT)	2300 – 2400 MHz	-	1.4:1	2.0:1	
VSWR (TX)	2300 – 2400 MHz	-	1.4:1	1.8:1	
Passband Ripple	2300 – 2400 MHz	-	1.1	1.7	dB
Attenuation	10 – 1574 MHz	31	34	-	dB
	703 – 748 MHz	40			
	1574 – 1577 MHz	31	36	-	dB
	1577 – 1680 MHz	31	30	-	dB
	1710 – 1785 MHz	29			
	1805 – 2170 MHz	25			
	1845 – 1880 MHz	27	29.5	-	dB
	2110 – 2170 MHz	25	26	-	dB
	2427 – 2460 MHz	45			
	2460 – 2500 MHz	36	46	-	dB
	4600 – 4800 MHz	30	34	-	dB
	6900 – 7200 MHz	30	39	-	dB
	WiFi Channels 5 ⁽³⁾	34	46	-	dB
	WiFi Channels 6 – 13 ⁽³⁾	40	51	-	dB
	2422 – 7200 MHz ⁽³⁾	20		-	dB
H2	2300 – 2400 MHz ⁽⁴⁾		-35		dBm

Notes:

1. All specifications are based on the TriQuint schematic for the main reference design shown on page 3. Min/max is being specified over -20 to +90 °C.
2. Typical values are derived through integration of the linear s-parameter over the indicated band at +25 °C.
3. Integration of linear s-parameters over an 18MHz sliding frequency span.
4. H2 is measured for Pin=28 dBm (CW) at room temperature.

885025-EVB Evaluation Board

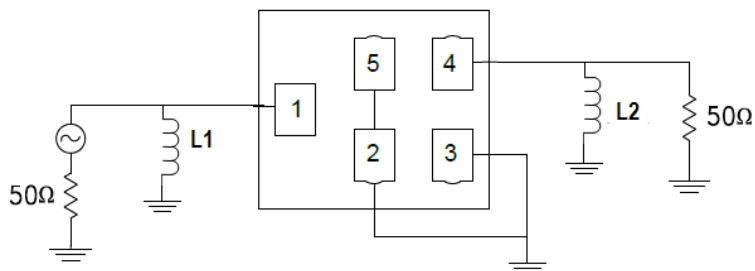

Notes:


1. Matching component values shown are for the specified TriQuint evaluation board. Value adjustment may be required in end user product circuits depending on component manufacturer and PCB material.

Bill of Material – 885025-EVB

Reference Des.	Value	Description	Manuf.	Part Number
PCB	N/A	3 layer	Multiple	
U1	N/A	2300-2400 MHz Tx/Rx Filter	TriQuint	885075
L1	3.4 nH	Chip Inductor, 0201, $\pm 2\%$	Murata	
L2	3.4 nH	Chip Inductor, 0201, $\pm 2\%$	Murata	
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018


Performance Plots

Test conditions unless otherwise noted: Temp. = +25 °C



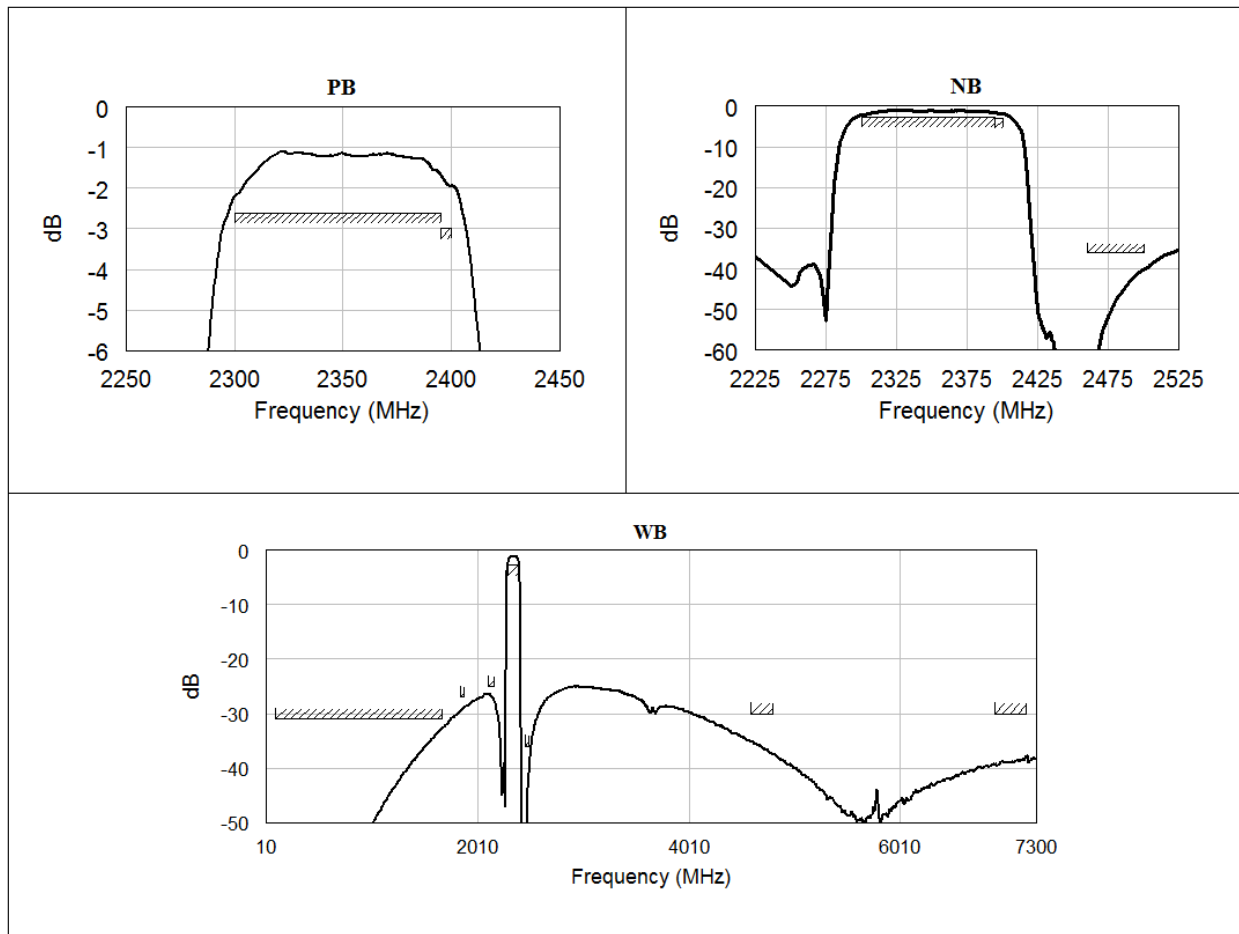


Performance Plots (cont'd)

Test conditions unless otherwise noted: Temp. = +25 °C

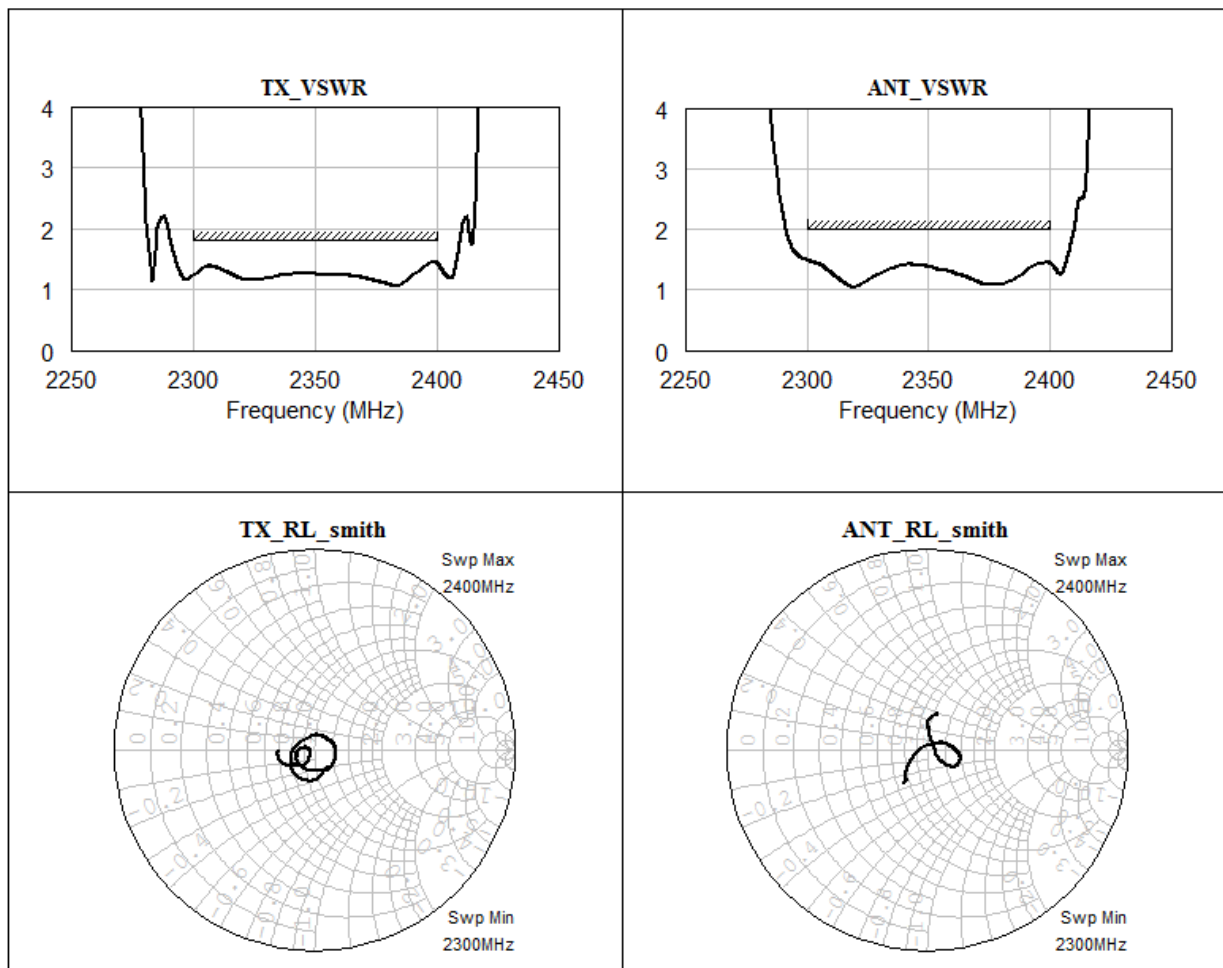

Package Information, Marking and Dimensions

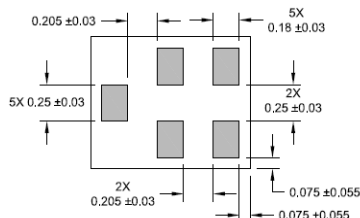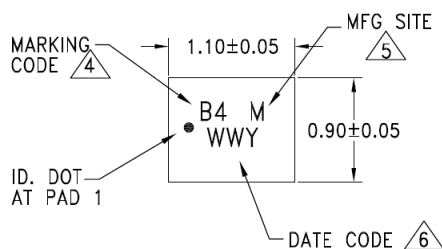

Package Style: CSP

Dimensions: 1.1 x 0.9 x 0.50 mm

Package for Surface Mount Technology

Terminations: Au plating 0.5 - 1.0µm, over a 2- 6µm Ni Plating

Approximate weight 1.37mg.

Marking Code uniquely identifies Part Number

M = Manufacturing site (Blank for Apopka, C for Costa Rica)


Date code consists of:

WW = 2 digit week,

Y = last digit of year

An asterisk (*) in front of the marking code indicates prototype.


PCB Mounting Pattern

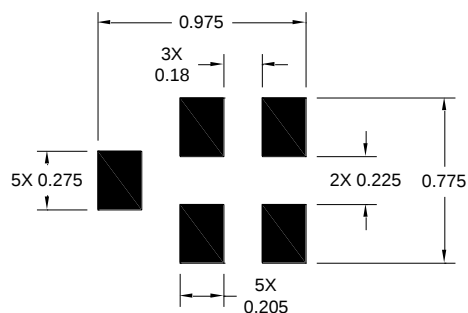

Notes:

1. All dimensions are in millimeters. Angles are in degrees.
2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.

Tape and Reel information

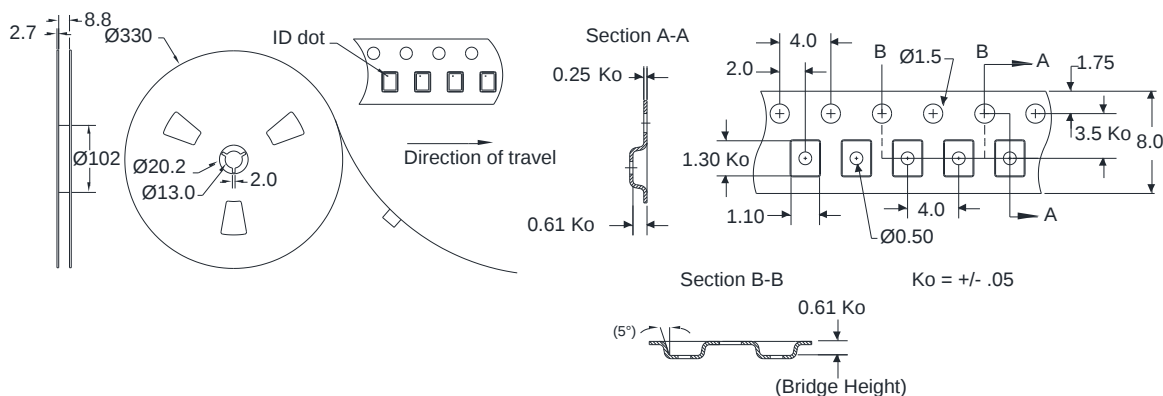

Standard T/R size=15,000 units/reel. All dimensions are in millimeters.

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 1C
Value: $\geq 1000\text{ V}$ to $< 2000\text{ V}$
Test: Human Body Model (HBM)
Standard: JEDEC/ESDA Standard JS-001-2012

ESD Rating: Class C3
Value: $\geq 1000\text{ V}$
Test: Charged Device Model (CDM)
Standard: JEDEC Standard JESD22-C101F

MSL Rating

MSL Rating: Level 3
Test: 260°C convection reflow
Standard: JEDEC Standard IPC/JEDEC J-STD-020

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

RoHs Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($\text{C}_{15}\text{H}_{12}\text{Br}_4\text{O}_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@triquint.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.