
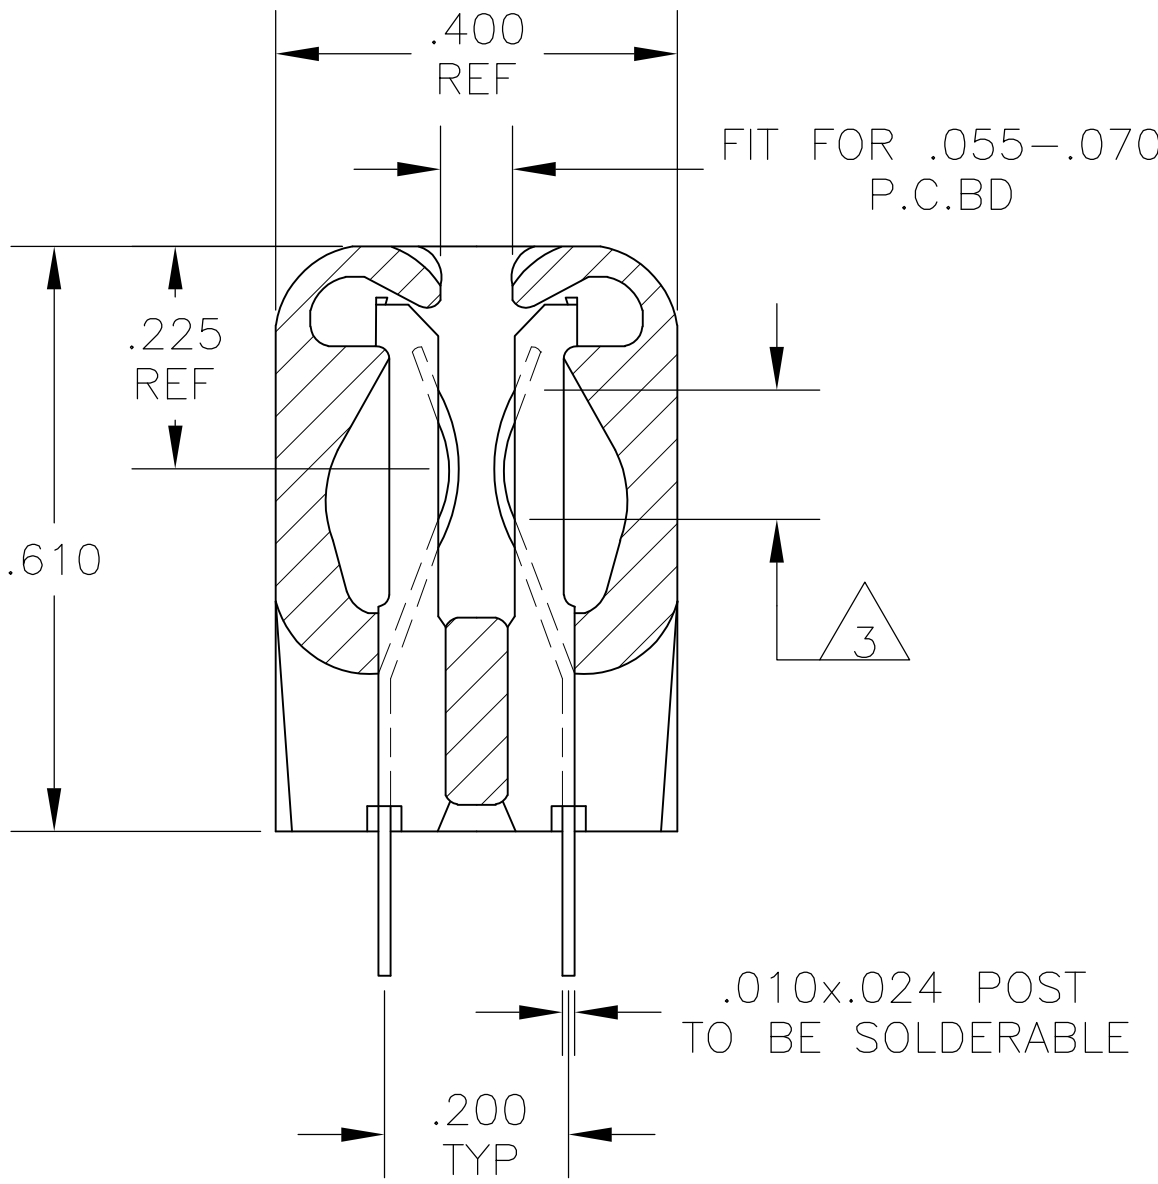


LOC		DIST		REVISIONS					
AD	00	IP	LTR	DESCRIPTION				DATE	DWN APVD
		G		REVISED PER ECO-08-018879				01AUG08	HMR MM

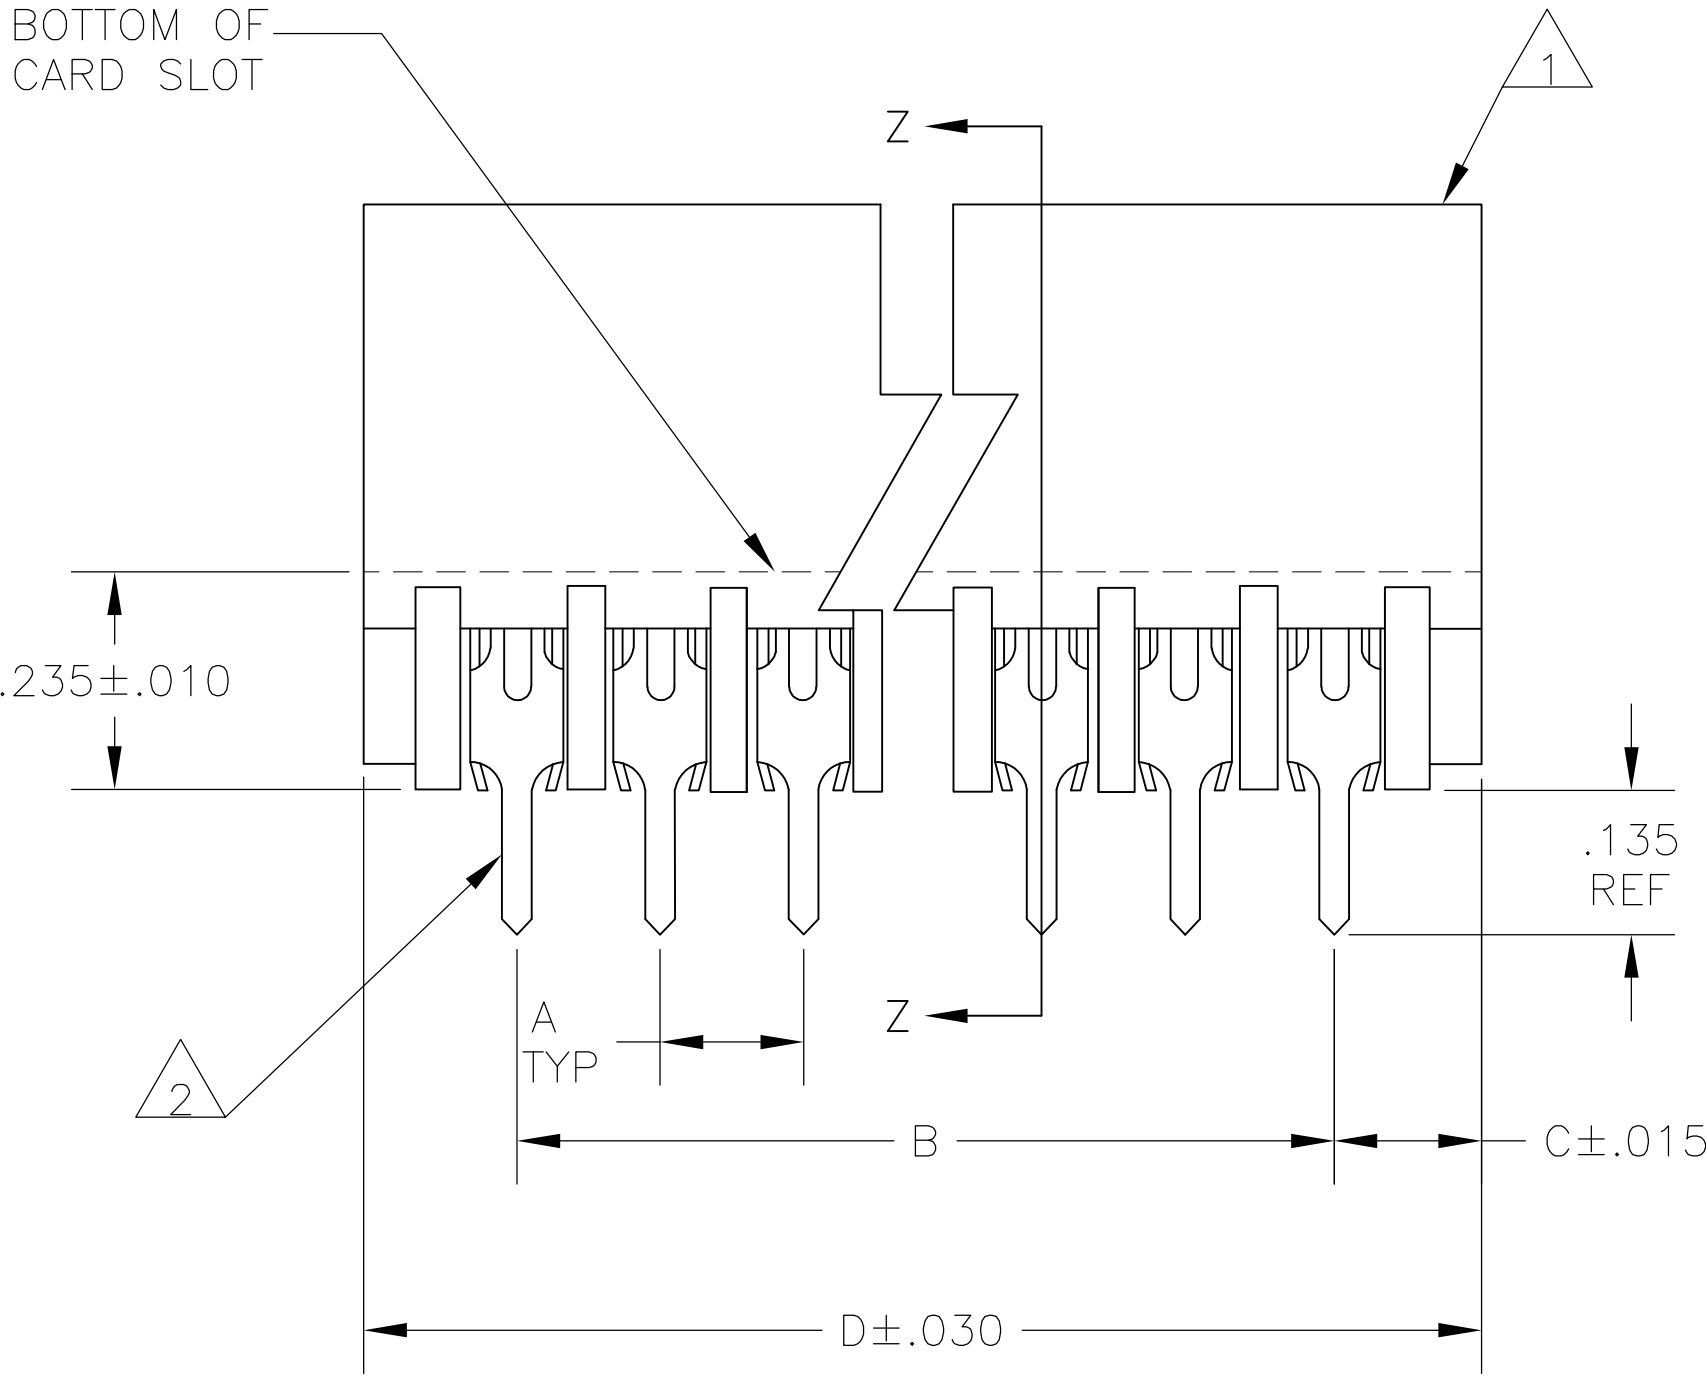


SECTION Z-Z

- 1 HOUSING MATERIAL: GLASS-FILLED POLYESTER, COLOR-BLACK
- 2 CONTACT : PHOSPHOR BRONZE
- 3 FINISH: .000015 GOLD SELECTIVE.
- 4 SEE SHEET 2 FOR RECOMMENDED P.C.BOARD LAYOUT
- 5 MATTE TIN PLATE ON SOLDER TAILS.


OBSOLETE	5	3.875	.125	3.625	.125	30	5-531534-2
		6.375	.125	6.125	.125	50	531534-3
		3.875	.125	3.625	.125	30	531534-2
		1.500	.125	1.250	.125	11	531534-1
		D	C	B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN A.M.SHAAP	09FEB81	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
			CHK D.L.KELLY	09FEB81			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME		
		0 PLC ± -			PRODUCT SPEC		
		1 PLC ± -			APPLICATION SPEC		
		2 PLC ± -			RESTRICTED TO		
		4 PLC ± .005			SIZE CAGE CODE DRAWING NO		
		ANGLES FINISH			WEIGHT		
MATERIAL					A1 00779 C=531534		
 					SCALE 5:1 SHEET 1 OF 2 REV G		
CUSTOMER DRAWING							


D

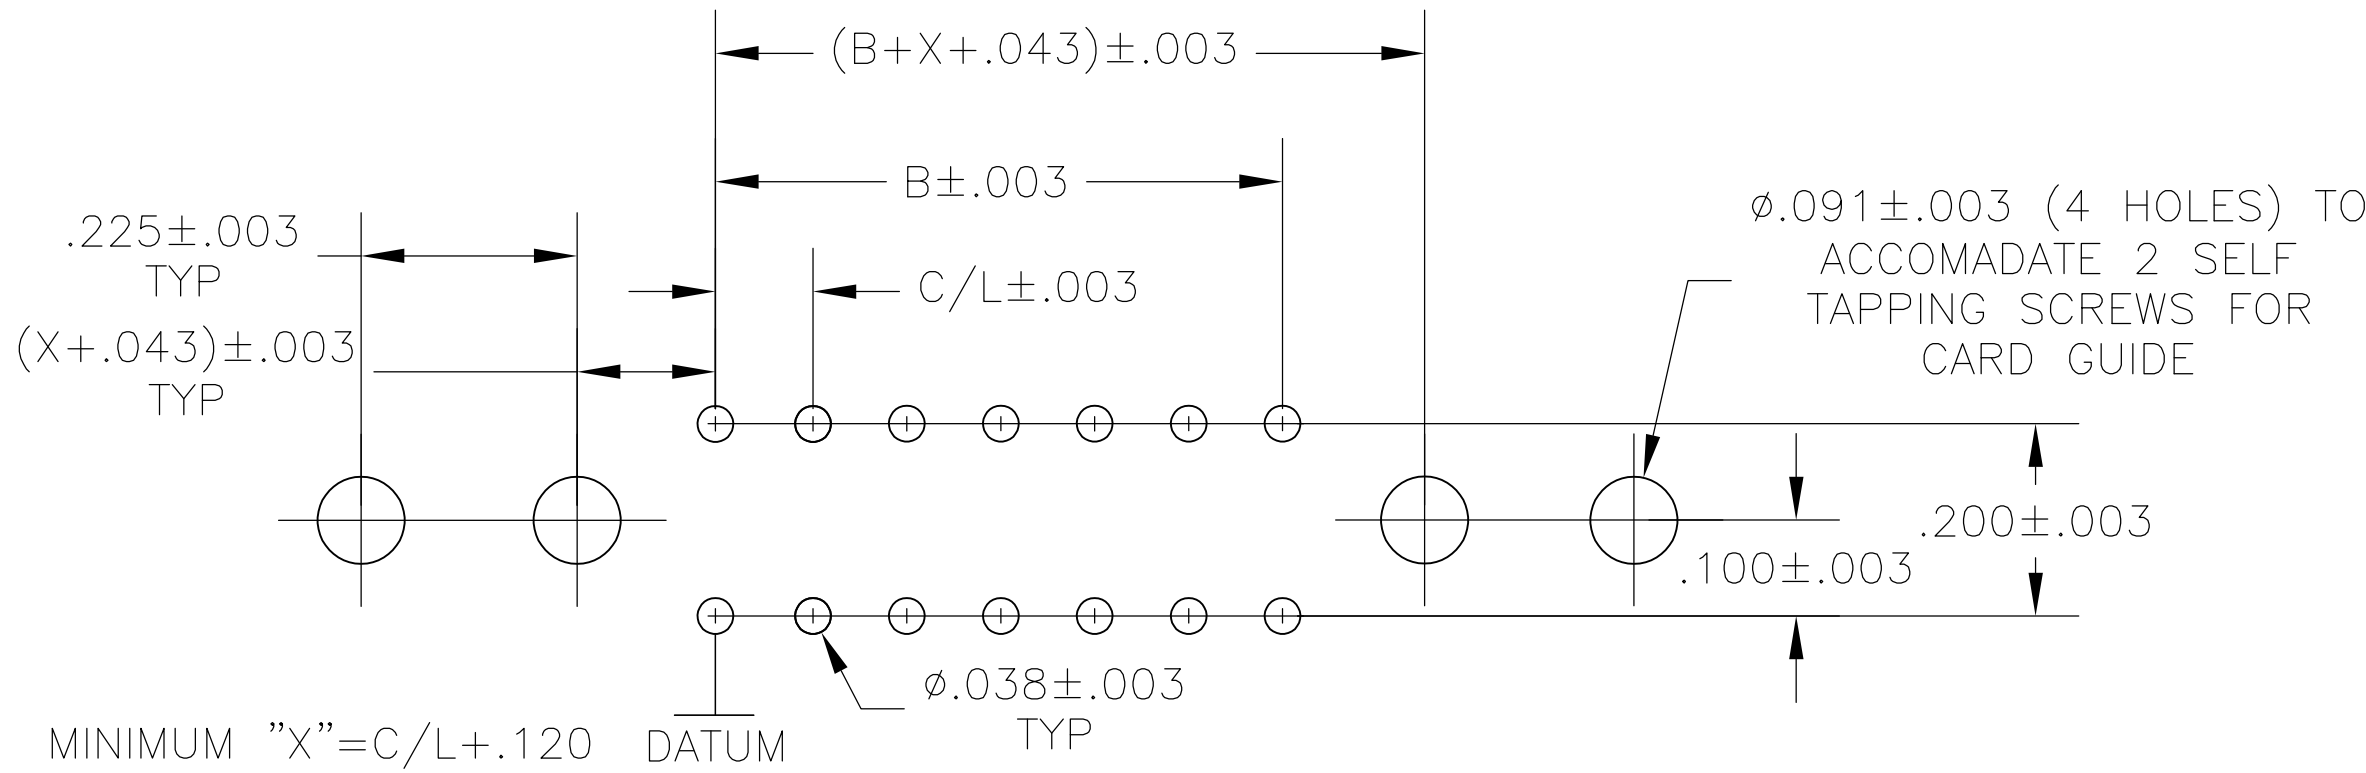

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583671

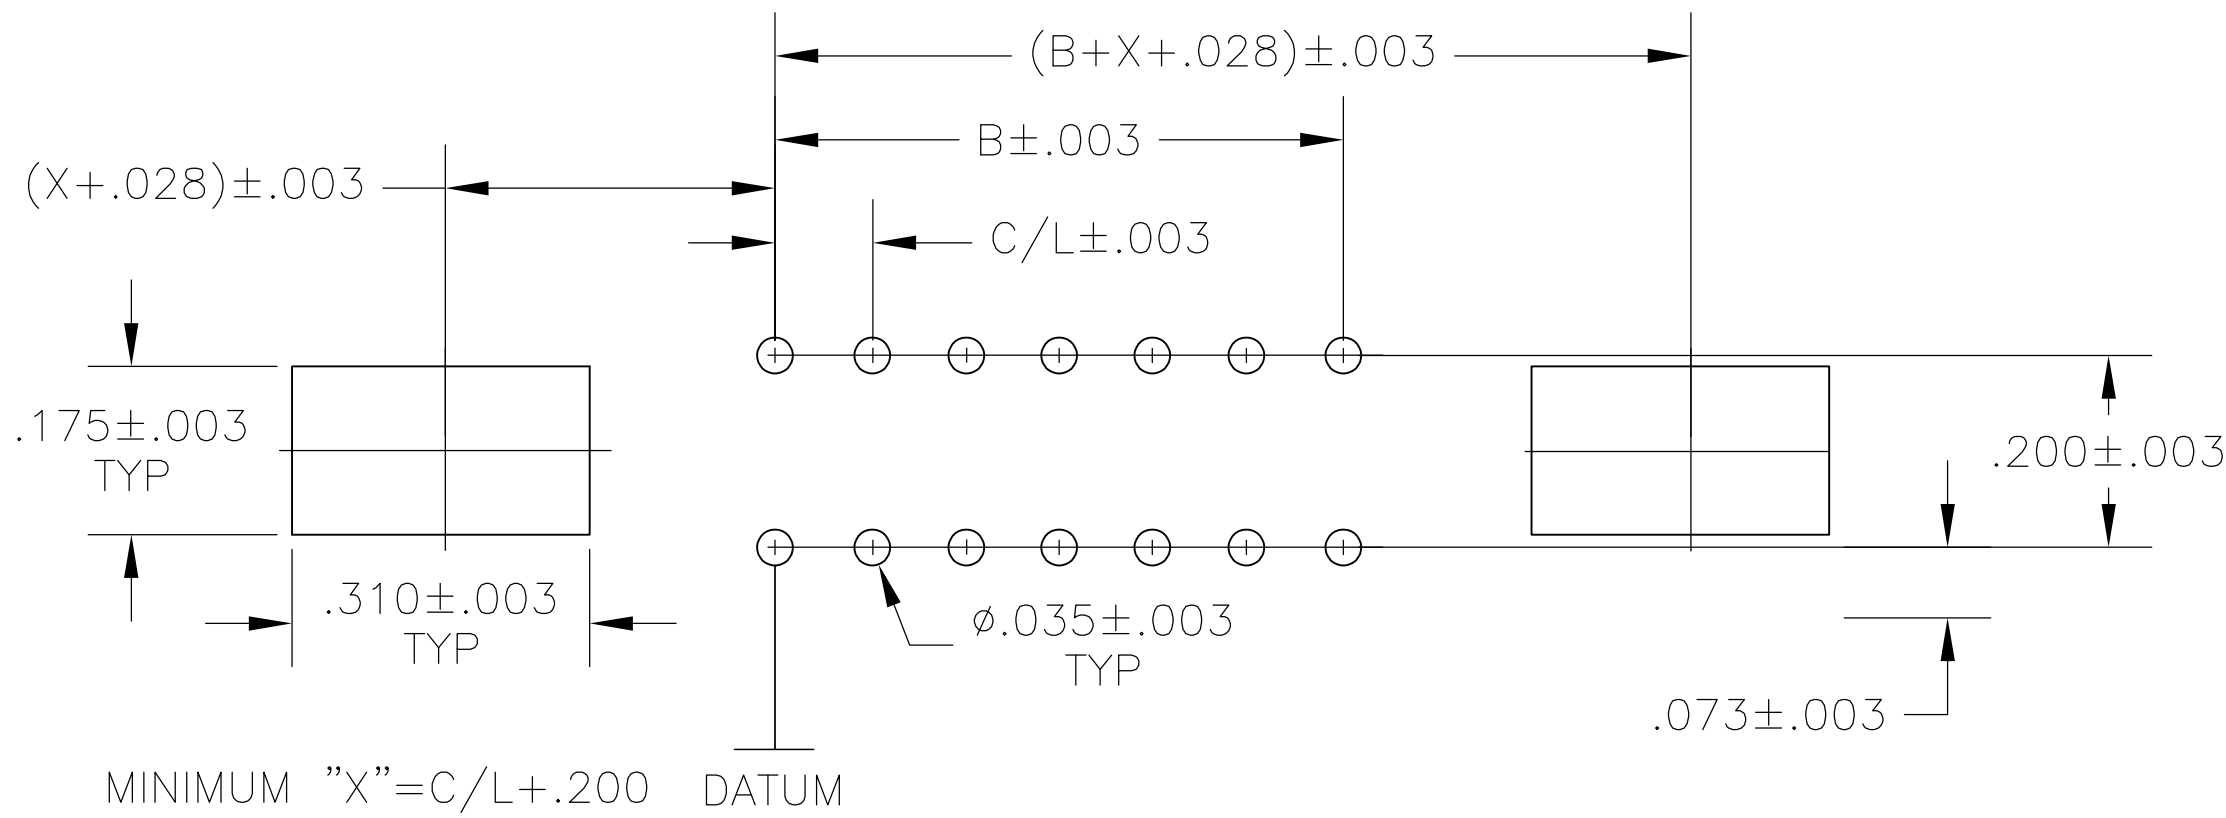


BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583408 OR 583425

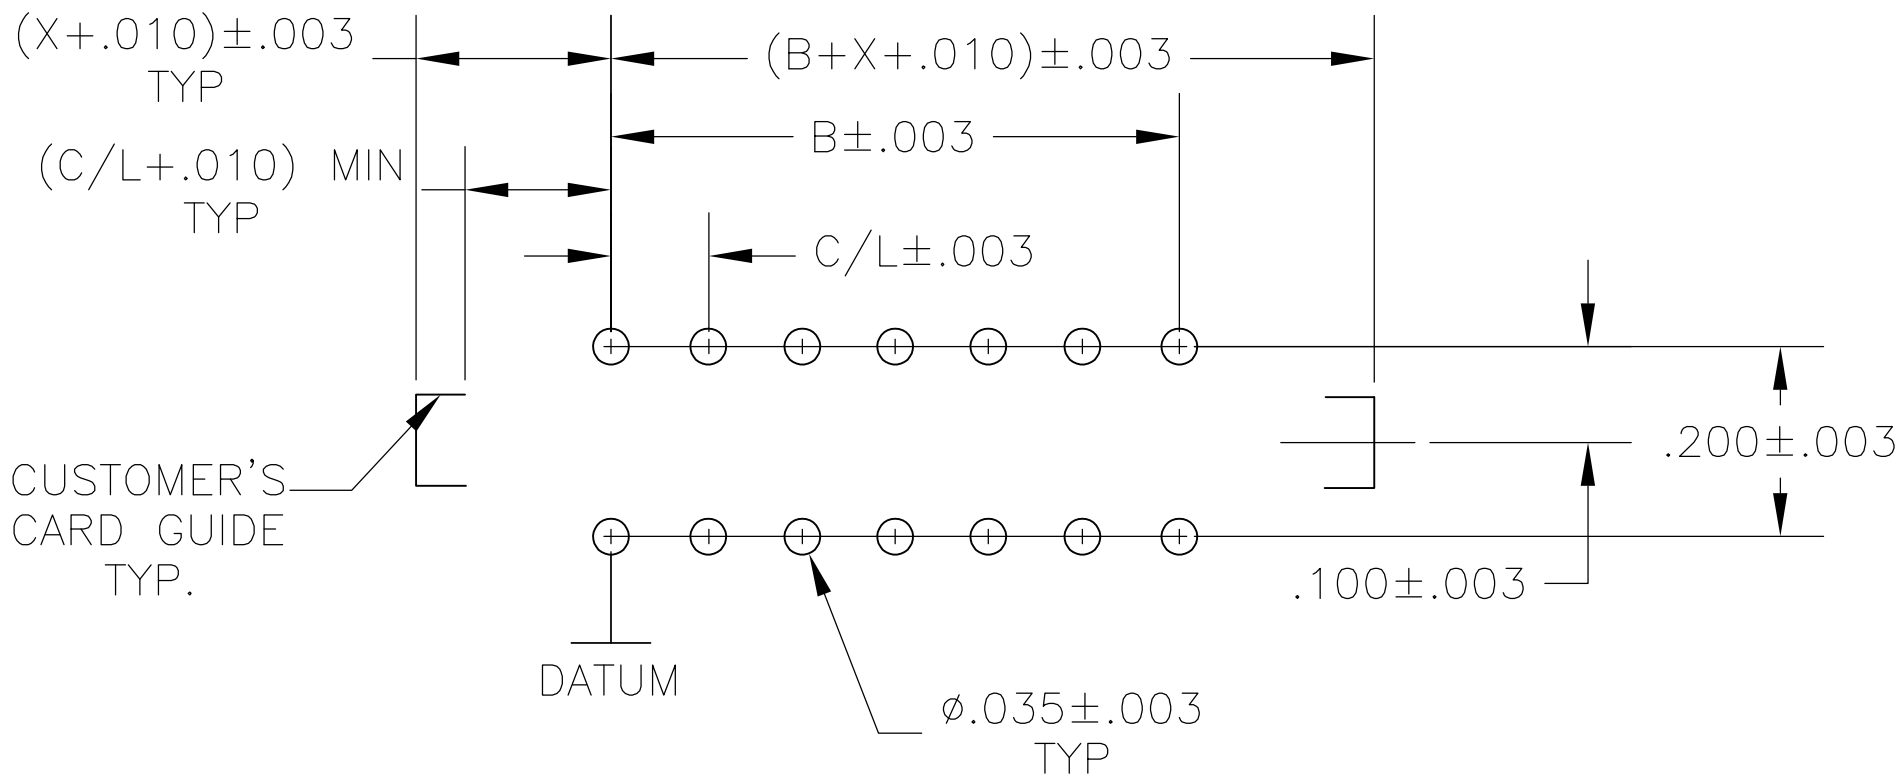


BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE

INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

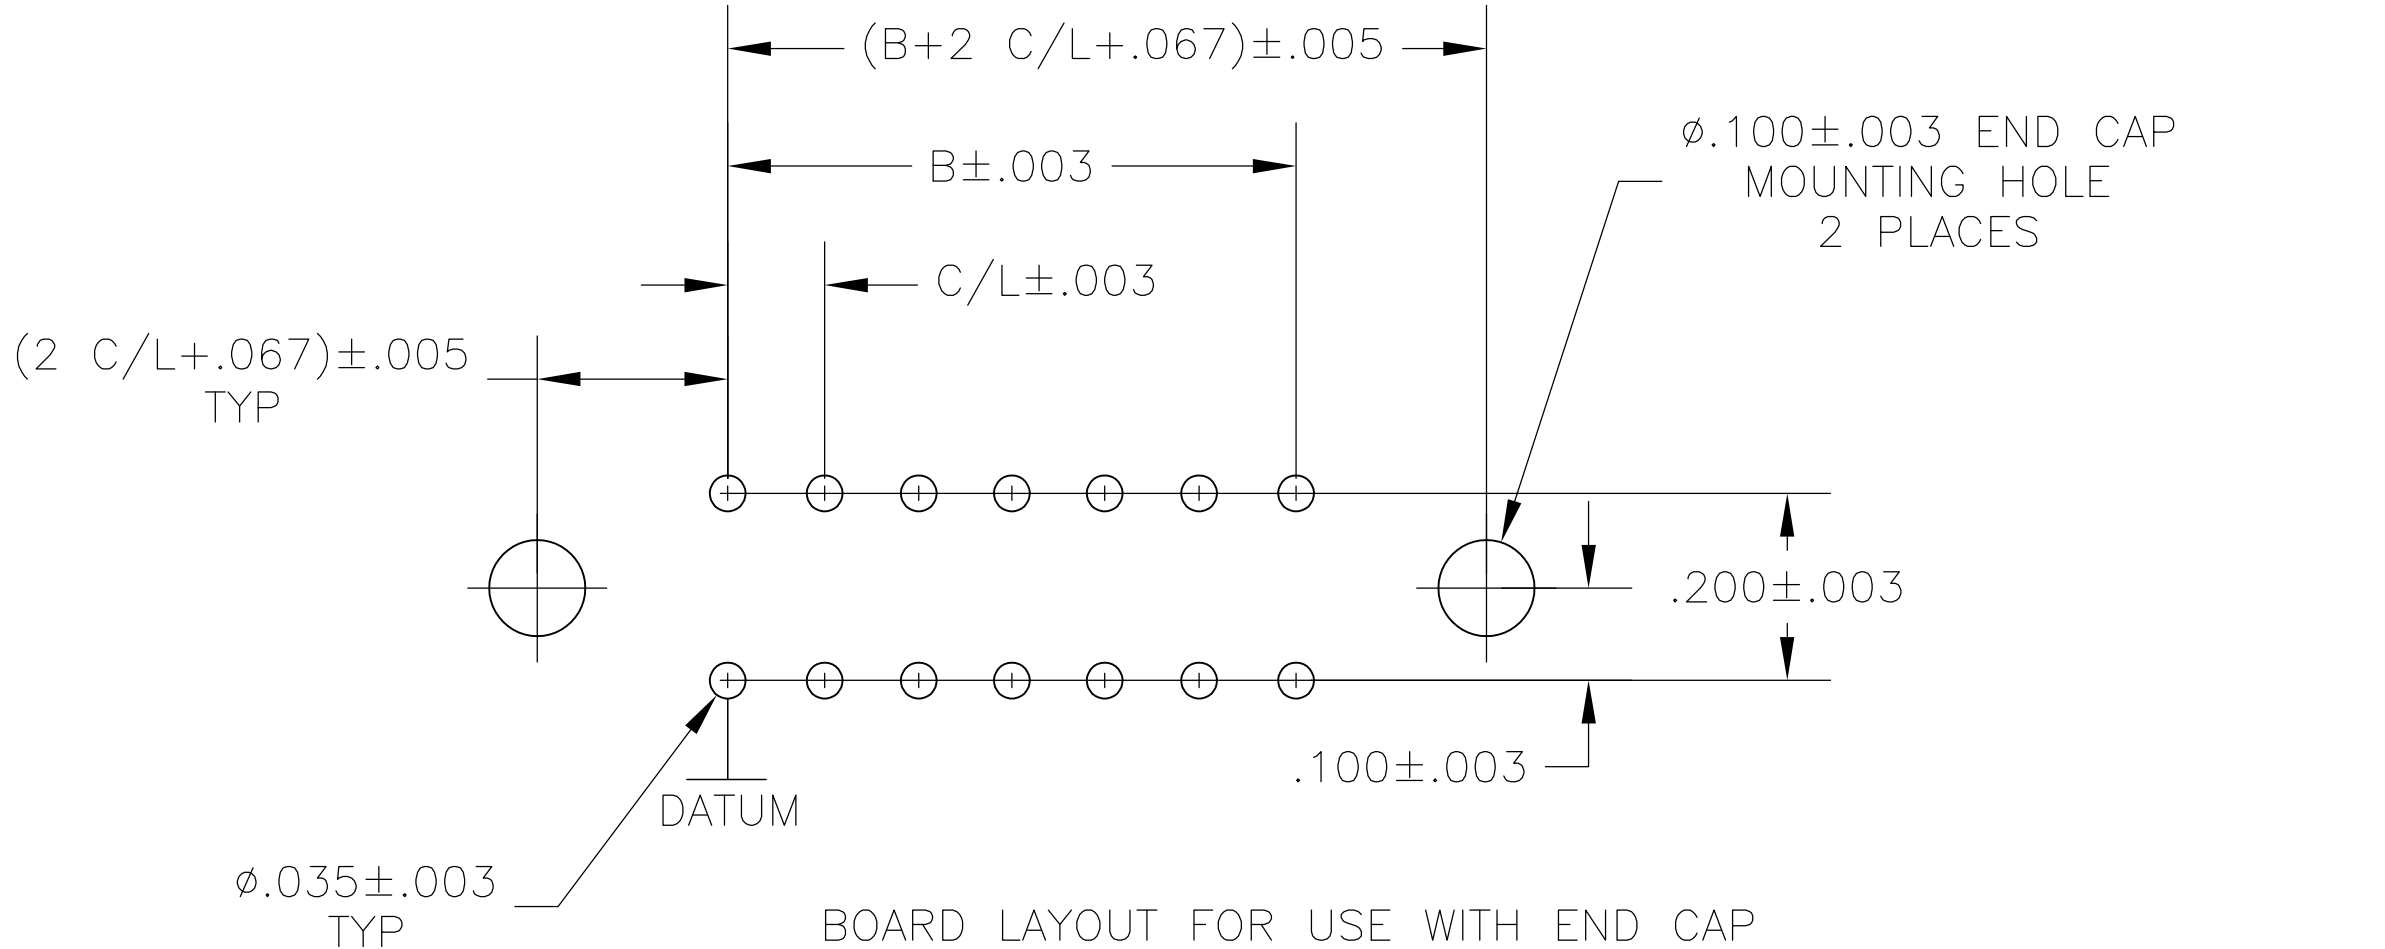

BOARD LAYOUT FOR USE WITH END CAP

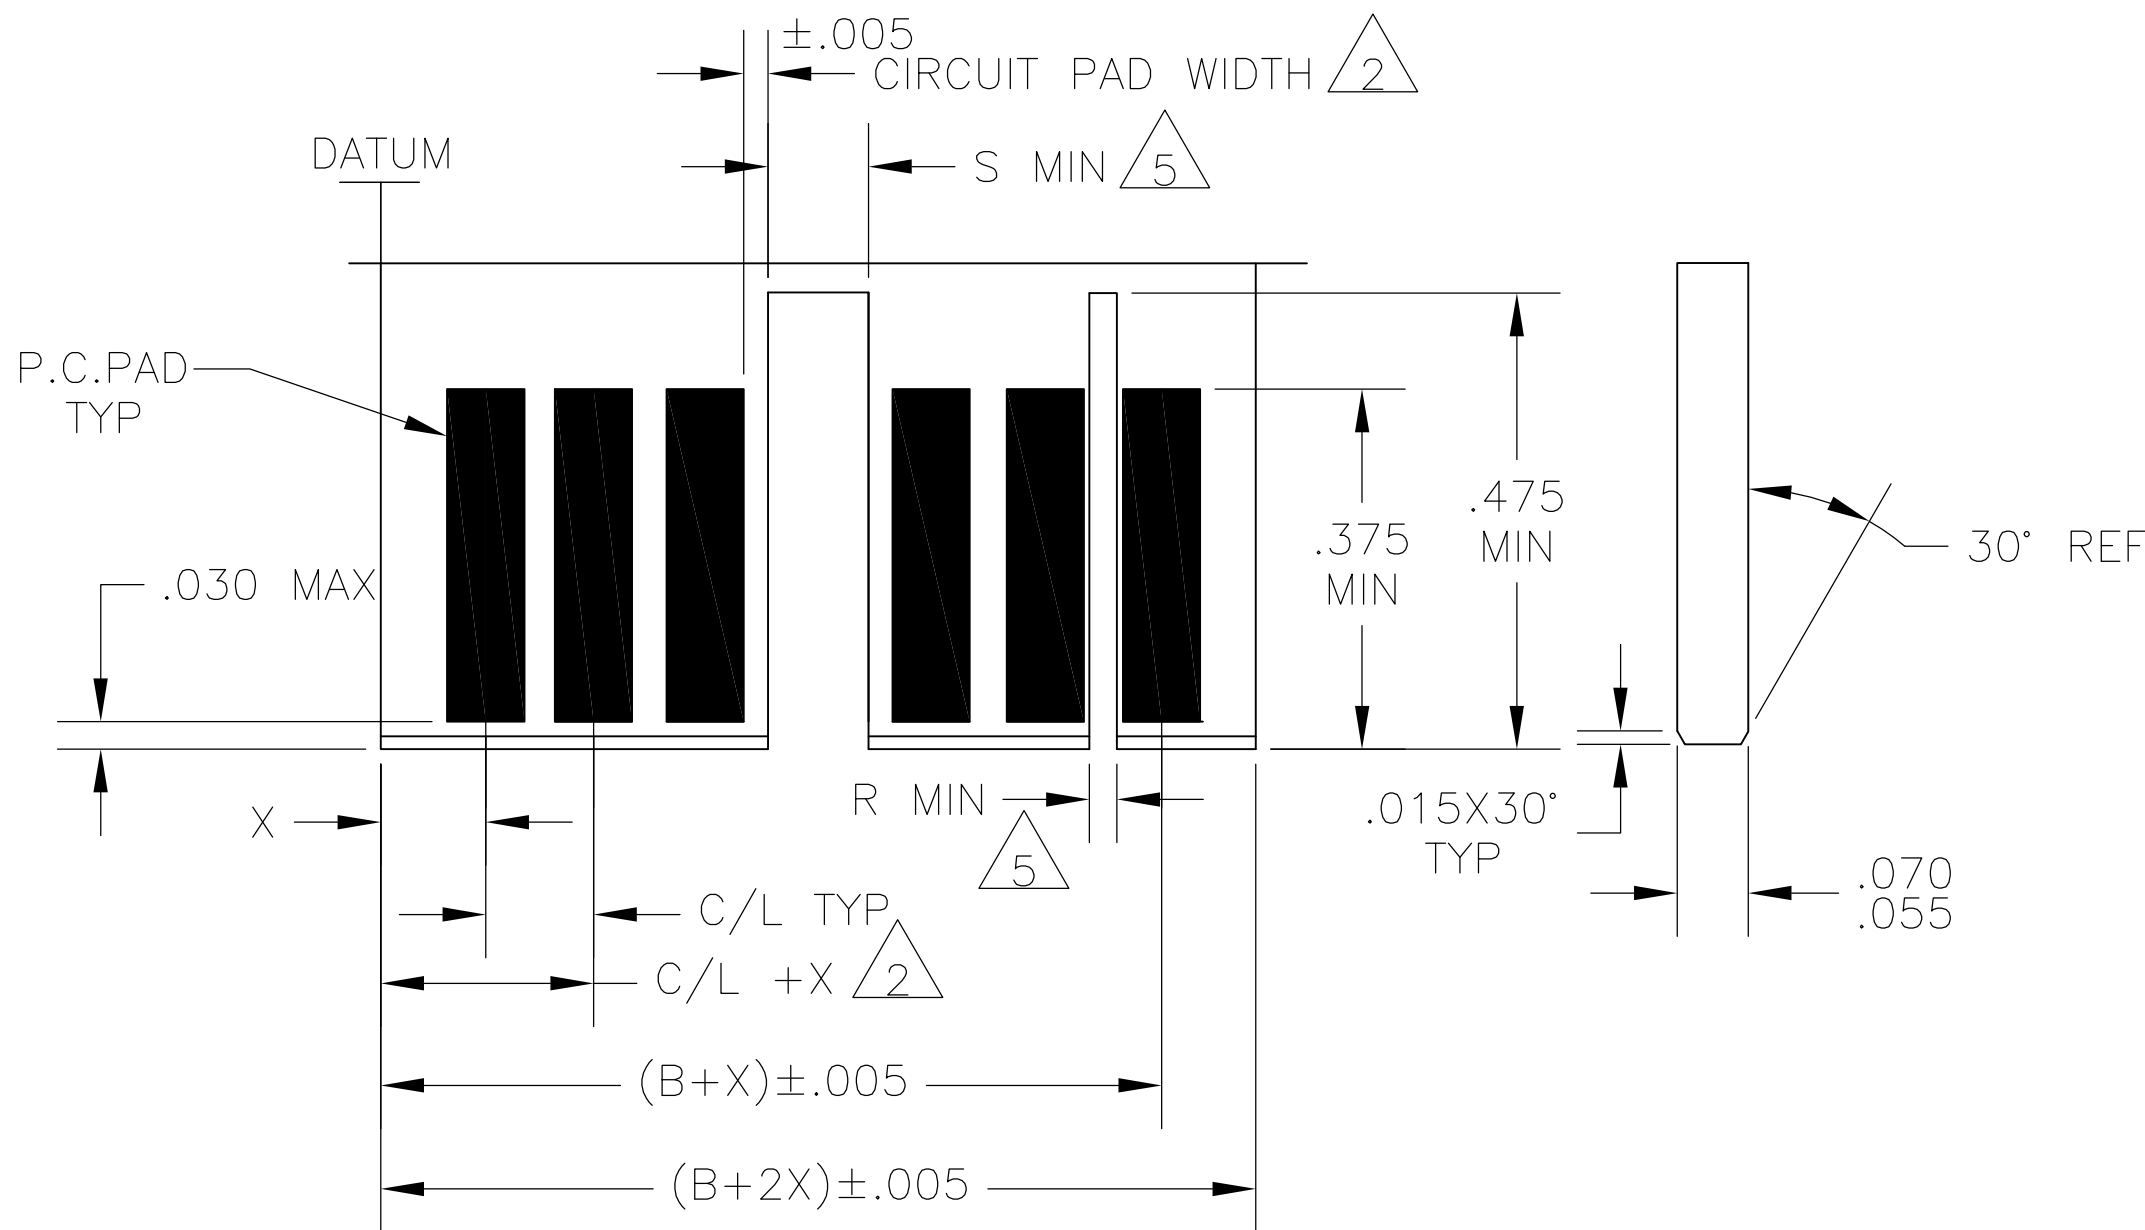

DAUGHTER BOARD LAYOUT

- MAX ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN. MAX. ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
- EACH PAD LOCATION INCREASES BY C/L±.005 WITH A NON-CUMULATIVE TOLERANCE OF ±.005. CIRCUIT PAD WIDTH -.045 FOR .100 C/L, .072 FOR .125 C/L, .072 FOR .150 C/L, .080 FOR .156 C/L. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
- C/L INCREMENTS ON MOTHER BOARD HAVE ±.003 NON-CUMULATIVE TOLERANCE.
- "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = C/L - .008.
- THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A.M. SHAAPE 09FEB81	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK D.L. KELLY 09FEB81	NAME D.L. KELLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0. PLC ± .005		APPLICATION SPEC		
1. PLC ± .005		SIZE		
2. PLC ± .005		CAGE CODE		
3. PLC ± .005		DRAWING NO.		
4. PLC ± .005		RESTRICTED TO		
MATERIAL		WEIGHT		
FINISH		CUSTOMER DRAWING		
SCALE		SHEET		
5:1		2 OF 2		
REV		G		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.