

# EP Series Sealed Tiny Pushbutton Switches



A  
Pushbutton

## Features/Benefits


- Sealed against solder & cleaning processes
- Thru-hole and surface mount models
- Snap-fitting actuator accepts standard caps
- Tape & reel packaging available
- RoHS compliant models available



Models Available

## Typical Applications

- Telecommunications and networking equipment
- Computers and peripherals
- Instrumentation and controls

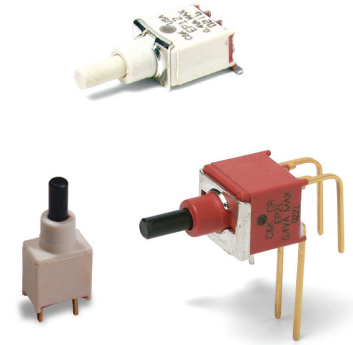

## Specifications

**CONTACT RATING:** B contact material: 0.4 VA max. @ 20 V AC or DC max. See page A-13 for additional ratings.

**ELECTRICAL LIFE:** EP11, EP21 models: 60,000 make-and-break cycles at full load. EP12 models: 30,000 cycles.

**CONTACT RESISTANCE:** Below 20 mΩ typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

**INSULATION RESISTANCE:** 10<sup>9</sup> Ω min.

**DIELECTRIC STRENGTH:** 1000 Vrms min. @ sea level.

**OPERATING TEMPERATURE:** -30°C to 85°C.

**SOLDERABILITY:** Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

**DEGREE OF PROTECTION:** IP57; Protection against harmful dust deposit, full-scale voltage protection, temporary immersion.

**PACKAGING:** Surface mount switches standard in anti-static tape and reel packaging per EIA 481-3, see page A-14 for drawings and reel information. Tape and cover strip are conductive for use near statically sensitive components, consult Customer Service Center.

## Materials

**CASE & BUSHING:** High temperature material, glass filled nylon 4/6, flame retardant, heat stabilized (UL 94V-0) on EP11 / EP12 models; glass filled nylon 6/6 on EP21.

**PLUNGER:** Thermoplastic polyester or glass filled nylon (UL 94V-0), with internal o-ring seal. SA surface mount: High temperature material, glass filled LCP (UL 94V-0).

**SWITCH SUPPORT:** Brass, matte-tin plated.

**CONTACTS & TERMINALS:** B contact material: Copper alloy, with gold plate over nickel plate. See page A-13 for additional contact materials.

**TERMINAL SEAL:** Epoxy.

**NOTE:** Any models supplied with Q, B, P, S, R or G contact material are RoHS compliant.

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

**CAUTION:** PC mounting layouts and pads as shown are designed to be compatible with the latest equipment and reflow techniques. Care should be taken in the design and location of PC lands to suit individual needs. Orientation relative to reflow direction may significantly impact solder joint integrity.

## Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages A-10 thru A-14. For additional options not shown in catalog, consult Customer Service Center. All models are process sealed to withstand machine soldering temperatures and pressure wash cleaning methods.

|                                                                                                                                 |                                                                                                                                                                                                                  |                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                           |                                          |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|
| <p><b>Switch Function</b></p> <p><b>EP11</b> SPST Off-Mom.</p> <p><b>EP12</b> SPDT On-Mom.</p> <p><b>EP21</b> DPST Off-Mom.</p> | <p><b>Plunger</b></p> <p><b>S</b> .215" high</p> <p><b>S1</b> .110" high</p> <p><b>S2</b> .465" high</p> <p><b>FP</b> Flush</p> <p><b>R</b> Snap-fitting, .215 high (not available with <b>EP12</b> version)</p> | <p><b>Bushing</b></p> <p><b>D1</b> Unthreaded</p> | <p><b>Terminations</b></p> <p><b>A</b> Right angle, PC thru-hole</p> <p><b>C</b> PC Thru-hole</p> <p><b>AV</b> Vertical right angle, PC thru-hole</p> <p><b>AV3</b> Vertical right angle, snap-in, PC thru-hole</p> <p><b>SA</b> Right angle, surface mount</p> <p><b>SA1</b> Right angle, surface mount rear facing</p> <p><b>V3</b> Vertical mount, v-bracket</p> <p><b>V31</b> Vertical mount, v-bracket, snap-in (EP11 &amp; EP12 only)</p> <p><b>W</b> Wire wrap</p> | <p><b>Contact Material</b></p> <p><b>B</b> Gold</p> <p><b>P</b> Gold, matte-tin</p> <p><b>Q</b> Silver</p> <p><b>S</b> Silver, matte-tin</p> <p><b>G</b> Gold over silver</p> <p><b>R</b> Gold over silver, matte tin</p> | <p><b>Seal</b></p> <p><b>E</b> Epoxy</p> |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|




4 Sep 19

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change



# EP Series Sealed Tiny Pushbutton Switches

## SWITCH FUNCTION



| NO. POLES                                                                            | MODEL NO. | SWITCH FUNCTION              |        | CONNECTED TERMINALS          |         | SCHEMATIC                                                             |
|--------------------------------------------------------------------------------------|-----------|------------------------------|--------|------------------------------|---------|-----------------------------------------------------------------------|
|                                                                                      |           | POS. 1                       | POS. 2 | POS. 1                       | POS. 2  |                                                                       |
|                                                                                      |           |                              |        |                              |         |                                                                       |
|                                                                                      |           | C&K marking on opposite side |        | C&K marking on opposite side |         |                                                                       |
| SP                                                                                   | EP11      | OFF                          | MOM.   | OPEN                         | 1-3     | SPST                                                                  |
|                                                                                      | EP12      | ON                           | MOM.   | 2-1                          | 2-3     | SPDT                                                                  |
| <b>SPDT</b><br><br>Part number shown: EP12SD1CBE<br>Terminal Nos. For Reference Only |           |                              |        |                              |         |                                                                       |
| DP                                                                                   | EP21      | OFF                          | MOM.   | OPEN                         | 1-3,4-6 | DPST                                                                  |
|                                                                                      |           |                              |        |                              |         | <br>Part number shown: EP21SD1CBE<br>Terminal Nos. For Reference Only |


MOM. = Momentary

All models with all options when ordered with G, Q, R or S contact material.


## PLUNGER




**S** .215" HIGH




**S1** .110" HIGH




**S2** .465" HIGH



**FP** FLUSH PLUNGER



**R** SNAP-FITTING



S1 & S2 actuators are not available with EP12 & EP21 models.


FP & R actuators are not available with EP21 model.  
R actuators are not available with EP12 model.

NOTE: Caps available for plunger options, see page A-14.


## BUSHING



**D1** UNTHREADED



NOTE: Internal actuator o-ring standard.



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

**C&K**

4 Sep 19

# EP Series Sealed Tiny Pushbutton Switches




A

Pushbutton

## TERMINATIONS




### C PC THRU-HOLE

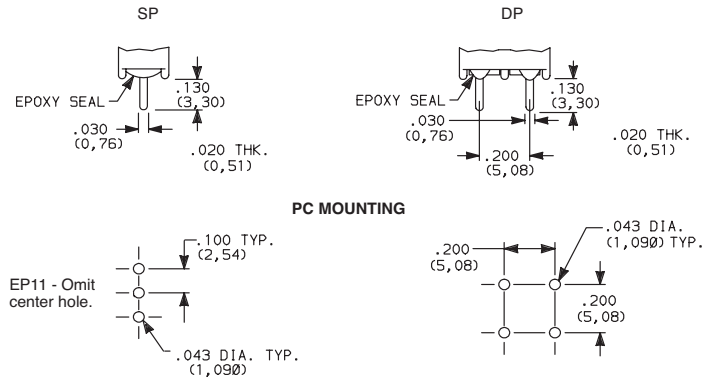


SP and DP

### W WIRE WRAP

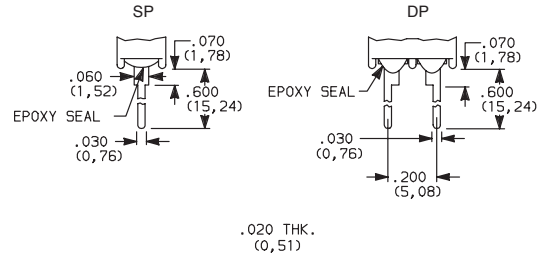

SP and DP

### A RIGHT ANGLE, PC THRU-HOLE

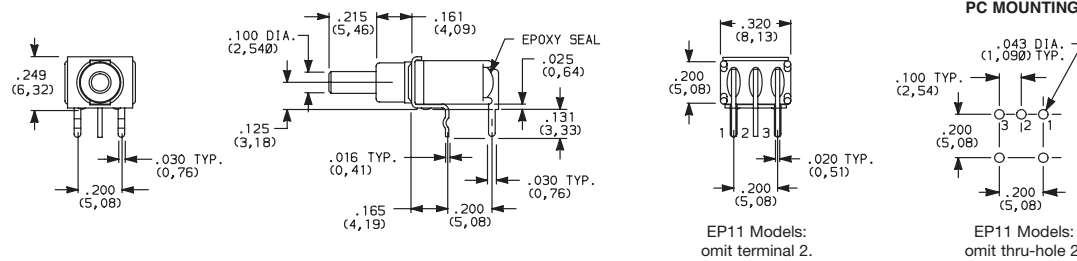


EP12SD1ABE  
SPDT

EP11 Models:  
omit terminal 2.


EP11 Models:  
omit thru-hole 2.

### A RIGHT ANGLE, PC THRU-HOLE

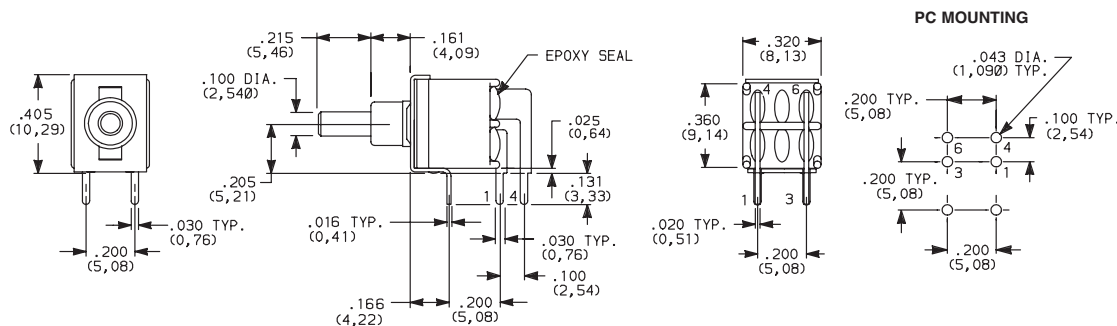

EP21SD1ABE  
DPST

### AV VERTICAL RIGHT ANGLE, PC THRU-HOLE

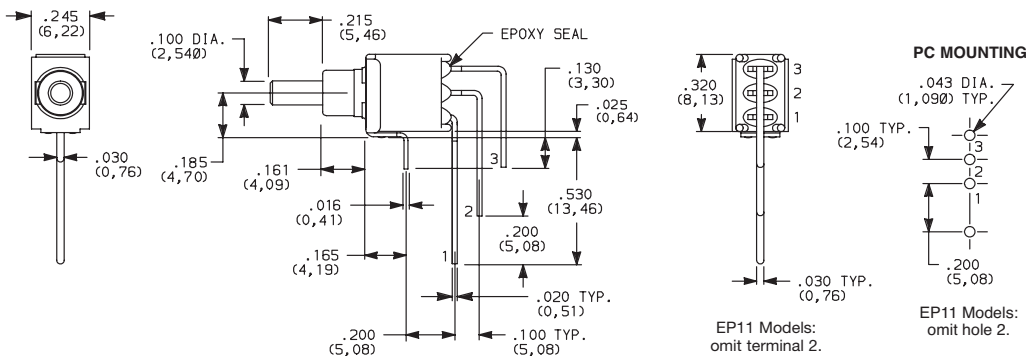


EP12SD1AVBE  
SPDT

NOTE: Terminal bend radii and lead-in manufacturing option.

EP11 Models:  
omit terminal 2.

EP11 Models:  
omit hole 2.



Third Angle  
Projection

**C&K**

4 Sep 19

A-11

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

www.ckswitches.com



# EP Series Sealed Tiny Pushbutton Switches


## TERMINATIONS




Pushbutton

A


### AV VERTICAL RIGHT ANGLE, THRU-HOLE



**EP21SD1AVBE  
DPST**

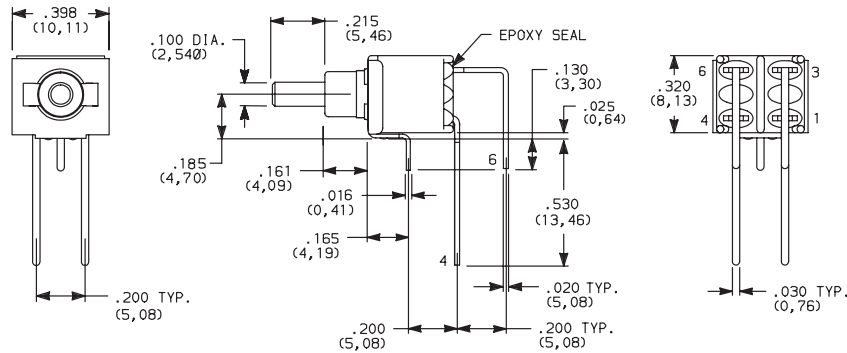


#### PC MOUNTING




NOTE: Terminal bend radii and lead-in manufacturing option.


### AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE



**EP12SD1AV3BE  
SPST**

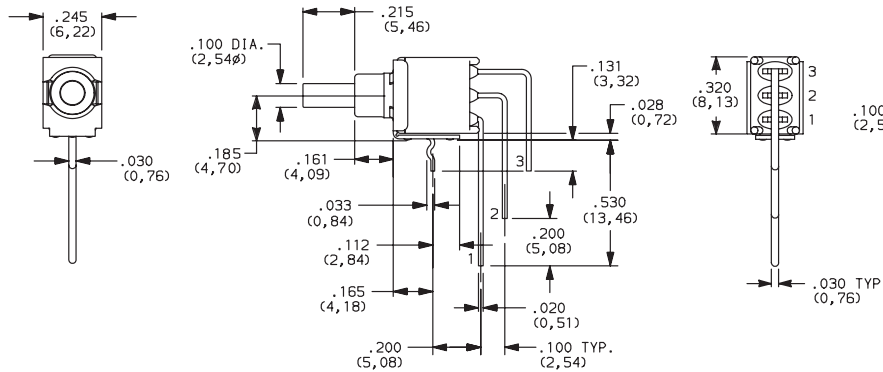


#### PC MOUNTING




EP11 Models:  
omit hole 2.

### SA RIGHT ANGLE, SURFACE MOUNT



**EP12SD1SAPE  
SPDT**

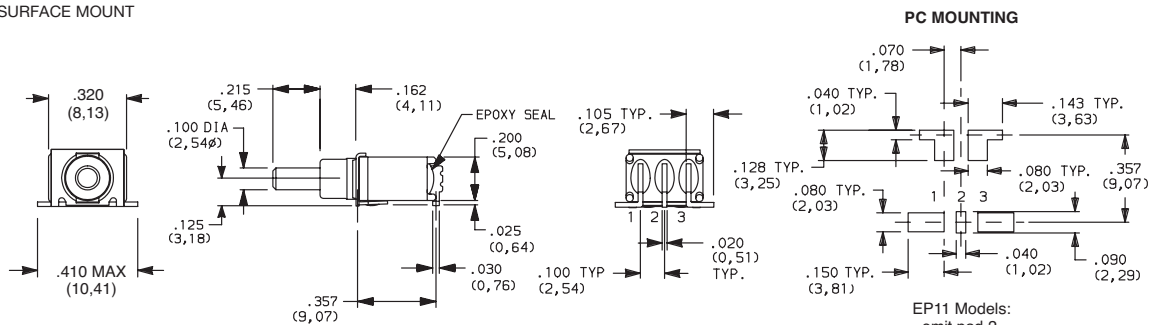

#### PC MOUNTING

EP11 Models:  
omit pad 2.


Available with P contact material only.  
Not Available on DPST models.

EP11 Models:  
omit terminal 2.


### SA1 RIGHT ANGLE, SURFACE MOUNT



**EP12SD1SA1BE  
SPDT**

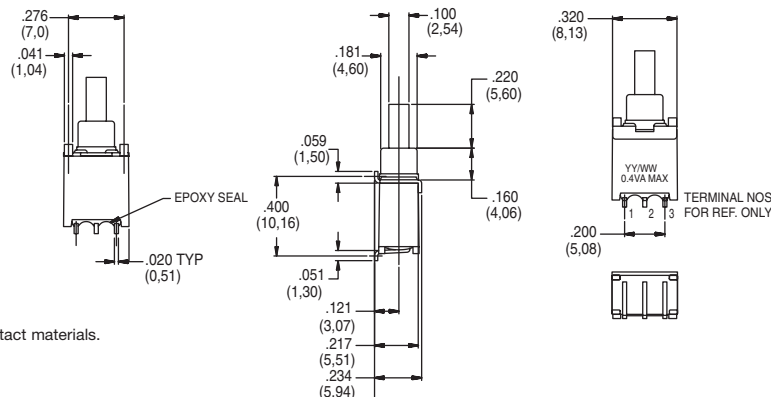

#### PC MOUNTING



SA1 is only available with B and P contact materials.  
Not Available on DPST models.



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

# EP Series Sealed Tiny Pushbutton Switches






A  
Pushbutton

## TERMINATIONS




**V3** VERTICAL MOUNT, V-BRACKET

**V31** VERTICAL MOUNT, V-BRACKET, SNAP-IN

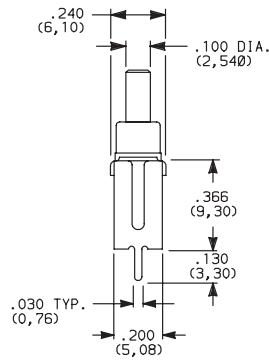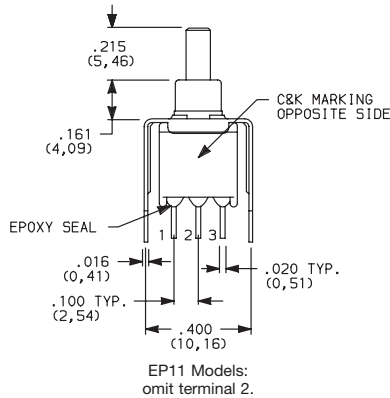

### PC MOUNTING





EP11 Models:  
o e e ole




**EP12SD1V3BE  
SPDT**

**V3** VERTICAL MOUNT, V-BRACKET

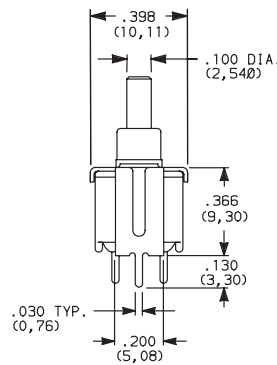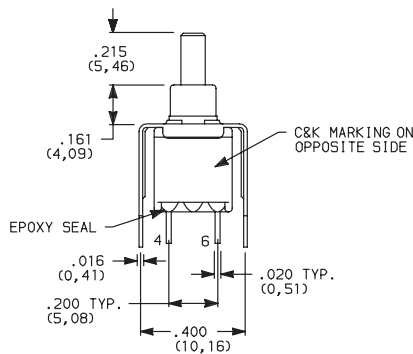

### PC MOUNTING



**EP21SD1V3BE  
DPST**

## CONTACT MATERIAL



| OPTION CODE | CONTACT MATERIAL                | TERMINAL PLATING       | RATINGS                        |                                                                    |
|-------------|---------------------------------|------------------------|--------------------------------|--------------------------------------------------------------------|
| <b>B</b>    | GOLD <sup>1</sup>               | GOLD <sup>1</sup>      | LOW LEVEL/DRY CIRCUIT          | 0.4 VA MAX. @ 20 V AC OR DC MAX.                                   |
| <b>P</b>    |                                 | MATTE-TIN <sup>6</sup> |                                |                                                                    |
| <b>Q</b>    | SILVER <sup>4,5</sup>           | SILVER <sup>5</sup>    | POWER                          | 1 AMP @ 120 V AC OR 28 V DC.                                       |
| <b>S</b>    |                                 | MATTE-TIN <sup>6</sup> |                                |                                                                    |
| <b>G</b>    | GOLD OVER SILVER <sup>2,3</sup> | GOLD <sup>3</sup>      | LOW LEVEL/DRY CIRCUIT OR POWER | 0.4 VA MAX @ 20 V AC OR DC MAX. OR<br>1 AMP @ 120 V AC OR 28 V DC. |
| <b>R</b>    |                                 | MATTE-TIN <sup>6</sup> |                                |                                                                    |

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

<sup>1</sup> CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>6</sup> TERMINALS: Copper alloy, with matte tin over nickel plate.

<sup>2</sup> END CONTACTS: Coin silver, with gold plate over nickel plate.

<sup>3</sup> CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>4</sup> END CONTACTS: Coin silver, silver plated.

<sup>5</sup> CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.


NOTE: Any models supplied with Q, B, P, S, R or G contact material are RoHS compliant.

All models  with all options when ordered with G, S, R or Q contact material.

## SEAL



**E** EPOXY SEAL



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

**C&K**


4 Sep 19



# EP Series Sealed Tiny Pushbutton Switches

## AVAILABLE HARDWARE

### Cap




#### PART NO.

**508101000** WHITE  
**508102000** BLACK  
**508103000** RED

Material: Nylon  
Finish: Gloss

Not for use on S1 plunger

### Cap



#### PART NO.


**465801000** WHITE  
**465802000** BLACK  
**465803000** RED

Material: Nylon  
Finish: Gloss

Not for use on S1 plunger

### Cap

Compatible with snap-fitting plungers  
EP11 & EP12 Models. R option only.




#### PART NO.

**585A01000** WHITE  
**585A02000** BLACK  
**585A03000** RED

Material: Nylon  
Finish: Gloss

### Cap

Compatible with snap-fitting plungers  
EP11 & EP12 Models. R option only.



#### PART NO.


**785A01000** WHITE  
**785A02000** BLACK  
**785A03000** RED

Material: Nylon  
Finish: Gloss

NOTE: Other colors available, consult Customer Service Center.

## TAPE & REEL

For part number EPXX-SA/SA1

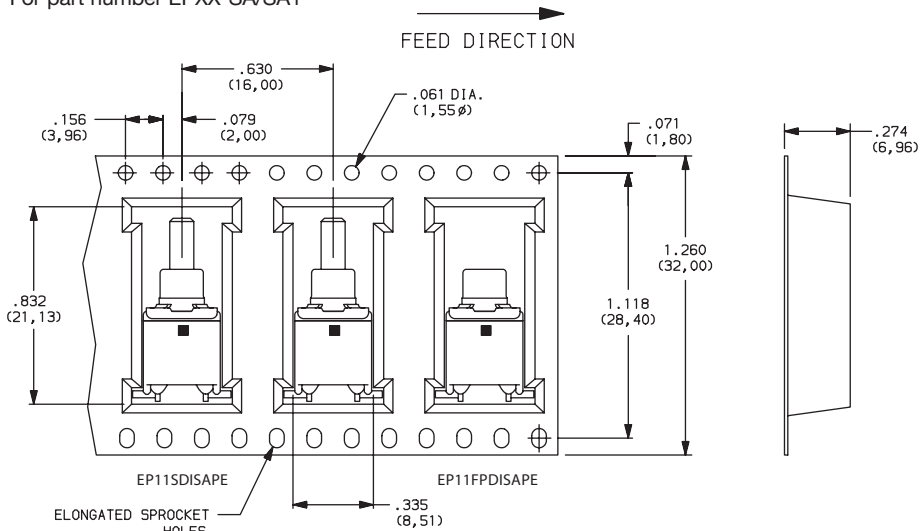

| REEL INFORMATION  |               |
|-------------------|---------------|
| OUTSIDE DIAMETER  | 13.00 (330,0) |
| PILOT HOLE        | .512 (13,0)   |
| QUANTITY PER REEL | 600           |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.