



VEC Series

Features

- 4 ϕ ~ 6.3 ϕ , 85°C, 2,000 hours assured
- Vertical chip type miniaturized for 5.5mm, high capacitors
- Low Leakage Current Lead free reflow soldering is available
- Designed for surface mounting on high density PC board
- RoHS Compliance




Marking color: Black

Specifications


| Items | Performance | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|----------------|-----------|--------------------|------------------------------|--------|-----------------------------------|-----------------|------------------------|-----------------|-------------------|------|------|------|------|---|---|-------------------|---|---|---|---|---|---|
| Category Temperature Range | -40°C ~ +85°C | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Tolerance | ±20% (at 120Hz, 20°C) | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current (at 20°C) | I = 0.002CV or 0.5 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V | | | | | | | | | | | | | | | | | | | | | | | |
| Tanδ (at 120Hz, 20°C) | <table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> </tr> </table> | Rated Voltage | 6.3 | 10 | 16 | 25 | 35 | 50 | Tanδ (max) | 0.28 | 0.24 | 0.20 | 0.14 | 0.12 | 0.10 | | | | | | | | | |
| Rated Voltage | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | | | |
| Tanδ (max) | 0.28 | 0.24 | 0.20 | 0.14 | 0.12 | 0.10 | | | | | | | | | | | | | | | | | | |
| Low Temperature Characteristics (at 120Hz) | <p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table> | Rated Voltage | | 6.3 | 10 | 16 | 25 | 35 | 50 | Impedance Ratio | Z(-25°C)/Z(+20°C) | 3 | 3 | 2 | 2 | 2 | 2 | Z(-40°C)/Z(+20°C) | 8 | 5 | 4 | 3 | 3 | 3 |
| Rated Voltage | | 6.3 | 10 | 16 | 25 | 35 | 50 | | | | | | | | | | | | | | | | | |
| Impedance Ratio | Z(-25°C)/Z(+20°C) | 3 | 3 | 2 | 2 | 2 | 2 | | | | | | | | | | | | | | | | | |
| | Z(-40°C)/Z(+20°C) | 8 | 5 | 4 | 3 | 3 | 3 | | | | | | | | | | | | | | | | | |
| Endurance | <table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C.</p> | Test Time | 2,000 Hrs | Capacitance Change | Within ±20% of initial value | Tanδ | Less than 200% of specified value | Leakage Current | Within specified value | | | | | | | | | | | | | | | |
| Test Time | 2,000 Hrs | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±20% of initial value | | | | | | | | | | | | | | | | | | | | | | | |
| Tanδ | Less than 200% of specified value | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | | | | | |
| Shelf Life Test | <table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied.</p> | Test Time | 1,000 Hrs | Capacitance Change | Within ±20% of initial value | Tanδ | Less than 200% of specified value | Leakage Current | Within specified value | | | | | | | | | | | | | | | |
| Test Time | 1,000 Hrs | | | | | | | | | | | | | | | | | | | | | | | |
| Capacitance Change | Within ±20% of initial value | | | | | | | | | | | | | | | | | | | | | | | |
| Tanδ | Less than 200% of specified value | | | | | | | | | | | | | | | | | | | | | | | |
| Leakage Current | Within specified value | | | | | | | | | | | | | | | | | | | | | | | |
| Ripple Current & Frequency Multipliers | <table border="1"> <tr> <td>Frequency (Hz)</td> <td>50</td> <td>120</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multiplier</td> <td>0.7</td> <td>1.0</td> <td>1.3</td> <td>1.4</td> </tr> </table> | Frequency (Hz) | 50 | 120 | 1k | 10k up | Multiplier | 0.7 | 1.0 | 1.3 | 1.4 | | | | | | | | | | | | | |
| Frequency (Hz) | 50 | 120 | 1k | 10k up | | | | | | | | | | | | | | | | | | | | |
| Multiplier | 0.7 | 1.0 | 1.3 | 1.4 | | | | | | | | | | | | | | | | | | | | |

Diagram of Dimensions

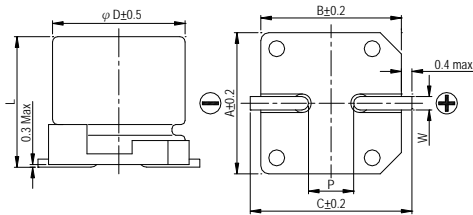

| φ D | L | A | B | C | W | P ± 0.2 |
|-----|-----------|-----|-----|-----|-----------|---------|
| 4 | 5.3 ± 0.2 | 4.3 | 4.3 | 5.1 | 0.5 ~ 0.8 | 1.0 |
| 5 | 5.3 ± 0.2 | 5.3 | 5.3 | 5.9 | 0.5 ~ 0.8 | 1.5 |
| 6.3 | 5.3 ± 0.2 | 6.6 | 6.6 | 7.2 | 0.5 ~ 0.8 | 2.0 |

Marking



Dimension & Permissible Ripple Current

Dimension: φ D × L(mm)

Ripple Current: mA/rms at 120 Hz, 85°C

| V. DC | μF | Contents | 6.3V (0J) | | 10V (1A) | | 16V (1C) | | 25V (1E) | | 35V (1V) | | 50V (1H) | |
|-------|-----|----------|-----------|----|----------|----|----------|----|----------|----|----------|----|----------|----|
| | | | φ D×L | mA | φ D×L | mA | φ D×L | mA | φ D×L | mA | φ D×L | mA | φ D×L | mA |
| | 1 | 010 | | | | | | | | | | | 4×5.3 | 10 |
| | 2.2 | 2R2 | | | | | | | | | | | 4×5.3 | 15 |
| | 3.3 | 3R3 | | | | | | | | | | | 4×5.3 | 19 |
| | 4.7 | 4R7 | | | | | | | 4×5.3 | 19 | 4×5.3 | 20 | 5×5.3 | 26 |
| | 10 | 100 | | | 4×5.3 | 23 | 4×5.3 | 26 | 5×5.3 | 32 | 5×5.3 | 34 | 6.3×5.3 | 44 |
| | 22 | 220 | 4×5.3 | 31 | 5×5.3 | 39 | 5×5.3 | 44 | 6.3×5.3 | 55 | 6.3×5.3 | 59 | | |
| | 33 | 330 | 5×5.3 | 44 | 5×5.3 | 48 | 6.3×5.3 | 63 | 6.3×5.3 | 67 | | | | |
| | 47 | 470 | 5×5.3 | 52 | 6.3×5.3 | 67 | 6.3×5.3 | 75 | | | | | | |
| | 100 | 101 | 6.3×5.3 | 89 | 6.3×5.3 | 98 | | | | | | | | |

Part Numbering System

| | | | | | | |
|-------------|-------------|-----------------------|---------------|--------------|---------------|------------------------------|
| VEC series | 10μF | ±20% | 16V | Carrier Tape | 4 φ × 5.3L | Pb-free and PET coating case |
| VEC | 100 | M | 1C | TR | - | 0405 |
| Series name | Capacitance | Capacitance Tolerance | Rated Voltage | Package Type | Terminal Type | Case size |
| | | | | | | Lead Wire and Coating Type |

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 12.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.