



SPECIFICATIONS

PRODUCT : **VARISTOR**

TYPE : **GNR20D****K**

MODEL :

CITATION :

REVISION : **B01**

TOTAL PAGES : **5** PAGE : **1/5**

RELEASED DATE : **Oct. 05, 2001**

REVISION HISTORY

NO	REV. DATE	DCR NO.	DESCRIPTION OF CHANGE	REV.
1	Oct. 05, 2001		NEW RELEASE	B01
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				

Approved by	Checked by	Edited by
Yu-Chang Huang	Cloud Chen	Andy Chiang

CERAMATE	TYPE	GNR20D□□□K	MODEL		PAGE	2/5
CITATION				DATE	Oct. 05, 2001	
SUBJECT	QUALITY APPROVAL and STRUCTURE			REV.	B01	

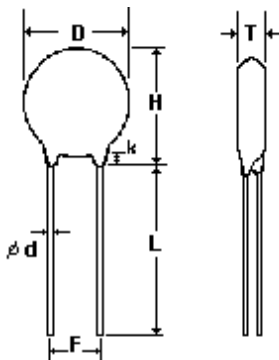
1. QUALITY SYSTEM APPROVAL

ISO9001 Certificate of approval No.97-HOU-AQ-1382

2. SAFETY STANDARDS APPROVAL

Standard No.	UL 1414	UL 1449	UL 497B	CUL	CSA C22.2 No.1	VDE 42000
File No.	E181368	E166389	E187844	E166389	LR105317	5938
180K~680K			Approved			Approved
820K~181K		Approved	Approved	Approved		Approved
201K~471K	Approved	Approved	Approved	Approved	Approved	Approved
511K		Approved	Approved	Approved		Approved
561K~821K	Approved	Approved	Approved	Approved		Approved
911K~112K						Approved
182K						

3. STRUCTURE

NO.	ITEM	DESCRIPTION		
3.1	Main Material	Zinc Oxide		
3.2	Coating Material	Epoxy Resin		
3.3	Marking	GNR, Part number, UL, CSA(or CUL) and VDE recognized component mark, Date code		
3.4	Appearance	Without dirt and crack, marking should be clear		
3.5	Dimensions		D(max.)	23.0
			H(max.)	26.5
			T(max.)	*(1)
			F	10.0± 1.0
			φ d	1.0± 0.1
			L(min.)	25.0
			k(max.)	3.0
			Unit: mm	

***(1) See Page 3, Dimensions Table**

	TYPE	GNR20D□□□K	MODEL		PAGE	3/5
CITATION				DATE	Oct. 05, 2001	
SUBJECT	DIMENSIONS TABLE			REV.	B01	

Part No.	T _{max.}
20D180K	4.3
20D220K	4.5
20D270K	4.8
20D330K	4.1
20D390K	4.3
20D470K	4.5
20D560K	4.7
20D680K	4.5
20D820K	4.1
20D101K	4.3
20D121K	4.5
20D151K	4.8
20D181K	4.2
20D201K	4.3
20D221K	4.4
20D241K	4.5
20D271K	4.6
20D301K	4.8
20D331K	4.9
20D361K	5.1
20D391K	5.2
20D431K	5.4
20D471K	5.6
20D511K	5.7
20D561K	5.8
20D621K	6.1
20D681K	6.4
20D751K	6.7
20D781K	6.8
20D821K	7.0
20D911K	7.1
20D102K	7.3
20D112K	7.7
20D182K	11.7

Unit:mm

CERAMATE	TYPE	GNR20D ☐ ☐ ☐ K	MODEL		PAGE	4/5
CITATION				DATE	Oct. 05, 2001	
SUBJECT	ELECTRICAL CHARACTERISTICS			REV.	B01	

4. ELECTRICAL CHARACTERISTICS

NO.	ITEM	PERFORMANCE	TEST METHODS
4.0	Standard Conditions		Unless otherwise specified, all tests are made under environmental conditions as given below: Temperature: 5~35℃ Relative humidity: 45~85 % RH
4.1	Maximum Allowable Voltage	AC : *(2) V _{rms} DC : *(2) V	Maximum continuous sine wave(RMS) or DC voltage which may be applied.
4.2	Varistor Voltage	V _{1mA} : *(2) V	Voltage across the varistor measured at C _{mA} DC.
4.3	Varistor Voltage Temperature Coefficient	0 ~ -0.05 %/℃	$\frac{V_{CmA} \text{ at } 85^{\circ}\text{C} - V_{CmA} \text{ at } 25^{\circ}\text{C}}{V_{CmA} \text{ at } 25^{\circ}\text{C}} \times \frac{1}{60} \times 100$
4.4	Max. Clamping Voltage	*(2) V at *(2) A	Peak voltage across the varistor with a specified peak impulse current of 8× 20 μs waveform.
4.5	Rated Power	*(2) W	Maximum 50~60Hz power which may be loaded for 1,000 hrs at 85± 2℃ with $\Delta V_{CmA} / V_{CmA} \leq \pm 10\%$.
4.6	Withstanding Surge Current	*(2) A	The max. current within the varistor voltage change of less than ± 10% when one impulse current (8× 20 μs) applied.
			The max. current with a varistor voltage change of less than ± 10% when two times impulse current (8× 20 μs) are applied at intervals of 5 minutes.
4.7	Energy	*(2) Joule	The max. energy absorbed with a varistor voltage change of less than ± 10% when one impulse(10 × 1000 μs) is applied.
4.8	Surge Life	*(2) A	The max. current with a varistor voltage change of less than ± 10% when 10,000 times impulse current (8× 20 μs) are applied at intervals of 20 seconds at room temperature.

*** (2) See Page 5**

	TYPE	GNR20D□□□K	MODEL		PAGE	5/5
CITATION				DATE	Oct. 05, 2001	
SUBJECT	ELECTRICAL CHARACTERISTICS			REV.	B01	

PART NUMBER	MAXIMUM ALLOWABLE VOLTAGE		VARISTOR VOLTAGE	CLAMPING VOLTAGE (MAX.)		RATED WATTAGE (MAX.)	SURGE CURRENT (8/20 μ s)		MAXIMUM ENERGY (10/1000 μ s)	SURGE LIFE
	AC _{rms} (V)	DC(V)	(V)	(V)	Ip(A)	(W)	I _{tm} (A)		W _{tm} (joule)	(A)
							1 TIME	2 TIMES		
20D180K	11	14	16~20	36	20	0.2	3000	2000	13.0	130
20D220K	14	18	20~24	43					16.0	
20D270K	17	22	24~30	53					19.0	
20D330K	20	26	30~36	65					24.0	
20D390K	25	31	35~43	77					28.0	
20D470K	30	38	42~52	93					34.0	
20D560K	35	45	50~62	110					41.0	
20D680K	40	56	61~75	135					49.0	
20D820K	50	65	74~90	135					100	
20D101K	60	85	90~110	165	70.0					
20D121K	75	100	108~132	200	85.0					
20D151K	95	125	135~165	250	106.0					
20D181K	115	150	162~198	300	130.0					
20D201K	130	170	185~225	340	140.0					
20D221K	140	180	198~242	360	155.0					
20D241K	150	200	216~264	395	168.0					
20D271K	175	225	247~303	455	190.0					
20D301K	190	250	270~330	505	210.0					
20D331K	210	275	297~363	545	228.0					
20D361K	230	300	324~396	595	255.0					
20D391K	250	320	351~429	650	275.0					
20D431K	275	350	387~473	710	303.0					
20D471K	300	385	423~517	775	350.0					
20D511K	320	410	459~561	845	382.0					
20D561K	350	460	504~616	920	7500	382.0				
20D621K	385	505	558~682	1025		382.0				
20D681K	420	560	612~748	1120		382.0				
20D751K	460	615	675~825	1240		420.0				
20D781K	485	640	702~858	1290		440.0				
20D821K	510	670	738~902	1355		460.0				
20D911K	550	745	819~1001	1500		510.0				
20D102K	625	825	900~1100	1650		565.0				
20D112K	680	895	990~1210	1815		620.0				
20D182K	1000	1465	1700~1980	2970		1020.0	200			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.