


Tandem 600V Hyperfast Rectifier

MAJOR PRODUCTS CHARACTERISTICS

$I_{F(AV)}$	15 A
V_{RRM}	600 V (in series)
T_j (max)	150 °C
V_F (max)	2.6 V
I_{RM} (typ.)	4.8 A

FEATURES AND BENEFITS

- Especially suited as boost diode in continuous mode power factor correctors and hard switching conditions.
- Designed for high dI/dt operation. Hyperfast recovery current to compete with GaAs devices. Allows downsizing of mosfet and heatsinks.
- Internal ceramic insulated devices with equal thermal conditions for both 300V diodes.
- Insulation (2500V RMS) allows placement on same heatsink as mosfet and flexible heatsinking on common or separate heatsink.
- Matched diodes for typical PFC application without need for voltage balance network.
- $C = 7\text{pF}$

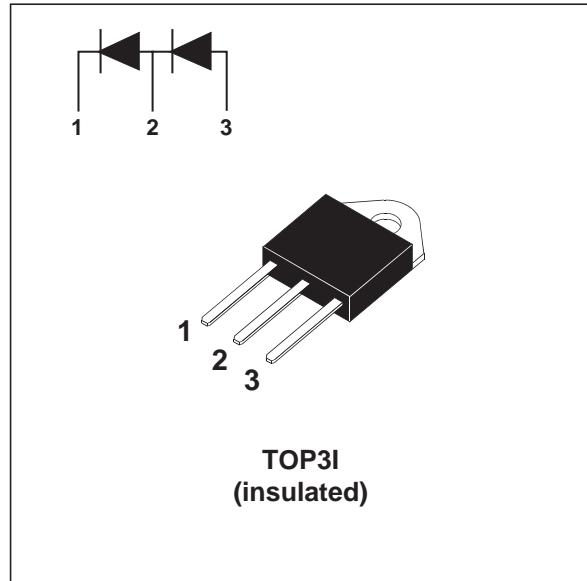

DESCRIPTION

The TURBOSWITCH "H" is an ultra high performance diode composed of two 300V dice in series. TURBOSWITCH "H" family drastically cuts losses in the associated MOSFET when run at high dI_F/dt .

ABSOLUTE RATINGS (limiting values for both diodes in series)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	600	V
$I_{F(RMS)}$	RMS forward current	26	A
I_{FSM}	Surge non repetitive forward current	130	A
T_{stg}	Storage temperature range	-65 +150	°C
T_j	Maximum operating junction temperature	+ 150	°C

STTH1506TPI

THERMAL AND POWER DATA

Symbol	Parameter	Test conditions	Value	Unit
R _{th} (j-c)	Junction to case	Per diode	2.9	°C/W
R _{th} (c)		Coupling	0.3	
R _{th} (j-c)	Junction to case	Total	1.6	
P ₁	Conduction power dissipation for both diodes	I _{F(AV)} = 15 A δ = 0.5 T _c = 70°C	50	W

STATIC ELECTRICAL CHARACTERISTICS (for both diodes)

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
I _R *	Reverse leakage current	V _R = V _{RRM}	T _j = 25°C			20	μA
			T _j = 125°C		30	200	
V _F **	Forward voltage drop	I _F = 15 A	T _j = 25°C			3.6	V
			T _j = 125°C		2.1	2.6	

Pulse test: * tp = 5ms, δ < 2%

** tp = 380μs, δ < 2%

To evaluate the maximum conduction losses use the following equation:

$$P = 1.8 \times I_{F(AV)} + 0.053 \times I_F^2(\text{RMS})$$

RECOVERY CHARACTERISTICS

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
trr	Reverse recovery time	I _F = 0.5 A Irr = 0.25A I _R = 1 A	T _j = 25°C		16		ns
		I _F = 1 A dI _F /dt = - 50A/μs V _R = 30 V				35	
I _{RM}	Reverse recovery current	V _R = 400 V I _F = 15 A dI _F /dt = -200 A/μs	T _j = 125°C		4.8	6.0	A
					0.4		-

TURN-ON SWITCHING CHARACTERISTICS

Symbol	Parameter	Tests Conditions		Min.	Typ.	Max.	Unit
tfr	Forward recovery time	I _F = 15 A dI _F /dt = 100A/μs, V _{FR} = 1.1 x V _{Fmax}	T _j = 25°C			200	ns
V _{FP}	Forward recovery voltage	I _F = 15 A dI _F /dt = 100 A/μs	T _j = 25°C			6	V

Fig. 1: Conduction losses versus average current.

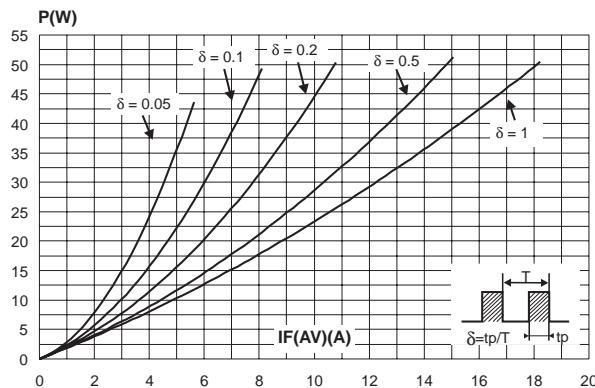


Fig. 3: Relative variation of thermal impedance junction to case versus pulse duration.

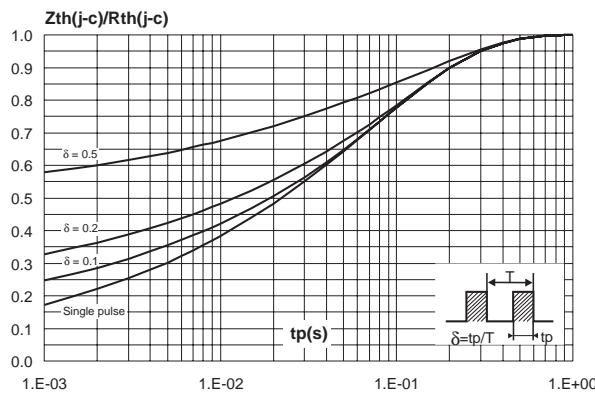


Fig. 5: Reverse recovery time versus dI_F/dt (90% confidence).

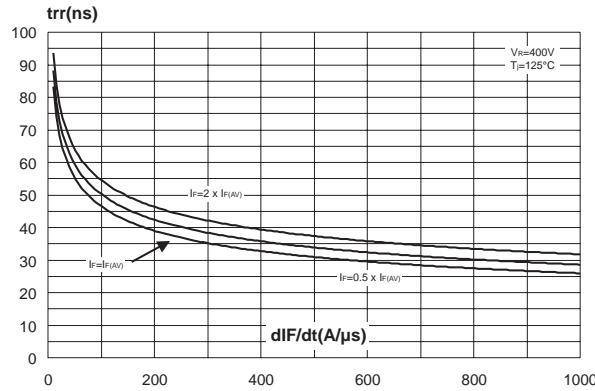


Fig. 2: Forward voltage drop versus forward current.

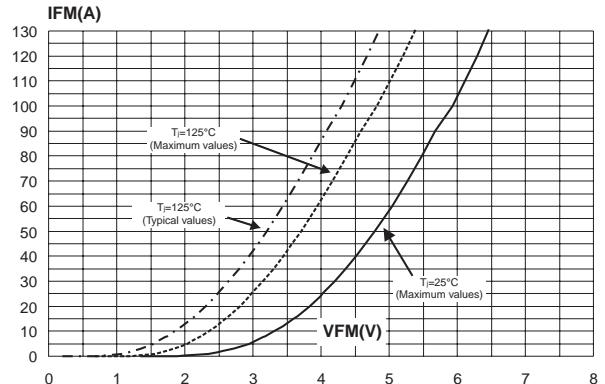


Fig. 4: Peak reverse recovery current versus dI_F/dt (90% confidence).


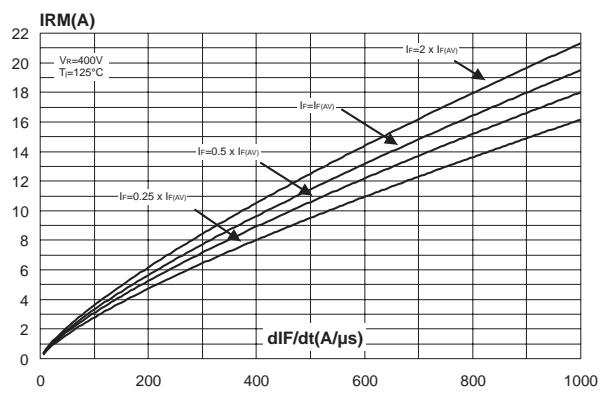


Fig. 6: Reverse recovery charges versus dI_F/dt (90% confidence).

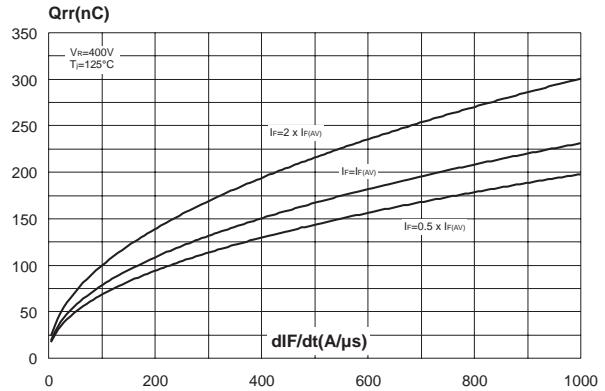

STTH1506TPI

Fig. 7: Softness factor versus dI_F/dt (typical values).

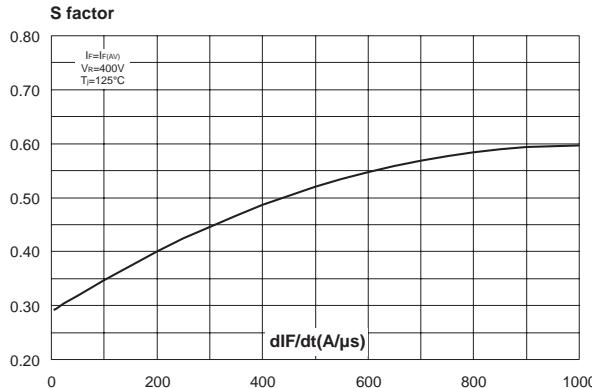


Fig. 8: Relative variations of dynamic parameters versus junction temperature.

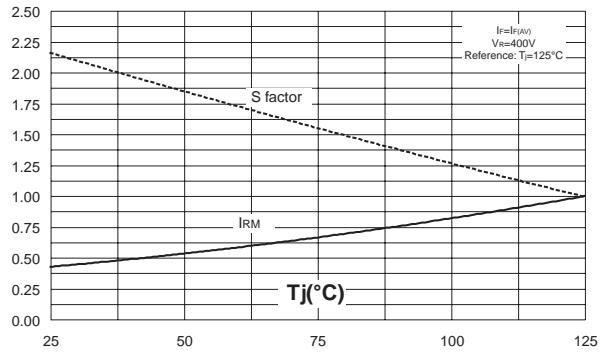


Fig. 9: Transient peak forward voltage versus dI_F/dt (90% confidence).

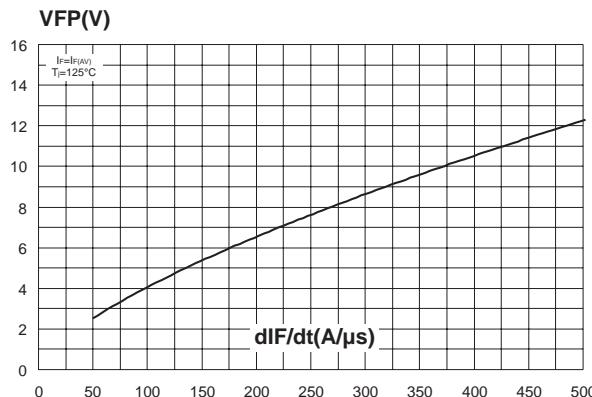


Fig. 10: Forward recovery time versus dI_F/dt (90% confidence).



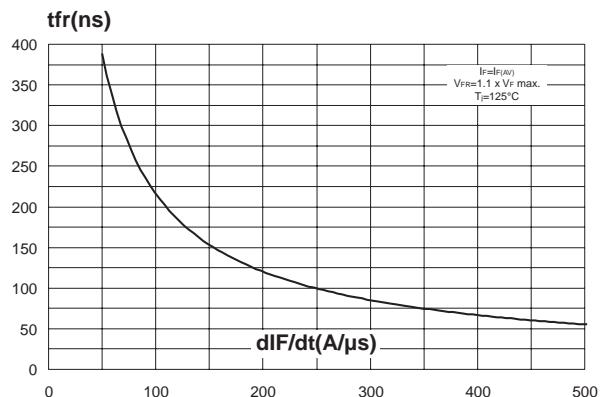


Fig. 11: Junction capacitance versus reverse voltage applied (typical values).

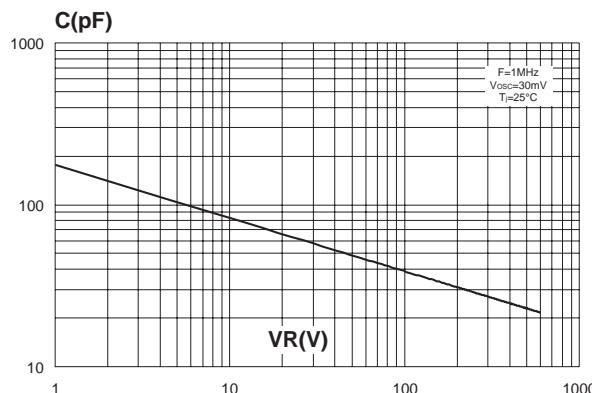

PACKAGE MECHANICAL DATA
TOP3I

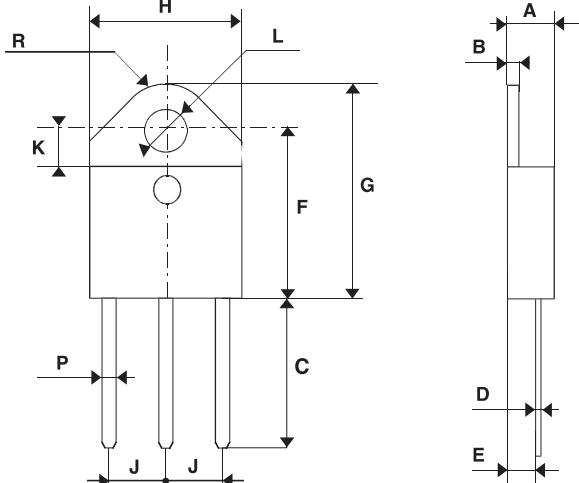

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.4		4.6	0.173		0.181
B	1.45		1.55	0.057		0.061
C	14.35		15.60	0.565		0.614
D	0.5		0.7	0.020		0.028
E	2.7		2.9	0.106		0.114
F	15.8		16.5	0.622		0.650
G	20.4		21.1	0.815		0.831
H	15.1		15.5	0.594		0.610
J	5.4		5.65	0.213		0.222
K	3.4		3.65	0.134		0.144
L	4.08		4.17	0.161		0.164
P	1.20		1.40	0.047		0.055
R		4.60			0.181	

Ordering code	Marking	Package	Weight	Base qty	Delivery mode
STTH1506TPI	STTH1506TPI	TOP3I	4.46 g.	30	Tube

- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.