

Thick Film Chip Resistors



Features:




- Small size and lightweight
- Suitable for both flow and reflow soldering
- Reduction of assembly costs and matching with placement machines

Standard : 2, 5 and 10% - A series
: 1% - B series


Performance Specifications:

Temperature Coefficient	: 1 Ω to 10 Ω $\leq \pm 400$ PPM/ $^{\circ}$ C 11 Ω to 100 Ω $\leq \pm 200$ PPM/ $^{\circ}$ C > 100 Ω $\leq \pm 100$ PPM/ $^{\circ}$ C (0201 > 100 Ω $\leq \pm 200$ PPM/ $^{\circ}$ C)
Short-time Overload	: $\pm 5\%$: $\pm (2\% + 0.1 \Omega)$ Max. : $\pm 1\%$: $\pm (1\% + 0.1 \Omega)$ Max.
Minimum Insulation Resistance	: 1,000 M Ω
Dielectric Withstanding Voltage	: No evidence of flashover, mechanical damage, arcing or insulation breakdown
Terminal Bending	: $\pm (1\% + 0.05 \Omega)$ Max.
Soldering Heat	: Resistance change rate is $\pm (1\% + 0.05 \Omega)$ Max.
Minimum Solderability	: 95% coverage
Temperature Cycling	: $\pm 5\%$: $\pm (1\% + 0.05 \Omega)$ Max. : $\pm 1\%$: $\pm (0.5\% + 0.05 \Omega)$ Max.
Humidity (Steady State)	: $\pm 5\%$: $\pm (3\% + 0.1 \Omega)$ Max. : $\pm 1\%$: $\pm (0.5\% + 0.1 \Omega)$ Max.
Load Life in Humidity	: $\pm 5\%$: $\pm (3\% + 0.1 \Omega)$ Max. : $\pm 1\%$: $\pm (1\% + 0.1 \Omega)$ Max.
Load Life	: $\pm 5\%$: $\pm (3\% + 0.1 \Omega)$ Max. : $\pm 1\%$: $\pm (1\% + 0.1 \Omega)$ Max.

Construction

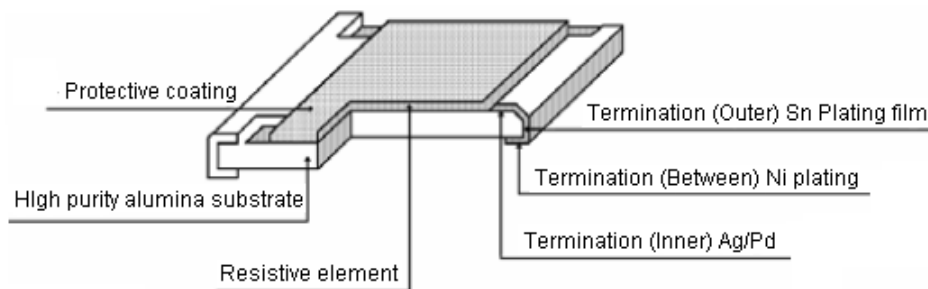

Power Rating and Dimension

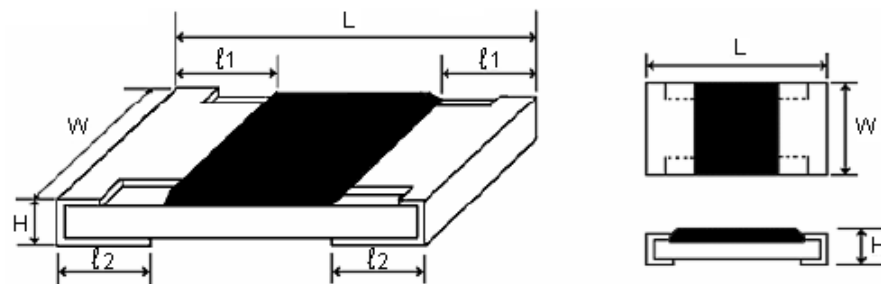

Thick Film Chip Resistors




Type	Power Rating at 70°C	Max. Working Voltage	Max. Overload Voltage	Operating Temperature (°C)	Tolerance %	Resistance Range	Standard Series	Dimension (mm)				
								L	W	H	ℓ1	ℓ2
0402	1/16 W	1 A 50 V	2 A 100 V	-55 to +155	Jumper	< 50 mΩ	B A A	1 ±0.1	0.5 ±0.05	0.35 ±0.05	0.2 ±0.1	0.25 ±0.1
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
0603	1/10 W-S 1/16 W	1 A 50 V	2 A 100 V	-55 to +155	Jumper	< 50 mΩ	B A A	1.6 ±0.1	0.8 ^{+0.15} _{-0.1}	0.45 ±0.1	0.3 ±0.2	0.3 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
0805	1/8 W-S 1/10 W	2 A 150 V	4 A 300 V	-55 to +155	Jumper	< 50 mΩ	B A A	2 ±0.15	1.25 ^{+0.15} _{-0.1}	0.55 ±0.1	0.4 ±0.2	0.4 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
1206	1/4 W-S 1/8 W	2 A 200 V	4 A 400 V	-55 to +155	Jumper	< 50 mΩ	B A A	3.1 ±0.15	1.55 ^{+0.15} _{-0.1}	0.55 ±0.1	0.45 ±0.2	0.45 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
1210	1/3 W-S 1/4 W	2 A 200 V	4 A 400 V	-55 to +155	Jumper	< 50 mΩ	B A A	3.1 ±0.1	2.6 ±0.15	0.55 ±0.1	0.5 ±0.25	0.5 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
2010	3/4 W-S 1/2 W	2 A 200 V	4 A 400V	-55 to +155	Jumper	< 50 mΩ	B A A	5 ±0.1	2.5 ±0.15	0.55 ±0.1	0.6 ±0.25	0.5 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						
2512	1 W	2.5 A 200 V	5 A 400 V	-55 to +155	Jumper	< 50 mΩ	B A A	6.35 ±0.1	3.2 ±0.15	0.55 ±0.1	0.6 ±0.25	0.5 ±0.2
					±1	10 Ω - 1 MΩ						
					±2	1 Ω - 1 MΩ						
					±5	1 Ω - 1 MΩ						

Thick Film Chip Resistors



Derating Curve

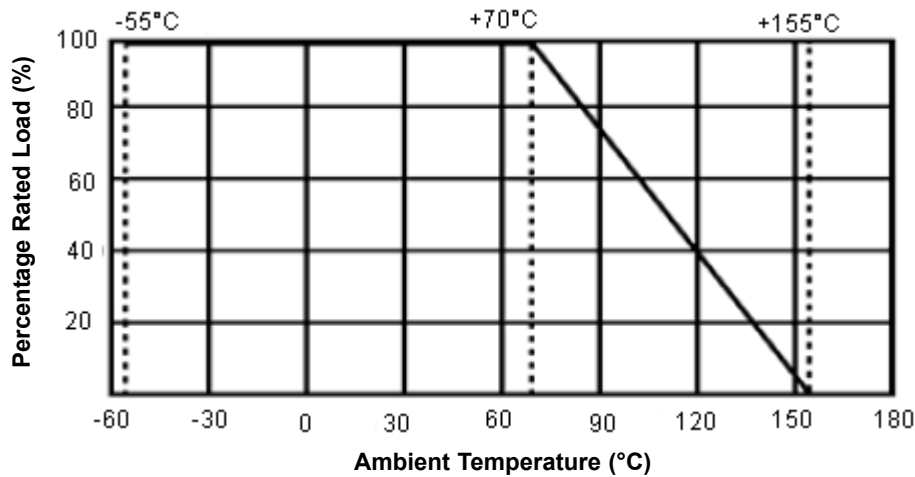

Multiplier Code (for 0603 1% marking)

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multiplier	10 ⁰	10 ¹	10 ²	10 ³	10 ⁴	10 ⁵	10 ⁶	10 ⁷	10 ⁻¹	10 ⁻²	10 ⁻³

Standard B Series Resistance Value Code (for 0603 1% marking)

Ω Value	Code	Ω Value	Code	Ω Value	Code	Ω Value	Code	Ω Value	Code
100	1	162	21	261	41	422	61	681	81
102	2	165	22	267	42	432	62	698	82
105	3	169	23	274	43	442	63	715	83
107	4	174	24	280	44	453	64	732	84
110	5	178	25	287	45	464	65	750	85
113	6	182	26	294	46	475	66	768	86
115	7	187	27	301	47	487	67	787	87
118	8	191	28	309	48	499	68	806	88
121	9	196	29	316	49	511	69	825	89
124	10	200	30	324	50	523	70	845	90
127	11	205	31	332	51	536	71	866	91
130	12	210	32	340	52	549	72	887	92
133	13	215	33	348	53	562	73	909	93
137	14	221	34	357	54	576	74	931	94
140	15	226	35	365	55	590	75	953	95
143	16	232	36	374	56	604	76	976	96
147	17	237	37	383	57	619	77	-	-
150	18	243	38	392	58	634	78	-	-
154	19	249	39	402	59	649	79	-	-
158	20	255	40	412	60	665	80	-	-

Thick Film Chip Resistors

Marking on the Resistors Body:

- For 0402 size, no marking on the body due to the small size of the resistor.
- $\pm 5\%$ tolerance product. (Including resistance values less than $1\ \Omega$; both 1% and 5%) The marking is 3 digits, the first 2 digits are the significant figures of the resistance and the 3rd digit denotes number of zeros.


153 = $15,000\ \Omega = 15\ \text{K}\Omega$ 120 = $12\ \Omega$ Below $10\ \Omega$ shown as this: 6R8 = $6.8\ \Omega$ 0.1 Ω to 0.99 Ω shown as this: R33 = $0.33\ \Omega$



- $\pm 1\%$ tolerance marking of case size 0805 and bigger is 4 digits, the first 3 digits are the significant figures of the resistance and the 4th digit denotes number of zeros.

2372 = $23700\ \Omega = 23.7\ \text{K}\Omega$; 1430 = $143\ \Omega$

0.1 Ω to 0.99 Ω shown as this: R33 = $0.33\ \Omega$



Below $10\ \Omega$ shown as this: 3R24 = $3.24\ \Omega$



- Standard B series values ($\pm 1\%$ tolerance) of 0603 size. Due to the small size of the resistor's body, 3 digits marking will be used to indicate the accurate resistance value by using the Multiplier code & Standard B Series Resistance Value Code.

1.96 $\text{K}\Omega = 196 \times 10^1\ \Omega = 29\text{B}$

12.4 $\Omega = 124 \times 10^{-1}\ \Omega = 10\text{X}$



- Standard A series values which does not belong to B series values (in $\pm 1\%$ tolerance) of 0603 size. The marking is the same as 5% tolerance but marked with underline.

122 = $1200 = 1.2\ \text{K}\Omega$

680 = $68\ \Omega$



Part Number Table

Description	Part Number
Thick Film Resistor	MC0402WG00000TCE-TC
Thick Film Resistor	MC0603SAF0000T5E
Thick Film Resistor	MC0805S8F0000T5E
Thick Film Resistor	MC1206S4F0000T5E
Thick Film Resistor	MC1210S3F1000T5E
Thick Film Resistor	MC2010W2F0000T4E
Thick Film Resistor	MC25121WF1000T4E

Thick Film Chip Resistors



Part Number Explanation

MC1206	S4	F	0000	T	5	E
Resistor Type	Wattage	Tolerance	Resistance Value	Packing Type	Packing Quantity	Special Feature
Chip resistor types	: 0402, 0603, 0805, 1206, 1210, 2010, 2512					
Normal size	: WG=1/16W, W2=1/2W, 1W=1W					
Small size	: SA=1/10W-S, S8=1/8W-S, S4=1/4W-S, S3=1/3W-S					
Resistance Value	: A-series :					
	1 st digit is "0"					
	2 nd & 3 rd digits are significant figures of the resistance					
	4 th indicate the number of zeros					
	: B-series :					
	1 st to 3 rd digits are significant figures of the resistance					
	4 th digit indicate the number of zeros "J" to 0.1, "K" to 0.01, "L" to 0.001					
	Ex. 012J to 1 Ω2, 226K to 2 Ω26					
	Jumper : use "0" for 1 st to 4 th digits					
Tolerance	: 0 = Jumper, F = ±1%					
Packing Type	: T = Tape / reel					
Packing Quantity	: 4 = 4,000 pieces, 5 = 5,000 pieces, C = 10,000 pieces					
Special Feature	: E = lead (Pb) free plating type					

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.