


# MSMLG5.0A – MSMLG170CAe3, MSMLJ5.0A – MSMLJ170CAe3 Surface Mount 3000 Watt Transient Voltage Suppressor

## 1 Product Overview

The MSMLG5.0A–MSMLG170CA and the MSMLJ5.0A–MSMLJ170CA series of high-reliability transient voltage suppressors (TVS) protect circuits from voltage spikes containing up to 3000 W (10/1000  $\mu$ s model pulse). The SMLG gull-wing design in the DO-215AB package allows for visible solder connections. The SMLJ J-bend design in the DO-214AB package allows for greater PC board mounting density. Selections include unidirectional and bidirectional as well as RoHS-compliant versions. These are available with a variety of upscreening options for enhanced reliability. They protect against the secondary effects of lightning per IEC61000-4-5 and against voltage pulses from inductive switching environments and induced by RF radiation. Since their response time is virtually instantaneous, they can also be used in protection from ESD and EFT per IEC61000-4-2 and IEC61000-4-4.



**DO-215AB  
Package**



**DO-214AB  
Package**

For the latest information, visit our website [www.microsemi.com](http://www.microsemi.com).

### 1.1 Features

The following are key features of the MSMLG5.0A through MSMLG170CAe3 and the MSMLJ5.0A through MSMLJ170CAe3 devices:

- High-reliability devices with fabrication and assembly lot traceability for all M prefix devices
- All devices are 100% surge tested
- $3\sigma$  lot norm screening performed on standby current ( $I_b$ ) for all M prefix devices
- Available in both unidirectional and bidirectional versions
- Moisture classification is “Level 1” with no dry pack required per IPC/JEDEC J-STD-020B for all M prefix devices.
- Enhanced reliability screening options with M prefix are available in reference to MIL-PRF-19500. Refer to [High Reliability Up-Screened Plastic Products Portfolio](#) for more details on the screening options (see Part Nomenclature for all available options).
- RoHS compliant versions available
- Axial-lead equivalent packages for thru-hole mounting are available as M5KP5.0A to M5KP110CA with 5000 W rating (contact Microsemi for other surface mount options).

## 1.2 Applications and Benefits

The following are benefits of the MSMLG5.0A through MSMLG170CAe3 and the MSMLJ5.0A through MSMLJ170CAe3 devices.

- Suppresses transients up to 3000 W (10/1000  $\mu$ s test pulse—see [Figure 2 \(see page 7\)](#))
- Protection from switching transients and induced RF
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4
- Secondary lightning protection per IEC 61000-4-5 with 42  $\Omega$  source impedance:

Class 1 and 2: SML 5.0A to SML 170A or CA

Class 3: SML 5.0A to SML 150A or CA

Class 4: SML 5.0A to SML 75A or CA

- Secondary lightning protection per IEC 61000-4-5 with 12  $\Omega$  source impedance:

Class 1: SML 5.0A to SML 170A or CA

Class 2: SML 5.0A to SML 90A or CA

Class 3: SML 5.0A to SML 48A or CA

Class 4: SML 5.0A to SML 24A or CA

- Secondary lightning protection per IEC 61000-4-5 with 2  $\Omega$  source impedance:

Class 2: SML 5.0A to SML 43A or CA

Class 3: SML 5.0A to SML 22A or CA

Class 4: SML 5.0A to SML10A or CA

## 1.3 Part Nomenclature

The following table lists the part nomenclature for the MSMLG5.0A through MSMLG170CAe3 and the MSMLJ5.0 through MSMLJ170CAe3 devices.

**Table 1 • MXSMLG5.0CAe3 Part Nomenclature**

|               |                                |                                                                                                                                                                           |
|---------------|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MX</b>     | Reliability level*             | M (controlled product)<br>MA (avionics grade) MX (reference JANTX)<br>MXL (MX life)<br>Blank = commercial<br>*(see <a href="#">Hirel Non-Hermetic Product Portfolio</a> ) |
| <b>SM</b>     | Surface-mount package          |                                                                                                                                                                           |
| <b>L</b>      | 3000 W power level             |                                                                                                                                                                           |
| <b>G or J</b> | Gull-wing or J-bend lead frame |                                                                                                                                                                           |
| <b>5.0</b>    | Reverse standoff voltage       | (see <a href="#">Typical Electrical Performance (see page 5)</a> table)                                                                                                   |
| <b>C</b>      | Uni/bidirectional              | C = Bidirectional<br>Blank = Unidirectional                                                                                                                               |
| <b>A</b>      | ± 5% Tolerance level           |                                                                                                                                                                           |
| <b>e3</b>     | RoHS Compliance                | e3 = RoHS compliant<br>Blank = non-RoHS compliant                                                                                                                         |

## 1.4 Symbols and Definitions

The following table lists the symbols and definitions used for the MSMLG5.0A through MSMLG170CAe3 and the MSMLJ5.0 through MSMLJ170CAe3 devices.

**Table 2 • Symbols and Definitions**

| Symbol     | Value                          | Definition                                                                                                              |
|------------|--------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| $I_{(BR)}$ | Breakdown current              | The current used for measuring breakdown voltage $V_{(BR)}$ .                                                           |
| $I_D$      | Standby current                | The current at the rated standoff voltage $V_{WM}$ .                                                                    |
| $I_F$      | Forward current                | The forward current dc value, no alternating component.                                                                 |
| $I_{PP}$   | Peak impulse current           | The peak current during the impulse.                                                                                    |
| $P_{PP}$   | Peak pulse Power               | The peak power dissipation resulting from peak impulse current $I_{PP}$ .                                               |
| $V_{(BR)}$ | Minimum breakdown voltage      | The minimum voltage the device will exhibit at a specified current.                                                     |
| $V_C$      | Clamping voltage               | Clamping voltage at $I_{PP}$ (peak pulse current) at the specified pulse conditions (typically shown as maximum value). |
| $V_{WM}$   | Rated working standoff voltage | The maximum peak voltage that can be applied over the operating temperature range.                                      |

## 2 Electrical Specifications

This section shows the electrical specifications for the MSMLG5.0A–MSMLG170CA and the MSMLJ5.0A–MSMLJ170CA devices.

### 2.1 Maximum Ratings

The following table shows you the absolute maximum ratings for the MSMLG5.0A–MSMLG170CA and the MSMLJ5.0A–MSMLJ170CA devices.

**Table 3 • Absolute Maximum Ratings**

| Parameter/Test Conditions                                                            | Symbol              | Value          | Unit              |
|--------------------------------------------------------------------------------------|---------------------|----------------|-------------------|
| Junction and storage temperature                                                     | $T_J$ and $T_{STG}$ | –65 to 150     | °C                |
| Thermal resistance junction-to-lead                                                  | $R_{\theta JL}$     | 17.5           | °C/W              |
| Thermal resistance junction-to-ambient <sup>1</sup>                                  | $R_{\theta JA}$     | 77.5           |                   |
| Peak pulse power dissipation at 25 °C<br>(10/1000 $\mu$ s, see Figures 1, 2, and 3). | $P_{PP}$            | 3000           | W                 |
| Impulse repetition rate (duty factor)                                                | df                  | 0.01 or less   | %                 |
| $t_{clamping}$ (0 V to $V_{(BR)}$ min)                                               | Unidirectional      | $t_{clamping}$ | <100 ps           |
|                                                                                      | Bidirectional       |                | <5 ns             |
| Rated average power dissipation                                                      | TL = 45 °C          | $P_{M(AV)}$    | 6 W               |
|                                                                                      | TL = 25 °C          |                | 1.61 <sup>1</sup> |
| Maximum forward surge current <sup>2</sup>                                           | $I_{FSM}$           | 200            | A (pk)            |
| Solder temperature at 10 s                                                           | $T_{SP}$            | 260            | °C                |

**Notes:**

1. When mounted on FR4 PC board (1 oz Cu) with recommended mounting pad (see pad layout).
2. Peak impulse of 8.3 ms half-sine wave at 25 °C (unidirectional only).

## 2.2 Typical Electrical Performance

The following table shows the Electrical characteristics for the MSMLG5.0A–MSMLG170CA and the MSMLJ5.05A–MSMLJ170CA devices at 25 °C unless otherwise specified.

For bidirectional device types, indicate a CA suffix after the part number (i.e. MSMLG170CA).

**Table 4 • Typical Electrical Performance**

| Part Number |          | V <sub>WM</sub><br>Reverse<br>Standoff<br>Voltage | V <sub>BR</sub> Breakdown<br>Voltage at I <sub>BR</sub> | I <sub>BR</sub> Test<br>Current | V <sub>C</sub> Max<br>Clamping<br>Voltage<br>at I <sub>PP</sub> | I <sub>PP</sub> Max<br>Peak<br>Pulse<br>Current | I <sub>O</sub> Max<br>Stand-by<br>Current<br>at V <sub>WM</sub> |
|-------------|----------|---------------------------------------------------|---------------------------------------------------------|---------------------------------|-----------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------------|
| Gull-wing   | J-bend   | (V)                                               | (V)                                                     | (mA)                            | (V)                                                             | (A)                                             | (μA)                                                            |
| SMLG5.0A    | SMLJ5.0A | 5.0                                               | 6.40 – 7.00                                             | 10                              | 9.2                                                             | 326.0                                           | 1000                                                            |
| SMLG6.0A    | SMLJ6.0A | 6.0                                               | 6.67 – 7.37                                             | 10                              | 10.3                                                            | 291.3                                           | 1000                                                            |
| SMLG6.5A    | SMLJ6.5A | 6.5                                               | 7.22 – 7.98                                             | 10                              | 11.2                                                            | 267.9                                           | 500                                                             |
| SMLG7.0A    | SMLJ7.0A | 7.0                                               | 7.78 – 8.60                                             | 10                              | 12.0                                                            | 250.0                                           | 200                                                             |
| SMLG7.5A    | SMLJ7.5A | 7.5                                               | 8.33 – 9.21                                             | 1                               | 12.9                                                            | 232.6                                           | 100                                                             |
| SMLG8.0A    | SMLJ8.0A | 8.0                                               | 8.89 – 9.83                                             | 1                               | 13.6                                                            | 220.6                                           | 50                                                              |
| SMLG8.5A    | SMLJ8.5A | 8.5                                               | 9.44 – 10.4                                             | 1                               | 14.4                                                            | 208.4                                           | 25                                                              |
| SMLG9.0A    | SMLJ9.0A | 9.0                                               | 10.0 – 11.1                                             | 1                               | 15.4                                                            | 194.8                                           | 10                                                              |
| SMLG10A     | SMLJ10A  | 10                                                | 11.1 – 12.3                                             | 1                               | 17.0                                                            | 176.4                                           | 5                                                               |
| SMLG11A     | SMLJ11A  | 11                                                | 12.2 – 13.5                                             | 1                               | 18.2                                                            | 164.8                                           | 5                                                               |
| SMLG12A     | SMLJ12A  | 12                                                | 13.3 – 14.7                                             | 1                               | 19.9                                                            | 150.6                                           | 5                                                               |
| SMLG13A     | SMLJ13A  | 13                                                | 14.4 – 15.9                                             | 1                               | 21.5                                                            | 139.4                                           | 5                                                               |
| SMLG14A     | SMLJ14A  | 14                                                | 15.6 – 17.2                                             | 1                               | 23.2                                                            | 129.4                                           | 2                                                               |
| SMLG15A     | SMLJ15A  | 15                                                | 16.7 – 18.5                                             | 1                               | 24.4                                                            | 123.0                                           | 2                                                               |
| SMLG16A     | SMLJ16A  | 16                                                | 17.8 – 19.7                                             | 1                               | 26.0                                                            | 115.4                                           | 2                                                               |
| SMLG17A     | SMLJ17A  | 17                                                | 18.9 – 20.9                                             | 1                               | 27.6                                                            | 106.6                                           | 2                                                               |
| SMLG18A     | SMLJ18A  | 18                                                | 20.0 – 22.1                                             | 1                               | 29.2                                                            | 102.8                                           | 2                                                               |
| SMLG20A     | SMLJ20A  | 20                                                | 22.2 – 24.5                                             | 1                               | 32.4                                                            | 92.6                                            | 2                                                               |
| SMLG22A     | SMLJ22A  | 22                                                | 24.4 – 26.9                                             | 1                               | 35.5                                                            | 84.4                                            | 2                                                               |
| SMLG24A     | SMLJ24A  | 24                                                | 26.7 – 29.5                                             | 1                               | 38.9                                                            | 77.2                                            | 2                                                               |
| SMLG26A     | SMLJ26A  | 26                                                | 28.9 – 31.9                                             | 1                               | 42.1                                                            | 71.2                                            | 2                                                               |
| SMLG28A     | SMLJ28A  | 28                                                | 31.1 – 34.4                                             | 1                               | 45.4                                                            | 66.0                                            | 2                                                               |
| SMLG30A     | SMLJ30A  | 30                                                | 33.3 – 36.8                                             | 1                               | 48.4                                                            | 62.0                                            | 2                                                               |
| SMLG33A     | SMLJ33A  | 33                                                | 36.7 – 40.6                                             | 1                               | 53.3                                                            | 56.2                                            | 2                                                               |
| SMLG36A     | SMLJ36A  | 36                                                | 40.0 – 44.2                                             | 1                               | 58.1                                                            | 51.6                                            | 2                                                               |
| SMLG40A     | SMLJ40A  | 40                                                | 44.4 – 49.1                                             | 1                               | 64.5                                                            | 46.4                                            | 2                                                               |
| SMLG43A     | SMLJ43A  | 43                                                | 47.8 – 52.8                                             | 1                               | 69.4                                                            | 43.2                                            | 2                                                               |
| SMLG45A     | SMLJ45A  | 45                                                | 50.0 – 55.3                                             | 1                               | 72.7                                                            | 41.2                                            | 2                                                               |
| SMLG48A     | SMLJ48A  | 48                                                | 53.3 – 58.9                                             | 1                               | 77.4                                                            | 38.8                                            | 2                                                               |
| SMLG51A     | SMLJ51A  | 51                                                | 56.7 – 62.7                                             | 1                               | 82.4                                                            | 36.4                                            | 2                                                               |
| SMLG54A     | SMLJ54A  | 54                                                | 60.0 – 66.3                                             | 1                               | 87.1                                                            | 34.4                                            | 2                                                               |
| SMLG58A     | SMLJ58A  | 58                                                | 64.4 – 71.2                                             | 1                               | 93.6                                                            | 32.0                                            | 2                                                               |
| SMLG60A     | SMLJ60A  | 60                                                | 66.7 – 73.7                                             | 1                               | 96.8                                                            | 31.0                                            | 2                                                               |
| SMLG64A     | SMLJ64A  | 64                                                | 71.1 – 78.6                                             | 1                               | 103.0                                                           | 29.2                                            | 2                                                               |
| SMLG70A     | SMLJ70A  | 70                                                | 77.8 – 86.0                                             | 1                               | 113                                                             | 26.6                                            | 2                                                               |
| SMLG75A     | SMLJ75A  | 75                                                | 83.3 – 92.1                                             | 1                               | 121                                                             | 24.8                                            | 2                                                               |

| Part Number |          | V <sub>WM</sub><br>Reverse<br>Standoff<br>Voltage | V <sub>BR</sub> Breakdown<br>Voltage at I <sub>BR</sub> | I <sub>BR</sub> Test<br>Current | V <sub>C</sub> Max<br>Clamping<br>Voltage<br>at I <sub>PP</sub> | I <sub>PP</sub> Max<br>Peak<br>Pulse<br>Current | I <sub>B</sub> Max<br>Stand-by<br>Current<br>at V <sub>WM</sub> |
|-------------|----------|---------------------------------------------------|---------------------------------------------------------|---------------------------------|-----------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------------|
| SMLG78A     | SMLJ78A  | 78                                                | 86.7 – 95.8                                             | 1                               | 126                                                             | 22.8                                            | 2                                                               |
| SMLG85A     | SMLJ85A  | 85                                                | 94.4 – 104.0                                            | 1                               | 137                                                             | 20.8                                            | 2                                                               |
| SMLG90A     | SMLJ90A  | 90                                                | 100 – 111                                               | 1                               | 146                                                             | 20.6                                            | 2                                                               |
| SMLG100A    | SMLJ100A | 100                                               | 111 – 123                                               | 1                               | 162                                                             | 18.6                                            | 2                                                               |
| SMLG110A    | SMLJ110A | 110                                               | 122 – 135                                               | 1                               | 177                                                             | 16.8                                            | 2                                                               |
| SMLG120A    | SMLJ120A | 120                                               | 133 – 147                                               | 1                               | 193                                                             | 15.6                                            | 2                                                               |
| SMLG130A    | SMLJ130A | 130                                               | 144 – 159                                               | 1                               | 209                                                             | 14.4                                            | 2                                                               |
| SMLG150A    | SMLJ150A | 150                                               | 167 – 185                                               | 1                               | 243                                                             | 12.4                                            | 2                                                               |
| SMLG160A    | SMLJ160A | 160                                               | 178 – 197                                               | 1                               | 259                                                             | 11.6                                            | 2                                                               |
| SMLG170A    | SMLJ170A | 170                                               | 189 – 209                                               | 1                               | 275                                                             | 11.0                                            | 2                                                               |

Bidirectional capacitance is half that shown in [Figure 4 \(see page 8\)](#) at 0 V.

## 2.3 Typical Performance Curves

This section shows the typical performance curves of the MSMLG5.0A–MSMLG170CA and the MSMLJ5.0A–MSMLJ170CA devices.

The following graph shows peak-pulse power versus pulse time (up to 50% of exponentially decaying pulse).

**Figure 1 • Peak Pulse Power vs. Pulse Time (to 50% of exponentially decaying pulse)**



The following graph shows the pulse waveform with these parameters:  $t_r = 10\ \mu s$  and  $t_p = 1000\ \mu s$ .

**Figure 2 • Pulse Waveform**



The following graph shows the derating curve.

**Figure 3 • Derating Curve**



The following graph shows the typical capacitance versus the breakdown voltage. Note that the bidirectional capacitance is half that shown at 0 V.

**Figure 4 • Typical Capacitance vs. Breakdown Voltage (Unidirectional Configuration)**



**Note:**

Bidirectional capacitance is half that shown in Figure 4 at 0 V.


## 3 Package Specification

The following sections shows the package specifications for the SMLG (DO-215AB) and SMLG (DO-214AB) packages.

### 3.1 Package Information

The following illustration shows the SMLJ DO-214AB package dimensions. The typical standoff height is 0.004 in—0.008 in (0.1—0.2 mm).

**Figure 5 • SMLG (DO-215AB) Package Dimensions**

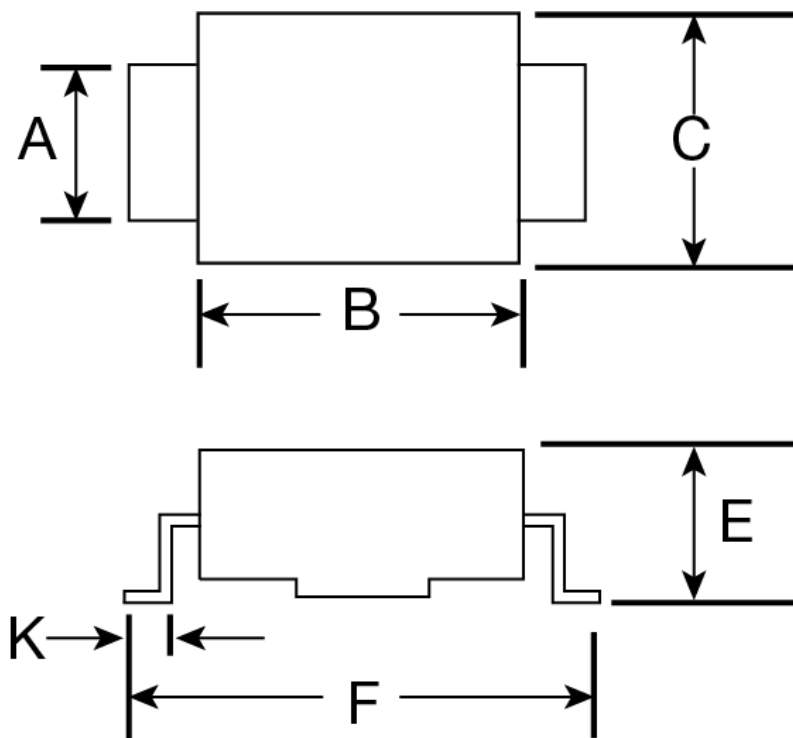

The following table shows the SMLG DO-215AB mechanical and packaging information.

**Table 5 • SMLG (DO-215AB) Mechanical and Package Information**

| Letter         | Dimensions (in.) | Dimensions (mm) |
|----------------|------------------|-----------------|
| A              | 0.115—0.121      | 2.92—3.07       |
| B              | 0.260—0.280      | 6.60—7.11       |
| C              | 0.220—0.245      | 5.59—6.22       |
| E              | 0.077—0.110      | 1.95—2.80       |
| F <sup>1</sup> | 0.380—0.400      | 9.65—10.16      |
| K              | 0.025—0.040      | 0.635—1.016     |

**Note:**

1. Dimension "E" exceeds the JEDEC outline as shown.

The following illustration shows the mechanical and packaging information for the SMLG (DO-214AB) package.

**Figure 6 • SMLJ\_(DO-214AB)\_Package\_Dimensions**



The following table shows the SMLJ DO-214AB mechanical and packaging information.

**Table 6 • SMLJ (DO-214AB) Mechanical and Package Information**

| Letter | Dimensions (in.) | Dimensions (mm) |
|--------|------------------|-----------------|
| A      | 0.115—0.121      | 2.92—3.07       |
| B      | 0.260—0.280      | 6.60—7.11       |
| C      | 0.220—0.245      | 5.59—6.22       |
| D      | 0.305—0.320      | 7.75—8.13       |
| E      | 0.077—0.110      | 1.95—2.80       |
| L      | 0.030—0.060      | 0.760—1.52      |

## 3.2 Pad Layout

The following illustration shows the pad layout for the SMLG (DO-215AB) and SMLJ (DO-214AB) packages.

**Figure 7 • Pad Layout**



The following table shows the SMLG DO-215AB pad layout dimensions.

**Table 7 • SMLG (DO-215AB) Pad Layout Dimensions**

| Letter | Dimensions (in.) | Dimensions (mm) |
|--------|------------------|-----------------|
| A      | 0.510            | 12.95           |
| B      | 0.110            | 2.79            |
| C      | 0.150            | 3.81            |

The following table shows the SMLJ DO-214AB pad layout dimensions.

**Table 8 • SMLJ (DO-214AB) Pad Layout Dimensions**

| Letter | Dimensions (in.) | Dimensions (mm) |
|--------|------------------|-----------------|
| A      | 0.390            | 9.90            |
| B      | 0.110            | 2.79            |
| C      | 0.150            | 3.81            |

**Microsemi Headquarters**

One Enterprise, Aliso Viejo,  
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)

[www.microsemi.com](http://www.microsemi.com)

© 2018 Microsemi. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

RF01003



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.