

MC1723
MC1723C

MC1723, MC1723C

T-58-11-23

MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$ unless otherwise noted.)

Rating	Symbol	Value	Unit
Pulse Voltage from V_{CC} to V_{EE} (50 ms)	$V_{in(p)}$	50	V_{peak}
Continuous Voltage from V_{CC} to V_{EE}	V_{in}	40	Vdc
Input-Output Voltage Differential	$V_{in} - V_O$	40	Vdc
Maximum Output Current	I_L	150	mA dc
Current from V_{ref}	I_{ref}	15	mA dc
Current from V_z	I_z	25	mA
Voltage Between Non-Inverting Input and V_{EE}	V_{ie}	8.0	Vdc
Differential Input Voltage	V_{id}	± 5.0	Vdc
Power Dissipation and Thermal Characteristics			
Plastic Package			
$T_A = +25^\circ\text{C}$	P_D	1.25	W
Derate above $T_A = +25^\circ\text{C}$	$1/\theta_{JA}$	10	$\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Air	θ_{JA}	100	$^\circ\text{C}/\text{W}$
Metal Package			
$T_A = +25^\circ\text{C}$	P_D	1.0	Watt
Derate above $T_A = +25^\circ\text{C}$	$1/\theta_{JA}$	6.6	$\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Air	θ_{JA}	150	$^\circ\text{C}/\text{W}$
$T_C = +25^\circ\text{C}$	P_D	2.1	Watts
Derate above $T_A = +25^\circ\text{C}$	$1/\theta_{JA}$	14	$\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Case	θ_{JC}	35	$^\circ\text{C}/\text{W}$
Dual In-Line Ceramic Package			
$T_A = +25^\circ\text{C}$	P_D	1.5	Watt
Derate above $T_A = +25^\circ\text{C}$	$1/\theta_{JA}$	10	$\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Air	θ_{JA}	100	$^\circ\text{C}/\text{W}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Metal Package		-65 to +175	
Dual In-Line Ceramic			
Operating Ambient Temperature Range	T_A	0 to +70	$^\circ\text{C}$
MC1723C		-55 to +125	
MC1723			

ELECTRICAL CHARACTERISTICS (Unless otherwise noted: $T_A = +25^\circ\text{C}$, $V_{in} = 12\text{ Vdc}$, $V_O = 5.0\text{ Vdc}$, $I_L = 1.0\text{ mA dc}$, $R_{SC} = 0$, $C_1 = 100\text{ pF}$, $C_{ref} = 0$ and divider impedance as seen by the error amplifier $\leq 10\text{ k}\Omega$ connected as shown in Figure 2)

Characteristic	Symbol	MC1723			MC1723C			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Voltage Range	V_{in}	9.5	—	40	9.5	—	40	Vdc
Output Voltage Range	V_O	2.0	—	37	2.0	—	37	Vdc
Input-Output Voltage Differential	$V_{in} - V_O$	3.0	—	38	3.0	—	38	Vdc
Reference Voltage	V_{ref}	6.95	7.15	7.35	6.80	7.15	7.50	Vdc
Standby Current Drain ($I_L = 0$, $V_{in} = 30\text{ V}$)	I_{IB}	—	2.3	3.5	—	2.3	4.0	mA dc
Output Noise Voltage ($f = 100\text{ Hz}$ to 10 kHz)	V_n	—	20	—	—	20	—	$\mu\text{V(RMS)}$
$C_{ref} = 0$		—	2.5	—	—	2.5	—	
$C_{ref} = 5.0\text{ }\mu\text{F}$		—	—	—	—	—	—	
Average Temperature Coefficient of Output Voltage ($T_{low} \text{ ①} < T_A < T_{high} \text{ ②}$)	TCV_O	—	0.002	0.015	—	0.003	0.015	$\%/^\circ\text{C}$
Line Regulation	Regline	—	0.01	0.1	—	0.01	0.1	$\%V_O$
$(T_A = +25^\circ\text{C}) \begin{cases} 12\text{ V} < V_{in} < 15\text{ V} \\ 12\text{ V} < V_{in} < 40\text{ V} \end{cases}$		—	0.02	0.2	—	0.1	0.5	
$(T_{low} \text{ ①} < T_A < T_{high} \text{ ②})$		—	—	0.3	—	—	0.3	
$12\text{ V} < V_{in} < 15\text{ V}$		—	—	—	—	—	—	
Load Regulation ($1.0\text{ mA} < I_L < 50\text{ mA}$)	Regload	—	0.03	0.15	—	0.03	0.2	$\%V_O$
$T_A = +25^\circ\text{C}$		—	—	0.6	—	—	0.6	
$T_{low} \text{ ①} < T_A < T_{high} \text{ ②}$		—	—	—	—	—	—	
Ripple Rejection ($f = 50\text{ Hz}$ to 10 kHz)	RR	—	74	—	—	74	—	dB
$C_{ref} = 0$		—	86	—	—	86	—	
$C_{ref} = 5.0\text{ }\mu\text{F}$		—	—	—	—	—	—	
Short Circuit Current Limit ($R_{SC} = 10\text{ }\Omega$, $V_O = 0$)	I_{sc}	—	65	—	—	65	—	mA dc
Long Term Stability	$\Delta V_O / \Delta t$	—	0.1	—	—	0.1	—	$\%/1000\text{ Hr}$

① $T_{low} = 0^\circ\text{C}$ for MC1723C
 $= -55^\circ\text{C}$ for MC1723

② $T_{high} = +70^\circ\text{C}$ for MC1723C
 $= +125^\circ\text{C}$ for MC1723

MC1723, MC1723C

T-58-11-23

TYPICAL CHARACTERISTICS

($V_{in} = 12 \text{ Vdc}$, $V_O = 5.0 \text{ Vdc}$, $I_L = 1.0 \text{ mAdc}$, $R_{SC} = 0$, $T_A = +25^\circ\text{C}$ unless otherwise noted.)

FIGURE 4 – MAXIMUM LOAD CURRENT AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

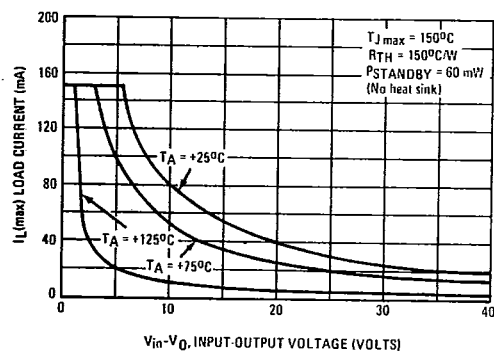


FIGURE 5 – LOAD REGULATION CHARACTERISTICS WITHOUT CURRENT LIMITING

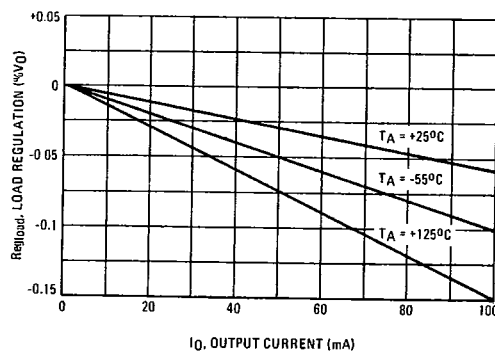


FIGURE 6 – LOAD REGULATION CHARACTERISTICS WITH CURRENT LIMITING

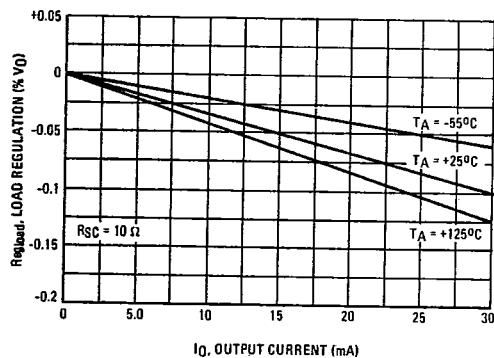


FIGURE 7 – LOAD REGULATION CHARACTERISTICS WITH CURRENT LIMITING

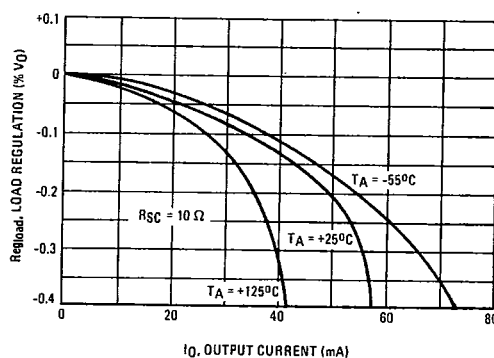


FIGURE 8 – CURRENT LIMITING CHARACTERISTICS


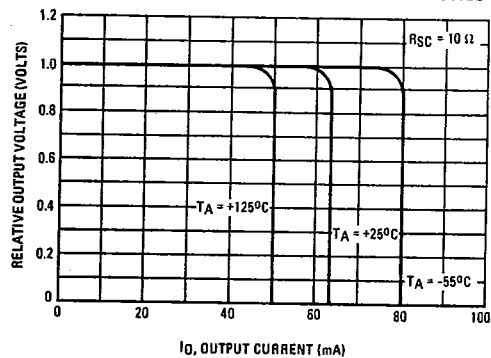


FIGURE 9 – CURRENT LIMITING CHARACTERISTICS AS A FUNCTION OF JUNCTION TEMPERATURE

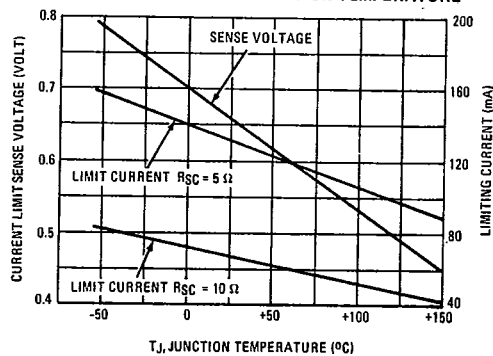

MC1723, MC1723C

T-58-11-23

TYPICAL CHARACTERISTICS (continued)

FIGURE 10 — LINE REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

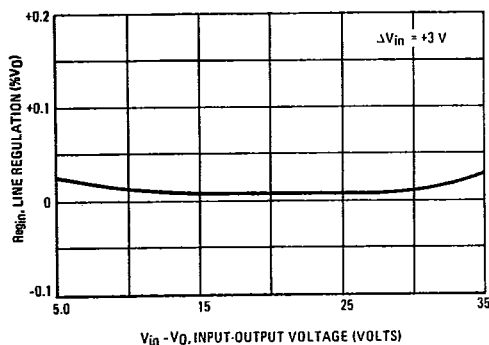


FIGURE 11 — LOAD REGULATION AS A FUNCTION OF INPUT-OUTPUT VOLTAGE DIFFERENTIAL

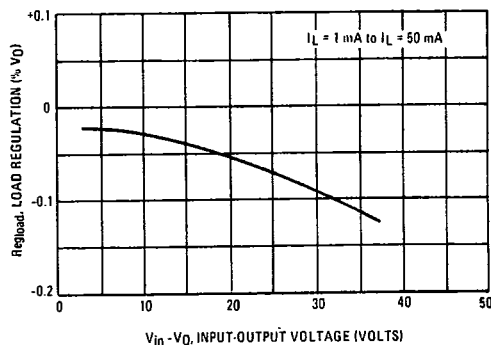


FIGURE 12 — STANDBY CURRENT DRAIN AS A FUNCTION OF INPUT VOLTAGE

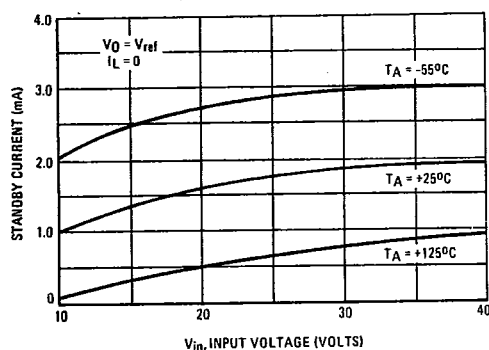


FIGURE 13 — LINE TRANSIENT RESPONSE

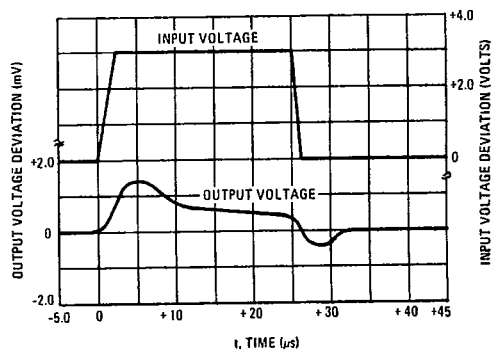


FIGURE 14 — LOAD TRANSIENT RESPONSE


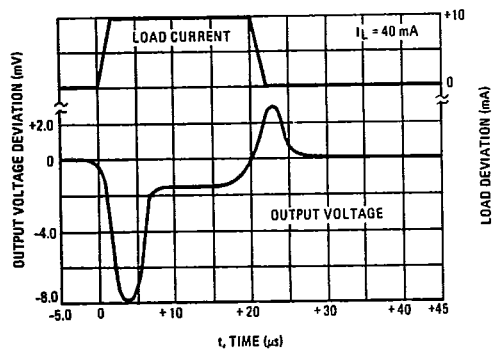


FIGURE 15 — OUTPUT IMPEDANCE AS FUNCTION OF FREQUENCY

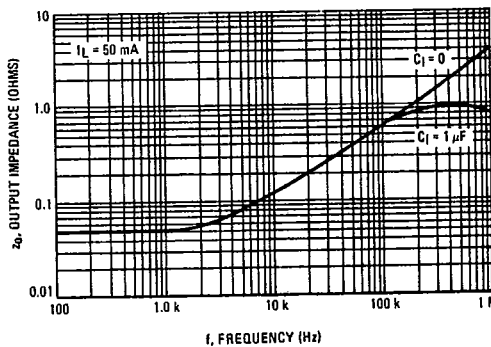

MC1723, MC1723C

T-58-11-23

TYPICAL APPLICATIONS

Pin numbers adjacent to terminals are for the metal package;
pin numbers in parenthesis are for the dual in-line packages.

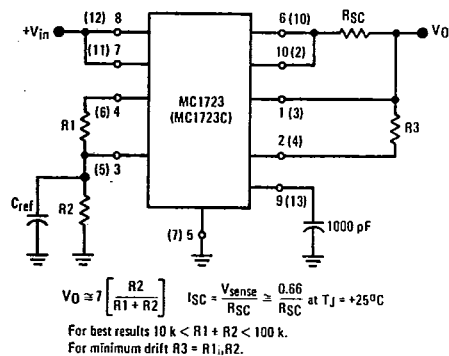
FIGURE 16 – TYPICAL CONNECTION FOR $2 < V_O < 7$ 

FIGURE 17 – MC1723,C FOLDBACK CONNECTION

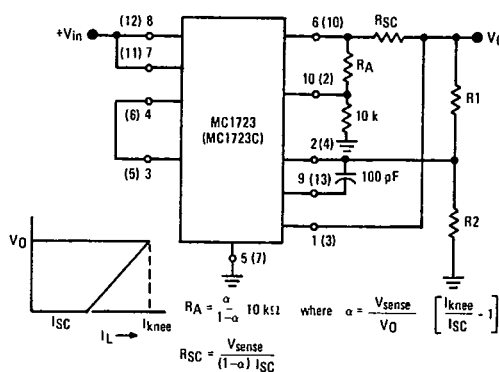


FIGURE 18 – +5 V, 1-AMPERE SWITCHING REGULATOR

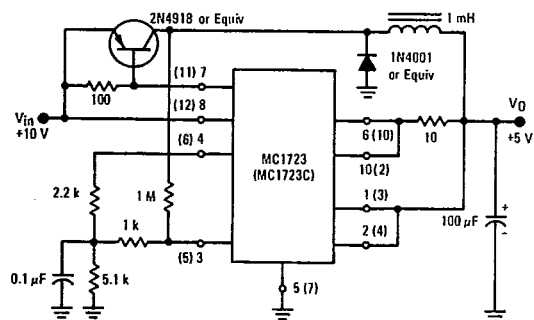


FIGURE 19 – +5 V, 1-AMPERE HIGH EFFICIENCY REGULATOR

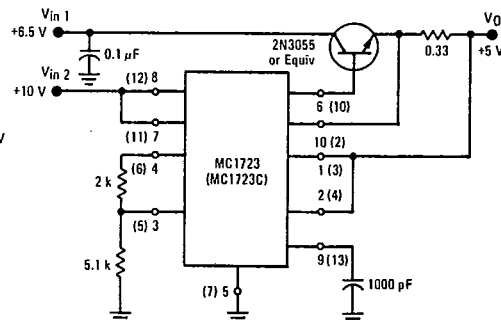


FIGURE 20 – +15 V, 1-AMPERE REGULATOR WITH REMOTE SENSE


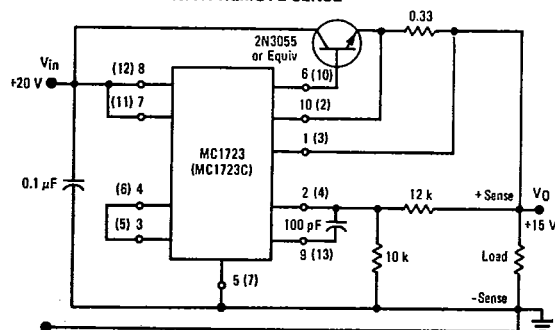


FIGURE 21 – -15 V NEGATIVE REGULATOR

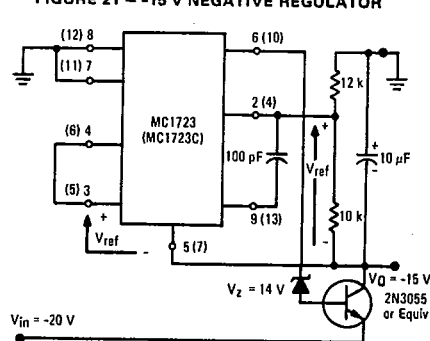


MC1723, MC1723C

7-58-11-23

TYPICAL APPLICATIONS (continued)

FIGURE 22 - +12 V, 1-AMPERE REGULATOR

USING PNP CURRENT BOOST

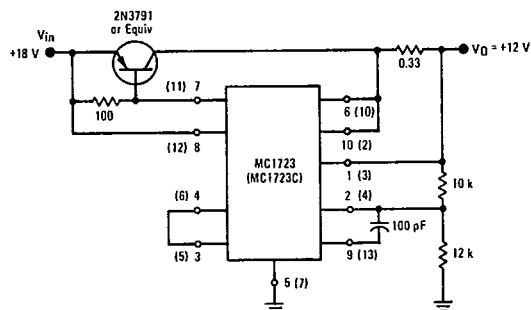

SECTION 19




PACKAGE OUTLINE DIMENSIONS

T-90-20

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	—	22.23	—	0.875
C	8.35	11.43	0.329	0.450
D	0.97	1.09	0.038	0.043
E	—	3.43	—	0.135
F	30.15 BSC	—	1.187 BSC	—
G	10.92 BSC	—	0.430 BSC	—
H	8.46 BSC	—	0.333 BSC	—
J	16.89 BSC	—	0.665 BSC	—
K	7.92	—	0.312	—
Q	3.94	4.09	0.151	0.161
S	—	13.34	—	0.525
T	—	4.78	—	0.188
V	3.94	4.09	0.151	0.161

K SUFFIX METAL PACKAGE CASE 1-03 $R_{\theta JA} = 45^{\circ}\text{C/W}$ (TYP) (TO-3)


- NOTES:
1. DIAMETER V AND SURFACE W ARE DATUMS.
 2. POSITIONAL TOLERANCE FOR HOLE Q:
 $\phi 0.25 (0.010) \text{ (M)} \text{ (W)} \text{ (V)} \text{ (Q)}$
 3. POSITIONAL TOLERANCE FOR LEADS:
 $\phi 0.30 (0.012) \text{ (M)} \text{ (W)} \text{ (V)} \text{ (Q)} \text{ (Q)}$



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.32	5.33	0.170	0.210
B	4.45	5.20	0.175	0.205
C	3.19	4.19	0.125	0.165
D	0.41	0.55	0.016	0.022
F	0.41	0.48	0.016	0.019
G	1.15	1.39	0.045	0.055
H	—	2.54	—	0.100
J	2.42	2.66	0.095	0.105
K	12.70	—	0.500	—
L	6.35	—	0.250	—
N	2.04	2.66	0.080	0.105
P	2.53	—	0.100	—
R	3.43	—	0.135	—
S	0.39	0.50	0.015	0.020

LP, P, Z SUFFIX PLASTIC PACKAGE CASE 29-04 $R_{\theta JA} = 200^{\circ}\text{C/W}$ (TYP) (TO-226AA/TO-92)


- NOTES:
1. CONTOUR OF PACKAGE BEYOND ZONE "P" IS UNCONTROLLED.
 2. DIM "F" APPLIES BETWEEN "H" AND "L". DIM "D" & "S" APPLIES BETWEEN "L" & 12.70mm (0.5") FROM SEATING PLANE. LEAD DIM IS UNCONTROLLED IN "H" & BEYOND 12.70mm (0.5") FROM SEATING PLANE.
 3. CONTROLLING DIM: INCH.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.02	9.29	0.355	0.369
B	8.01	8.50	0.315	0.335
C	4.20	4.57	0.165	0.180
D	0.44	0.53	0.017	0.021
E	0.44	0.88	0.017	0.035
F	0.41	0.48	0.016	0.019
G	5.08 BSC	—	0.200 BSC	—
H	0.72	0.86	0.029	0.034
J	0.74	1.01	0.029	0.040
K	12.70	13.05	0.500	0.510
L	6.35	—	0.250	—
M	8.5 BSC	—	0.335 BSC	—
P	—	1.27	—	0.050
R	2.34	—	0.090	—

G, H SUFFIX METAL PACKAGE CASE 79-05 $R_{\theta JA} = 185^{\circ}\text{C/W}$ (TYP) (TO-39)



- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION J MEASURED FROM DIMENSION A MAXIMUM.
 4. DIMENSION B SHALL NOT VARY MORE THAN 0.25 (0.010) IN ZONE R. THIS ZONE CONTROLLED FOR AUTOMATIC HANDLING.
 5. DIMENSION F APPLIES BETWEEN DIMENSION P AND L. DIMENSION D APPLIES BETWEEN DIMENSION L AND K MINIMUM. LEAD DIAMETER IS UNCONTROLLED IN DIMENSION P AND BEYOND DIMENSION K MINIMUM.

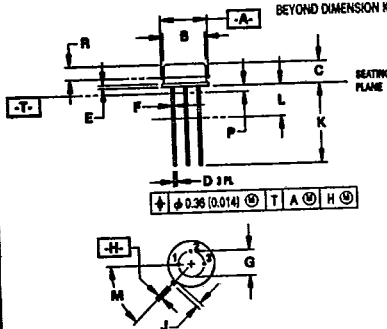

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	14.48	15.75	0.570	0.620
B	9.68	10.28	0.380	0.405
C	4.07	4.82	0.160	0.190
D	0.84	0.88	0.033	0.035
F	3.61	3.73	0.142	0.147
G	2.42	2.66	0.095	0.105
H	2.80	3.33	0.110	0.135
J	0.38	0.56	0.014	0.022
K	12.70	14.27	0.500	0.562
L	1.15	1.39	0.045	0.055
N	4.83	5.33	0.190	0.210
Q	2.54	3.04	0.100	0.120
R	2.04	2.79	0.080	0.110
S	1.15	1.39	0.045	0.055
T	5.97	6.47	0.235	0.255
U	0.00	1.27	0.000	0.050
V	1.15	—	0.045	—
Z	—	2.04	—	0.080

KC, T SUFFIX PLASTIC PACKAGE CASE 221A-04 $R_{\theta JA} = 65^{\circ}\text{C/W}$ (TYP) (TO-220AB)

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIM Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.




PACKAGE OUTLINE DIMENSIONS (continued)

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	14.529	15.570	0.572	0.613
B	9.908	10.541	0.390	0.415
C	4.318	4.572	0.170	0.180
D	0.635	0.965	0.025	0.038
E	1.169	1.397	0.046	0.055
G	1.702 BSC		0.067 BSC	
H	2.109	2.717	0.083	0.107
J	0.381	0.635	0.015	0.025
K	25.907	26.670	1.016	1.050
L	8.052	9.398	0.317	0.370
Q	3.556	3.937	0.140	0.155
U	11.893	12.827	0.468	0.505

T SUFFIX
PLASTIC PACKAGE
CASE 314D-02


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

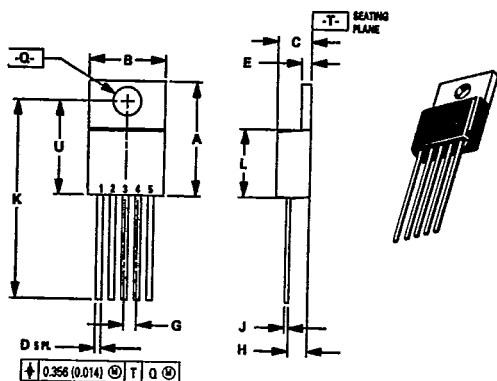

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.84	0.94	0.033	0.037
F	0.77	1.14	0.030	0.045
G	2.29 BSC		0.090 BSC	
H	0.97	1.06	0.038	0.042
J	0.46	0.58	0.018	0.023
K	8.89	9.65	0.350	0.380
M	5.21	5.46	0.205	0.215
S	1.91	2.28	0.075	0.090
V	0.89	1.27	0.035	0.050

DT-1 SUFFIX
PLASTIC PACKAGE
CASE 369-03


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.97	6.22	0.235	0.245
B	6.35	6.73	0.250	0.265
C	2.19	2.38	0.086	0.094
D	0.69	0.88	0.027	0.035
E	0.84	0.94	0.033	0.037
F	0.77	1.14	0.030	0.045
G	4.58 BSC		0.180 BSC	
H	0.97	1.06	0.038	0.042
J	0.46	0.58	0.018	0.023
K	2.60	2.89	0.102	0.114
L	2.29 BSC		0.090 BSC	
M	5.21	5.46	0.205	0.215
S	0.64	0.88	0.025	0.035
U	0.51		0.020	
V	0.89	1.27	0.035	0.050
Y	4.32		0.170	

DT SUFFIX
PLASTIC PACKAGE
CASE 369A-03
DPAK

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

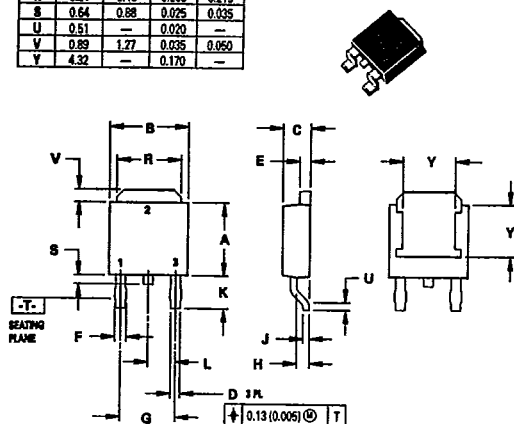


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.51	9.29	0.335	0.370
B	7.25	8.51	0.305	0.335
C	4.19	4.70	0.165	0.185
D	0.407	0.533	0.016	0.021
E	—	1.02	—	0.040
F	0.406	0.483	0.016	0.019
G	5.84 BSC		0.230 BSC	
H	0.712	0.854	0.028	0.034
J	0.737	1.14	0.029	0.045
K	12.70	—	0.500	—
L	6.35	12.70	0.250	0.500
M	36° BSC		36° BSC	
P	—	1.27	—	0.050
Q	3.56	4.06	0.140	0.160
R	0.254	1.02	0.010	0.040

H, G SUFFIX
METAL PACKAGE
CASE 603-04
 $R_{\theta JA} = 160^{\circ}\text{C/W}$
(TO-100)

- NOTE:
 LEADS WITHIN 0.18 mm (0.007) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.

All JEDEC Dimensions and Notes Apply.


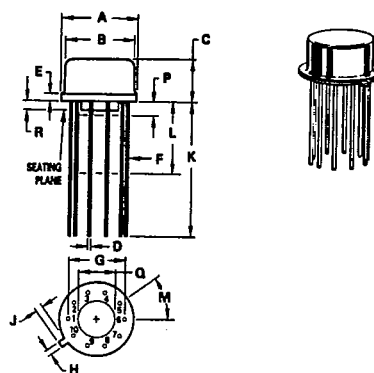


PACKAGE OUTLINE DIMENSIONS (continued)

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.51	9.39	0.335	0.370
B	7.75	8.51	0.305	0.335
C	4.19	6.73	0.165	0.265
D	0.407	0.533	0.016	0.021
E	—	1.02	—	0.040
F	0.406	0.483	0.016	0.019
G	5.84 BSC	—	0.230 BSC	—
H	0.712	0.864	0.028	0.034
J	0.737	1.14	0.029	0.045
K	12.70	—	0.500	—
L	6.35	12.70	0.250	0.500
M	36° BSC	—	36° BSC	—
P	—	1.27	—	0.050
Q	3.56	4.06	0.140	0.160
R	0.254	1.02	0.010	0.040

G SUFFIX
METAL PACKAGE
CASE 603C-01
 $R_{\theta JA} = 150^{\circ}\text{C/W (TYP)}$
(TO-100)




- NOTES:
- LEADS WITHIN 0.18 mm (0.007) RADIUS OF TRUE POSITION TO DIM. "A" & "H" AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - LEAD DIA UNCONTROLLED BEYOND DIM "K" MIN.

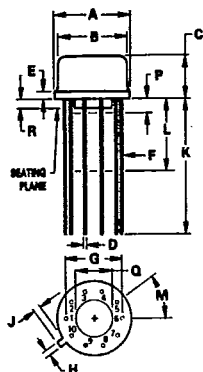

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	19.05	19.94	0.750	0.785
B	6.10	7.49	0.240	0.295
C	—	5.08	—	0.200
D	0.38	0.53	0.015	0.021
F	1.40	1.78	0.055	0.070
G	2.54 BSC	—	0.100 BSC	—
H	0.51	1.14	0.020	0.045
J	0.20	0.30	0.008	0.012
K	3.18	4.32	0.125	0.170
L	7.62 BSC	—	0.300 BSC	—
M	—	15°	—	15°
N	0.51	1.02	0.020	0.040

DP2, D, J, L, N SUFFIX
CERAMIC PACKAGE
CASE 620-10
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$


- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - PACKAGE INDEX: NOTCH IN LEAD NOTCH IN CERAMIC OR INK DOT.
 - DIM "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - DIM "A" AND "B" DO NOT INCLUDE GLASS RUN-OUT.
 - DIM "F" MAY NARROW TO 0.76 mm (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

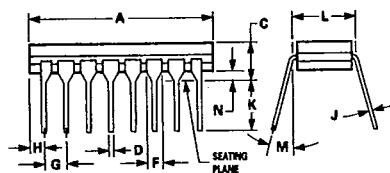

N, P1 SUFFIX
PLASTIC PACKAGE
CASE 626-05
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

- NOTES:
- LEAD POSITIONAL TOLERANCE:
 $\pm 0.13 (0.005) \text{ T A B}$
 - DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
 - DIMENSIONS A AND B ARE DATUMS.
 - DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.52	0.040	0.060
G	2.54 BSC	—	0.100 BSC	—
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC	—	0.300 BSC	—
M	—	10°	—	10°
N	0.76	1.01	0.030	0.040

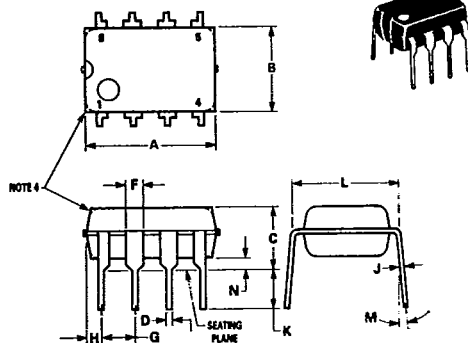

L SUFFIX
CERAMIC PACKAGE
CASE 632-08
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$
(TO-116)

- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 - CONTROLLING DIMENSION: INCH.
 - DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
 - DIM F MAY NARROW TO 0.76 mm (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	19.05	19.94	0.750	0.785
B	6.23	7.11	0.245	0.280
C	3.94	5.08	0.155	0.200
D	0.38	0.50	0.015	0.020
F	1.40	1.65	0.055	0.065
G	2.54 BSC	—	0.100 BSC	—
J	0.21	0.38	0.008	0.015
K	3.18	4.31	0.125	0.170
L	7.62 BSC	—	0.300 BSC	—
M	0°	15°	0°	15°
N	0.51	1.01	0.020	0.040

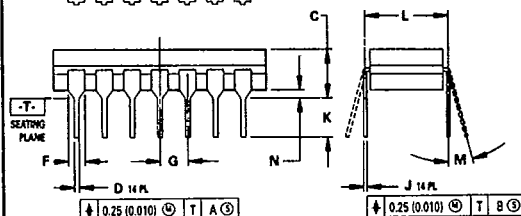


PACKAGE OUTLINE DIMENSIONS (continued)

**N, P, N-14, P2 SUFFIX
PLASTIC PACKAGE
CASE 646-06**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.18	19.54	0.715	0.770
B	6.10	6.60	0.240	0.260
C	3.69	4.69	0.145	0.185
D	0.39	0.53	0.015	0.021
F	1.02	1.79	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	1.32	2.41	0.052	0.095
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	0°	10°	0°	10°
N	0.39	1.01	0.015	0.039

- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 - ROUNDED CORNERS OPTIONAL.

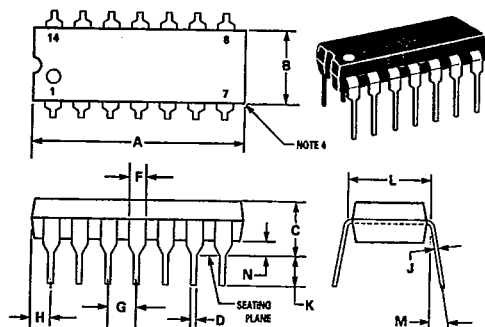
**N, P SUFFIX
PLASTIC PACKAGE
CASE 648-08**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.80	19.55	0.740	0.770
B	6.35	6.85	0.250	0.270
C	3.69	4.44	0.145	0.175
D	0.39	0.53	0.015	0.021
F	1.02	1.77	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	1.27 BSC		0.050 BSC	
J	0.21	0.38	0.008	0.015
K	2.80	3.30	0.110	0.130
L	7.50	7.74	0.295	0.305
M	0°	10°	0°	10°
S	0.51	1.01	0.020	0.040

- NOTES:
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 - CONTROLLING DIMENSION: INCH.
 - DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 - ROUNDED CORNERS OPTIONAL.

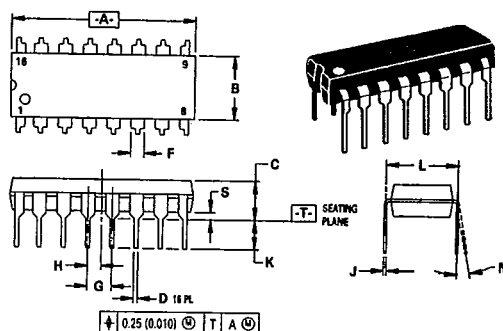
**P SUFFIX
PLASTIC PACKAGE
CASE 648C-02**


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.80	21.34	0.740	0.840
B	6.10	6.50	0.240	0.260
C	3.69	4.69	0.145	0.185
D	0.39	0.53	0.015	0.021
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.39	2.41	0.015	0.095
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	0°	10°	0°	10°
N	0.39	1.01	0.015	0.040

- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 - DIMENSION "B" DOES NOT INCLUDE MOLD FLASH.
 - ROUNDED CORNERS OPTIONAL.
 - EXTERNAL LEAD CONNECTION, BETWEEN 4 AND 5, 12 AND 13 AS SHOWN.

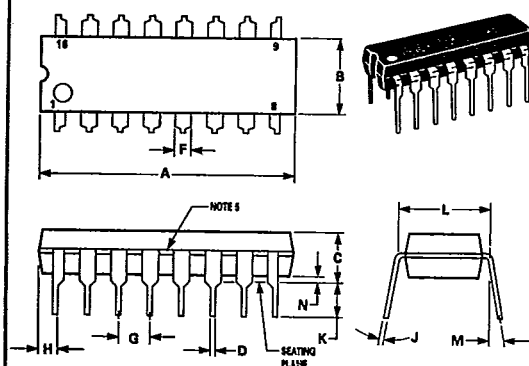
**J-8, J, JG, U, Z SUFFIX
CERAMIC PACKAGE
CASE 693-02**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.91	10.92	0.390	0.430
B	6.22	6.99	0.245	0.275
C	4.32	5.08	0.170	0.200
D	0.41	0.51	0.016	0.020
F	1.40	1.65	0.055	0.065
G	2.54 BSC		0.100 BSC	
H	1.14	1.65	0.045	0.065
J	0.20	0.30	0.008	0.012
K	3.18	4.06	0.125	0.160
L	7.37	7.87	0.290	0.310
M	—	15°	—	15°
N	0.51	1.02	0.020	0.040


- NOTES:
- LEADS WITHIN 0.13 mm (0.005) RAD OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
 - DIMENSION "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.

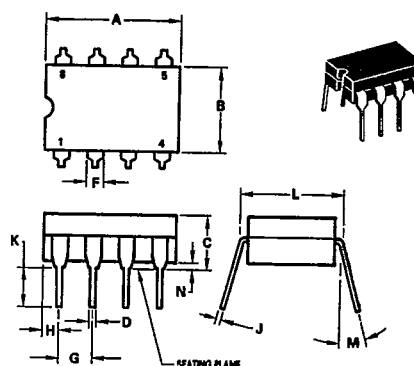


PACKAGE OUTLINE DIMENSIONS (continued)

**A, B, N, P SUFFIX
PLASTIC PACKAGE
CASE 707-02**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	22.22	23.24	0.875	0.915
B	6.10	6.60	0.240	0.260
C	3.56	4.57	0.140	0.180
D	0.36	0.56	0.014	0.022
F	1.27	1.78	0.050	0.070
G	2.54 BSC		0.100 BSC	
H	1.02	1.52	0.040	0.060
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040




- NOTES:
1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25mm (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
 2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

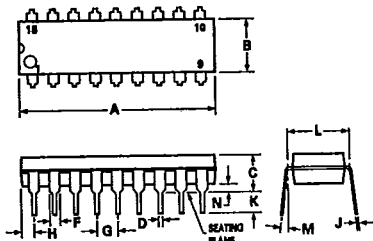
**J, L SUFFIX
CERAMIC PACKAGE
CASE 726-04**
 $R_{\theta JA} = 100^{\circ}\text{C/W (TYP)}$

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	22.35	23.11	0.880	0.910
B	6.10	7.49	0.240	0.295
C	—	5.08	—	0.200
D	0.38	0.53	0.015	0.021
F	1.40	1.78	0.055	0.070
G	2.54 BSC		0.100 BSC	
H	0.51	1.14	0.020	0.045
J	0.20	0.30	0.008	0.012
K	3.18	4.32	0.125	0.170
L	7.62 BSC		0.300 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040




- NOTES:
1. LEADS, TRUE POSITIONED WITHIN 0.25 mm (0.010) DIA. AT SEATING PLANE, AT MAXIMUM MATERIAL CONDITION.
 2. DIM "L" TO CENTER OF LEADS WHEN FORMED PARALLEL.
 3. DIM "A" & "B" INCLUDES MENISCUS.
 4. "F" DIMENSION IS FOR FULL LEADS. "HALF" LEADS ARE OPTIONAL AT LEAD POSITIONS 1, 9, 10, AND 18.

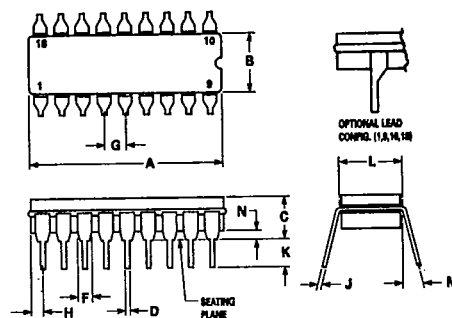
**D SUFFIX
CASE 751-03
PLASTIC PACKAGE
SO-8, SOP-8**
 $R_{\theta JA} = 190^{\circ}\text{C/W (SO-8)}$
 $R_{\theta JA} = 160^{\circ}\text{C/W (SOP-8)}$


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.196
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.75	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019




- NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
 2. POSITIONAL TOLERANCE FOR D DIMENSION (8 PLACES):
 $\pm 0.25 (0.010) \text{ } \textcircled{D} \text{ } \textcircled{T} \text{ } \textcircled{B} \text{ } \textcircled{A} \text{ } \textcircled{D}$
 3. POSITIONAL TOLERANCE FOR P DIMENSION (4 PLACES):
 $\pm 0.25 (0.010) \text{ } \textcircled{P} \text{ } \textcircled{B} \text{ } \textcircled{D}$
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 5. CONTROLLING DIMENSION: MILLIMETER.
 6. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 7. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

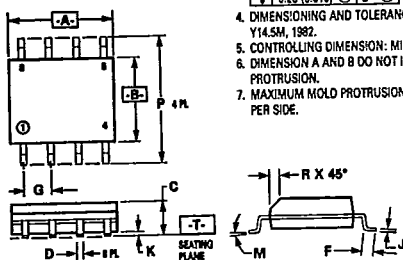
**D SUFFIX
CASE 751A-02
SO-14**
 $R_{\theta JA} = 145^{\circ}\text{C/W (TYP)}$

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	8.55	8.75	0.337	0.344
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019



- NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
 2. POSITIONAL TOLERANCE FOR D DIMENSION (14 PLACES):
 $\pm 0.25 (0.010) \text{ } \textcircled{D} \text{ } \textcircled{T} \text{ } \textcircled{B} \text{ } \textcircled{A} \text{ } \textcircled{D}$
 3. POSITIONAL TOLERANCE FOR P DIMENSION (7 PLACES):
 $\pm 0.25 (0.010) \text{ } \textcircled{P} \text{ } \textcircled{B} \text{ } \textcircled{D}$
 4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 5. CONTROLLING DIMENSION: MILLIMETER.
 6. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
 7. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.



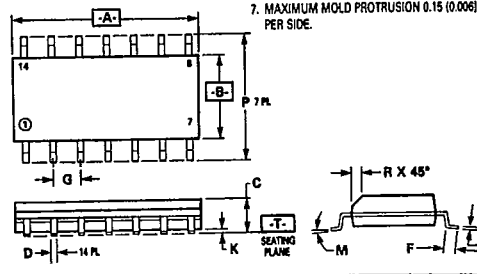


DW SUFFIX PLASTIC PACKAGE CASE 751G-01 SO-16L


DIM	MIN	MAX	MIN	MAX
A	10.15	10.45	0.400	0.411
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.65	0.395	0.415
	0.25	0.75	0.010	0.029

NOTES:

1. DIMENSIONS A AND B ARE DATUMS AND T IS A DATUM SURFACE.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
3. CONTROLLING DIMENSION: MILLIMETER.
4. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
5. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.

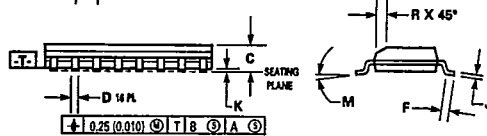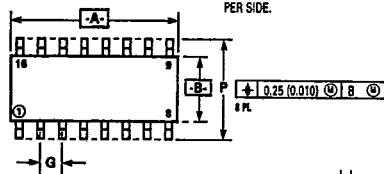


CASE 762-01 PLASTIC MEDIUM POWER PACKAGE SIP-9



DIM	MIN	MAX	MIN	MAX
A	22.40	23.00	0.873	0.907
B	6.40	6.80	0.252	0.269
C	3.45	3.85	0.135	0.152
D	0.40	0.55	0.015	0.021
E	3.35	3.80	0.369	0.377
F	1.40	1.80	0.055	0.070
G	2.54 BSC		0.100 BSC	
H	1.51	1.71	0.059	0.067
J	0.380	0.460	0.014	0.018
K	3.35	4.30	0.130	0.169
M	32° BSC		32° BSC	
N	2.50	2.70	0.099	0.106
Q	3.15	3.45	0.124	0.136
R	13.00	13.50	0.512	0.547
S	1.65	1.95	0.065	0.077
T	22.00	22.20	0.866	0.874
V	0.55	0.75	0.021	0.029
W	2.89 BSC		0.113 BSC	
X	0.85	0.75	0.035	0.029
Y	2.70	2.90	0.106	0.110

NOTES:

1. DIMENSIONS A, AND C ARE DATUMS. AND -T- IS A DATUM PLANE.
2. POSITIONAL TOLERANCE FOR LEAD DIMENSION D:
 $\pm 0.25 (0.010) \text{ } \textcircled{D} \text{ } \textcircled{T} \text{ } \textcircled{A} \text{ } \textcircled{C}$
3. POSITIONAL TOLERANCE FOR LEAD DIMENSION J:
 $\pm 0.25 (0.010) \text{ } \textcircled{J} \text{ } \textcircled{T} \text{ } \textcircled{C} \text{ } \textcircled{D}$
4. POSITIONAL TOLERANCE FOR LEAD DIMENSION G:
 $\pm 0.25 (0.010) \text{ } \textcircled{G} \text{ } \textcircled{T} \text{ } \textcircled{A} \text{ } \textcircled{C}$
5. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1982.
6. CONTROLLING DIMENSION: MILLIMETER.

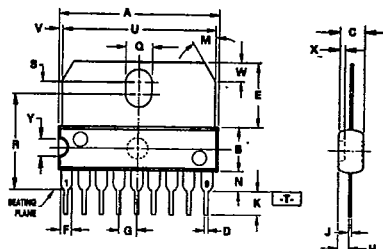



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.