

High Temperature Silicon Carbide Power Schottky Diode

V_{RRM}	=	1200 V
$I_F @ 25\text{ }^\circ\text{C}$	=	30 A
Q_C	=	58 nC

Features

- 1200 V Schottky rectifier
- 250 °C maximum operating temperature
- Zero reverse recovery charge
- Superior surge current capability
- Positive temperature coefficient of V_F
- Temperature independent switching behavior
- Lowest figure of merit Q_C/I_F
- Available screened to Mil-PRF-19500



Die Size = 2.95 mm x 2.95 mm

Advantages

- High temperature operation
- Improved circuit efficiency (Lower overall cost)
- Low switching losses
- Ease of paralleling devices without thermal runaway
- Smaller heat sink requirements
- Industry's lowest reverse recovery charge
- Industry's lowest device capacitance
- Ideal for output switching of power supplies
- Best in class reverse leakage current at operating temperature

Applications

- Down Hole Oil Drilling
- Geothermal Instrumentation
- Solenoid Actuators
- General Purpose High-Temperature Switching
- Amplifiers
- Solar Inverters
- Switched-Mode Power Supply (SMPS)
- Power Factor Correction (PFC)

Maximum Ratings at $T_j = 250\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Values		Unit
			min.	typ.	
Repetitive peak reverse voltage	V_{RRM}			1200	V
Continuous forward current	I_F	$T_C = 25\text{ }^\circ\text{C}$, $R_{thJC} = 1.08$		30	A
Continuous forward current	I_F	$T_C \leq 225\text{ }^\circ\text{C}$, $R_{thJC} = 1.08$		9.4	A
RMS forward current	$I_{F(RMS)}$	$T_C \leq 225\text{ }^\circ\text{C}$, $R_{thJC} = 1.08$		16	A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25\text{ }^\circ\text{C}$, $t_p = 10\text{ ms}$		65	A
Non-repetitive peak forward current	$I_{F,max}$	$T_C = 25\text{ }^\circ\text{C}$, $t_p = 10\text{ }\mu\text{s}$		280	A
I^2t value	$\int i^2 dt$	$T_C = 25\text{ }^\circ\text{C}$, $t_p = 10\text{ ms}$		20	A ² S
Power dissipation	P_{tot}	$T_C = 25\text{ }^\circ\text{C}$, $R_{thJC} = 1.08$		230	W
Operating and storage temperature	T_j, T_{sig}			-55 to 250	°C

Electrical Characteristics at $T_j = 250\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Diode forward voltage	V_F	$I_F = 10\text{ A}$, $T_j = 25\text{ }^\circ\text{C}$		1.6		V
		$I_F = 10\text{ A}$, $T_j = 210\text{ }^\circ\text{C}$		2.3		
Reverse current	I_R	$V_R = 1200\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$		1	20	μA
		$V_R = 1200\text{ V}$, $T_j = 250\text{ }^\circ\text{C}$		55	300	
Total capacitive charge	Q_C	$I_F \leq I_{F,MAX}$ $di_F/dt = 200\text{ A}/\mu\text{s}$ $T_j = 210\text{ }^\circ\text{C}$	$V_R = 400\text{ V}$	58		nC
			$V_R = 960\text{ V}$	95		
Switching time	t_s		$V_R = 400\text{ V}$ $V_R = 960\text{ V}$	< 49		ns
Total capacitance	C	$V_R = 1\text{ V}$, $f = 1\text{ MHz}$, $T_j = 25\text{ }^\circ\text{C}$		884		pF
		$V_R = 400\text{ V}$, $f = 1\text{ MHz}$, $T_j = 25\text{ }^\circ\text{C}$		79		
		$V_R = 1000\text{ V}$, $f = 1\text{ MHz}$, $T_j = 25\text{ }^\circ\text{C}$		63		

Figures:

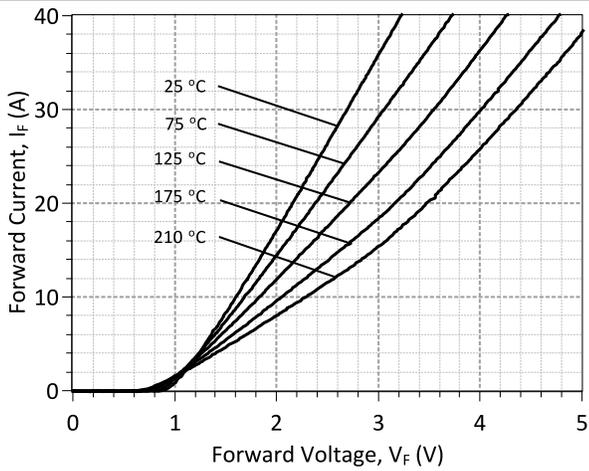


Figure 1: Typical Forward Characteristics

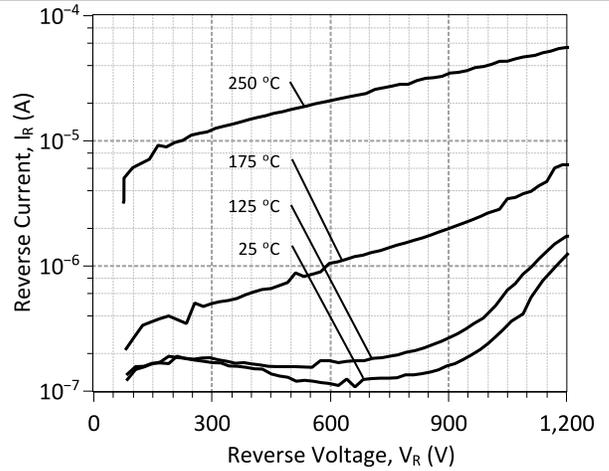


Figure 2: Typical Reverse Characteristics

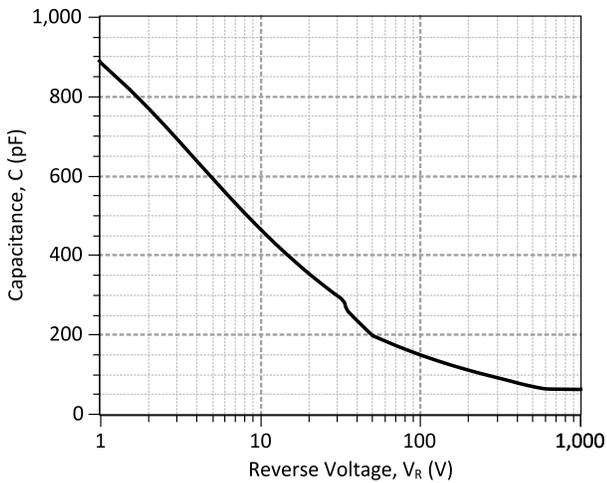


Figure 3: Typical Junction Capacitance vs Reverse Voltage Characteristics


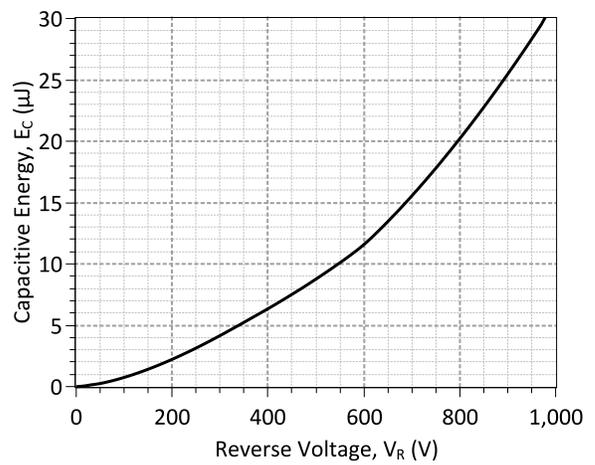


Figure 4: Typical Capacitive Energy vs Reverse Voltage Characteristics

Mechanical Parameters

Die Dimensions	2.95 x 2.95	mm ²
Anode pad size	2.69 x 2.69	
Die Area total / active	8.70/7.02	
Die Thickness	360	μm
Wafer Size	100	mm
Flat Position	0	deg
Die Frontside Passivation	Polyimide	
Anode Pad Metallization	4000 nm Al	
Backside Cathode Metallization	400 nm Ni + 200 nm Au	
Die Attach	Electrically conductive glue or solder	
Wire Bond	Al ≤ 380 μm	
Reject ink dot size	Φ ≥ 0.3 mm	
Recommended storage environment	Store in original container, in dry nitrogen, < 6 months at an ambient temperature of 23 °C	

Chip Dimensions:

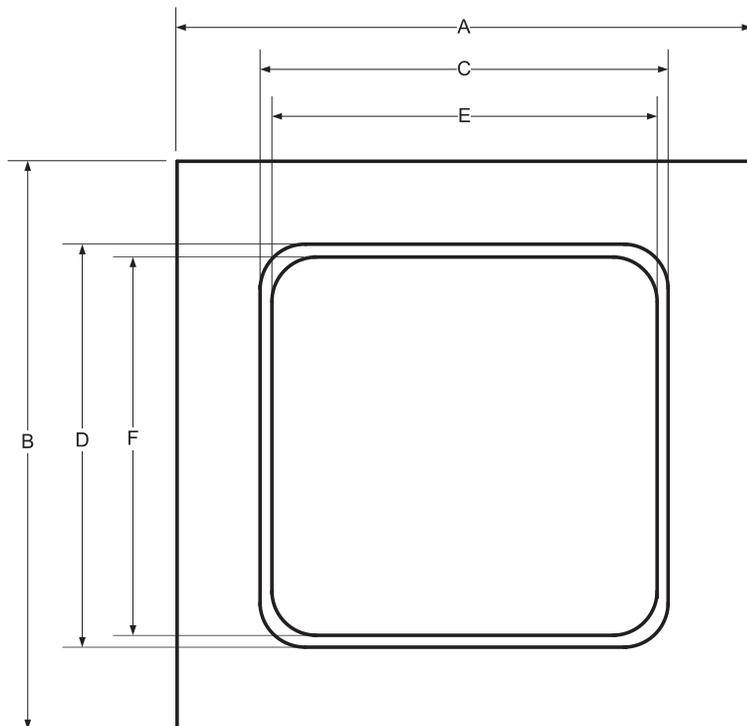

DIE	A [mm]	2.95
	B [mm]	2.95
METAL	C [mm]	2.69
	D [mm]	2.69
WIRE BONDABLE	E [mm]	2.65
	F [mm]	2.65

Revision History

Date	Revision	Comments	Supersedes
2015/02/09	1	Inserted Mechanical Parameters	
2012/04/03	0	Initial release	

Published by

GeneSiC Semiconductor, Inc.
43670 Trade Center Place Suite 155
Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

SPICE Model Parameters

This is a secure document. Please copy this code from the SPICE model PDF file on our website (http://www.genesicsemi.com/images/hit_sic/baredie/schottky/GB20SHT12-CAL_SPICE.pdf) into LTSPICE (version 4) software for simulation of the GB20SHT12-CAL.

```
*      MODEL OF GeneSiC Semiconductor Inc.
*
*      $Revision: 1.0          $
*      $Date: 05-SEP-2013    $
*
*      GeneSiC Semiconductor Inc.
*      43670 Trade Center Place Ste. 155
*      Dulles, VA 20166
*
*      COPYRIGHT (C) 2013 GeneSiC Semiconductor Inc.
*      ALL RIGHTS RESERVED
*
*      These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
*      OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
*      TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
*      PARTICULAR PURPOSE."
*      Models accurate up to 2 times rated drain current.
*
*      Start of GB20SHT12-CAL SPICE Model
*
.SUBCKT GB20SHT12 ANODE KATHODE
D1 ANODE KATHODE GB20SHT12_25C; Call the Schottky Diode Model
D2 ANODE KATHODE GB20SHT12_PIN; Call the PiN Diode Model
.MODEL GB20SHT12_25C D
+ IS      1.74E-13      RS      0.05105
+ TRS1    0.005        TRS2    1.68E-5
+ N       1.2637323    IKF     1.884319
+ EG      1.2          XTI     3
+ CJO     1.15E-09    VJ     0.44
+ M       1.5          FC      0.5
+ TT      1.00E-10    BV     1200
+ IBV     1.00E-03    VPK    1200
+ IAVE    20          TYPE    SiC_Schottky
+ MFG     GeneSiC_Semiconductor
.MODEL GB20SHT12_PIN D
+ IS      5.15E-15     RS      0.2
+ N       3.1605      IKF     0.00055844
+ EG      3.23        XTI     3
+ FC      0.5         TT      0
+ BV     1200         IBV     1.00E-03
+ VPK    1200         IAVE    20
+ TYPE    SiC_PiN
.ENDS
*
*      End of GB20SHT12-CAL SPICE Model
```

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[GeneSiC Semiconductor:](#)

[GB20SHT12-CAL](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.