




LUXEON Rebel ES

High value and easy design-in

LUXEON Rebel ES is a high flux, high gives you the flexibility you need to design luminaires and lamps for outdoor and industrial lighting applications and bring them to market. Tested and binned at 700mA, confidently design LUXEON Rebel ES into high lumen applications or create more energy efficient devices using the same emitter. Luminaire manufacturers and designers count on LUXEON Rebel ES for quality, reliability and in-device performance.

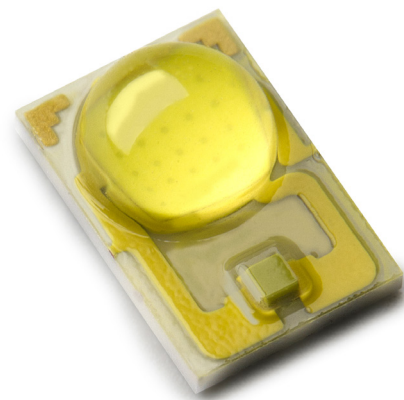

FEATURES AND BENEFITS

- High lm/\$ for cost competitive applications
- Broad portfolio of emitters for indoor and outdoor applications
- CCT and CRI combinations to support a wide range of applications
- Extensive applications ecosystem for easy design-in and quick ROI
- LM-80 test report available

PRIMARY APPLICATIONS

- High Bay & Low Bay
- Outdoor
- Specialty Lighting

Table of Contents

| | |
|---|----|
| Introduction | 1 |
| General Information | 2 |
| Product Nomenclature | 2 |
| Average Lumen Maintenance Characteristics | 3 |
| Environmental Compliance | 3 |
| Product Selection Guide | 4 |
| Optical Characteristics | 5 |
| Electrical Characteristics | 6 |
| Absolute Maximum Ratings | 7 |
| JEDEC Moisture Sensitivity | 7 |
| Reflow Soldering Characteristics | 8 |
| Mechanical Dimensions | 9 |
| Pad Configuration | 10 |
| Solder Pad Design | 10 |
| Relative Spectral Distribution vs. Wavelength Characteristics | 11 |
| Typical Light Output Characteristics | 15 |
| Typical Forward Current Characteristics | 15 |
| Typical Luminous Efficacy | 16 |
| Current Derating Curves | 18 |
| Typical Radiation Pattern | 20 |
| Emitter Pocket Tape Packaging | 21 |
| Emitter Reel Packaging | 22 |
| Product Binning and Labeling | 23 |
| Luminous Flux Bins | 24 |
| LUXEON Rebel ES ANSI 1/4th Quadrant Color Bin Structure | 28 |
| LUXEON Rebel ES ANSI 1/4th Quadrant Bin Structure | 30 |
| Forward Voltage Bins | 31 |

General Information

Product Nomenclature

LUXEON Rebel ES is tested and binned at 700mA, with current pulse duration of 20 ms. All characteristic charts where the thermal pad is kept at constant temperature (25°C typically) are measured with current pulse duration of 20 ms. Under these conditions, junction temperature and thermal pad temperature are the same.

The LUXEON Rebel ES family of emitters contain a series of LEDs designed for Illumination applications.

The part number designation for the LXML series is explained as follows:

L X M L - A B C D

Where:

- A — designates radiation pattern (value P for Lambertian)
- B — designates color (W for White)
- C — designates color variant (C for Cool-White, N for Neutral-White)
- D — designates test current (value 2 for 700mA)

The part number designation for the LXW8 series is explained as follows:

L X W A - B C D E

Where:

- A — designates minimum CRI performance (value 8 = 80 minimum and 9 = 90 minimum)
- B — designates radiation pattern (value P for Lambertian)
- C — designates color (value W = White)
- D & E — designates nominal ANSI CCT (value 27 = 2700K, 30 = 3000K, 35 = 3500K, 40 = 4000K and 50 = 5000K)

The part number designation for the LXH7 series is explained as follows:

L X H A - B C D E

Where:

- A — designates minimum CRI performance (value 7 = 70 minimum)
- B — designates radiation pattern (value P for Lambertian)
- C — designates color (value W = White)
- D & E — designates nominal ANSI CCT (value 40 = 4000K)

Therefore products tested and binned at 700mA follow the part numbering scheme:

L X M L - P W x 2, L X W x - P W x x and L X H 7 - P W x x

Average Lumen Maintenance Characteristics

Lumen maintenance for solid state lighting devices (LEDs) is typically defined in terms of the percentage of initial light output remaining after a specified period of time. Lumileds projects that LUXEON Rebel ES products will deliver, on average, 70% lumen maintenance (L70) at 50,000 hours of operation at a forward current of 1000mA. This projection is based on constant current operation with junction temperature maintained at or below 135°C. This performance is based on independent test data, Lumileds historical data from tests run on similar material systems, and internal LUXEON reliability testing. Observation of design limits included in this data sheet is required in order to achieve this projected lumen maintenance.

Environmental Compliance

Lumileds is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON Rebel ES is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS and REACH directives. Lumileds will not intentionally add the following restricted materials to the LUXEON Rebel ES: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

Product Selection Guide for LUXEON Rebel ES

Thermal Pad Temperature = 25°C

Table 1.

| Performance at Test Current (700mA) | | | | |
|-------------------------------------|-------------|-------------|-------------|---------------------------------------|
| Nominal CCT/Color | Part Number | Minimum CRI | Typical CRI | Min Luminous Flux (lm) ^[1] |
| 4100K Neutral White | LXML-PWN2 | 60 | 65 | 200 |
| 5650K Cool White | LXML-PWC2 | 60 | 70 | 200 |
| 2700K | LXW9-PW27 | 90 | 95 | 120 |
| 3000K | LXW9-PW30 | 90 | 95 | 140 |
| 3500K | LXW8-PW35 | 80 | 85 | 160 |
| 4000K | LXH7-PW40 | 70 | 75 | 180 |
| 4000K | LXW8-PW40 | 80 | 85 | 170 |
| 5000K | LXW8-PW50 | 80 | 85 | 180 |

Note for Table 1:

1. Minimum luminous flux performance within published operating conditions. Lumileds maintains a tolerance of $\pm 6.5\%$ on luminous flux measurements and ± 2 on CRI measurements.

Typical Luminous Flux Characteristics at 350mA, 700mA and 1000mA for LUXEON Rebel ES, Thermal Pad Temperature = 25°C

Table 2.

| Nominal CCT/Color | Part Number | Typical Luminous Flux (lm) @ 350mA Forward Current ^[1] | Typical Luminous Flux (lm) @ 700mA Forward Current ^[1] | Typical Luminous Flux (lm) @ 1000mA Forward Current ^[1] |
|---------------------|-------------|---|---|--|
| 4100K Neutral White | LXML-PWN2 | 130 | 230 | 310 |
| 5650K Cool White | LXML-PWC2 | 135 | 235 | 320 |
| 2700K | LXW9-PW27 | 75 | 135 | 184 |
| 3000K | LXW9-PW30 | 81 | 145 | 197 |
| 3500K | LXW8-PW35 | 103 | 185 | 252 |
| 4000K | LXH7-PW40 | 114 | 205 | 279 |
| 4000K | LXW8-PW40 | 106 | 190 | 258 |
| 5000K | LXW8-PW50 | 111 | 200 | 272 |

Note for Table 2:

1. Typical luminous flux performance within published operating conditions. Lumileds maintains a tolerance of $\pm 6.5\%$ on luminous flux measurements.

Optical Characteristics for LUXEON Rebel ES at Test Current ^[1]

Thermal Pad Temperature = 25°C

Table 3.

| Part Number | Nominal CCT | Color Temperature CCT | | | Typ Total Included Angle ^[2] $\theta_{0.90V}$ | Typ Viewing Angle ^[3] 2 $\theta_{1/2}$ |
|-------------|---------------------|-----------------------|---------|---------|---|--|
| | | Minimum | Typical | Maximum | | |
| LXML-PWN2 | 4100K Neutral White | 3500K | 4100K | 4500K | 160° | 120° |
| LXML-PWC2 | 5650K Cool White | 4500K | 5650K | 10000K | 160° | 120° |
| LXW9-PW27 | 2700K | 2580K | 2725K | 2870K | 160° | 120° |
| LXW9-PW30 | 3000K | 2870K | 3045K | 3220K | 160° | 120° |
| LXW8-PW35 | 3500K | 3220K | 3465K | 3710K | 160° | 120° |
| LXH7-PW40 | 4000K | 3710K | 3985K | 4260K | 160° | 120° |
| LXW8-PW40 | 4000K | 3710K | 3985K | 4260K | 160° | 120° |
| LXW8-PW50 | 5000K | 4745K | 5028K | 5311K | 160° | 120° |

Notes for Table 3:

1. Test current is 700mA for all LXML-PWx2, LXWx-PWxx and LXH7-PWxx emitters.
2. Total angle at which 90% of total luminous flux is captured.
3. Viewing angle is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.

Electrical Characteristics at 700mA for LUXEON Rebel ES

Thermal Pad Temperature = 25°C

Table 4.

| Part Number | Nominal CCT/Color | Forward Voltage Vf ^[1] (V) | | | Typ. Temperature Coefficient of Forward Voltage ^[2] (mV/°C) $\Delta V_f / \Delta T_j$ | Typical Thermal Resistance Junction to Thermal Pad (°C/W) $R\theta_{J-C}$ |
|-------------|---------------------|---------------------------------------|---------|---------|--|---|
| | | Minimum | Typical | Maximum | | |
| LXML-PWN2 | 4100K Neutral White | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXML-PWC2 | 5650K Cool White | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXW9-PW27 | 2700K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXW9-PW30 | 3000K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXW8-PW35 | 3500K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXH7-PW40 | 4000K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXW8-PW40 | 4000K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |
| LXW8-PW50 | 5000K | 2.5 | 2.90 | 3.25 | -2.0 to -4.0 | 6 |

Notes for Table 4:

1. Lumileds maintains a tolerance of $\pm 0.06V$ on forward voltage measurements.
2. Measured between 25°C = T_j = 110°C at I_f = 700mA.

Typical Electrical Characteristics at 350mA, 700mA and 1000mA for LUXEON Rebel ES

Thermal Pad Temperature = 25°C

Table 5.

| Nominal CCT/Color | Part Number | Typical Forward Voltage V_f (V) @ 350mA Forward Current | Typical Forward Voltage V_f (V) @ 700mA Forward Current | Typical Forward Voltage V_f (V) @ 1000mA Forward Current |
|---------------------|-------------|---|---|--|
| 4100K Neutral White | LXML-PWN2 | 2.75 | 3.00 | 3.10 |
| 5650K Cool White | LXML-PWC2 | 2.75 | 3.00 | 3.10 |
| 2700K | LXW9-PW27 | 2.75 | 3.00 | 3.10 |
| 3000K | LXW9-PW30 | 2.75 | 3.00 | 3.10 |
| 3500K | LXW8-PW35 | 2.75 | 3.00 | 3.10 |
| 4000K | LXH7-PW40 | 2.75 | 3.00 | 3.10 |
| 4000K | LXW8-PW40 | 2.75 | 3.00 | 3.10 |
| 5000K | LXW8-PW50 | 2.75 | 3.00 | 3.10 |

Notes for Table 5:

1. Lumileds maintains a tolerance of $\pm 0.06V$ on forward voltage measurements.

Absolute Maximum Ratings

Table 6.

| Parameter | LUXEON Rebel ES |
|---|--|
| DC Forward Current (mA) | 1000 ^[2] |
| Peak Pulsed Forward Current (mA) | 1200 ^[3] |
| ESD Sensitivity | < 8000V Human Body Model (HBM) Class 3A JESD22-A114-E |
| LED Junction Temperature ^[1] | 150°C |
| Operating Case Temperature at 700mA | -40°C - 135°C |
| Storage Temperature | -40°C - 135°C |
| Soldering Temperature | JEDEC 020c 260°C |
| Allowable Reflow Cycles | 3 |
| Reverse Voltage (Vr) | LUXEON Rebel ES LEDs are not designed to be driven in reverse bias |

Notes for Table 6:


1. Proper current derating must be observed to maintain junction temperature below the maximum. For additional information on thermal measurement guidelines please refer to Application Brief AB33.
2. Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple", with frequencies ≥ 100 Hz and amplitude ≤ 200 mA are acceptable, assuming the average current throughout each cycle does not exceed 1000mA.
3. Pulsed operation with a peak drive current of 1200mA is acceptable if the pulse on-time is ≤ 5 ms per cycle and the duty cycle is $\leq 50\%$.

JEDEC Moisture Sensitivity

Table 7.

| Level | Floor Life | | Soak Requirements Standard | |
|-------|------------|-------------------------------------|----------------------------|------------------|
| | Time | Conditions | Time | Conditions |
| 1 | unlimited | $\leq 30^\circ\text{C}$ / 85% RH | 168h + 5 / - 0 | 85°C / 85% RH |

Reflow Soldering Characteristics

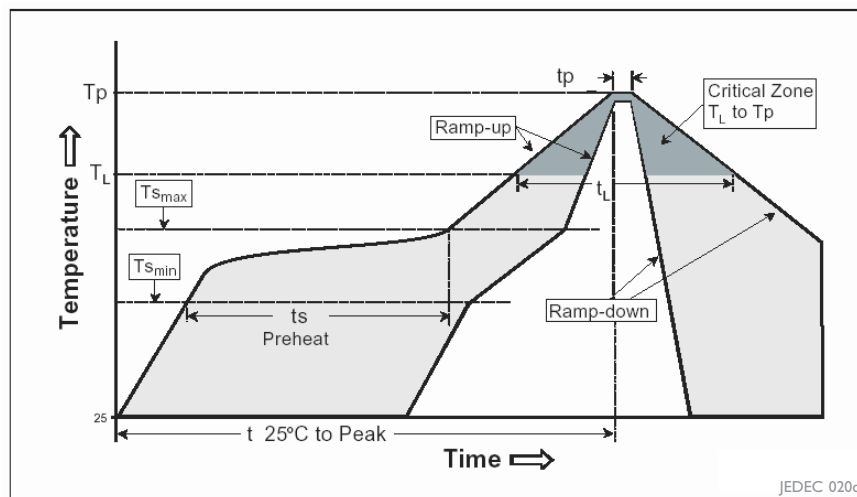

Temperature profile for Table 8.

Table 8.

| Profile Feature | Lead Free Assembly |
|--|--------------------|
| Average Ramp-Up Rate ($T_{s_{max}}$ to T_p) | 3°C / second max |
| Preheat Temperature Min ($T_{s_{min}}$) | 150°C |
| Preheat Temperature Max ($T_{s_{max}}$) | 200°C |
| Preheat Time ($t_{s_{min}}$ to $t_{s_{max}}$) | 60 - 180 seconds |
| Temperature (T_L) | 217°C |
| Time Maintained Above Temperature (T_L) | 60 - 150 seconds |
| Peak / Classification Temperature (T_p) | 260°C |
| Time Within 5°C of Actual Peak Temperature (t_p) | 20 - 40 seconds |
| Ramp - Down Rate | 6°C / second max |
| Time 25°C to Peak Temperature | 8 minutes max |

Notes for Table 8:

1. All temperatures refer to the application Printed Circuit Board (PCB), measured on the surface adjacent to the package body.
2. For additional information on thermal measurement guidelines please refer to Application Brief AB33.

Mechanical Dimensions


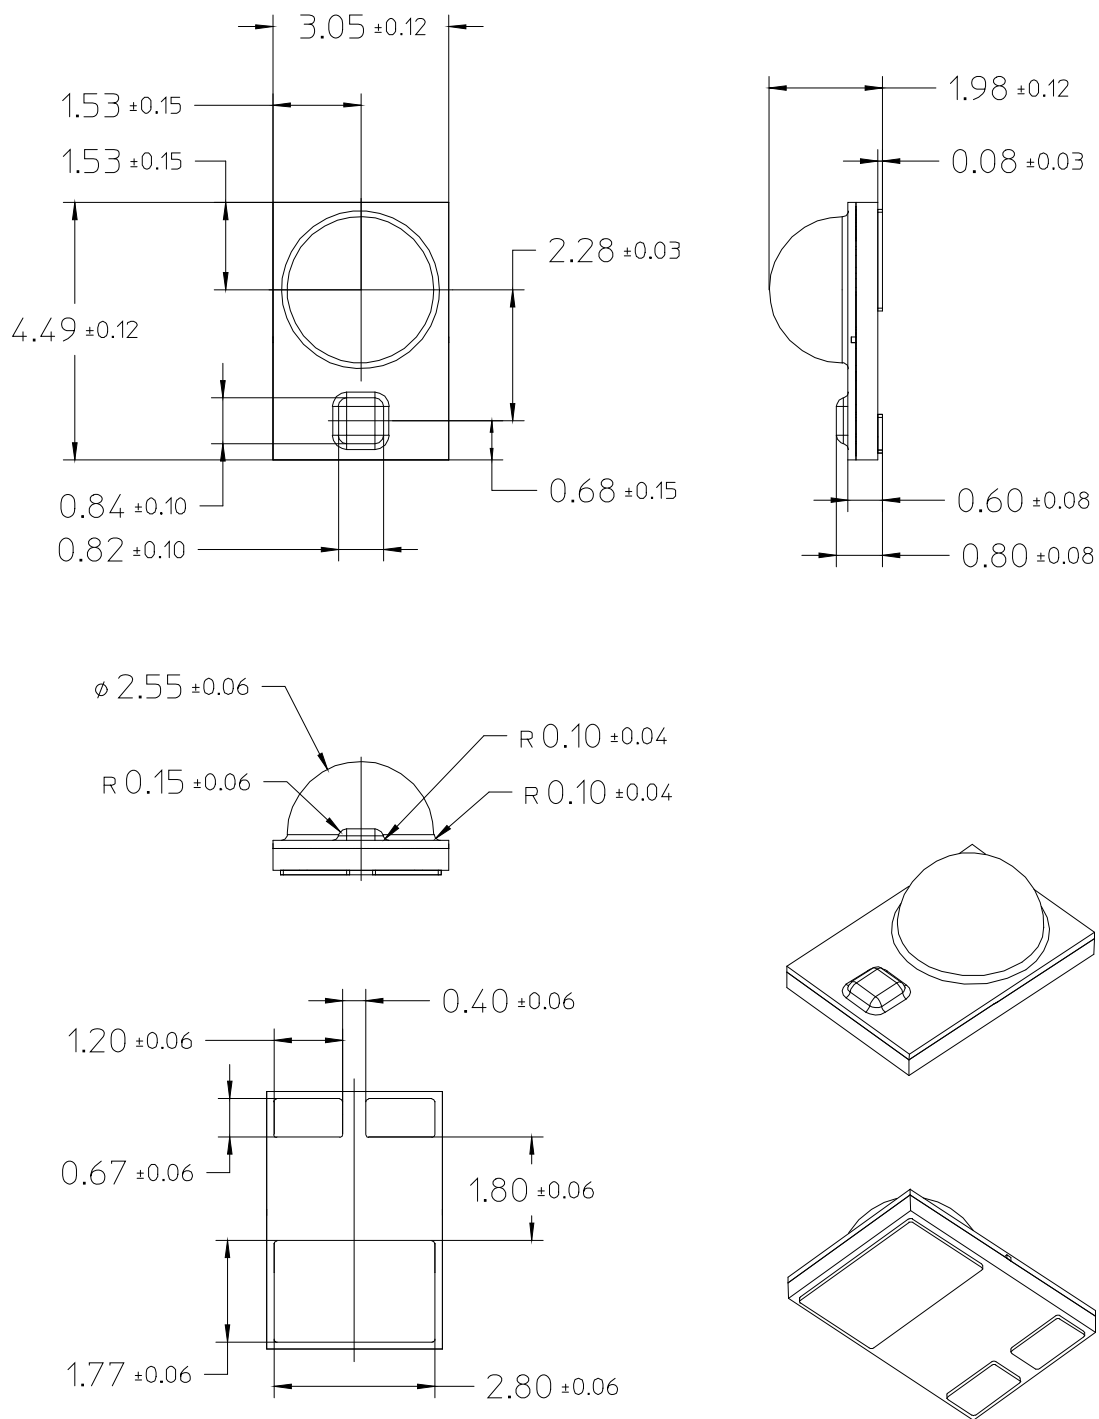


Figure 1. Package outline drawing.

Notes for Figure 1:

1. Do not handle the device by the lens—care must be taken to avoid damage to the lens or the interior of the device that can be damaged by excessive force to the lens.
2. Drawings not to scale.
3. All dimensions are in millimeters.
4. The thermal pad is electrically isolated from the anode and cathode contact pads.

Pad Configuration

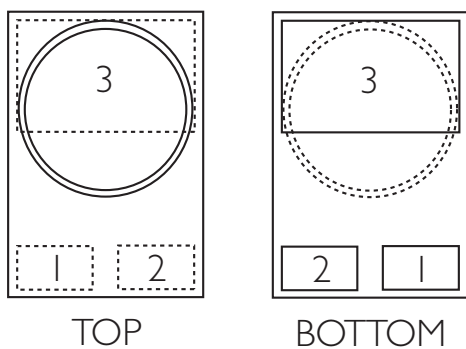

| PAD | FUNCTION |
|-----|----------|
| 1 | CATHODE |
| 2 | ANODE |
| 3 | THERMAL |

Figure 2. Pad configuration.

Note for Figure 2:

1. The Thermal Pad is electrically isolated from the Anode and Cathode contact pads.

Solder Pad Design

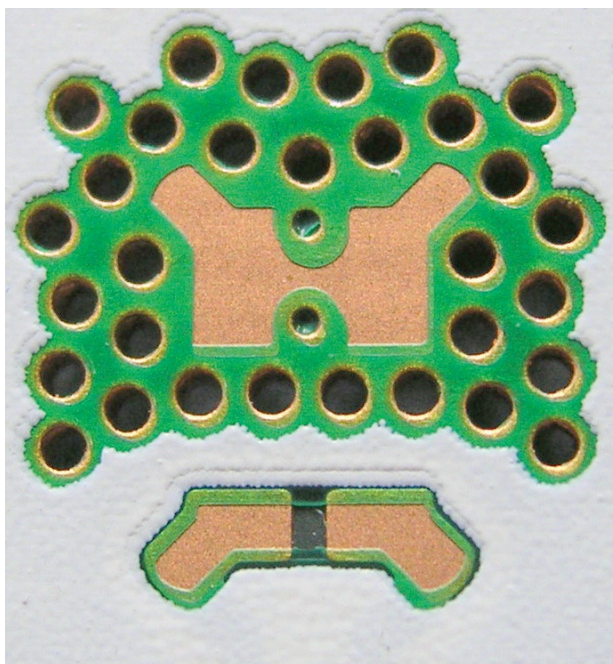


Figure 3. Solder pad layout.

Notes for Figure 3:

1. The photograph shows the recommended LUXEON Rebel ES layout on Printed Circuit Board (PCB). This design easily achieves a thermal resistance of 7K/W.
2. Application Brief AB32 provides extensive details for this layout. Printed Circuit Board layout files (.dwg) are available at www.lumileds.com.

Relative Spectral Distribution vs. Wavelength Characteristics

LXML-PWN2 (4100K) Neutral-White at Test Current

Thermal Pad Temperature = 25°C

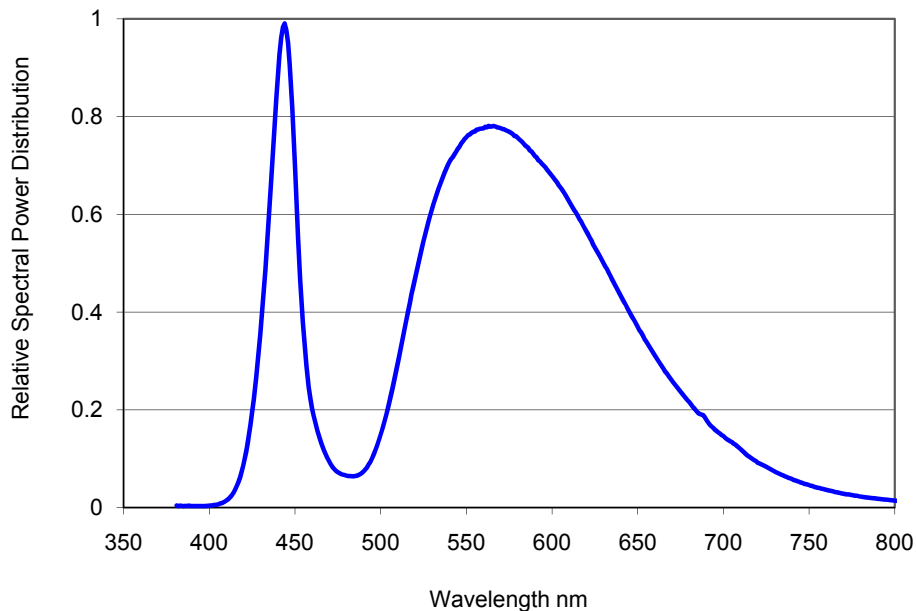


Figure 4. Color spectrum of LXML-PWN2 emitter, integrated measurement.

LXML-PWC2 (5650K) Cool-White at Test Current

Thermal Pad Temperature = 25°C

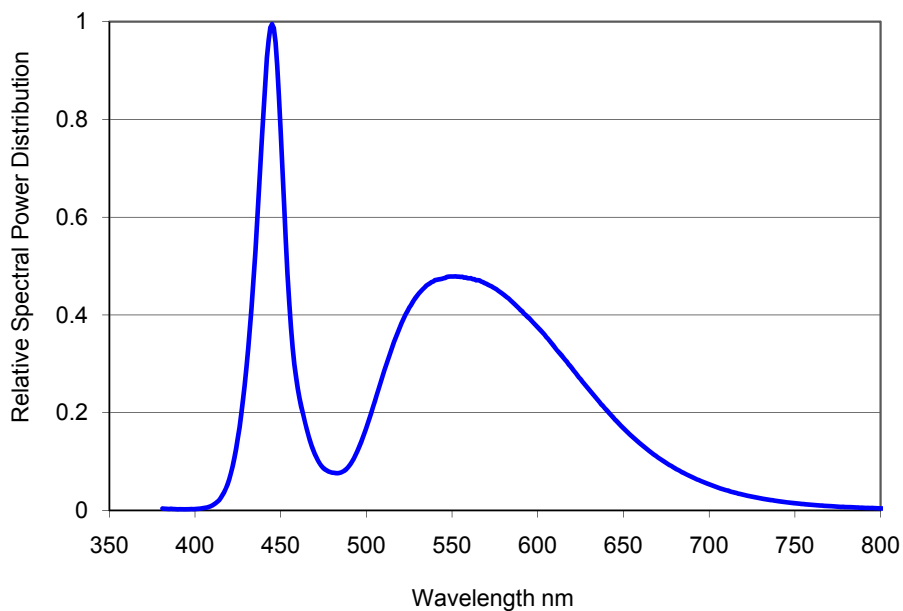


Figure 5. Color spectrum of LXML-PWC2 emitter, integrated measurement.

LXW9-PW27 (2700K) at Test Current, Thermal Pad Temperature = 25°C

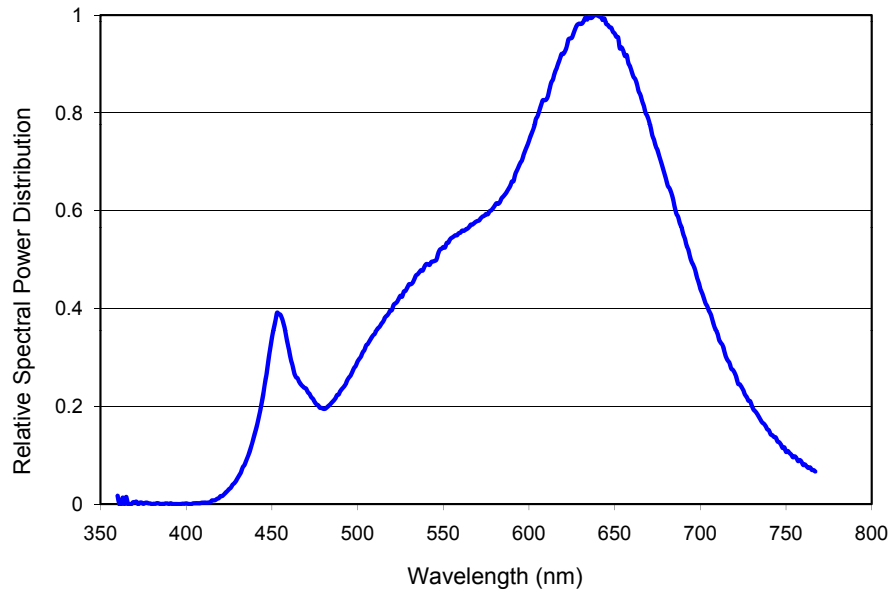


Figure 6. Color spectrum of LXW9-PW27 emitter, integrated measurement.

LXW9-PW30 (3000K) at Test Current, Thermal Pad Temperature = 25°C

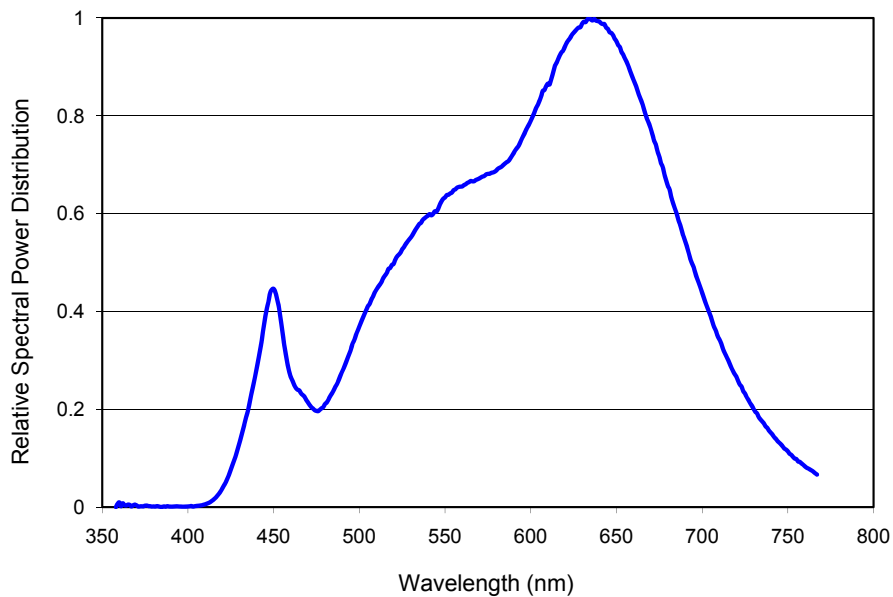


Figure 7. Color spectrum of LXW9-PW30 emitter, integrated measurement.

LXW8-PW35 (3500K) at Test Current, Thermal Pad Temperature = 25°C

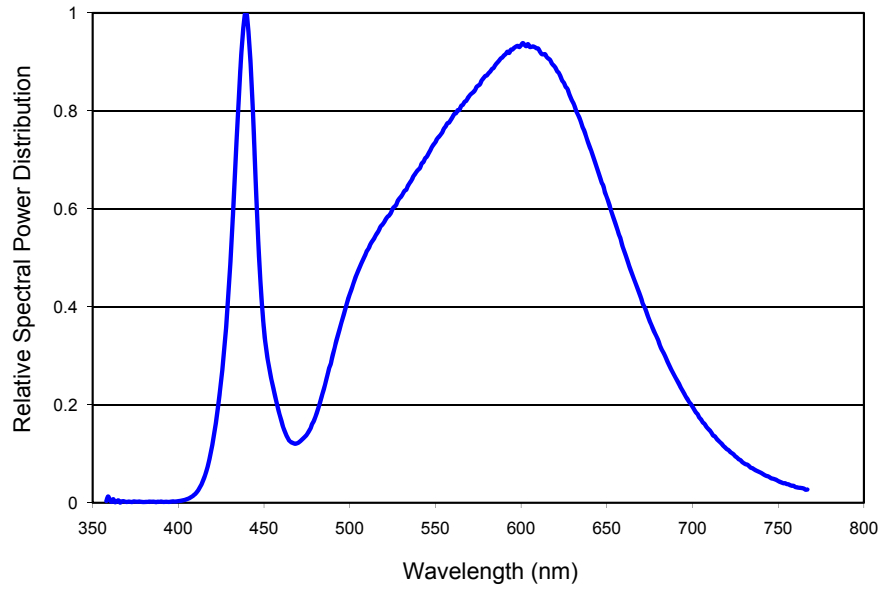


Figure 8. Color spectrum of LXW8-PW35 emitter, integrated measurement.

LXH7-PW40 (4000K) at Test Current, Thermal Pad Temperature = 25°C

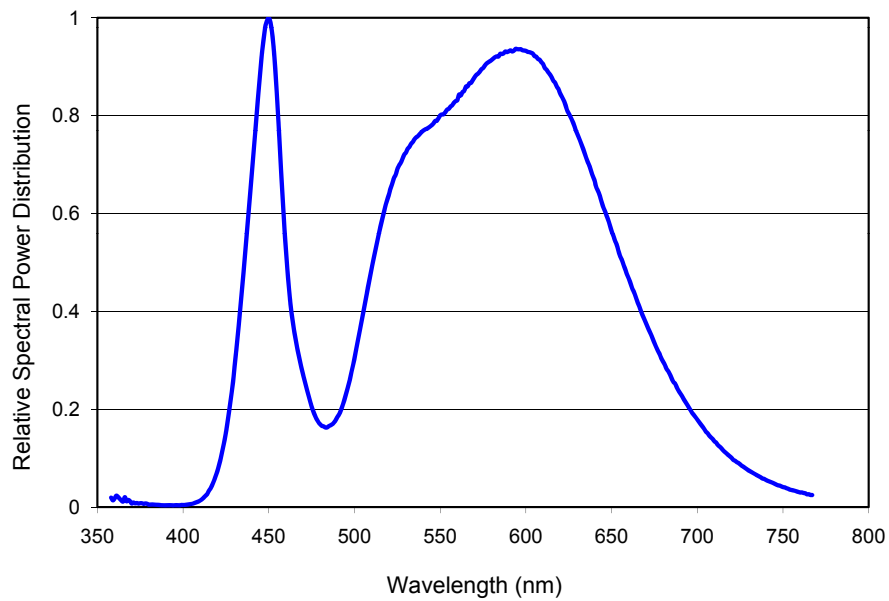


Figure 9. Color spectrum of LXH7-PW40 emitter, integrated measurement.

LXW8-PW40 (4000K) at Test Current, Thermal Pad Temperature = 25°C

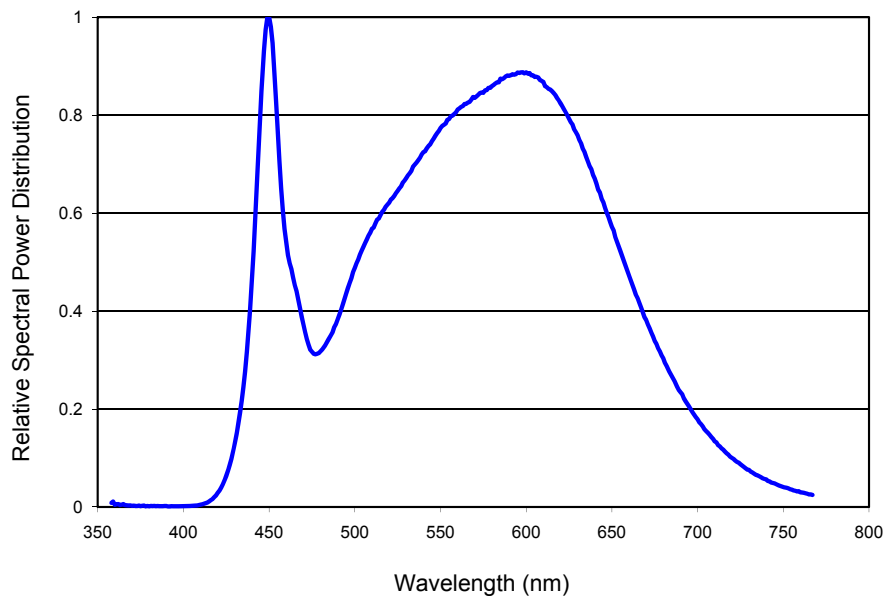


Figure 10. Color spectrum of LXW8-PW40 emitter, integrated measurement.

LXW8-PW50 (5000K) at Test Current, Thermal Pad Temperature = 25°C

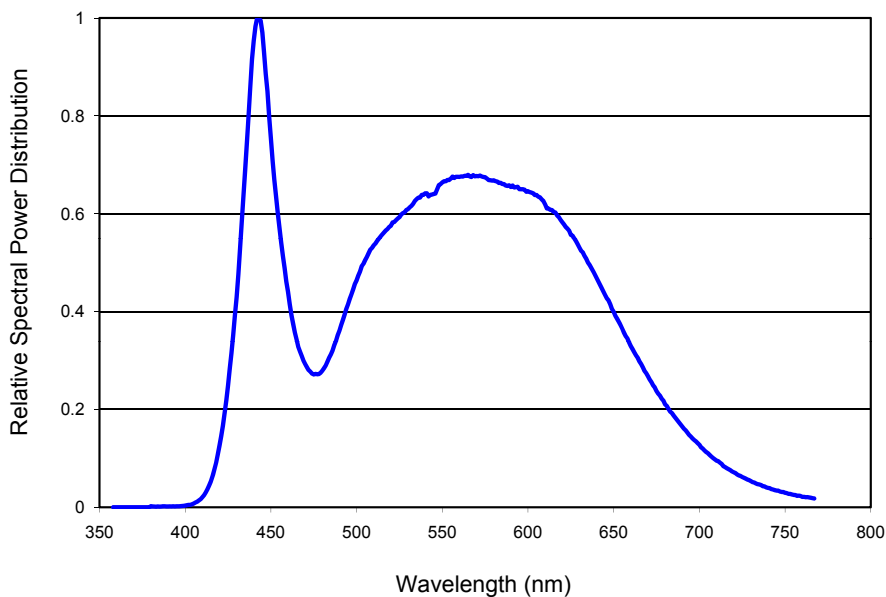


Figure 11. Color spectrum of LXW8-PW50 emitter, integrated measurement.

Typical Light Output Characteristics

Typical Relative Luminous Flux Vs. Temperature for LUXEON Rebel ES Emitters at Test Current

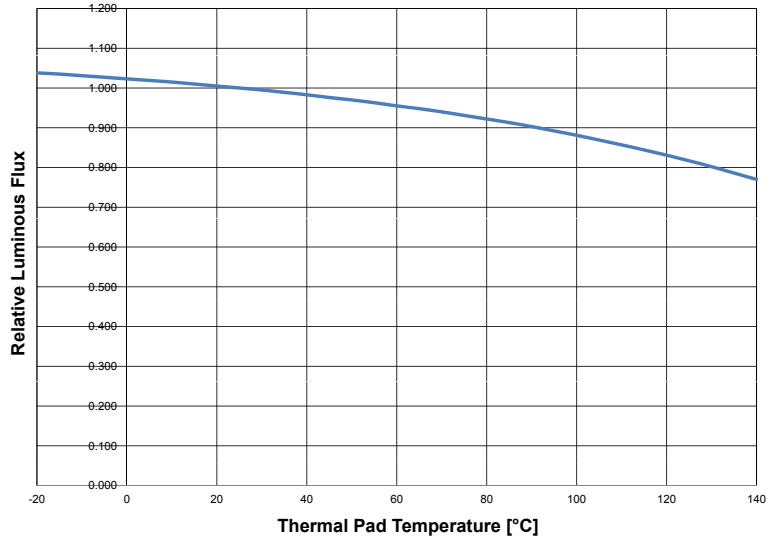


Figure 12. Relative light output vs. thermal pad temperature.

Typical Forward Current Characteristics

4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K at Test Current, Thermal Pad Temperature = 25°C

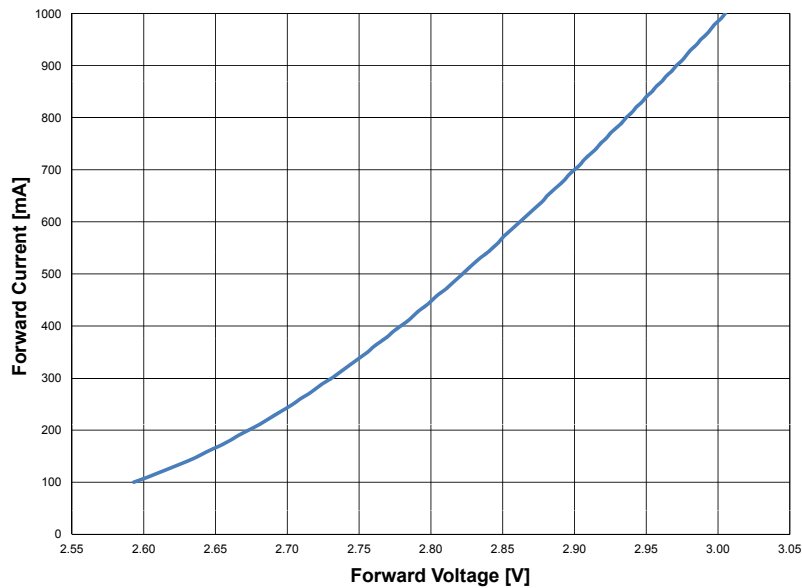


Figure 13. Forward current vs. forward voltage.

Typical Luminous Efficacy

Typical Luminous Efficacy Characteristic vs. Forward Current for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters

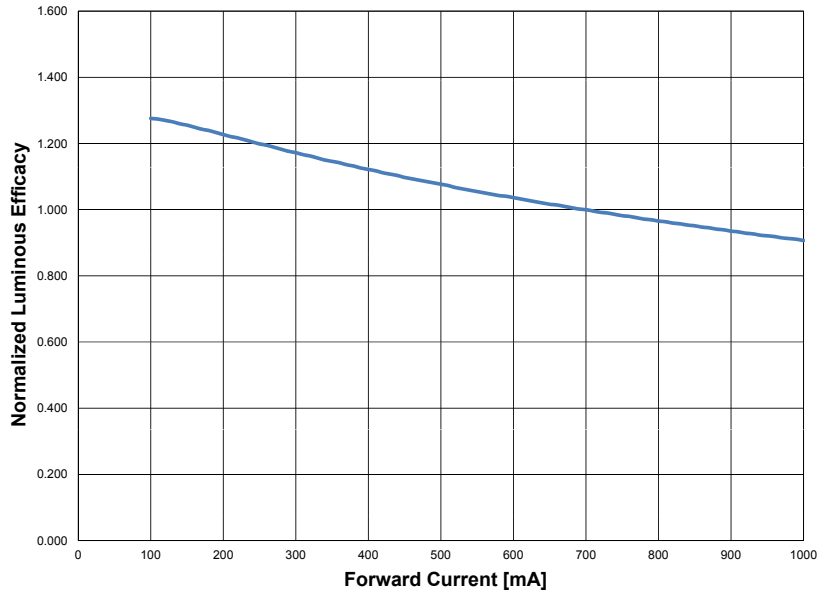


Figure 14. Typical luminous efficacy characteristic vs. forward current, thermal pad temperature = 25°C.

Typical Relative Luminous Flux vs. Forward Current for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters. Thermal Pad Temperature = 25°C

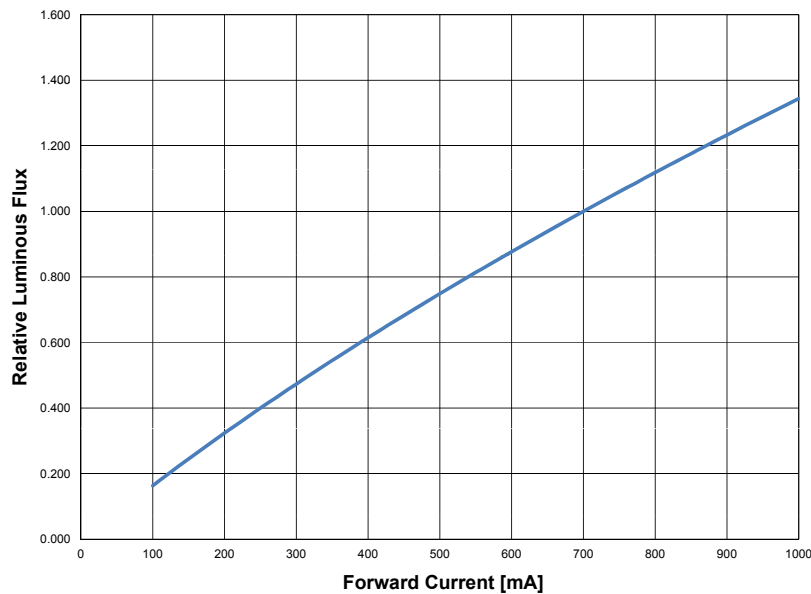


Figure 15. Typical relative luminous flux vs. forward current, thermal pad temperature = 25°C.

Typical Relative Luminous Efficacy vs. Temperature

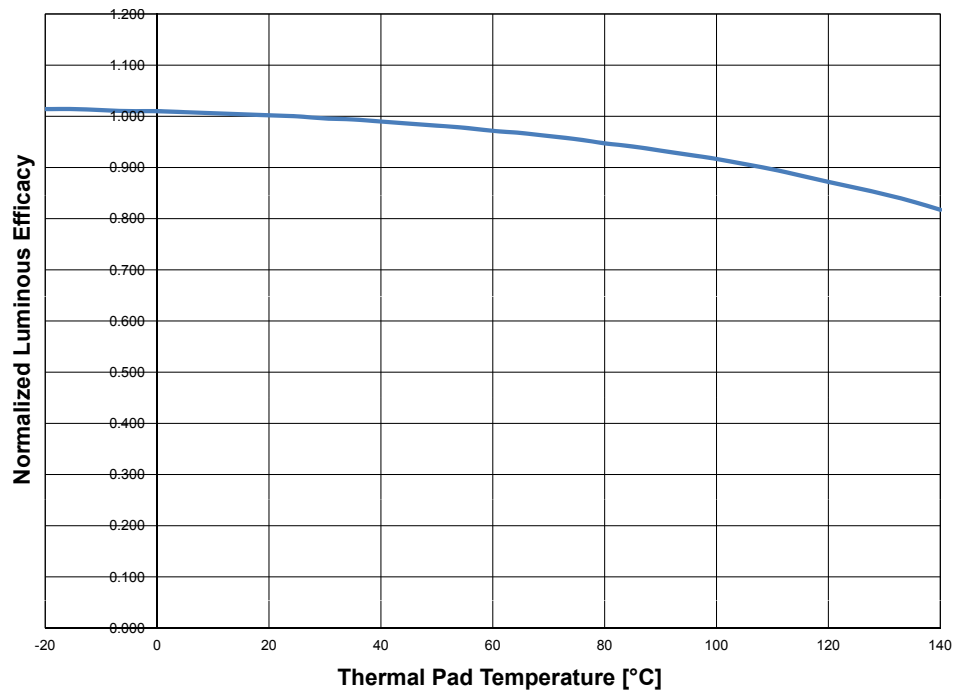


Figure 16. Relative luminous efficacy vs. thermal pad temperature, test current 700mA.

Current Derating Curves

Current Derating Curves at 350mA Forward Current Operation for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters

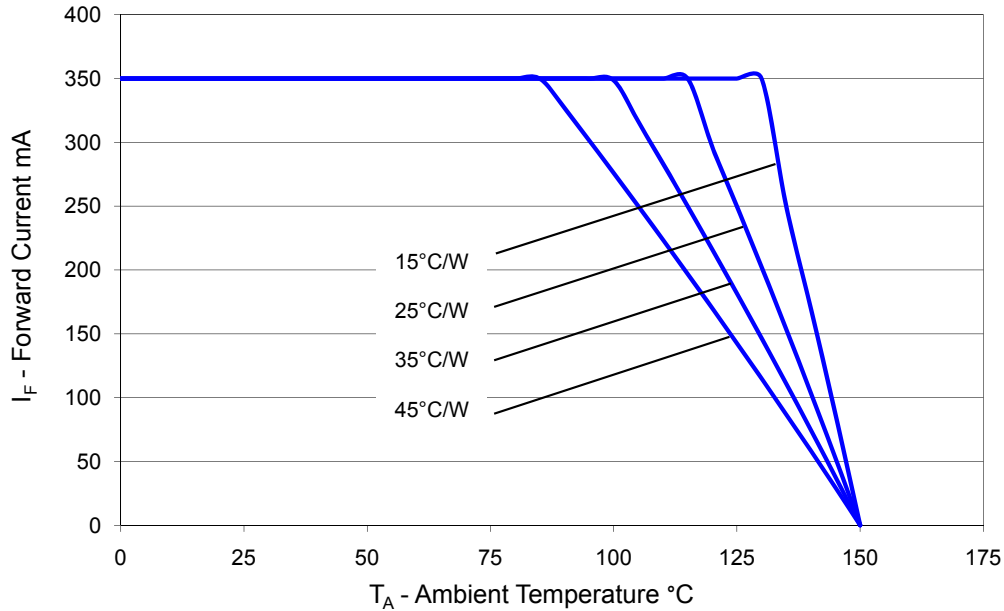


Figure 17. Maximum forward current vs. ambient temperature, based on $T_{JMAX} = 150^\circ\text{C}$.

Current Derating Curves at 700mA Forward Current Operation for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters

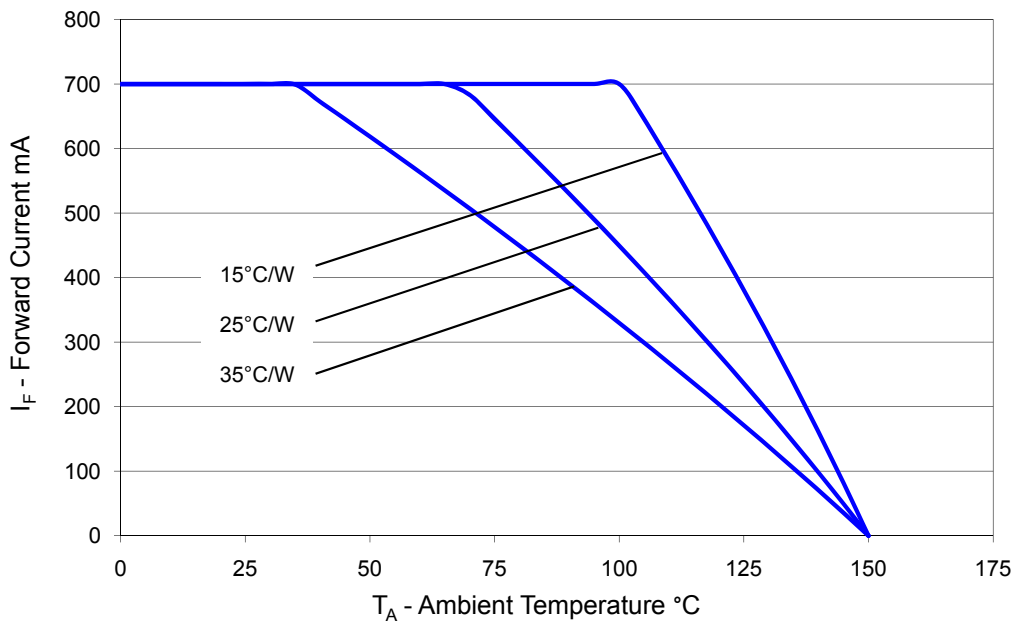


Figure 18. Maximum forward current vs. ambient temperature, based on $T_{JMAX} = 150^\circ\text{C}$.

Current Derating Curves at 1000mA Forward Current Operation for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters

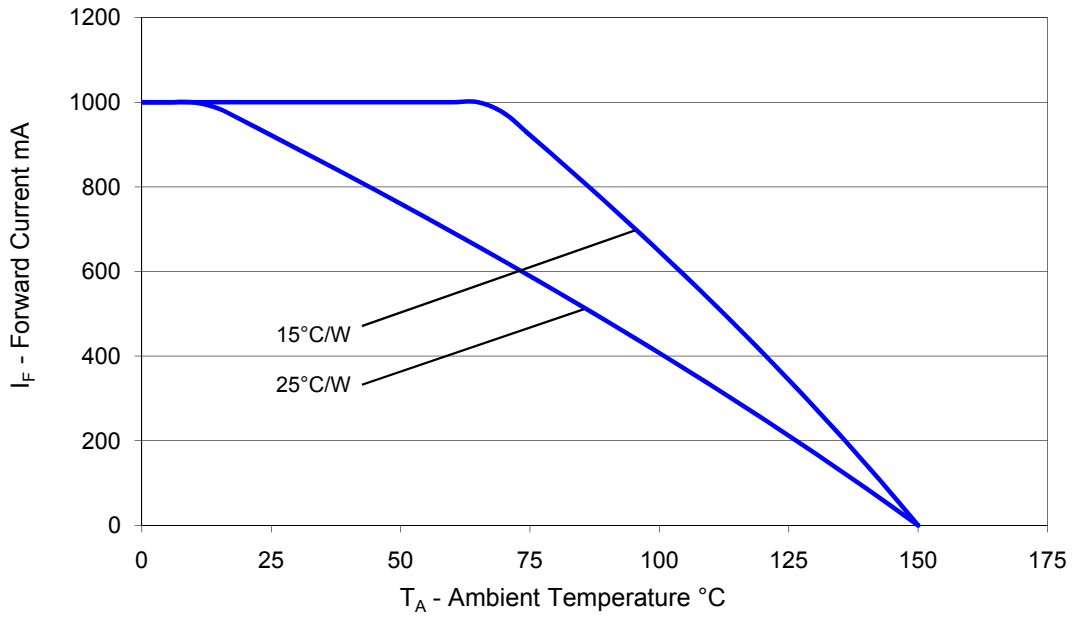


Figure 19. Maximum forward current vs. ambient temperature, based on $T_{JMAX} = 150^{\circ}C$.

Typical Radiation Pattern

Typical Spatial Radiation Pattern for 4100K Neutral White, 5650K Cool White, 2700K, 3000K, 3500K, 4000K and 5000K Emitters




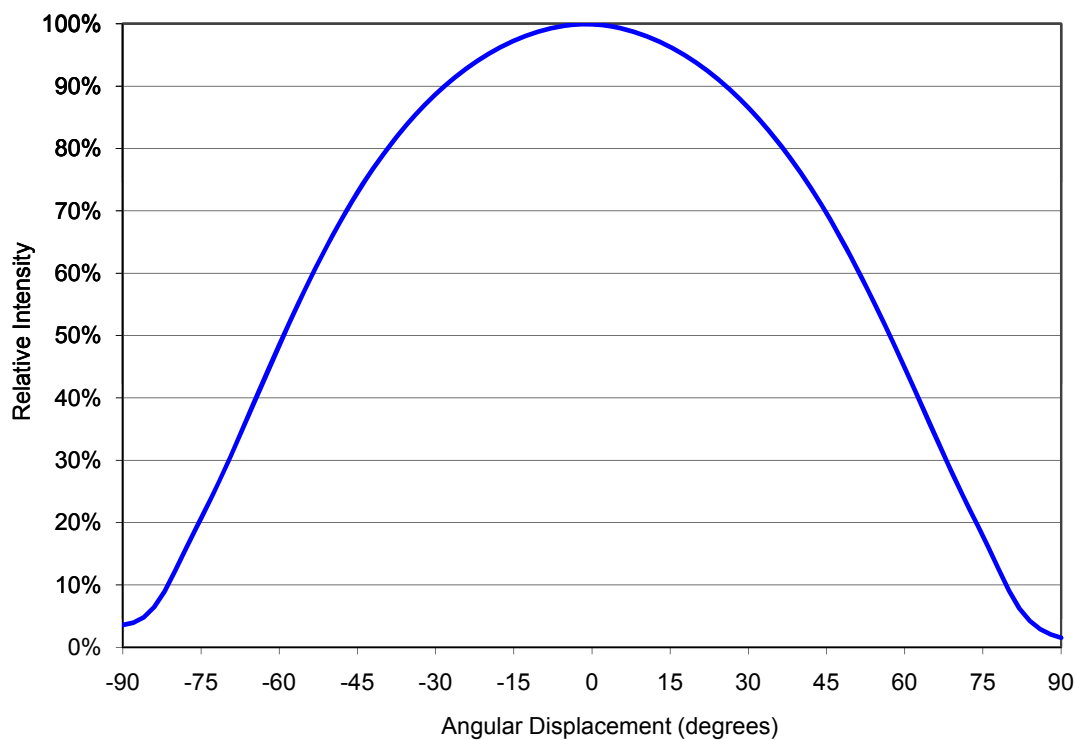


Figure 20. Typical representative spatial radiation pattern for 4100K neutral white, 5650K cool white, 2700K, 3000K 3500K, 4000K and 5000K lambertian.

Emitter Pocket Tape Packaging

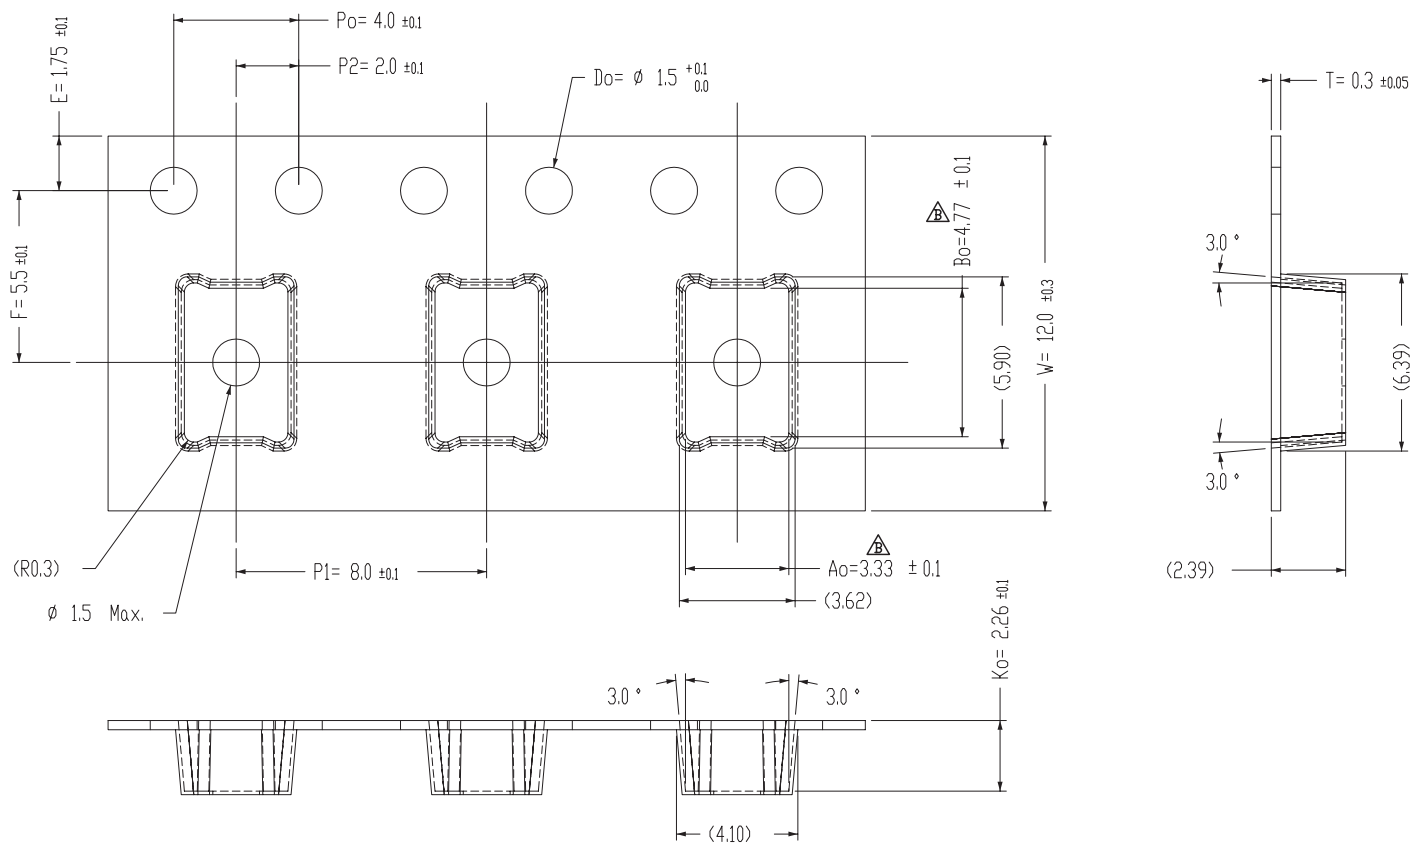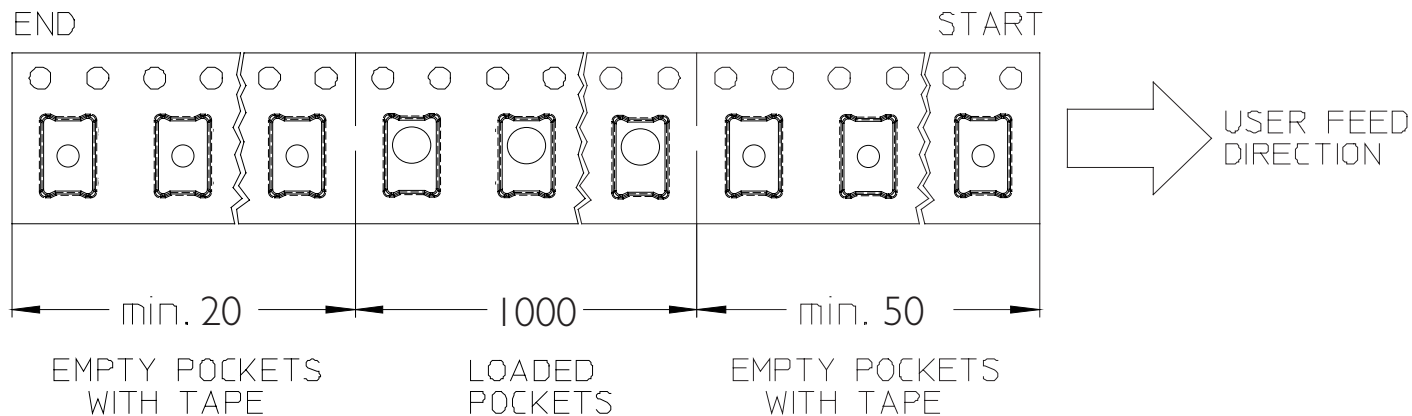

Emitter Reel Packaging

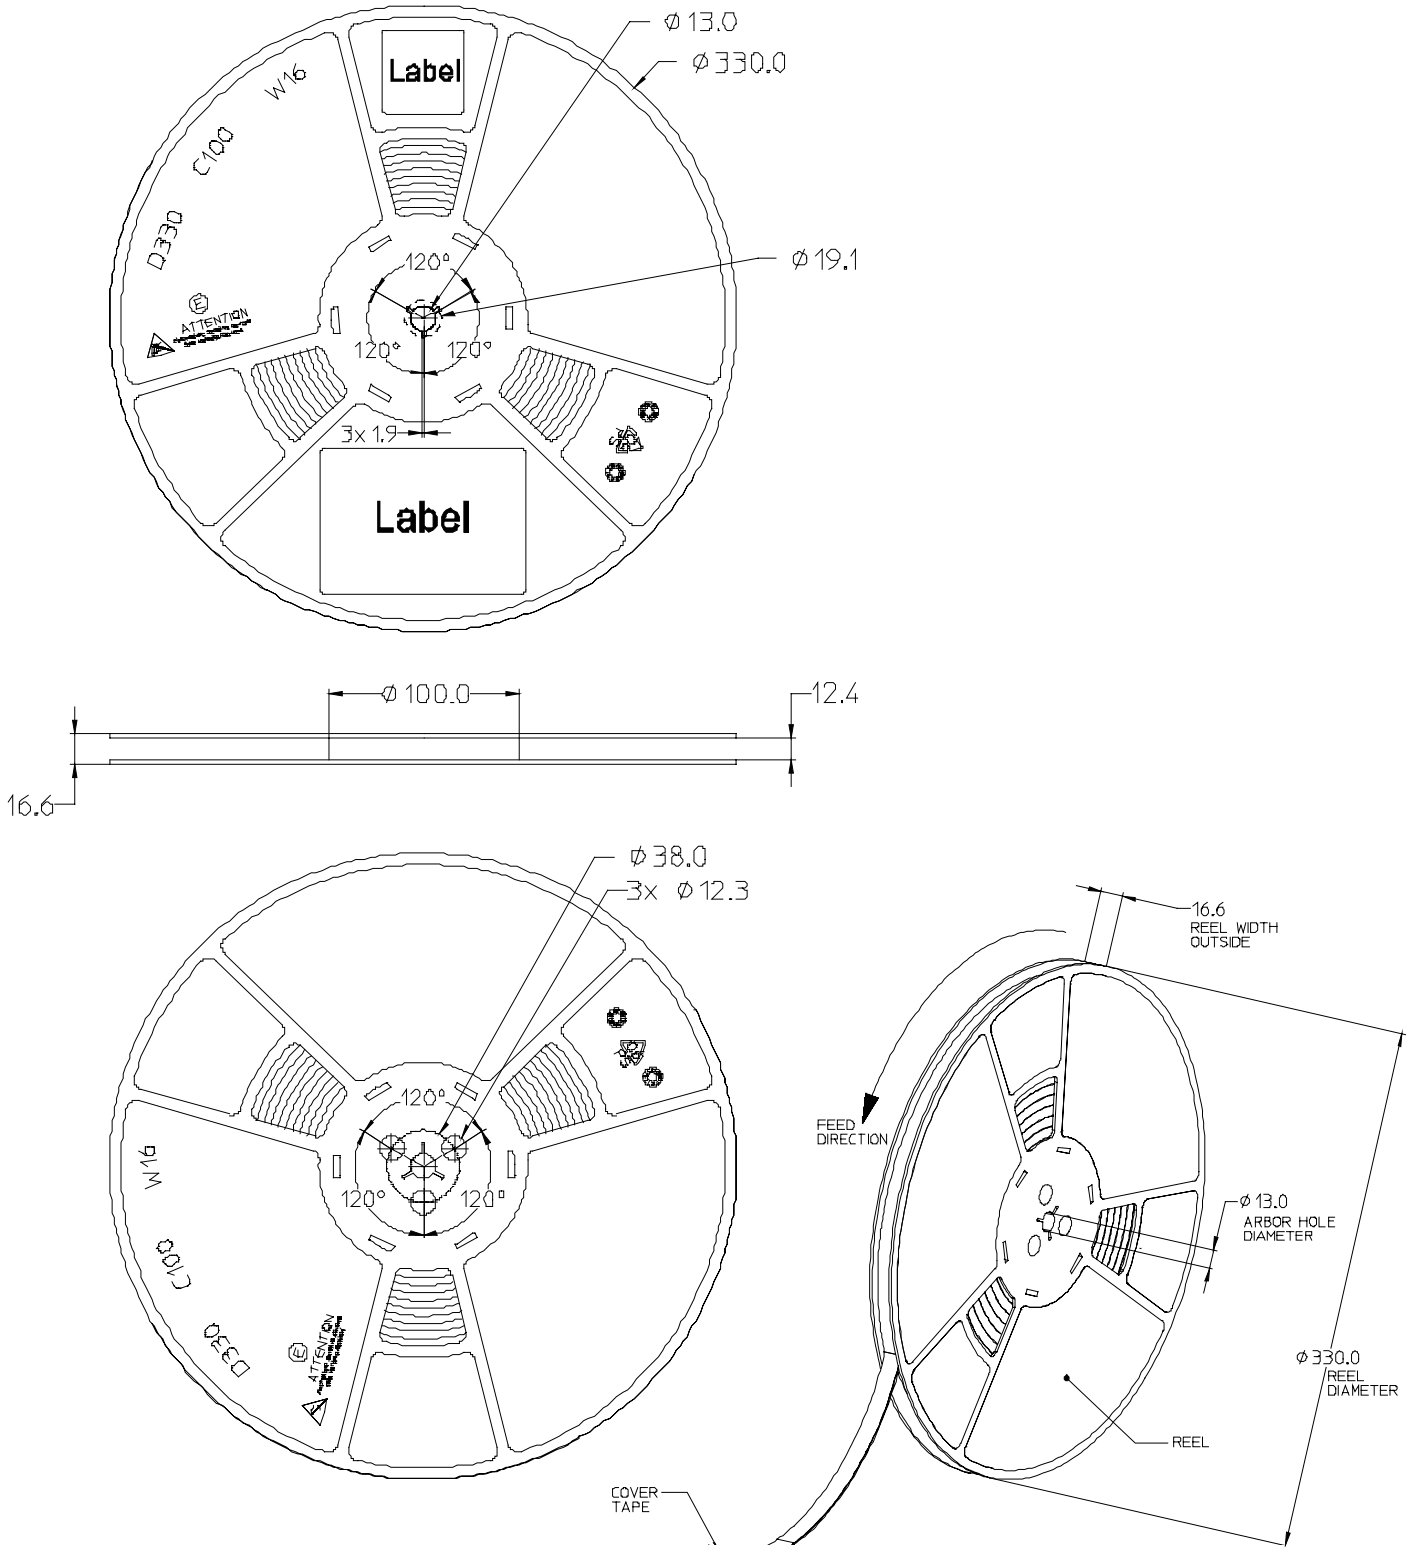

Product Binning and Labeling

Purpose of Product Binning

In the manufacturing of semiconductor products, there is a variation of performance around the average values given in the technical data sheets. For this reason, Lumileds bins the LED components for luminous flux, color and forward voltage (V_f).

Decoding Product Bin Labeling

LUXEON Rebel ES emitters are labeled using a four digit alphanumeric code (CAT code) depicting the bin values for emitters packaged on a single reel. All emitters packaged within a reel are of the same 3-variable bin combination. Using these codes, it is possible to determine optimum mixing and matching of products for consistency in a given application.

Reels of LUXEON Rebel ES emitters are labeled with a four digit alphanumeric CAT code following the format below.

A B C D

A = Flux bin (P, Q, R, S etc.)

B & C = Color bin (W0, V0, U0 etc. for LXML-PWx2 series. 7A, 7B, 7C and 7D for LXWx-PWxx series.
5W, 5X, 5Y and 5Z for LXH7-PW40 emitter)

D = V_f bin (P, R, S and T)

Luminous Flux Bins

Table 9 lists the standard photometric luminous flux bins for LUXEON Rebel ES emitters (tested and binned at 700mA).

Although several bins are outlined, product availability in a particular bin varies by production run and by product performance.

Not all bins are available in all colors.

Table 9. Flux Bins

| Bin Code | Min Photometric Flux (lm) | Max Photometric Flux (lm) |
|----------|---------------------------|---------------------------|
| P | 120 | 140 |
| Q | 140 | 160 |
| R | 160* | 180 |
| S | 180 | 200 |
| T | 200 | 220 |
| U | 220 | 240 |
| V | 240 | 260 |
| W | 260 | 280 |
| X | 280 | 300 |

* 170 lm for LXW8-PW4

Beginning in March 2013, LUXEON Rebel ES will transition to 10 lumen flux bins as shown in the table below. This transition may result in mixed shipments of old bin codes and new bin codes during calendar year 2013.

Table 10. Flux Bins

| Bin Code | Min Photometric Flux (lm) | Max Photometric Flux (lm) |
|----------|---------------------------|---------------------------|
| 1 | 120 | 130 |
| 2 | 130 | 140 |
| 3 | 140 | 150 |
| 4 | 150 | 160 |
| 5 | 160 | 170 |
| 6 | 170 | 180 |
| 7 | 180 | 190 |
| 8 | 190 | 200 |
| 9 | 200 | 210 |
| A | 210 | 220 |
| B | 220 | 230 |
| C | 230 | 240 |
| D | 240 | 250 |
| E | 250 | 260 |
| F | 260 | 270 |
| G | 270 | 280 |
| H | 280 | 290 |
| J | 290 | 300 |
| K | 300 | 310 |
| L | 310 | 320 |

4100K Neutral White Bin Structure

4100K Neutral White LUXEON Rebel ES emitters are tested and binned by x,y coordinates. 12 Color Bins, CCT Range 3,500K to 4,500K.

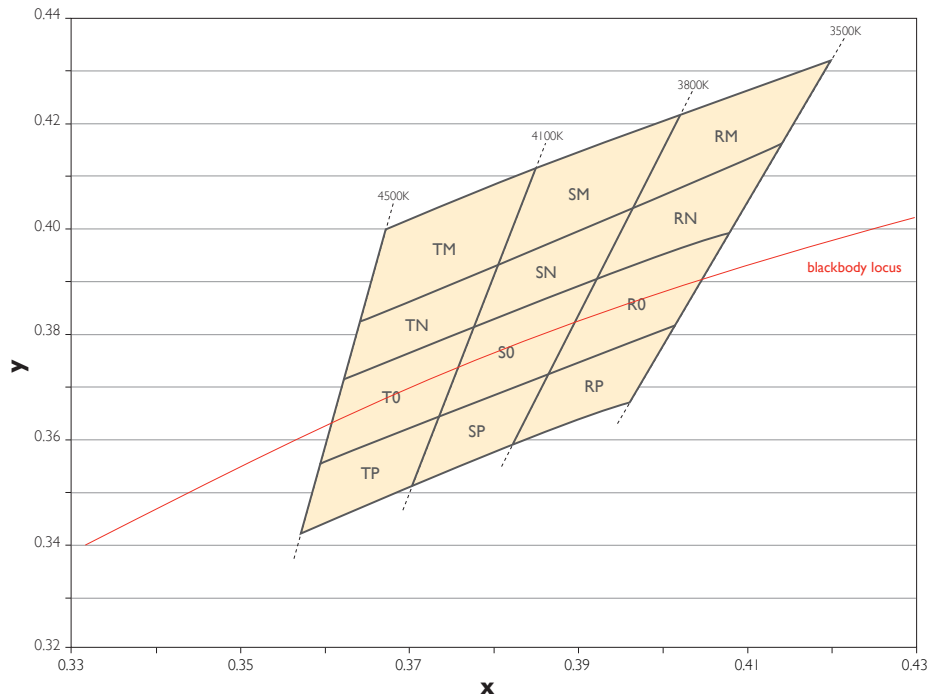


Figure 21. 4100K Neutral White bin structure.

Table 11. 4100K Neutral White Bin Coordinates

| Bin Code | x | y | Typical CCT (K) | Bin Code | x | y | Typical CCT (K) |
|----------|----------|----------|-----------------|----------|----------|----------|-----------------|
| TM | 0.367294 | 0.400290 | 4300 | SO | 0.378264 | 0.382458 | 3950 |
| | 0.385953 | 0.412995 | | | 0.392368 | 0.390932 | |
| | 0.381106 | 0.393747 | | | 0.387071 | 0.373899 | |
| | 0.364212 | 0.382878 | | | 0.374075 | 0.365822 | |
| TN | 0.364212 | 0.382878 | 4300 | SP | 0.374075 | 0.365822 | 3950 |
| | 0.381106 | 0.393747 | | | 0.387071 | 0.373899 | |
| | 0.378264 | 0.382458 | | | 0.382598 | 0.359515 | |
| | 0.362219 | 0.371616 | | | 0.370582 | 0.351953 | |
| TO | 0.362219 | 0.371616 | 4300 | RM | 0.402270 | 0.422776 | 3650 |
| | 0.378264 | 0.382458 | | | 0.420940 | 0.432618 | |
| | 0.374075 | 0.365822 | | | 0.414776 | 0.416097 | |
| | 0.359401 | 0.355699 | | | 0.396279 | 0.403508 | |
| TP | 0.359401 | 0.355699 | 4300 | RN | 0.396279 | 0.403508 | 3650 |
| | 0.374075 | 0.365822 | | | 0.414776 | 0.416097 | |
| | 0.370582 | 0.351953 | | | 0.408593 | 0.399525 | |
| | 0.357079 | 0.342581 | | | 0.392368 | 0.390932 | |
| SM | 0.385953 | 0.412995 | 3950 | RO | 0.392368 | 0.390932 | 3650 |
| | 0.402270 | 0.422776 | | | 0.408593 | 0.399525 | |
| | 0.396279 | 0.403508 | | | 0.402113 | 0.382156 | |
| | 0.381106 | 0.393747 | | | 0.387071 | 0.373899 | |
| SN | 0.381106 | 0.393747 | 3950 | RP | 0.387071 | 0.373899 | 3650 |
| | 0.396279 | 0.403508 | | | 0.402113 | 0.382156 | |
| | 0.392368 | 0.390932 | | | 0.396564 | 0.367284 | |
| | 0.378264 | 0.382458 | | | 0.382598 | 0.359515 | |

Note for Table 11:

- Lumileds maintains a tester tolerance of ± 0.005 on x, y color coordinates.

5650K Cool White Bin Structure

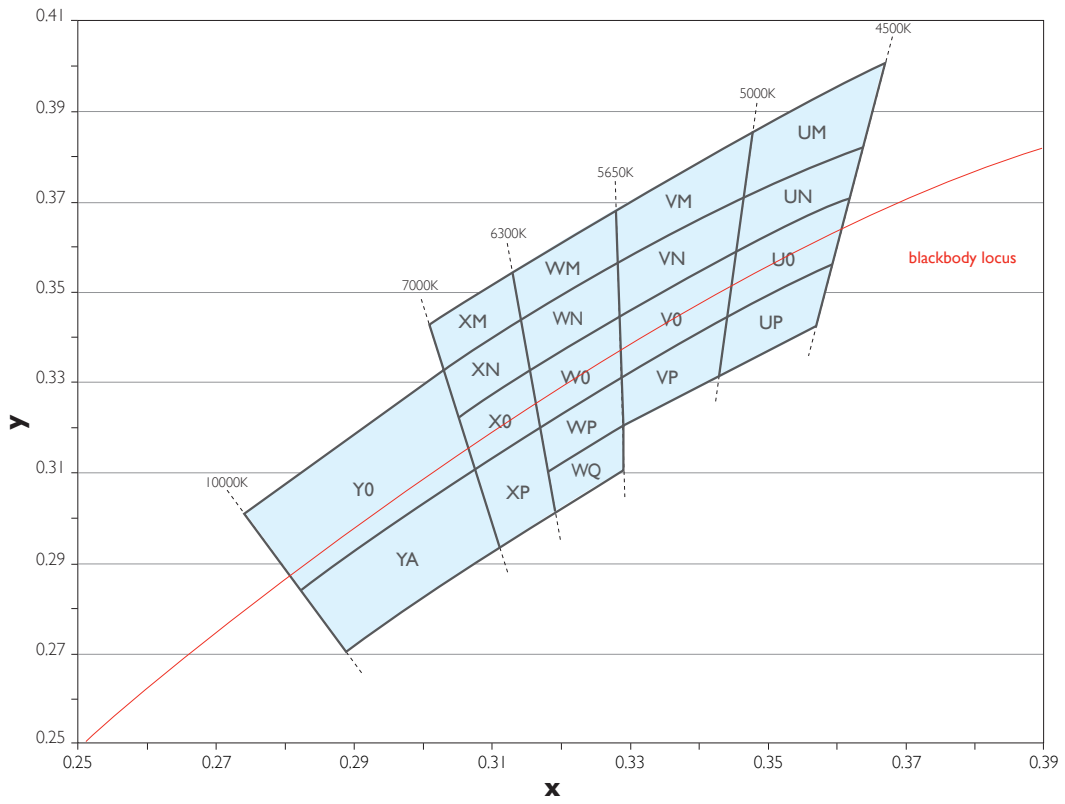


Figure 22. 5650K Cool White bin structure.

5650K Cool White LUXEON Rebel ES emitters are tested and binned by x,y coordinates. 19 Color Bins, CCT Range 4,500K to 10,000K.

Table 12. 5650K Cool White Bin Coordinates

| Bin Code | x | y | Typical CCT (K) | Bin Code | x | y | Typical CCT (K) |
|----------|--|--|-----------------|----------|--|--|-----------------|
| YO | 0.274238 0.303051 0.307553 0.282968 | 0.300667 0.332708 0.310778 0.283772 | 8000 | WQ | 0.318606 0.329393 0.329544 0.319597 | 0.310201 0.320211 0.310495 0.301303 | 6000 |
| YA | 0.282968 0.307553 0.311163 0.289922 | 0.283772 0.310778 0.293192 0.270316 | 8000 | VM | 0.328636 0.348147 0.346904 0.328823 | 0.368952 0.385629 0.371742 0.356917 | 5300 |
| XM | 0.301093 0.313617 0.314792 0.303051 | 0.342244 0.354992 0.344438 0.332708 | 6700 | VN | 0.328823 0.346904 0.345781 0.329006 | 0.356917 0.371742 0.359190 0.345092 | 5300 |
| XN | 0.303051 0.314792 0.316042 0.305170 | 0.332708 0.344438 0.333222 0.322386 | 6700 | VO | 0.329006 0.345781 0.344443 0.329220 | 0.345092 0.359190 0.344232 0.331331 | 5300 |
| XO | 0.305170 0.316042 0.317466 0.307553 | 0.322386 0.333222 0.320438 0.310778 | 6700 | VP | 0.329220 0.344443 0.343352 0.329393 | 0.331331 0.344232 0.332034 0.320211 | 5300 |
| XP | 0.307553 0.317466 0.319597 0.311163 | 0.310778 0.320438 0.301303 0.293192 | 6700 | UM | 0.348147 0.367294 0.364212 0.346904 | 0.385629 0.400290 0.382878 0.371742 | 4750 |
| WM | 0.313617 0.328636 0.328823 0.314792 | 0.354992 0.368952 0.356917 0.344438 | 6000 | UN | 0.346904 0.364212 0.362219 0.345781 | 0.371742 0.382878 0.371616 0.359190 | 4750 |
| WN | 0.314792 0.328823 0.329006 0.316042 | 0.344438 0.356917 0.345092 0.333222 | 6000 | UO | 0.345781 0.362219 0.359401 0.344443 | 0.359190 0.371616 0.355699 0.344232 | 4750 |
| WO | 0.316042 0.329006 0.329220 0.317466 | 0.333222 0.345092 0.331331 0.320438 | 6000 | UP | 0.344443 0.359401 0.357079 0.343352 | 0.344232 0.355699 0.342581 0.332034 | 4750 |
| WP | 0.317466 0.329220 0.329393 0.318606 | 0.320438 0.331331 0.320211 0.310201 | 6000 | | | | |

Note for Table 12:

1. Lumileds maintains a tester tolerance of ± 0.005 on x, y color coordinates.

LUXEON Rebel ES ANSI 1/4th Quadrant Color Bin Structure

ANSI 1/4th quadrant color bin structure for LXW9-PW27, LXW9-PW30, LXW8-PW35, LXW8-PW40 and LXW8-PW50 emitters

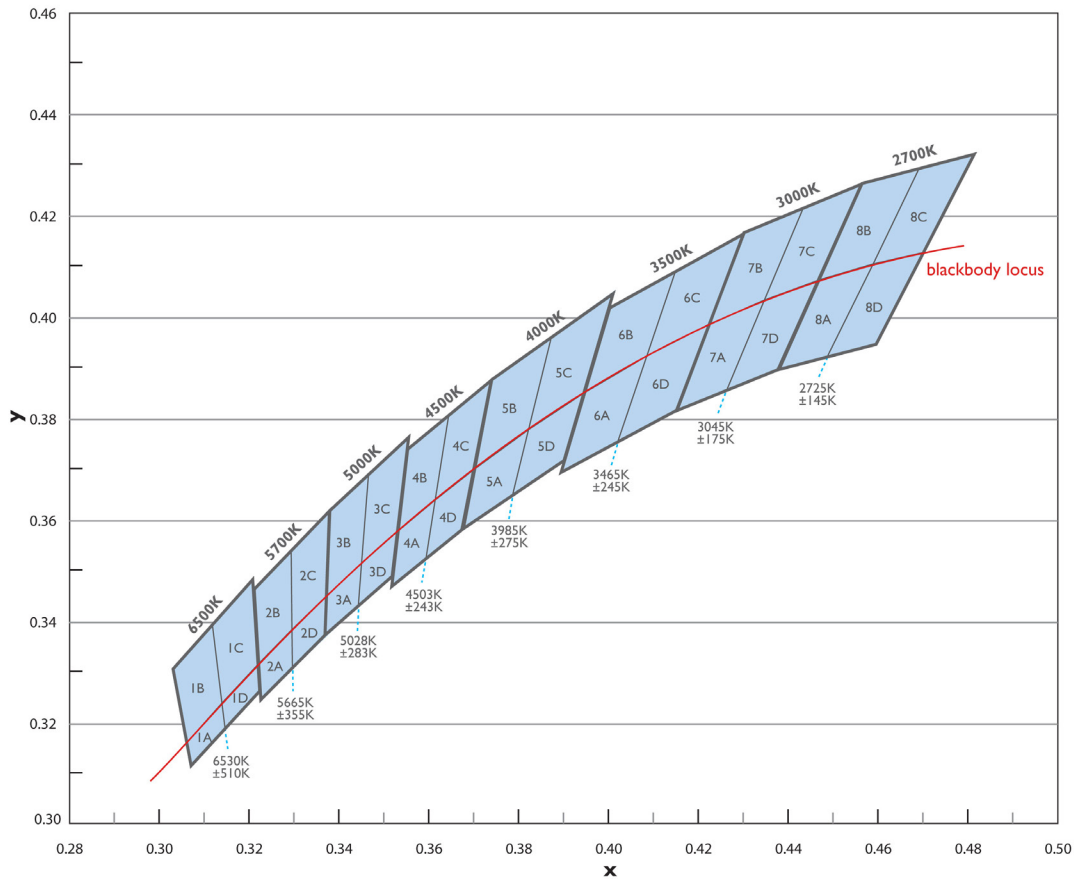


Figure 23. LUXEON Rebel ES ANSI 1/4th quadrant color bin structure.

LUXEON Rebel ES emitters are tested and binned by x,y coordinates.
32 Color Bins, CCT Range 2580K to 7040K

Table 13. LUXEON Rebel ES ANSI 1/4th quadrant Bin Coordinates

| Nominal CCT | Bin Code | x | y | Nominal CCT | Bin Code | x | y |
|-------------|----------|----------|----------|-------------|----------|----------|----------|
| 2700K | 8A | 0.458614 | 0.410315 | 3500K | 6A | 0.408216 | 0.392153 |
| | | 0.446470 | 0.407117 | | | 0.394131 | 0.384815 |
| | | 0.437300 | 0.389300 | | | 0.388900 | 0.369000 |
| | | 0.448286 | 0.391847 | | | 0.401706 | 0.375155 |
| 2700K | 8B | 0.468732 | 0.428946 | 3500K | 6B | 0.414622 | 0.408937 |
| | | 0.456200 | 0.426000 | | | 0.399600 | 0.401500 |
| | | 0.446470 | 0.407117 | | | 0.394131 | 0.384815 |
| | | 0.458614 | 0.410315 | | | 0.408216 | 0.392153 |
| 2700K | 8C | 0.481300 | 0.431900 | 3500K | 6C | 0.429900 | 0.416500 |
| | | 0.468732 | 0.428946 | | | 0.414622 | 0.408937 |
| | | 0.458614 | 0.410315 | | | 0.408216 | 0.392153 |
| | | 0.469954 | 0.412602 | | | 0.422071 | 0.398417 |
| 2700K | 8D | 0.469954 | 0.412602 | 3500K | 6D | 0.422071 | 0.398417 |
| | | 0.458614 | 0.410315 | | | 0.408216 | 0.392153 |
| | | 0.448286 | 0.391847 | | | 0.401706 | 0.375155 |
| | | 0.459300 | 0.394400 | | | 0.414700 | 0.381400 |
| 3000K | 7A | 0.434392 | 0.403186 | 4000K | 5A | 0.381883 | 0.377641 |
| | | 0.422071 | 0.398417 | | | 0.369655 | 0.369740 |
| | | 0.414700 | 0.381400 | | | 0.367000 | 0.357800 |
| | | 0.425959 | 0.385336 | | | 0.378297 | 0.364637 |
| 3000K | 7B | 0.442994 | 0.421230 | 4000K | 5B | 0.386955 | 0.395809 |
| | | 0.429900 | 0.416500 | | | 0.373600 | 0.387400 |
| | | 0.422071 | 0.398417 | | | 0.369655 | 0.369740 |
| | | 0.434392 | 0.403186 | | | 0.381883 | 0.377641 |
| 3000K | 7C | 0.456200 | 0.426000 | 4000K | 5C | 0.400600 | 0.404400 |
| | | 0.442994 | 0.421230 | | | 0.386955 | 0.395809 |
| | | 0.434392 | 0.403186 | | | 0.381883 | 0.377641 |
| | | 0.446470 | 0.407117 | | | 0.394131 | 0.384815 |
| 3000K | 7D | 0.446470 | 0.407117 | 4000K | 5D | 0.394131 | 0.384815 |
| | | 0.434392 | 0.403186 | | | 0.381883 | 0.377641 |
| | | 0.425959 | 0.385336 | | | 0.378297 | 0.364637 |
| | | 0.437300 | 0.389300 | | | 0.389800 | 0.371600 |
| 5000K | 3A | 0.344719 | 0.351301 | | | | |
| | | 0.336916 | 0.344873 | | | | |
| | | 0.336600 | 0.336900 | | | | |
| | | 0.343985 | 0.342749 | | | | |
| 5000K | 3B | 0.346260 | 0.368726 | | | | |
| | | 0.337600 | 0.361600 | | | | |
| | | 0.336916 | 0.344873 | | | | |
| | | 0.344719 | 0.351301 | | | | |
| 5000K | 3C | 0.355100 | 0.376000 | | | | |
| | | 0.346260 | 0.368726 | | | | |
| | | 0.344719 | 0.351301 | | | | |
| | | 0.352638 | 0.357500 | | | | |
| 5000K | 3D | 0.352638 | 0.357500 | | | | |
| | | 0.344719 | 0.351301 | | | | |
| | | 0.343985 | 0.342749 | | | | |
| | | 0.351500 | 0.348700 | | | | |

Notes for Table 13:

1. Lumileds maintains a tester tolerance of ± 0.005 on x, y color coordinates.
2. Applicable for LXW9-PW27, LXW9-PW30, LXW8-PW35, LXW8-PW40 and LXW8-PW50 emitters.

LUXEON Rebel ES ANSI 1/4th Quadrant Bin Structure

ANSI 1/4th quadrant bin structure for LXH7-PW40 emitter

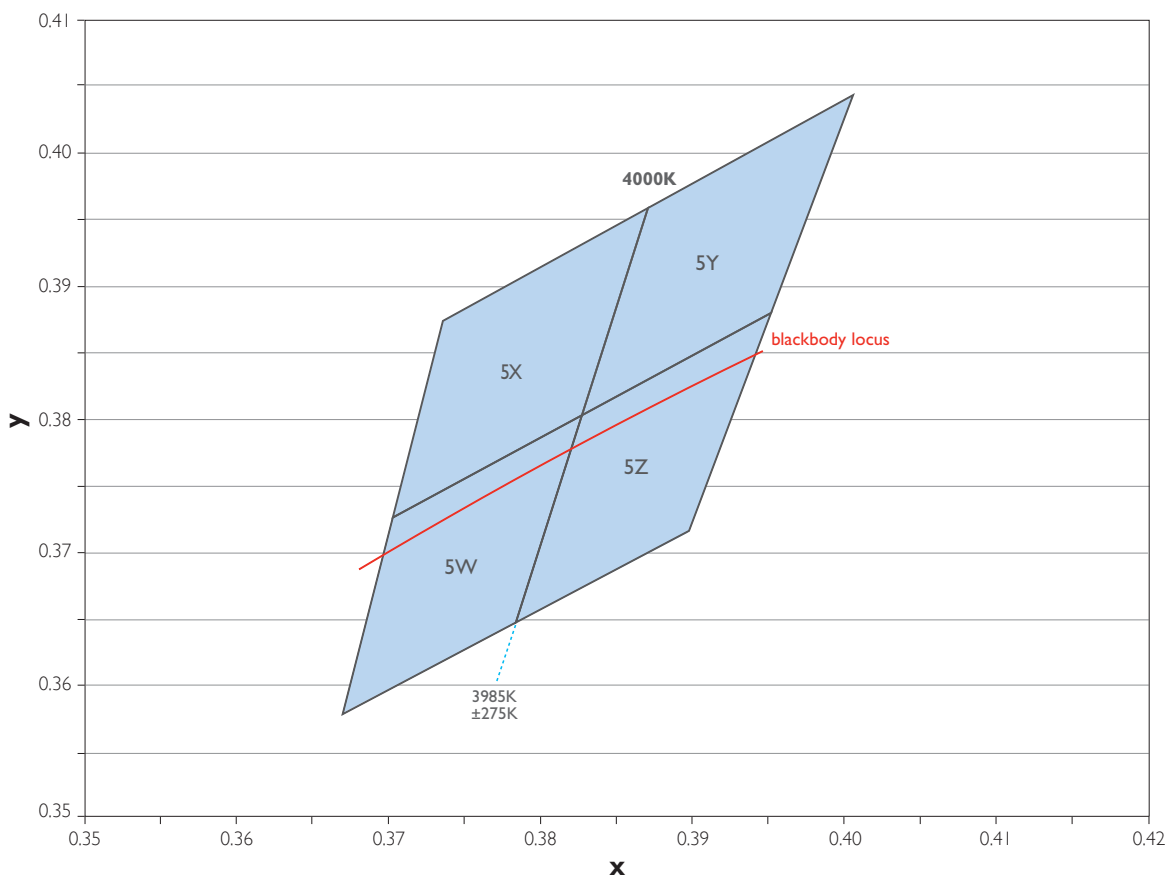


Figure 24. LUXEON Rebel ES ANSI 1/4th quadrant bin structure (LXH7-PW40 emitter only).

LUXEON Rebel ES emitters are tested and binned by x,y coordinates.
4 Color Bins, CCT Range 3710K to 4260K

Table 14. LUXEON Rebel ES ANSI 1/4th quadrant Bin Coordinates for LXH7-PW40 emitter

| Nominal CCT | Bin Code | x | y |
|-------------|----------|----------|----------|
| 4000K | 5W | 0.382750 | 0.380300 |
| | | 0.370300 | 0.372600 |
| | | 0.367000 | 0.357800 |
| | | 0.378400 | 0.364700 |
| 4000K | 5X | 0.382750 | 0.380300 |
| | | 0.387100 | 0.395900 |
| | | 0.373600 | 0.387400 |
| | | 0.370300 | 0.372600 |
| 4000K | 5Y | 0.382750 | 0.380300 |
| | | 0.395200 | 0.388000 |
| | | 0.400600 | 0.404400 |
| | | 0.387100 | 0.395900 |
| 4000K | 5Z | 0.382750 | 0.380300 |
| | | 0.378400 | 0.364700 |
| | | 0.389800 | 0.371600 |
| | | 0.395200 | 0.388000 |

Forward Voltage Bins

Table 15 lists minimum and maximum V_f bin values per emitter (tested and binned at 700mA). Although several bins are outlined, product availability in a particular bin varies by production run and by product performance.

Table 15. V_f Bins

| Bin Code | Minimum Forward Voltage (V) | Maximum Forward Voltage (V) |
|----------|-----------------------------|-----------------------------|
| P | 2.50 | 2.75 |
| R | 2.75 | 3.00 |
| S | 3.00 | 3.25 |
| T | 3.25 | 3.50 |

About Lumileds

Lumileds is the light engine leader, delivering innovation, quality, and reliability.

For 100 years, Lumileds commitment to innovation has helped customers pioneer breakthrough products in the automotive, consumer and illumination markets.

Lumileds is shaping the future of light with our LEDs and automotive lamps, and helping our customers illuminate how people see the world around them.

To learn more about our portfolio of light engines visit www.lumileds.com.



©2015 Lumileds Holding B.V. All rights reserved.
LUXEON is a registered trademark of the Lumileds Holding B.V.
in the United States and other countries.

www.lumileds.com

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided "as is," and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.