



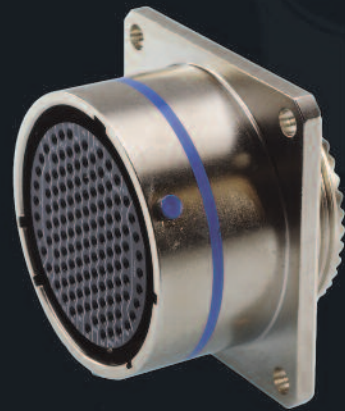

# ITT

**Interconnect Solutions**  
**Cannon, VEAM, BIW**

## Cannon MIL-DTL-38999 Connectors

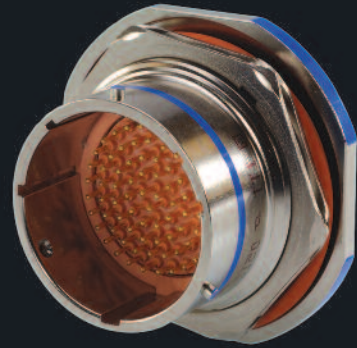

*Engineered for life*


## A Historical Achievement of Technology Leadership

### Defining and Championing Innovation

Showcasing a portfolio of creativity, ITT's "Engineered For Life" execution embraces products which have become ubiquitous in a broad collection of markets including: Military/Aerospace, Civil Aircraft, Industrial Instrumentation, Medical, Oil & Gas, Energy, Transportation, Telecom/Handset, Computer, Consumer, and Automotive.

ITT's rich interconnect history embraces contributions to both technological breakthroughs and social movements. With one of the industry's broadest product offerings, ITT's interconnect products have supported:

- Every Free World space mission, bringing the universe to our doorstep.
- Motion picture, radio, and television equipment, serving laughter and entertainment to millions.
- Commercial and military communications systems, linking the voices of the world.
- Computerized tools, reshaping the information highway.
- Aircraft, rapid transit, and automobiles, mobilizing our expanding society.
- Oil and natural gas production, powering the world's economies.
- Agricultural equipment, attacking the roots of world hunger.

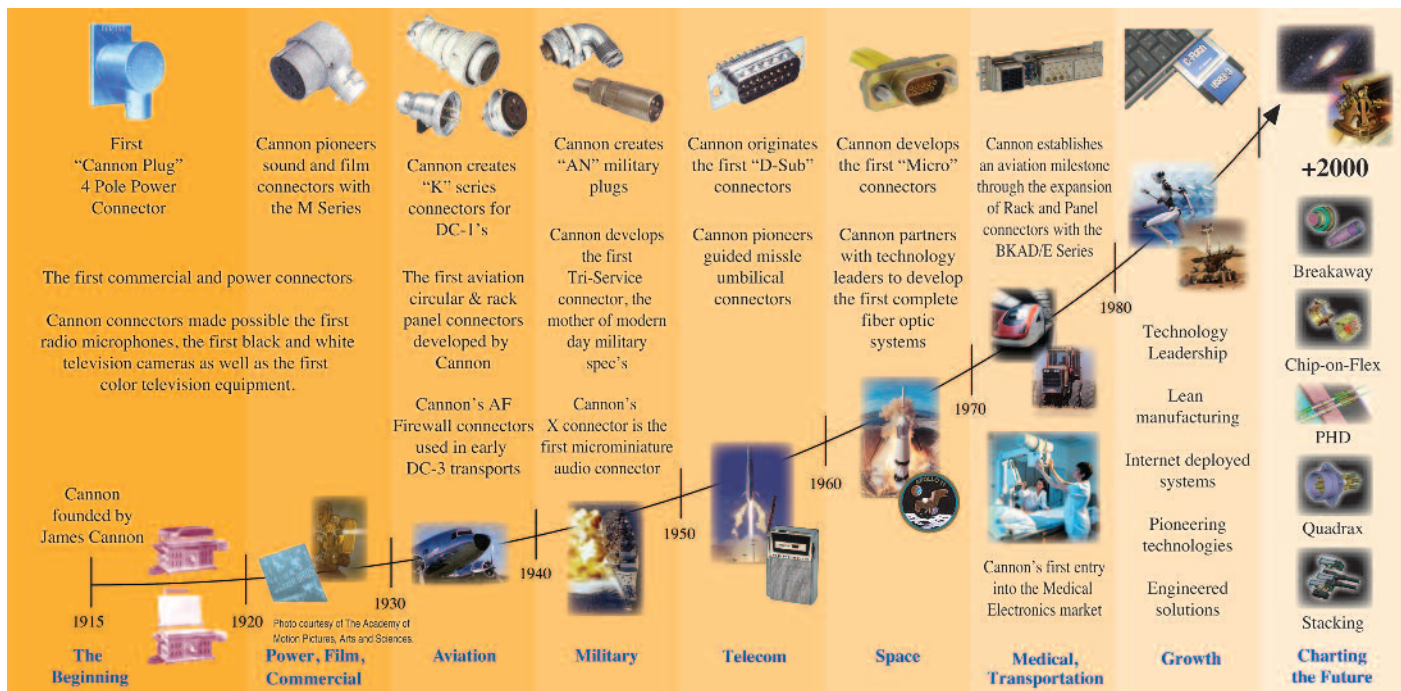

# ITT Interconnect Solutions

ITT Interconnect Solutions is a division of the multinational ITT Corporation, a \$9 billion dollar global enterprise representing the brands Cannon, VEAM, and BIW. Our connector portfolio remains the most extensive in the industry offering the most reliable and cost effective range of interconnect solutions. These innovations have enabled ITT to provide products and technologies to such markets as:

- Automotive
- Computer/Consumer
- Industrial/Instrumentation
- Military/Aerospace
- Oil Fields
- Telecom/Handset
- Transportation

When you specify a Cannon, VEAM or BIW connector, you can rely on a product designed, developed, and manufactured to the highest quality and reliability standards. This tradition of excellence is based on ITT's corporate culture of operating its businesses under the principles of Six Sigma. At ITT, Six Sigma is not just a quality philosophy but a complete corporate culture that drives the entire business. Our Value Based Management and Value Based Product Development systems are two cornerstones that allow for the development of both leadership and product engineering principles, ensuring the correct industry leading products are developed to the accepted market driven lead times. These principles have allowed ITT to become the market leader in all of our business portfolios.

## Six Sigma Manufacturing

ITT operates manufacturing facilities in the United States, Germany, Italy, Mexico, China, Japan and the UK, all of which have particular product area strengths allowing ITT to offer a truly global footprint to our customers. Our facilities are world class and accommodate full vertical integration utilizing the latest manufacturing technologies including: automated and robotic machining centers, Super Market manufacturing cells, Kanban pull systems, and automated electrical, mechanical, and optical test and inspection equipment. The combination of our manufacturing strength and our advanced manufacturing facilities allows ITT

to offer products at market driven prices. Our capabilities, especially in robotics, computerized precision tooling, Kaizen Project Management, Six Sigma tools, and testing, give ITT the most optimized global manufacturing footprint in the interconnect industry.

## The Custom Difference

As the industry leader in harsh environment interconnect applications, ITT's world class engineering teams will work directly with our customers to design and develop cost effective solutions for their applications. In many cases we may modify one of our standard designs to ensure a highly reliable solution where timing is critical. Yet, in those cases where a complete custom interconnect solution is required, ITT will work with our customer's Engineers to design an interconnect solution which will be cost effective yet highly reliable. As professional consultants, our Engineering teams will provide a thorough systems and mechanical analysis of any proposed solution. These analyses provide our customers with sophisticated electrical signal and mechanical characterizations to determine the best solution for their application.

## RoHS Compliance Information

ITT has implemented a strict parts control plan for all ITT electronics plants worldwide that allows the Cannon, VEAM, and BIW connector product portfolios to meet the requirements of European Union Directive 2002/95/EC better known as the Reduction of Hazardous Substances initiative. As appropriate, specific Cannon, VEAM, and BIW products may be ordered with an R prefix number which insures our customers will receive RoHS compliant parts for their commercial electronics applications and equipment. Since most RoHS hazardous substances center around specific metal plating and lead solder coatings, ITT's products for RoHS compliance are available in the following plating finishes: black zinc electroless nickel, stainless steel, Anodize over aluminum and Gold plating. It should be noted that gold plating would be recommended as the replacement for tin-lead solder when ordering board mount connectors.




## Delivering solutions that perform ...

ITT offers an extensive array of connector and switch products and the ability to deliver standard or custom solutions to meet the most stringent military requirements.

Our interconnect range includes sealed circulars, plastic and metal shell bayonet coupling circulars, miniature metal shell circulars, PC board header connectors and sensor and direct device connectors. ITT is also a systems supplier, providing value-added module and harness assemblies.

**In addition to our MIL-DTL-38999 series, we also offer these connectivity solutions:**

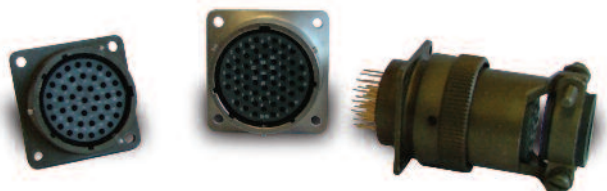

### Cannon KPT / KPSE

Environmentally sealed miniature circular connectors available in two versions: KPT (solder contact) and KPSE (high performance crimp contact). Intermateable and intermountable with all MIL-C-26482 connectors and is available with many materials, finishes and configurations.



### Cannon CA-Bayonet

Signal and power connectors with exceptional sealing against the ingress of fluids and will withstand the effects of high vibrations.



### Cannon Microminiature

High performance and reliability with exceptional versatility. Available in rectangular, circular and strip configurations, many of our connectors meet or exceed the applicable requirements of the MIL-DTL-83513 specification.



### Cannon Combo D-Sub

Product offering includes ability to integrate signal and coax, high power, and high voltage.

## Table of Contents

|                                       |       |
|---------------------------------------|-------|
| Specifications and Test Data .....    | 3-5   |
| KJL .....                             | 6-9   |
| KJ .....                              | 10-15 |
| KJA .....                             | 16-18 |
| Polarizing Positions .....            | 19    |
| Contact Arrangements .....            | 20-21 |
| Contacts .....                        | 22-24 |
| Torque Values / Wire Dimensions ..... | 25    |
| Backshells .....                      | 26-28 |
| Tools .....                           | 29    |
| Assembly Instructions .....           | 30    |
| MIL-DTL-38999 Specifications .....    | 31    |

ITT logo blocks and the composite ITT logo are registered trademarks of ITT Industries. ©2005




Dimensions shown in inches (mm)  
Specifications and dimensions subject to change

[www.ittcannon.com](http://www.ittcannon.com)




## SERIES I

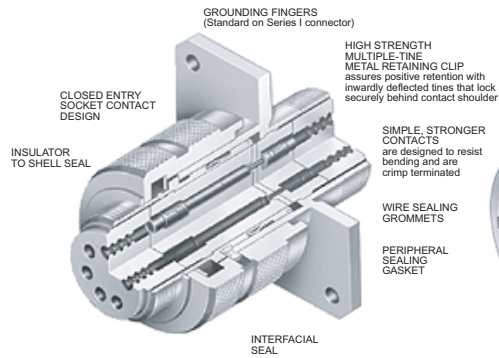


- Corrosion and zinc resistant shells of aluminum alloy with cadmium and zinc over nickel plating withstand a 500 hour salt spray exposure
- Rear release crimp snap-in contacts
- High contact density
- Standard MIL-C-39029 contacts, MIL-I-81969 application tools and MIL-STD 1560 insert arrangements

## SERIES II

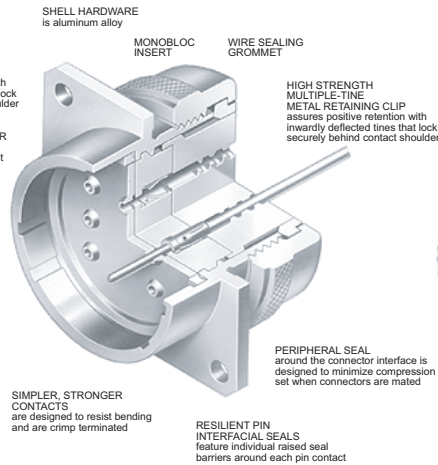

- Special/custom capabilities
- 100% scoop-proof - Series I and III
- Light weight /Low Profile - Series II
- Operates under severe high temperature vibration testing through 200 C - engineered for high density circuitry - Series III

## SERIES III

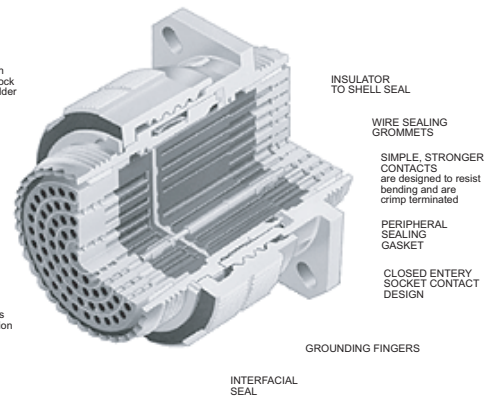

- Interfacial seal helps prevent electrolytic erosion of contacts - Series III
- Superior EMI shielding provides outstanding protection up to 65dB at 10 GHZ. - Series III

## Specification Comparison

| Design Criteria          | Series I     | Series II  | Series III         |
|--------------------------|--------------|------------|--------------------|
| Low Profile/Light Weight | no           | yes        | no                 |
| Scoop Proof              | yes          | no         | yes                |
| Coupling System          | Bayonet      | Bayonet    | Triple Lead Thread |
| Electrolytic Erosion     | no           | no         | yes                |
| Durability (Cycles)      | 500          | 250        | 500                |
| High Impact Shock        | yes          | no         | yes                |
| External Bending Moment  |              |            |                    |
| Shell Size 25            | 650 in/lbs   | 150 in/lbs | 1000 in/lbs        |
| Random Vibration "J"     | Ambient      | Ambient    | 492 F              |
| Sine Vibration           | 30G, Ambient |            | 60G, -85 to +392 F |
| Sand, Dust, Ice          | yes          |            | yes                |
| Shell Size               | 9-25         | 8-24       | 9-25               |

## Contact Rating

| Contact Size | Test Current DC Test Amperage | Maximum Millivolt Drop* | Crimp Well Data |            |
|--------------|-------------------------------|-------------------------|-----------------|------------|
|              |                               |                         | Well Diameter   | Well Depth |
| 22D          | 5                             | 40                      | .0345 ± .0010   | .157/.141  |
| 22M**        | 3                             | 30                      | .0280 ± .0010   | .157/.141  |
| 22**         | 5                             | 40                      | .0365 ± .0010   | .157/.141  |
| 20           | 7.5                           | 35                      | .0470 ± .0010   | .229/.209  |
| 16           | 13                            | 25                      | .0670 ± .0010   | .229/.209  |
| 12           | 23                            | 25                      | .1000 ± .0020   | .229/.209  |

\* Maximum millivolt drop data is determined by measuring resistance of mated contacts from end to end  
 \*\* For reference only

## Performance and Material Specifications

### MATERIALS AND FINISHES

|                  | Receptacle               | Grounded Plug            |
|------------------|--------------------------|--------------------------|
| Shell            | Aluminum alloy           | Aluminum alloy*          |
| Insulator        | High grade plastic       | High grade plastic       |
| Contacts         | Copper alloy, gold plate | Copper alloy, gold plate |
| Grommet and Seal | Silicone base elastomer  | Silicone base elastomer  |
| Jam Nut          | Aluminum alloy           | -                        |
| Grounding Spring | -                        | Beryllium copper         |

\*Finish as noted in How To Order sections.

### ELECTRICAL DATA

Contact Size: 22D, 22M\*, 22\*, 20, 16 and 12

#### Contact Rating and Wire Size Accomodation

| Wire Size | Contact Size and Test Amps |      |     |     |      |      |
|-----------|----------------------------|------|-----|-----|------|------|
|           | 22D                        | 22M* | 22* | 20  | 16   | 12   |
| 28        | 1.5                        | 1.5  | -   | -   | -    | -    |
| 26        | 2.0                        | 2.0  | 2.0 | -   | -    | -    |
| 24        | 3.0                        | 3.0  | 3.0 | 3.0 | -    | -    |
| 22        | 5.0                        | -    | 5.0 | 5.0 | -    | -    |
| 20        | -                          | -    | -   | 7.5 | 7.5  | -    |
| 18        | -                          | -    | -   | -   | 10.0 | -    |
| 16        | -                          | -    | -   | -   | 13.0 | -    |
| 14        | -                          | -    | -   | -   | -    | 17.0 |
| 12        | -                          | -    | -   | -   | -    | 23.0 |

\*For reference only

### Service Rating

| Altitude    | Service Rating M |         | Service Rating N |         | Service Rating I |         | Service Rating II |         |
|-------------|------------------|---------|------------------|---------|------------------|---------|-------------------|---------|
|             | Mated            | Unmated | Mated            | Unmated | Mated            | Unmated | Mated             | Unmated |
| Sea Level   | 1300             | 1300    | 1000             | 1000    | 1800             | 1800    | 2300              | 2300    |
| 50,000 ft.  | 800              | 550     | 600              | 400     | 1000             | 600     | 1000              | 800     |
| 70,000 ft.  | 800              | 350     | 600              | 260     | 1000             | 400     | 1000              | 500     |
| 100,000 ft. | 800              | 200     | 600              | 200     | 1000             | 200     | 1000              | 200     |

Test voltage, AC (rms)

## Test Data

| Test Description            | Parameters                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Durability                  | 500 cycles of mating and unmating, 250 cycles for Series II with spring fingers                                                                                                                                                                                                                                                                                                                  |
| Temperature Range           | Class F, N; - 65°C (-85°F) to + 200°C (+392°F) Class A; - 65°C (-85°F) to + 150°C (+302°F)<br>Class B,W; - 65°C (-85°F) to + 175°C (+347°F)                                                                                                                                                                                                                                                      |
| Vibration                   | Mated connectors are vibrated with weights to simulate rear accessory loads to the following levels:<br>Sine Vibration: Up to 60 G's - Series I & III (at rated temperature - Series III)<br>Not applicable for Series II.<br>Random Vibration: 43.7 Grms at rated temperature - Series III<br>49.5 Grms at Ambient Temperature - Series I & III<br>43.7 Grms at Ambient Temperature - Series II |
| EMI Shielding Effectiveness | Class F: EMI leakage attenuation, greater than 90dB at 100Mhz, greater than 65dB at 10 GHz. Shell to shell conductivity, 1.0 millivolt max. resistance.<br>Class W: EMI leakage attenuation, greater than 90dB at 100 MHz, greater than 50dB at 10 GHz. Shell to shell conductivity, 2.5 millivolt max.                                                                                          |
| Corrosion Resistant         | Class B, W, and Z will withstand 500 hours salt spray.<br>Class A, F, N, will withstand 48 hours salt spray.                                                                                                                                                                                                                                                                                     |
| Fluid Immersion             | Connectors are fluid resistant to many fuels, solvents, coolants and oils.                                                                                                                                                                                                                                                                                                                       |
| High Impact Shock           | Mated connectors terminated with MIL-C-915 cable and environmentally sealed backshells will withstand high impact shock per MIL-S-901. Applicable to Series I & III only.                                                                                                                                                                                                                        |
| Altitude                    | Designed to operate between sea level and 100,000 ft. above sea level.                                                                                                                                                                                                                                                                                                                           |
| Other Environments          | Mated connectors shall withstand sand and dust per method 110 of MIL-STD-202 and be ice resistant. Applicable to Series I & III only.                                                                                                                                                                                                                                                            |

NOTE: For hermetic standard or test data please consult ITT.

## Insert Availability and Identification

| Series II | Series I & III | Service Rating  | Total Contacts | Contact Size |    |    |     |      |
|-----------|----------------|-----------------|----------------|--------------|----|----|-----|------|
|           |                |                 |                | 22D          | 20 | 16 | 12  | 8    |
| 8-35      | 9-35           | M               | 6              | 6            |    |    |     |      |
| 8-98      | 9-98           | I               | 3              |              | 3  |    |     |      |
|           | 11-4           | I               | 4              |              | 4  |    |     |      |
| 10-5      | 11-5           | I               | 5              |              | 5  |    |     |      |
| 10-35     | 11-35          | M               | 13             | 13           |    |    |     |      |
| 10-98     | 11-98          | I               | 6              |              | 6  |    |     |      |
| 10-99     | 11-99          | I               | 7              |              | 7  |    |     |      |
| 12-3      |                | II              | 3              |              |    | 3  |     |      |
| 12-4      | 13-4           | I               | 4              |              |    | 4  |     |      |
| 12-8      | 13-8           | I               | 8              |              | 8  |    |     |      |
| 12-35     | 13-35          | M               | 22             | 22           |    |    |     |      |
| 12-98     | 13-98          | I               | 10             |              | 10 |    |     |      |
| 14-5      | 15-5           | II              | 5              |              |    | 5  |     |      |
| 14-15     | 15-15          | I               | 15             |              | 14 | 1  |     |      |
| 14-18     | 15-18          | I               | 18             |              | 18 |    |     |      |
|           | 15-19          | I               | 19             |              | 19 |    |     |      |
| 14-35     | 15-35          | M               | 37             | 37           |    |    |     |      |
| 14-97     | 15-97          | I               | 12             |              | 8  | 4  |     |      |
| 16-6      | 17-6           | I               | 6              |              |    |    | 6   |      |
| 16-8      | 17-8           | II              | 8              |              |    | 8  |     |      |
| 16-26     | 17-26          | I               | 26             |              | 26 |    |     |      |
| 16-35     | 17-35          | M               | 55             | 55           |    |    |     |      |
| 16-99     | 17-99          | I               | 23             |              | 21 | 2  |     |      |
| 18-11     | 19-11          | II              | 11             |              |    | 11 |     |      |
| 18-28     | 19-28          | I               | 28             |              | 26 | 2  |     |      |
| 18-30     | 19-30          | I               | 30             |              | 29 | 1  |     |      |
| 18-32     | 19-32          | I               | 32             |              | 32 |    |     |      |
| 18-35     | 19-35          | M               | 66             | 66           |    |    |     |      |
|           | 21-11          | I               | 11             |              |    |    | 11  |      |
| 20-16     | 21-16          | II              | 16             |              |    | 16 |     |      |
| 20-35     | 21-35          | M               | 79             | 79           |    |    |     |      |
| 20-39     | 21-39          | I               | 39             |              | 37 | 2  |     |      |
| 20-41     | 21-41          | I               | 41             |              | 41 |    |     |      |
|           | 21-75          | M               | 4              |              |    |    |     | 4*** |
| 22-21     | 23-21          | II              | 21             |              |    | 21 |     |      |
| 22-32     | 23-32          | I               | 32             |              | 32 |    |     |      |
| 22-35     | 23-35          | M               | 100            | 100          |    |    |     |      |
| 22-53     | 23-53          | I               | 53             |              | 53 |    |     |      |
| 22-55     | 23-55          | I               | 55             |              | 55 |    |     |      |
| 24-4      | 25-4           | I               | 56             |              | 48 | 8  |     |      |
|           | 25-19          | I               | 19             |              |    |    | 19  |      |
| 24-24     | 25-24          | I               | 24             |              |    | 12 | 12  |      |
| 24-29     | 25-29          | I               | 29             |              |    | 29 |     |      |
| 24-35     | 25-35          | M               | 128            | 128          |    |    |     |      |
|           | 25-37          | I               | 37             |              |    | 37 |     |      |
|           | 25-43          | I               | 43             |              | 23 | 20 |     |      |
|           | 25-46          | I, Twinax       | 46             |              | 40 | 4  |     | 2*** |
|           | 25-8           | Twinax          | 8              |              |    |    |     | 8*** |
|           | 25-20          | N, Coax, Twinax | 30             |              | 10 | 13 | 4** | 3*** |
|           | 25-42          | I, Coax         | 42             |              | 38 |    |     | 4*   |
| 24-61     | 25-61          | I               | 61             |              | 61 |    |     |      |
|           | 25-64          | I               | 64             | 40           | 8  | 10 | 6   |      |
|           | 25-66          | I               | 66             | 53           | 2  | 11 |     |      |

\* Coax for RG-180 cables

\*\* Coax for RG-174, -179, or -316 cables

\*\*\* Twinax for M17/176-00002 cables  
(check factory for other cable applications)

## How To Order

### Military Nomenclature

MS NUMBER SHELL STYLE \_\_\_\_\_ **MS27467 T 17 B 35 S**

CLASS \_\_\_\_\_

SHELL SIZE \_\_\_\_\_

HARDWARE FINISH \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

#### MS NUMBER SHELL STYLE

- MS27466 - Wall Mounting Receptacle
- MS27468 - Jam Nut Receptacle
- MS27467 - Grounded Plug
- MS27656 - Wall Mounting Receptacle (back panel mounting)
- MS27505 - Box Mounting Receptacle (back panel) (Class E)

#### CLASS

- E - Inactive for new design. Superseded by Class T.
- G - Environmental resistant Space Grade
- P - Environment - resistant with straight potting cup accessories
- T - Environment - resistant with accessory threads and teeth, except MS27505 (without rear accessory) (Class T not applicable to MS27505)

#### SHELL SIZE

9, 11, 13, 15, 17, 19, 21, 23, and 25

#### HARDWARE FINISH STANDARD

- A - Bright cadmium over electroless nickel plate, -85°F to +302°F (-65°C to +150°C)
- B - Olive drab cadmium over electroless nickel plate, -85°F to +347°F (-65°C to +175°C)
- F - Electroless nickel, -85°F to +392°F (-65°C to +200°C)

#### CONTACT ARRANGEMENT

See pages 20 and 21.

#### CONTACT STYLE

- P - Pin
- S - Socket
- \*A - Less Pin Contact
- \*B - Less Socket Contact

\*Used only when other than power contacts are to be installed (i.e. shielded, thermocouple, etc.)

#### POLARIZING POSITION

A, B, C, and D. (No letters required for normal). See page 19.

Note: To order MS connectors less standard power contacts, purchase order must state "Less Contacts"

### Cannon Nomenclature

SERIES PREFIX \_\_\_\_\_ **KJL 6 T 17 B 35 S N**

SHELL STYLE \_\_\_\_\_

CLASS \_\_\_\_\_

SHELL SIZE \_\_\_\_\_

HARDWARE FINISH \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

MODIFICATION CODE \_\_\_\_\_

#### SERIES PREFIX

KJL - Series I-Scop proof

#### SHELL STYLE

- 0 - Wall mounting receptacle
- 3 - Wall mounting receptacle (back panel mounting)
- 4 - Thru bulkhead receptacle
- 5 - Box mounting receptacle (back panel mounting)
- 6 - Straight plug, grounded
- 7 - Jam nut receptacle

#### CLASS

- E - Inactive for new design. Superseded by Class T.
- G - Environmental resistant - Space Grade
- F - Environment - resistant with strain relief accessory
- P - Environment - resistant with straight potting cup accessory
- T - Environment - resistant (without rear accessory) (Class T not applicable to KJL5)

#### SHELL SIZE

9, 11, 13, 15, 17, 19, 21, 23 and 25

#### HARDWARE FINISH STANDARD

- A - Bright cadmium over electroless nickel plate, -85°F to +302°F (-65°C to +150°C)
- B - Olive drab cadmium over electroless nickel plate, -85°F to +347°F (-65°C to +175°C)
- N - Electroless nickel, -85°F to +392°F (-65°C to +200°C)
- Z - Zinc Nickel, Black
- - (Dash) When using a finish modification code

#### CONTACT ARRANGEMENT

See pages 20 and 21.

#### CONTACT STYLE

- P - Pin
- S - Socket
- PS - Pin-Socket (Shell style 4 only)

#### POLARIZING POSITION

N (normal), A, B, C, D. See page 19.

#### MODIFICATION CODE



- L - Less contacts, not stamped on connector
- 16 - Outgassed NASA space graded connector
- 27 - Outgassed, standard connector
- A296 Black Zinc Cobalt, RoHS Compliant
- T69 Olive Drab (Green) Zinc Cobalt



## Wall Mounting Receptacle

**MS27466**  
(MS service class E, P, T)

**KJL0**

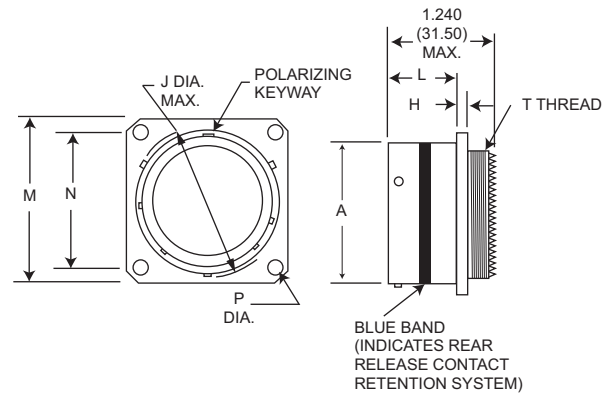



NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | H Max.      | J Dia. Max.   | L Max.       | M Max.        | N T.P.        | P Dia. Max. | T Thread         | Overall Length With Backshells |                |
|------------|---------------|-------------|---------------|--------------|---------------|---------------|-------------|------------------|--------------------------------|----------------|
|            |               |             |               |              |               |               |             |                  | F Cable Clamp                  | P Potting Max. |
| 9          | .573 (14.55)  | .100 (2.54) | .662 (16.81)  | .632 (16.05) | .958 (24.33)  | .719 (18.26)  | .138 (3.51) | 7/16-28UNEF-2A   | 1.846 (46.89)                  | 1.451 (36.86)  |
| 11         | .701 (17.81)  | .100 (2.54) | .810 (20.57)  | .632 (16.05) | 1.051 (26.70) | .812 (20.62)  | .138 (3.51) | 9/16-24UNEF-2A   | 1.846 (46.89)                  | 1.451 (36.86)  |
| 13         | .851 (21.62)  | .100 (2.54) | .960 (24.38)  | .632 (16.05) | 1.145 (29.08) | .906 (23.01)  | .138 (3.51) | 11/16-24UNEF-2A  | 1.846 (46.89)                  | 1.451 (36.86)  |
| 15         | .976 (24.79)  | .100 (2.54) | 1.085 (27.56) | .632 (16.05) | 1.239 (31.47) | .969 (24.61)  | .138 (3.51) | 13/16-20UNEF-2A  | 1.846 (46.89)                  | 1.451 (36.86)  |
| 17         | 1.101 (27.97) | .100 (2.54) | 1.210 (30.73) | .632 (16.05) | 1.332 (33.83) | 1.062 (26.97) | .138 (3.51) | 15/16-20UNEF-2A  | 1.966 (49.94)                  | 1.451 (36.86)  |
| 19         | 1.208 (30.68) | .100 (2.54) | 1.317 (33.45) | .632 (16.05) | 1.458 (37.03) | 1.156 (29.36) | .138 (3.51) | 1-1/16-18UNEF-2A | 1.966 (50.70)                  | 1.451 (36.86)  |
| 21         | 1.333 (33.86) | .130 (3.30) | 1.442 (36.63) | .602 (15.29) | 1.582 (40.18) | 1.250 (31.75) | .138 (3.51) | 1-3/16-18UNEF-2A | 1.966 (50.70)                  | 1.451 (36.86)  |
| 23         | 1.458 (37.03) | .130 (3.30) | 1.567 (39.80) | .602 (15.29) | 1.708 (43.38) | 1.375 (34.93) | .157 (3.99) | 1-5/16-18UNEF-2A | 1.966 (50.70)                  | 1.451 (36.86)  |
| 25         | 1.583 (40.21) | .130 (3.30) | 1.692 (42.98) | .602 (15.29) | 1.832 (46.53) | 1.500 (38.10) | .157 (3.99) | 1-7/16-18UNEF-2A | 1.966 (50.70)                  | 1.451 (36.86)  |

## Wall Mounting Receptacle (Back Panel)

**MS27656**  
(MS service class E, P, T)

**KJL3**

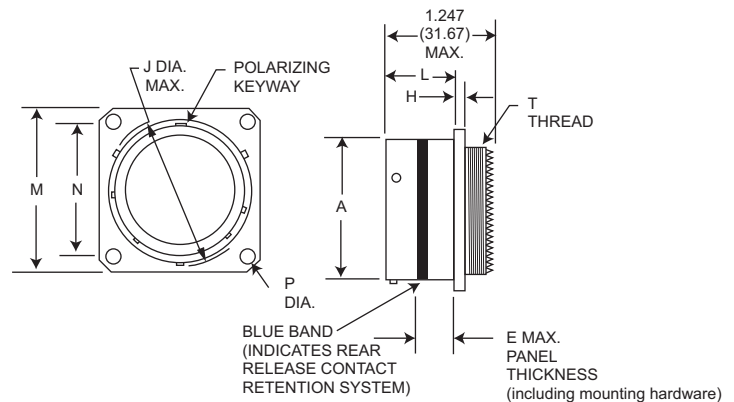

NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | E Max.      | H Max.      | J Dia. Max.   | L Max.       | M Max.        | N T.P.        | P Dia. Max. | T Thread         | Overall Length With Backshells |                |
|------------|---------------|-------------|-------------|---------------|--------------|---------------|---------------|-------------|------------------|--------------------------------|----------------|
|            |               |             |             |               |              |               |               |             |                  | F Cable Clamp                  | P Potting Max. |
| 9          | .573 (14.55)  | .234 (5.94) | .100 (2.54) | .662 (16.81)  | .820 (20.83) | .958 (24.33)  | .719 (18.26)  | .138 (3.51) | 7/16-28UNEF-2A   | 1.805 (45.85)                  | 1.410 (35.81)  |
| 11         | .701 (17.81)  | .234 (5.94) | .100 (2.54) | .810 (20.57)  | .820 (20.83) | 1.051 (26.70) | .812 (20.62)  | .138 (3.51) | 9/16-24UNEF-2A   | 1.805 (45.85)                  | 1.410 (35.81)  |
| 13         | .851 (21.62)  | .234 (5.94) | .100 (2.54) | .960 (24.38)  | .820 (20.83) | 1.145 (29.08) | .906 (23.01)  | .138 (3.51) | 11/16-24UNEF-2A  | 1.805 (45.85)                  | 1.410 (35.81)  |
| 15         | .976 (24.79)  | .234 (5.94) | .100 (2.54) | 1.085 (27.56) | .820 (20.83) | 1.239 (31.47) | .969 (24.61)  | .138 (3.51) | 13/16-20UNEF-2A  | 1.805 (45.85)                  | 1.410 (35.81)  |
| 17         | 1.101 (27.97) | .234 (5.94) | .100 (2.54) | 1.210 (30.73) | .820 (20.83) | 1.332 (33.83) | 1.062 (26.97) | .138 (3.51) | 15/16-20UNEF-2A  | 1.935 (48.90)                  | 1.410 (35.81)  |
| 19         | 1.208 (30.68) | .234 (5.94) | .100 (2.54) | 1.317 (33.45) | .820 (20.83) | 1.458 (37.03) | 1.156 (29.36) | .138 (3.51) | 1-1/16-18UNEF-2A | 1.955 (49.66)                  | 1.410 (35.81)  |
| 21         | 1.333 (33.86) | .204 (5.18) | .130 (3.30) | 1.442 (36.63) | .790 (20.07) | 1.582 (40.18) | 1.250 (31.75) | .138 (3.51) | 1-3/16-18UNEF-2A | 1.955 (49.66)                  | 1.410 (35.81)  |
| 23         | 1.458 (37.03) | .204 (5.18) | .130 (3.30) | 1.567 (39.80) | .790 (20.07) | 1.708 (43.38) | 1.375 (34.93) | .157 (3.99) | 1-5/16-18UNEF-2A | 1.955 (49.66)                  | 1.410 (35.81)  |
| 25         | 1.583 (40.21) | .193 (4.90) | .130 (3.30) | 1.692 (42.98) | .790 (20.07) | 1.832 (46.53) | 1.500 (38.10) | .157 (3.99) | 1-7/16-18UNEF-2A | 1.955 (49.66)                  | 1.410 (35.81)  |

Performance Specifications-Pages 3 and 4. Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29. Contact Arrangements - Pages 20 and 48.



Dimensions shown in inches (mm)  
Specifications and dimensions subject to change

www.ittcannon.com

## Box Mounting Receptacle (Back Panel)

MS27505E  
(MS service class E)

KJL5E

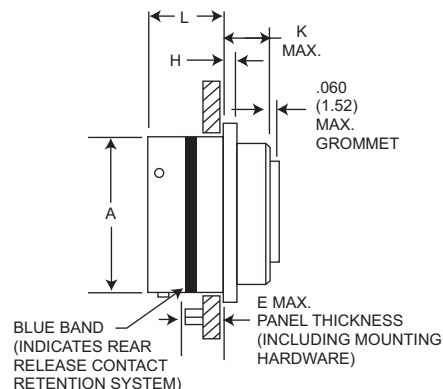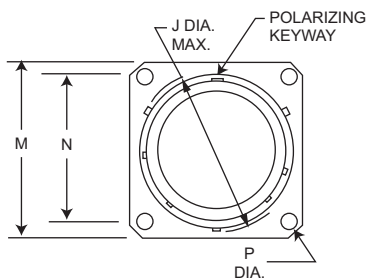



NOTE: This connector does not accommodate backshells.

| Shell Size | A Dia. Max.   | E Max.      | H Max.      | J Dia. Max.   | K Max.      | L Max.       | M Max.        | N T.P.        | P Dia. Max. |
|------------|---------------|-------------|-------------|---------------|-------------|--------------|---------------|---------------|-------------|
| 9          | .573 (14.55)  | .234 (5.94) | .100 (2.54) | .662 (16.81)  | .219 (5.56) | .820 (20.83) | .958 (24.33)  | .719 (18.26)  | .138 (3.51) |
| 11         | .701 (17.81)  | .234 (5.94) | .100 (2.54) | .810 (20.57)  | .219 (5.56) | .820 (20.83) | 1.051 (26.70) | .812 (20.62)  | .138 (3.51) |
| 13         | .851 (21.62)  | .234 (5.94) | .100 (2.54) | .960 (24.38)  | .219 (5.56) | .820 (20.83) | 1.145 (29.08) | .906 (23.01)  | .138 (3.51) |
| 15         | .976 (24.79)  | .234 (5.94) | .100 (2.54) | 1.085 (27.56) | .219 (5.56) | .820 (20.83) | 1.239 (31.47) | .969 (24.61)  | .138 (3.51) |
| 17         | 1.101 (27.97) | .234 (5.94) | .100 (2.54) | 1.210 (30.73) | .219 (5.56) | .820 (20.83) | 1.332 (33.83) | 1.062 (26.97) | .138 (3.51) |
| 19         | 1.208 (30.68) | .234 (5.94) | .100 (2.54) | 1.317 (33.45) | .219 (5.56) | .820 (20.83) | 1.458 (37.03) | 1.156 (29.36) | .138 (3.51) |
| 21         | 1.333 (33.86) | .204 (5.18) | .130 (3.30) | 1.442 (36.63) | .250 (6.35) | .790 (20.07) | 1.582 (40.18) | 1.250 (31.75) | .138 (3.51) |
| 23         | 1.458 (37.03) | .204 (5.18) | .130 (3.30) | 1.567 (39.80) | .250 (6.35) | .790 (20.07) | 1.708 (43.38) | 1.375 (34.93) | .157 (3.99) |
| 25         | 1.583 (40.21) | .193 (4.90) | .130 (3.30) | 1.692 (42.98) | .250 (6.35) | .790 (20.07) | 1.832 (46.53) | 1.500 (38.10) | .157 (3.99) |

## Straight Plug Grounded

MS27467  
(MS service class E, P, T)

KJL6

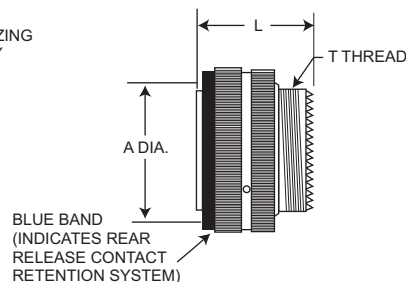

NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Max.        | G Dia. Max.   | J Dia. Max.   | (Class T)<br>L Max. | T Thread         | Overall Length With Backshells |                |
|------------|---------------|---------------|---------------|---------------------|------------------|--------------------------------|----------------|
|            |               |               |               |                     |                  | F Cable Clamp                  | P Potting Max. |
| 9          | .585 (14.86)  | .859 (21.82)  | .483 (12.27)  | 1.234 (31.34)       | 7/16-28UNEF-2A   | 1.793 (45.54)                  | 1.671 (42.44)  |
| 11         | .717 (18.21)  | .984 (24.99)  | .611 (15.52)  | 1.234 (31.34)       | 9/16-24UNEF-2A   | 1.793 (45.54)                  | 1.671 (42.44)  |
| 13         | .866 (22.00)  | 1.156 (29.36) | .760 (19.30)  | 1.234 (31.34)       | 11/16-24UNEF-2A  | 1.793 (45.54)                  | 1.671 (42.44)  |
| 15         | .990 (25.15)  | 1.281 (32.54) | .885 (22.48)  | 1.234 (31.34)       | 13/16-20UNEF-2A  | 1.793 (45.54)                  | 1.671 (42.44)  |
| 17         | 1.115 (28.32) | 1.406 (35.71) | 1.010 (25.65) | 1.234 (31.34)       | 15/16-20UNEF-2A  | 1.913 (48.59)                  | 1.671 (42.44)  |
| 19         | 1.222 (31.04) | 1.516 (38.51) | 1.115 (28.32) | 1.234 (31.34)       | 1-1/16-18UNEF-2A | 1.943 (49.35)                  | 1.671 (42.44)  |
| 21         | 1.347 (34.21) | 1.641 (41.68) | 1.240 (31.50) | 1.234 (31.34)       | 1-3/16-18UNEF-2A | 1.943 (49.35)                  | 1.766 (44.86)  |
| 23         | 1.472 (37.39) | 1.766 (44.86) | 1.365 (34.67) | 1.234 (31.34)       | 1-5/16-18UNEF-2A | 1.943 (49.35)                  | 1.766 (44.86)  |
| 25         | 1.597 (40.56) | 1.891 (48.03) | 1.490 (37.85) | 1.234 (31.34)       | 1-7/16-18UNEF-2A | 1.943 (49.35)                  | 1.766 (44.86)  |

Performance Specifications-Pages 3 and 4.



Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28 and 29.

Contact Arrangements - Pages 20 and 21.

## Jam Nut Receptacle

MS27468  
(MS service class E,P,T)

KJL7

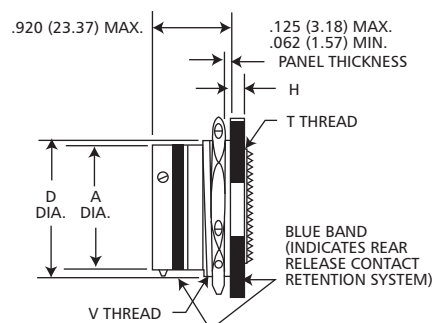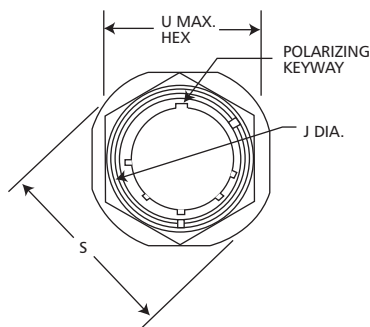

NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | D Max.        | H Max.      | J Dia. Max.   | S Dia. Max.   | T Thread         | U Max. Hex.   | V Thread Class 2A | Overall Length With Backshells |                |
|------------|---------------|---------------|-------------|---------------|---------------|------------------|---------------|-------------------|--------------------------------|----------------|
|            |               |               |             |               |               |                  |               |                   | F Cable Clamp                  | P Potting Max. |
| 9          | .573 (14.55)  | .655 (16.64)  | .120 (3.05) | .662 (16.81)  | 1.204 (30.58) | 7/16-28UNEF-2A   | .892 (22.66)  | 11/16-24UNEF      | 1.846 (46.89)                  | 1.451 (36.86)  |
| 11         | .701 (17.81)  | .755 (19.18)  | .120 (3.05) | .810 (20.57)  | 1.391 (35.33) | 9/16-24UNEF-2A   | 1.017 (25.83) | 13/16-24UNEF      | 1.846 (46.89)                  | 1.451 (36.86)  |
| 13         | .851 (21.62)  | .942 (23.93)  | .120 (3.05) | .960 (24.38)  | 1.516 (35.51) | 11/16-24UNEF-2A  | 1.205 (30.61) | 1-20UNEF          | 1.846 (46.89)                  | 1.451 (36.86)  |
| 15         | .976 (24.79)  | 1.066 (27.08) | .120 (3.05) | 1.085 (27.56) | 1.641 (41.68) | 13/16-20UNEF-2A  | 1.329 (33.76) | 1-1/8-18UNEF      | 1.846 (46.89)                  | 1.451 (36.86)  |
| 17         | 1.101 (27.97) | 1.191 (30.25) | .120 (3.05) | 1.210 (30.73) | 1.766 (44.86) | 15/16-20UNEF-2A  | 1.455 (36.96) | 1-1/4-18UNEF      | 1.966 (49.94)                  | 1.451 (36.86)  |
| 19         | 1.208 (30.68) | 1.316 (33.43) | .151 (3.84) | 1.317 (33.45) | 1.954 (49.63) | 1-1/16-18UNEF-2A | 1.579 (40.11) | 1-3/8-18UNEF      | 1.996 (50.70)                  | 1.451 (36.86)  |
| 21         | 1.333 (33.86) | 1.441 (36.60) | .151 (3.84) | 1.442 (36.63) | 2.078 (52.78) | 1-3/16-18UNEF-2A | 1.705 (43.31) | 1-1/2-18UNEF      | 1.996 (50.70)                  | 1.451 (36.86)  |
| 23         | 1.458 (37.03) | 1.566 (39.78) | .151 (3.84) | 1.567 (39.80) | 2.204 (55.98) | 1-5/16-18UNEF-2A | 1.829 (46.46) | 1-5/8-18UNEF      | 1.996 (50.70)                  | 1.451 (36.86)  |
| 25         | 1.583 (40.21) | 1.691 (42.95) | .151 (3.84) | 1.692 (42.98) | 2.328 (59.13) | 1-7/16-18UNEF-2A | 20.17 (51.23) | 1-3/4-18UNS       | 1.996 (50.70)                  | 1.451 (36.86)  |


Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 20, 28, and 29.


Contact Arrangements - Pages 20, 21.

## Panel Cutouts

Flange Mounted Receptacles



Jam Nut Receptacles



| Shell Size | A Dia.        | P Dia.      | (Class T)<br>R | Mtg. Screw | Shell Size | A<br>+.010 (.25)<br>-.000 (.00) | B<br>+.000 (.00)<br>-.010 (.25) |
|------------|---------------|-------------|----------------|------------|------------|---------------------------------|---------------------------------|
|            |               |             |                |            |            |                                 |                                 |
| 9          | .665 (16.89)  | .128 (3.25) | .719 (18.26)   | #4         | 9          | .700 (17.78)                    | .670 (17.02)                    |
| 11         | .812 (20.62)  | .128 (3.25) | .812 (20.62)   | #4         | 11         | .825 (20.96)                    | .771 (19.58)                    |
| 13         | .965 (24.51)  | .128 (3.25) | .906 (23.01)   | #4         | 13         | 1.010 (25.65)                   | .955 (24.26)                    |
| 15         | 1.085 (27.55) | .128 (3.25) | .969 (24.61)   | #4         | 15         | 1.135 (28.83)                   | 1.085 (27.56)                   |
| 17         | 1.250 (31.75) | .128 (3.25) | 1.062 (26.97)  | #4         | 17         | 1.260 (32.00)                   | 1.210 (30.73)                   |
| 19         | 1.322 (33.57) | .128 (3.25) | 1.156 (29.36)  | #4         | 19         | 1.385 (35.18)                   | 1.335 (33.91)                   |
| 21         | 1.447 (36.75) | .128 (3.25) | 1.250 (31.75)  | #4         | 21         | 1.510 (38.35)                   | 1.460 (37.08)                   |
| 23         | 1.569 (39.85) | .154 (3.91) | 1.375 (34.93)  | #6         | 23         | 1.635 (41.53)                   | 1.585 (40.26)                   |
| 25         | 1.703 (43.25) | .150 (3.81) | 1.500 (38.10)  | #6         | 25         | 1.760 (44.70)                   | 1.710 (43.43)                   |

Dimensions shown in inches (mm)  
Specifications and dimensions subject to change

www.ittcannon.com



## How To Order

### Military Nomenclature

#### MS NUMBER SHELL STYLE

- MS27472 - Wall Mounting Receptacle
- MS27473 - Straight Plug
- MS27474 - Jam Nut Receptacle
- MS27484 - Grounded Plug
- MS27497 - Wall Mounting Receptacle (back panel mounting)
- MS27513 - Box Mounting Receptacle
- MS27499 - Box Mounting Receptacle (Class E)
- MS27508 - Box Mounting (back panel mounting) (Class E)

#### CLASS

- E - Environment - resistant with rear accessory (without strain relief)
- G - Environmental - resistant wall mount and jam nut receptacle and plug types. Space Grade.
- P - Environment - resistant with straight potting cup accessories
- T - Environment - resistant (without rear accessory). (Class T not applicable to MS27499, MS27513, and MS27508.)

MS NUMBER SHELL STYLE \_\_\_\_\_

CLASS \_\_\_\_\_

SHELL SIZE \_\_\_\_\_

HARDWARE FINISH \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

#### SHELL SIZE

8, 10, 12, 14, 16, 18, 20, 22, 24.

#### HARDWARE FINISH STANDARD

- A - Bright cadmium over electroless nickel plate, - 85°F to + 302°F (- 65°C to + 150°C)
- B - Olive drab cadmium over electroless nickel plate, - 85°F to + 347°F (- 65°C to + 175°C)
- F - Electroless nickel, - 85°F to + 392°F (-65°C to + 200°C)

#### CONTACT ARRANGEMENT

See pages 20 and 21.

#### CONTACT STYLE

- P - Pin
- S - Socket
- \*A - Less Pin Contact
- \*B - Less Socket Contact

\*Used only when other than power contacts are to be installed (i.e. shielded, thermocouple, etc.)

#### POLARIZING POSITION

A, B, C, and D (no letter required for normal).  
See page 19.

Note: To order MS connectors less standard power contacts, purchase order must state "Less Contacts".

### ITT Nomenclature

#### SERIES PREFIX

- KJ - Series II - Low Profile

#### SHELL STYLE

- 0 - Wall mounting receptacle
- 2 - Box mounting receptacle
- 3 - Wall mounting receptacle (back panel mounting)
- 5 - Box mounting receptacle (back panel mounting)
- 6 - Straight plug
- G6 - Straight plug, grounded
- 7 - Jam nut receptacle

#### CLASS

- E - Environment - resistant with rear accessory (without strain relief)
- F - Environment - resistant with strain relief accessory
- G - Environmental - resistant wall mount and jam nut receptacle and plug type. Space Grade.
- P - Environment - resistant with straight potting cup accessory
- R - Environment - resistant with full grommet seal without rear accessory; shell styles 2 and 5 only
- T - Environment - resistant (without rear accessory). (Class T not applicable to KJ2E, KJ2R, KJ5E and KJ5R.)

SERIES PREFIX \_\_\_\_\_

SHELL STYLE \_\_\_\_\_

CLASS \_\_\_\_\_

SHELL SIZE \_\_\_\_\_

HARDWARE FINISH \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

MODIFICATION CODE \_\_\_\_\_

Note KJ supplied with exact complement of contacts.

#### SHELL SIZE

8, 10, 12, 14, 16, 18, 20, 22, and 24.

#### HARDWARE FINISH STANDARD

- A - Bright cadmium over electroless nickel plate, - 85°F to + 302°F (- 65°C to + 150°C)
- B - Olive drab cadmium over electroless nickel plate, - 85°F to + 347°F (- 65°C to + 175°C)
- N - Electroless nickel, - 85°F to + 392°F (-65°C to + 200°C)
- Z - Zinc Nickel, Black
- - (Dash) When using a finish modification code

#### CONTACT ARRANGEMENT

See pages 20 and 21.

#### CONTACT STYLE

- P - Pin
- S - Socket

#### POLARIZING POSITION

N(normal), A, B, C, D, see page 19.

#### MODIFICATION CODE


- L - Less contacts, not stamped on connector
- 16 - Outgassed  
NASA space graded connector
- 27 - Outgassed, standard connector
- A296 Black Zinc Cobalt, RoHS Compliant
- T69 Olive Drab (Green) Zinc Cobalt



## Wall Mounting Receptacle

**MS27472**  
(MS service class E, P, T)

**KJ0**

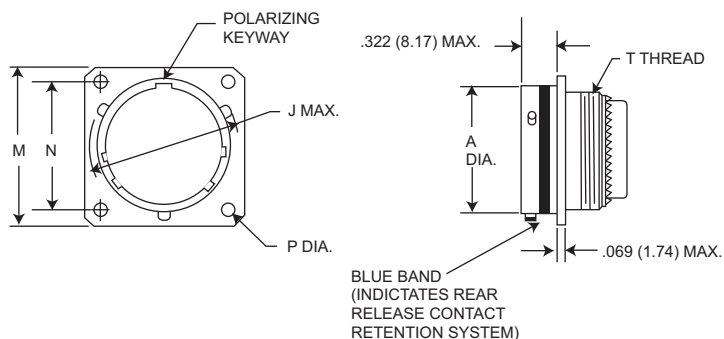


NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | J Dia. Max.   | M Max.        | N T.P.        | P<br>+.005 (0.13)<br>-.010 (0.25) | T Thread         | Overall length With Backshells |               |                |
|------------|---------------|---------------|---------------|---------------|-----------------------------------|------------------|--------------------------------|---------------|----------------|
|            |               |               |               |               |                                   |                  | E Straight                     | F Cable Clamp | P Potting Max. |
| 8          | .474 (12.04)  | .563 (14.30)  | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       | 7/16-28UNEF-2A   | .850 (21.59)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 10         | .591 (15.01)  | .680 (17.27)  | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       | 9/16-24UNEF-2A   | .850 (21.59)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 12         | .751 (19.08)  | .859 (21.82)  | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       | 11/16-24UNEF-2A  | .850 (21.59)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 14         | .876 (22.25)  | .984 (24.99)  | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       | 13/16-20UNEF-2A  | .850 (21.59)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 16         | 1.001 (25.43) | 1.108 (28.14) | 1.234 (31.34) | .969 (24.61)  | .125 (3.18)                       | 15/16-20UNEF-2A  | .850 (21.59)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 18         | 1.126 (28.60) | 1.233 (31.32) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       | 1-1/16-18UNEF-2A | .850 (21.59)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 20         | 1.251 (31.78) | 1.358 (34.49) | 1.453 (36.91) | 1.156 (27.36) | .125 (3.18)                       | 1-3/16-18UNEF-2A | .850 (21.59)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 22         | 1.376 (34.95) | 1.483 (37.67) | 1.578 (39.08) | 1.250 (31.76) | .125 (3.18)                       | 1-5/16-18UNEF-2A | .850 (21.59)                   | 1.930 (49.02) | 1.020 (25.91)  |
| 24         | 1.501 (38.13) | 1.610 (40.89) | 1.703 (43.26) | 1.375 (34.92) | .152 (3.86)                       | 1-7/16-18UNEF-2A | .850 (21.59)                   | 1.900 (48.26) | 1.080 (27.43)  |

## Box Mounting Receptacle

**MS27499E**  
(MS service class E)

**KJ2E**

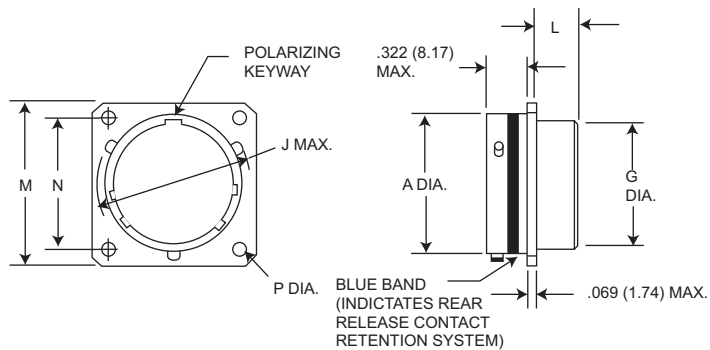

NOTE: This connector does not accommodate backshells

| Shell Size | A Dia. Max.   | G Dia. Max.   | J Dia. Max.   | L Max.      | M Max.        | N T.P.        | P<br>+.005 (0.13)<br>-.010 (0.25) |
|------------|---------------|---------------|---------------|-------------|---------------|---------------|-----------------------------------|
| 8          | .474 (12.04)  | .421 (10.69)  | .563 (14.30)  | .312 (7.92) | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       |
| 10         | .591 (15.01)  | .542 (13.77)  | .680 (17.27)  | .312 (7.92) | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       |
| 12         | .751 (19.08)  | .667 (16.94)  | .859 (21.82)  | .312 (7.92) | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       |
| 14         | .876 (22.25)  | .791 (20.09)  | .984 (24.99)  | .312 (7.92) | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       |
| 16         | 1.001 (25.43) | .916 (23.27)  | 1.108 (28.14) | .312 (7.92) | 1.234 (31.34) | .969 (24.61)  | .125 (3.18)                       |
| 18         | 1.126 (28.60) | 1.034 (26.26) | 1.233 (31.32) | .312 (7.92) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       |
| 20         | 1.251 (31.78) | 1.158 (29.41) | 1.358 (34.49) | .312 (7.92) | 1.453 (36.81) | 1.156 (27.36) | .125 (3.18)                       |
| 22         | 1.376 (33.95) | 1.283 (32.59) | 1.483 (37.67) | .312 (7.92) | 1.578 (40.08) | 1.250 (31.75) | .125 (3.18)                       |
| 24         | 1.501 (38.13) | 1.408 (35.76) | 1.610 (40.89) | .312 (7.92) | 1.703 (43.26) | 1.375 (34.93) | .152 (3.86)                       |

Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.


Contact Arrangements - Pages 20 and 21.



## Box Mounting Receptacle

**MS27513E**  
(MS service class E)

**KJ2R**

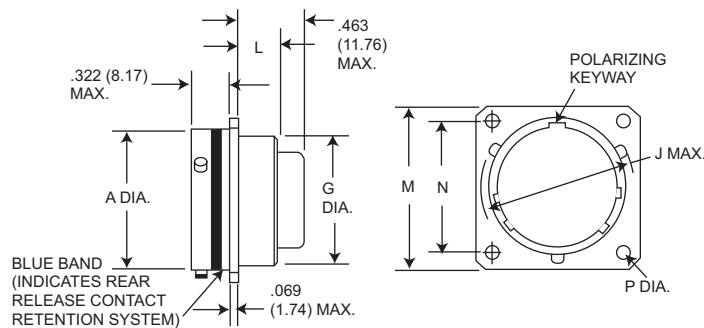


NOTE: This connector does not accommodate backshells

| Shell Size | A Dia. Max.   | G Dia. Max.   | J Dia. Max.   | L Max.      | M Max.        | N T.P.        | P<br>+.005 (0.13)<br>-.010 (0.25) |
|------------|---------------|---------------|---------------|-------------|---------------|---------------|-----------------------------------|
| 8          | .474 (12.04)  | .421 (10.69)  | .563 (14.30)  | .312 (7.92) | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       |
| 10         | .591 (15.01)  | .542 (13.77)  | .680 (17.27)  | .312 (7.92) | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       |
| 12         | .751 (19.08)  | .667 (16.94)  | .859 (21.82)  | .312 (7.92) | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       |
| 14         | .876 (22.25)  | .791 (20.09)  | .984 (24.99)  | .312 (7.92) | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       |
| 16         | 1.001 (25.43) | .916 (23.27)  | 1.108 (28.14) | .312 (7.92) | 1.234 (31.34) | .969 (24.61)  | .125 (3.18)                       |
| 18         | 1.126 (28.60) | 1.034 (26.26) | 1.233 (31.32) | .312 (7.92) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       |
| 20         | 1.251 (31.78) | 1.158 (29.41) | 1.358 (34.49) | .312 (7.92) | 1.453 (36.81) | 1.156 (27.36) | .125 (3.18)                       |
| 22         | 1.376 (33.95) | 1.283 (32.59) | 1.483 (37.67) | .312 (7.92) | 1.578 (40.08) | 1.250 (31.75) | .125 (3.18)                       |
| 24         | 1.501 (38.13) | 1.408 (35.76) | 1.610 (40.89) | .312 (7.92) | 1.703 (43.26) | 1.375 (34.93) | .152 (3.85)                       |

## Wall Mounting Receptacle

**MS27497**  
(MS service class E, P, T)

**KJ3**

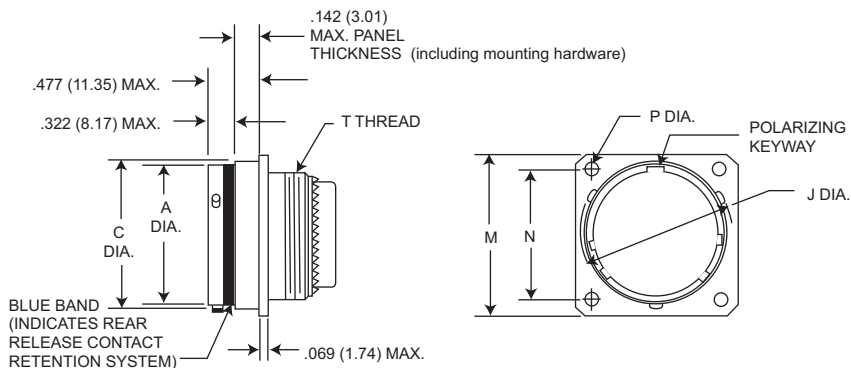

NOTE: For backshell dimensions and configurations, see pages A-30, A-32.

| Shell Size | A Dia. Max.   | C Dia. Max.   | J Dia. Max.   | M Max.        | N T.P.        | P<br>+.005 (0.13)<br>-.010 (0.25) | T Thread         | Overall Length With Backshells |               |                |
|------------|---------------|---------------|---------------|---------------|---------------|-----------------------------------|------------------|--------------------------------|---------------|----------------|
|            |               |               |               |               |               |                                   |                  | E Straight                     | F Cable Clamp | P Potting Max. |
| 8          | .474 (12.04)  | .522 (13.26)  | .563 (14.30)  | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       | 7/16-28UNEF-2A   | .855 (21.72)                   | 1.570 (39.88) | 1.020 (25.91)  |
| 10         | .591 (15.01)  | .639 (16.23)  | .680 (17.27)  | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       | 9/16-24UNEF-2A   | .855 (21.72)                   | 1.570 (39.88) | 1.020 (25.91)  |
| 12         | .751 (19.08)  | .808 (20.52)  | .859 (21.82)  | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       | 11/16-24UNEF-2A  | .855 (21.72)                   | 1.570 (39.88) | 1.020 (25.91)  |
| 14         | .876 (22.25)  | .935 (23.75)  | .984 (24.99)  | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       | 13/16-20UNEF-2A  | .855 (21.72)                   | 1.780 (45.21) | 1.020 (25.91)  |
| 16         | 1.001 (25.43) | 1.058 (26.87) | 1.108 (28.14) | 1.234 (31.34) | .969 (24.61)  | .125 (3.18)                       | 15/16-20UNEF-2A  | .855 (21.72)                   | 1.780 (45.21) | 1.020 (25.91)  |
| 18         | 1.126 (28.60) | 1.183 (30.05) | 1.233 (31.32) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       | 1-1/16-18UNEF-2A | .855 (21.72)                   | 1.780 (45.21) | 1.020 (25.91)  |
| 20         | 1.251 (31.78) | 1.308 (33.22) | 1.358 (34.49) | 1.453 (36.91) | 1.156 (29.36) | .125 (3.18)                       | 1-3/16-18UNEF-2A | .855 (21.72)                   | 1.780 (45.21) | 1.020 (25.91)  |
| 22         | 1.376 (34.95) | 1.433 (36.40) | 1.483 (37.67) | 1.578 (40.08) | 1.250 (31.75) | .125 (3.18)                       | 1-5/16-18UNEF-2A | .855 (21.72)                   | 1.960 (49.78) | 1.020 (25.91)  |
| 24         | 1.501 (38.13) | 1.568 (39.83) | 1.610 (40.89) | 1.703 (43.26) | 1.375 (34.93) | .152 (3.86)                       | 1-7/16-18UNEF-2A | .855 (21.72)                   | 1.960 (49.78) | 1.080 (27.43)  |

Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.


Contact Arrangements - Pages 20 and 21.

### Box Mounting Receptacle (Back Panel)

**MS27508E**  
(MS service class E)



**KJ5E**

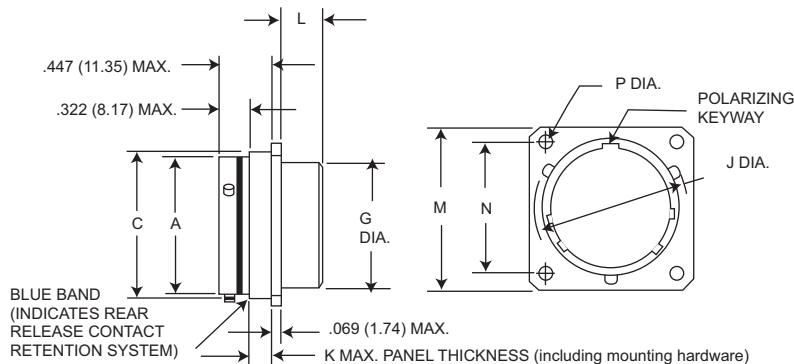


NOTE: This connector does not accommodate backshells

| Shell Size | A Dia. Max.   | C Dia. Max.   | G Dia. Max.   | J Dia. Max.   | K Max.      | L Max.      | M Max.        | N T.P         | P<br>+.005 (0.13)<br>-.010 (0.25) |
|------------|---------------|---------------|---------------|---------------|-------------|-------------|---------------|---------------|-----------------------------------|
| 8          | .474 (12.04)  | .522 (13.26)  | .421 (10.69)  | .563 (14.30)  | .147 (3.73) | .185 (4.70) | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       |
| 10         | .591 (15.01)  | .639 (16.23)  | .542 (13.77)  | .680 (17.27)  | .152 (3.86) | .185 (4.70) | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       |
| 12         | .751 (19.08)  | .808 (20.52)  | .667 (16.94)  | .859 (21.82)  | .152 (3.86) | .185 (4.70) | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       |
| 14         | .876 (22.25)  | .935 (23.75)  | .791 (20.09)  | .984 (24.99)  | .152 (3.86) | .185 (4.70) | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       |
| 16         | 1.001 (25.42) | 1.058 (26.87) | .916 (23.27)  | 1.108 (28.14) | .152 (3.86) | .185 (4.70) | 1.234 (31.24) | .969 (24.61)  | .125 (3.18)                       |
| 18         | 1.126 (28.60) | 1.183 (30.05) | 1.034 (31.34) | 1.233 (31.32) | .152 (3.86) | .185 (4.70) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       |
| 20         | 1.251 (31.77) | 1.308 (33.22) | 1.158 (34.52) | 1.358 (34.49) | .179 (4.55) | .185 (4.70) | 1.453 (36.91) | 1.156 (29.36) | .125 (3.18)                       |
| 22         | 1.376 (34.95) | 1.433 (36.40) | 1.283 (32.59) | 1.483 (37.67) | .179 (4.55) | .185 (4.70) | 1.578 (40.08) | 1.250 (31.75) | .125 (3.18)                       |
| 24         | 1.501 (38.13) | 1.568 (39.83) | 1.408 (35.76) | 1.610 (40.89) | .169 (4.29) | .185 (4.70) | 1.703 (43.66) | 1.375 (34.92) | .152 (3.86)                       |

### Box Mounting Receptacle (Back Panel)

No MS part number

**KJ5R**

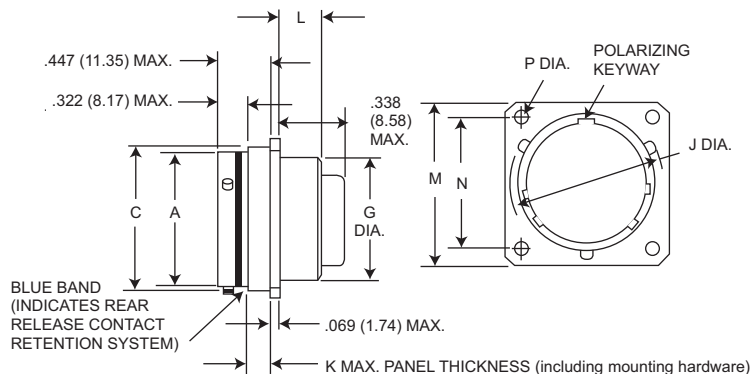

NOTE: This connector does not accommodate backshells

| Shell Size | A Dia. Max.   | C Dia. Max.   | G Dia. Max.   | J Dia. Max.   | K Max.      | L Max.      | M Max.        | N T.P         | P<br>+.005 (0.13)<br>-.010 (0.25) |
|------------|---------------|---------------|---------------|---------------|-------------|-------------|---------------|---------------|-----------------------------------|
| 8          | .474 (12.04)  | .522 (13.26)  | .421 (10.69)  | .563 (14.30)  | .147 (3.73) | .185 (4.70) | .828 (21.03)  | .594 (15.09)  | .125 (3.18)                       |
| 10         | .591 (15.01)  | .639 (16.23)  | .542 (13.77)  | .680 (17.27)  | .152 (3.86) | .185 (4.70) | .954 (24.23)  | .719 (18.26)  | .125 (3.18)                       |
| 12         | .751 (19.08)  | .808 (20.52)  | .667 (16.94)  | .859 (21.82)  | .152 (3.86) | .185 (4.70) | 1.047 (26.59) | .812 (20.62)  | .125 (3.18)                       |
| 14         | .876 (22.25)  | .935 (23.75)  | .791 (20.09)  | .984 (24.99)  | .152 (3.86) | .185 (4.70) | 1.141 (28.98) | .906 (23.01)  | .125 (3.18)                       |
| 16         | 1.001 (25.42) | 1.058 (26.87) | .916 (23.27)  | 1.108 (28.14) | .152 (3.86) | .185 (4.70) | 1.234 (31.24) | .969 (24.61)  | .125 (3.18)                       |
| 18         | 1.126 (28.60) | 1.183 (30.05) | 1.034 (31.34) | 1.233 (31.32) | .152 (3.86) | .185 (4.70) | 1.328 (33.73) | 1.062 (26.97) | .125 (3.18)                       |
| 20         | 1.251 (31.77) | 1.308 (33.22) | 1.158 (34.52) | 1.358 (34.49) | .179 (4.55) | .185 (4.70) | 1.453 (36.91) | 1.156 (29.36) | .125 (3.18)                       |
| 22         | 1.376 (34.95) | 1.433 (36.40) | 1.283 (32.59) | 1.483 (37.67) | .179 (4.55) | .185 (4.70) | 1.578 (40.08) | 1.250 (31.75) | .125 (3.18)                       |
| 24         | 1.501 (38.13) | 1.568 (39.83) | 1.408 (35.76) | 1.610 (40.89) | .169 (4.29) | .185 (4.70) | 1.703 (43.66) | 1.375 (34.92) | .152 (3.86)                       |

Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.


Contact Arrangements - Pages 20 and 21.

# Cannon KJ MIL-DTL-38999 Series II Connectors

## Straight Plug

**MS27473**  
(MS service class E, P, T)

**KJ6**

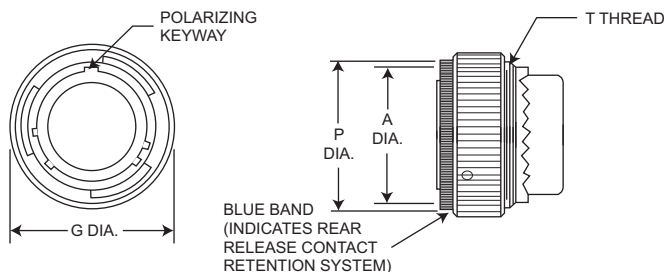


NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | G Dia. Max.   | P Dia. Max.   | T Thread         | Overall Length With Backshells |               |                |
|------------|---------------|---------------|---------------|------------------|--------------------------------|---------------|----------------|
|            |               |               |               |                  | E Straight                     | F Cable Clamp | P Potting Max. |
| 8          | .485 (12.32)  | .749 (19.02)  | .630 (16.00)  | 7/16-28UNEF-2A   | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 10         | .606 (15.39)  | .858 (21.79)  | .752 (19.10)  | 9/16-24UNEF-2A   | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 12         | .765 (19.43)  | 1.030 (26.16) | .925 (23.50)  | 11/16-24UNEF-2A  | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 14         | .890 (22.61)  | 1.155 (29.34) | 1.050 (26.67) | 13/16-20UNEF-2A  | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 16         | 1.014 (25.76) | 1.280 (32.51) | 1.172 (29.77) | 15/16-20UNEF-2A  | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 18         | 1.140 (28.96) | 1.405 (35.69) | 1.304 (33.12) | 1-1/16-18UNEF-2A | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 20         | 1.264 (32.11) | 1.530 (38.86) | 1.435 (36.45) | 1-3/16-18UNEF-2A | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 22         | 1.389 (35.28) | 1.640 (40.66) | 1.560 (39.62) | 1-5/16-18UNEF-2A | 1.026 (26.06)                  | 1.930 (49.02) | 1.020 (25.91)  |
| 24         | 1.514 (38.46) | 1.765 (44.83) | 1.688 (42.88) | 1-7/16-18UNEF-2A | 1.104 (28.04)                  | 1.930 (49.02) | 1.080 (27.43)  |

## Straight Plug Grounded

**MS27484**  
(MS service class E, P, T)

**KJG6**

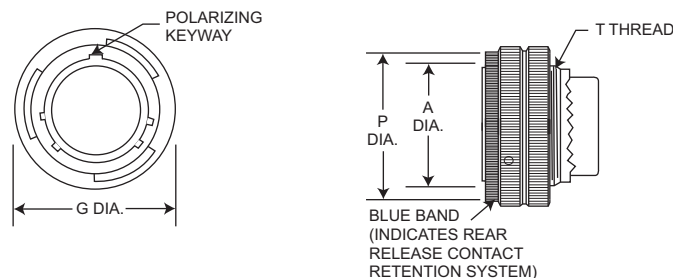

NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | A Dia. Max.   | G Dia. Max.   | P Dia. Max.   | T Thread         | Overall Length With Backshells |               |                |
|------------|---------------|---------------|---------------|------------------|--------------------------------|---------------|----------------|
|            |               |               |               |                  | E Straight                     | F Cable Clamp | P Potting Max. |
| 8          | .485 (12.32)  | .749 (19.02)  | .630 (16.00)  | 7/16-28UNEF-2A   | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 10         | .606 (15.39)  | .858 (21.79)  | .752 (19.10)  | 9/16-24UNEF-2A   | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 12         | .765 (19.43)  | 1.030 (26.16) | .925 (23.50)  | 11/16-24UNEF-2A  | 1.026 (26.06)                  | 1.555 (39.50) | 1.020 (25.91)  |
| 14         | .890 (22.61)  | 1.155 (29.34) | 1.050 (26.67) | 13/16-20UNEF-2A  | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 16         | 1.014 (25.76) | 1.280 (32.51) | 1.172 (29.77) | 15/16-20UNEF-2A  | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 18         | 1.140 (28.96) | 1.405 (35.69) | 1.304 (33.12) | 1-1/16-18UNEF-2A | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 20         | 1.264 (32.11) | 1.530 (38.86) | 1.435 (36.45) | 1-3/16-18UNEF-2A | 1.026 (26.06)                  | 1.790 (45.47) | 1.020 (25.91)  |
| 22         | 1.389 (35.28) | 1.640 (40.66) | 1.560 (39.62) | 1-5/16-18UNEF-2A | 1.026 (26.06)                  | 1.930 (49.02) | 1.020 (25.91)  |
| 24         | 1.514 (38.46) | 1.765 (44.83) | 1.688 (42.88) | 1-7/16-18UNEF-2A | 1.104 (28.04)                  | 1.930 (49.02) | 1.080 (27.43)  |

Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.

Contact Arrangements - Pages 20 and 21.




Dimensions shown in inches (mm)  
Specifications and dimensions subject to change

www.ittcannon.com

## Jam Nut Receptacle

**MS27474**  
(MS service class E, P, T)

**KJ7**

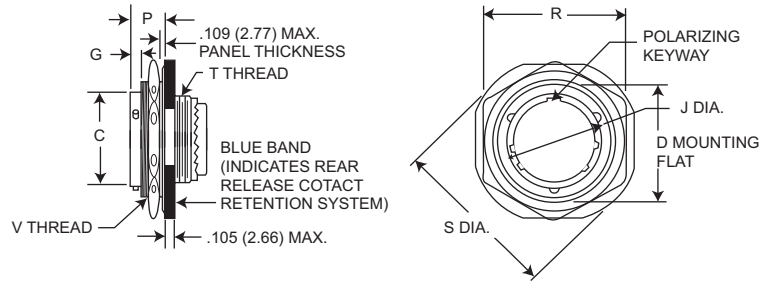

NOTE: For backshell dimensions and configurations, see pages 26 and 28.

| Shell Size | C Dia. Max.   | D Max.        | G Max.      | J Max.        | P Max.       | R Max. Hex.   | S Dia. Max.   | T Thread          | V Thread        | Overall length With Backshells |               |                |
|------------|---------------|---------------|-------------|---------------|--------------|---------------|---------------|-------------------|-----------------|--------------------------------|---------------|----------------|
|            |               |               |             |               |              |               |               |                   |                 | E Straight                     | F Cable Clamp | P Potting Max. |
| 8          | .474 (12.04)  | .818 (20.78)  | .145 (3.68) | .563 (14.30)  | .443 (11.25) | 1.079 (27.41) | 1.381 (35.08) | 7/16-28UNEF-2A    | 7/8-20UNEF-2A   | .840 (21.34)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 10         | .591 (15.01)  | .942 (23.93)  | .145 (3.68) | .680 (17.27)  | .443 (11.25) | 1.205 (30.61) | 1.506 (38.25) | 9/16-24UNEF-2A    | 1-20UNEF-2A     | .840 (21.34)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 12         | .751 (19.08)  | 1.066 (27.08) | .145 (3.68) | .859 (21.82)  | .443 (11.25) | 1.329 (33.76) | 1.631 (41.43) | 11/16-24UNEF-2A   | 1-1/8-18UNEF-2A | .840 (21.34)                   | 1.555 (39.50) | 1.020 (25.91)  |
| 14         | .876 (22.25)  | 1.191 (30.25) | .145 (3.68) | .984 (24.99)  | .443 (11.25) | 1.455 (36.96) | 1.756 (44.60) | 13/16-20UNEF-2A   | 1-1/4-18UNEF-2A | .840 (21.34)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 16         | 1.001 (25.43) | 1.321 (33.55) | .145 (3.68) | 1.108 (28.14) | .443 (11.25) | 1.579 (40.11) | 1.944 (49.38) | 1-15/16-20UNEF-2A | 1-3/8-18UNEF-2A | .840 (21.34)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 18         | 1.126 (28.60) | 1.441 (36.60) | .145 (3.68) | 1.233 (31.32) | .443 (11.25) | 1.705 (43.31) | 2.022 (51.36) | 1-1/16-18UNEF-2A  | 1-1/2-18UNEF-2A | .840 (21.34)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 20         | 1.251 (31.78) | 1.566 (39.78) | .171 (4.34) | 1.358 (34.49) | .469 (11.91) | 1.829 (46.46) | 2.147 (54.53) | 1-3/16-18UNEF-2A  | 1-5/8-18UNEF-2A | .840 (21.34)                   | 1.790 (45.47) | 1.020 (25.91)  |
| 22         | 1.376 (33.95) | 1.691 (42.95) | .171 (4.34) | 1.483 (37.67) | .469 (11.91) | 2.017 (51.23) | 2.271 (57.68) | 1-5/16-18UNEF-2A  | 1-3/4-18UNEF-2A | .840 (21.34)                   | 1.930 (49.02) | 1.020 (25.91)  |
| 24         | 1.501 (38.13) | 1.816 (46.13) | .171 (4.34) | 1.610 (40.89) | .469 (11.91) | 2.142 (54.41) | 2.396 (60.86) | 1-7/16-18UNEF-2A  | 1-7/8-18UNEF-2A | .860 (21.84)                   | 1.900 (48.26) | 1.080 (27.43)  |


Performance Specifications-Pages 3 and 4.

Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.


Contact Arrangements - Pages 20 and 21.

## Panel Cutouts

### Flange Mounted Receptacle



### Jam Nut Receptacle



| Shell Size | A Dia.        | P Dia.      | R             | Mfg. Screw |
|------------|---------------|-------------|---------------|------------|
| 8          | .610 (15.49)  | .125 (3.18) | .594 (15.09)  | #4         |
| 10         | .734 (18.64)  | .125 (3.18) | .719 (18.26)  | #4         |
| 12         | .860 (21.84)  | .125 (3.18) | .812 (20.62)  | #4         |
| 14         | .985 (25.02)  | .125 (3.18) | .906 (23.01)  | #4         |
| 16         | 1.110 (28.19) | .125 (3.18) | .969 (24.61)  | #4         |
| 18         | 1.234 (31.34) | .125 (3.18) | 1.062 (26.97) | #4         |
| 20         | 1.360 (35.54) | .125 (3.18) | 1.156 (29.36) | #4         |
| 22         | 1.484 (37.69) | .125 (3.18) | 1.250 (31.75) | #4         |
| 24         | 1.611 (40.92) | .152 (3.86) | 1.375 (34.93) | #6         |

| Shell Size | A Dia.        | B Dia.        |
|------------|---------------|---------------|
| 8          | .885 (22.48)  | .830 (21.08)  |
| 10         | 1.010 (25.65) | .955 (24.26)  |
| 12         | 1.135 (28.82) | 1.085 (27.56) |
| 14         | 1.260 (32.00) | 1.210 (30.73) |
| 16         | 1.385 (35.18) | 1.335 (33.91) |
| 18         | 1.510 (38.35) | 1.460 (37.08) |
| 20         | 1.635 (41.53) | 1.585 (40.26) |
| 22         | 1.760 (44.70) | 1.710 (43.43) |
| 24         | 1.885 (47.88) | 1.835 (46.61) |

## How To Order

### Military Nomenclature

CONNECTOR TYPE \_\_\_\_\_ **D38999** \_\_\_\_\_ **20** \_\_\_\_\_ **F** \_\_\_\_\_ **C** \_\_\_\_\_ **35** \_\_\_\_\_ **A** \_\_\_\_\_ **N**

SHELL STYLE \_\_\_\_\_

SERVICE CLASS \_\_\_\_\_  
(HARDWARE FINISH)

SHELL SIZE \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

**CONNECTOR TYPE**  
D38999/ - MIL-DTL-38999 Series III

**CONTACT ARRANGEMENT**  
See pages 20, 21.

**SHELL STYLE**  
D38999/20 - Wall mount receptacle  
D38999/24 - Jam nut receptacle  
D38999/26 - Straight Plug, Grounded

**CONTACT STYLE**  
P - Pin contacts  
S - Socket contact  
A - Less Pin contacts\*  
B - Less Socket contact\*

**SERVICE CLASS**  
(Hardware Finish)  
F - Electroless nickel - 85°F to +392°F  
(-65°C to +200°C)  
G - Electroless nickel plated. Space Grade.  
W - Olive drab cadmium over electroless nickel  
plate, -85°F to +347°F (-65°C to +175°C)

\* Used only when other than power contacts are to be installed (i.e., shielded, thermocouple, etc.)

**POLARIZING POSITION**  
N (normal), A, B, C, D, E. See page 19.

### SHELL SIZE

| A | B  | C  | D  | E  | F  | G  | H  | J  | Military Designation |
|---|----|----|----|----|----|----|----|----|----------------------|
| 9 | 11 | 13 | 15 | 17 | 19 | 21 | 23 | 25 | Cannon Designation   |

Note: To order MS connectors less standard power contacts, purchase order must state "Less Contacts".

### Cannon Nomenclature

SERIES PREFIX \_\_\_\_\_ **KJA** \_\_\_\_\_ **0** \_\_\_\_\_ **T** \_\_\_\_\_ **13** \_\_\_\_\_ **F** \_\_\_\_\_ **35** \_\_\_\_\_ **P** \_\_\_\_\_ **N** \_\_\_\_\_ **L**

SHELL STYLE \_\_\_\_\_

CLASS \_\_\_\_\_

SHELL SIZE \_\_\_\_\_

HARDWARE FINISH \_\_\_\_\_

CONTACT ARRANGEMENT \_\_\_\_\_

CONTACT STYLE \_\_\_\_\_

POLARIZING POSITION \_\_\_\_\_

MODIFICATION CODE \_\_\_\_\_

**SERIES PREFIX**  
KJA/KJB\* - Series III - Scoop proof, threaded coupling

**SHELL STYLE**  
0 - Wall mount receptacle  
6 - Straight plug  
7 - Jam nut receptacle

**CLASS**  
T - Environment-resistant (without rear accessory)

\* Consult factory for applicable layouts

| 9 | 11 | 13 | 15 | 17 | 19 | 21 | 23 | 25 | Cannon Designation   |
|---|----|----|----|----|----|----|----|----|----------------------|
| A | B  | C  | D  | E  | F  | G  | H  | J  | Military Designation |

**HARDWARE FINISH**  
F - Electroless nickel, - 85°F to +392°F  
(-65°C to +200°C)  
G - Electroless nickel plated. Space Grade.  
W - Olive drab cadmium over electroless nickel  
plate, -85°F to +347°F (-65°C to +175°C)  
Z - Zinc Nickel, Black  
- - (Dash) When using a finish modification code

**CONTACT STYLE**  
P -Pin contacts  
S -Socket contacts

**POLARIZING POSITION**  
N (normal) A, B, C, D, E. See page 19.

**MODIFICATION CODE**  
L - Less contacts, not stamped on connector  
16 - Outgassed  
NASA space graded connector  
27- Outgassed, standard connector  
A296 Black Zinc Cobalt, RoHS Compliant  
T69 Olive Drab (Green) Zinc Cobalt

**CONTACT ARRANGEMENTS**  
See pages 20 and 21.







## Wall Mount Receptacle

D38999/20

KJA0T

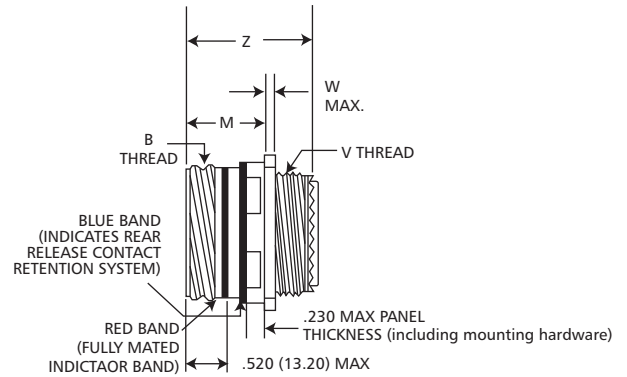
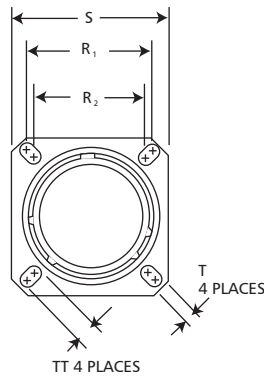


| Shell Size | MS Shell size Code | B Thread Class 2A (Plated) | M<br>+.000 (.000)<br>-.005 (.130) | R 1           | R 2           | S<br>+.004 (.100)<br>-.002 (.050) | T<br>+.004 (.100)<br>-.002 (.050) | TT<br>+.004 (.100)<br>-.002 (.050) | Metric V Thread (Plated) | W Max.      | Z<br>+.005 (.130)<br>-.010 (.250) |
|------------|--------------------|----------------------------|-----------------------------------|---------------|---------------|-----------------------------------|-----------------------------------|------------------------------------|--------------------------|-------------|-----------------------------------|
| 9          | A                  | .6250-0.1P-0.3L-TS         | .820 (20.83)                      | .719 (18.26)  | .594 (15.09)  | .938 (23.83)                      | .128 (3.25)                       | .216 (5.49)                        | M12X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 11         | B                  | .7500-0.1P-0.3L-TS         | .820 (20.83)                      | .812 (20.62)  | .719 (18.26)  | 1.031 (26.19)                     | .128 (3.25)                       | .194 (4.93)                        | M15X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 13         | C                  | .8750-0.1P-0.3L-TS         | .820 (20.83)                      | .906 (23.01)  | .812 (20.62)  | 1.125 (28.58)                     | .128 (3.25)                       | .194 (4.93)                        | M18X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 15         | D                  | 1.0000-0.1P-0.3L-TS        | .820 (20.83)                      | .969 (24.61)  | .906 (23.01)  | 1.219 (30.96)                     | .128 (3.25)                       | .173 (4.39)                        | M22X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 17         | E                  | 1.1875-0.1P-0.3L-TS        | .820 (20.83)                      | 1.062 (26.97) | .969 (24.61)  | 1.312 (33.32)                     | .128 (3.25)                       | .194 (4.93)                        | M25X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 19         | F                  | 1.2500-0.1P-0.3L-TS        | .820 (20.83)                      | 1.156 (29.36) | 1.062 (26.97) | 1.438 (36.53)                     | .128 (3.25)                       | .194 (4.93)                        | M28X1-6g0.100R           | .098 (2.50) | 1.235 (31.36)                     |
| 21         | G                  | 1.3750-0.1P-0.3L-TS        | .790 (20.07)                      | 1.250 (31.75) | 1.156 (29.36) | 1.562 (39.67)                     | .128 (3.25)                       | .194 (4.93)                        | M31X1-6g0.100R           | .126 (3.20) | 1.235 (31.36)                     |
| 23         | H                  | 1.5000-0.1P-0.3L-TS        | .790 (20.07)                      | 1.375 (34.92) | 1.250 (31.75) | 1.688 (42.88)                     | .154 (3.91)                       | .242 (6.15)                        | M34X1-6g0.100R           | .126 (3.20) | 1.235 (31.36)                     |
| 25         | J                  | 1.6250-0.1P-0.3L-TS        | .790 (20.07)                      | 1.500 (38.10) | 1.375 (34.92) | 1.812 (46.02)                     | .154 (3.91)                       | .242 (6.15)                        | M37X1-6g0.100R           | .126 (3.20) | 1.235 (31.36)                     |

## Straight Plug Grounded

D38999/26

KJA6T

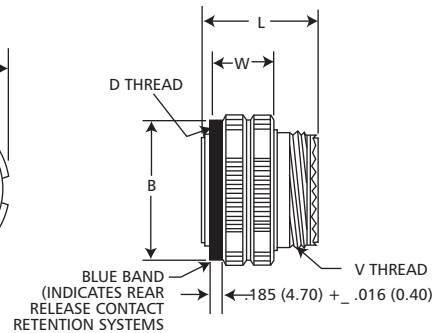

| Shell Size | MS Shell size Code | B<br>+.008 (.200)<br>-.000 (.000) | D Thread Class 2B (Plated) | K Max.        | L Max.        | Q Dia Max.    | Metric V Thread (Plated) | W<br>+.008 (.200)<br>-.004 (.100) |
|------------|--------------------|-----------------------------------|----------------------------|---------------|---------------|---------------|--------------------------|-----------------------------------|
| 9          | A                  | .724 (18.40)                      | .6250-0.1P-0.3L-TS         | .748 (19.00)  | 1.234 (31.34) | .859 (21.82)  | M12X1-6g0.100R           | .760 (19.30)                      |
| 11         | B                  | .831 (21.10)                      | .7500-0.1P-0.3L-TS         | .862 (21.90)  | 1.234 (31.34) | .969 (24.61)  | M15X1-6g0.100R           | .760 (19.30)                      |
| 13         | C                  | 1.000 (25.40)                     | .8750-0.1P-0.3L-TS         | 1.027 (26.10) | 1.234 (31.34) | 1.141 (28.98) | M18X1-6g0.100R           | .760 (19.30)                      |
| 15         | D                  | 1.130 (28.70)                     | 1.0000-0.1P-0.3L-TS        | 1.153 (29.30) | 1.234 (31.34) | 1.266 (32.16) | M22X1-6g0.100R           | .760 (19.30)                      |
| 17         | E                  | 1.268 (32.20)                     | 1.1875-0.1P-0.3L-TS        | 1.291 (32.80) | 1.234 (31.34) | 1.391 (35.53) | M25X1-6g0.100R           | .760 (19.30)                      |
| 19         | F                  | 1.374 (34.90)                     | 1.2500-0.1P-0.3L-TS        | 1.398 (35.50) | 1.234 (31.34) | 1.500 (38.10) | M28X1-6g0.100R           | .760 (19.30)                      |
| 21         | G                  | 1.500 (38.10)                     | 1.3750-0.1P-0.3L-TS        | 1.524 (38.70) | 1.234 (31.34) | 1.625 (41.28) | M31X1-6g0.100R           | .760 (19.30)                      |
| 23         | H                  | 1.618 (41.40)                     | 1.5000-0.1P-0.3L-TS        | 1.642 (41.70) | 1.234 (31.34) | 1.750 (44.45) | M34X1-6g0.100R           | .760 (19.30)                      |
| 25         | J                  | 1.744 (44.30)                     | 1.6250-0.1P-0.3L-TS        | 1.768 (44.90) | 1.234 (31.34) | 1.875 (47.62) | M37X1-6g0.100R           | .760 (19.30)                      |

Performance Specifications-Pages 3 and 4.


Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.

Contact Arrangements - Pages 20 and 21.

## Jam Nut Receptacle

D38999/24

KJA7T

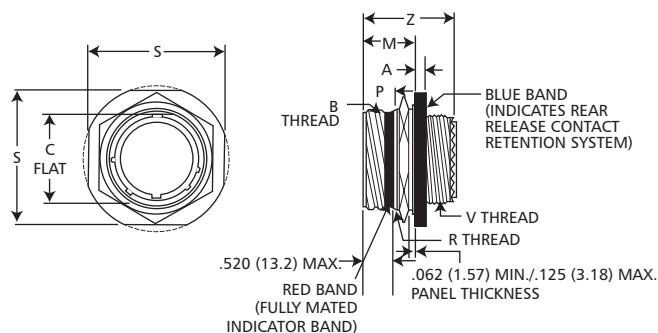

| Shell Size | MS Shell size Code | A<br>+.010 (.250)<br>-.005 (.130) | B Thread<br>Class 2A<br>(Plated) | C<br>+.004 (.100)<br>-.010 (.250) | Z<br>+.005 (.130)<br>-.040 (.100) | M<br>+.005 (.130)<br>-.004 (.100) | P<br>+.016 (.410)<br>-.004 (.100) | S             | Metric R Thread<br>(Plated) | Metric V Thread<br>(Plated) |
|------------|--------------------|-----------------------------------|----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|---------------|-----------------------------|-----------------------------|
| 9          | A                  | .104 (2.64)                       | .6250-0.1P-0.3L-TS               | .651 (16.53)                      | 1.243 (31.57)                     | .871 (22.12)                      | .555 (14.10)                      | 1.062 (26.97) | M17X1-6g0.100R              | M12X1-6g0.100R              |
| 11         | B                  | .104 (2.64)                       | .7500-0.1P-0.3L-TS               | .751 (19.07)                      | 1.243 (31.57)                     | .871 (22.12)                      | .555 (14.10)                      | 1.250 (31.75) | M20X1-6g0.100R              | M15X1-6g0.100R              |
| 13         | C                  | .104 (2.64)                       | .8750-0.1P-0.3L-TS               | .938 (23.82)                      | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 1.375 (34.92) | M25X1-6g0.100R              | M18X1-6g0.100R              |
| 15         | D                  | .104 (2.64)                       | 1.0000-0.1P-0.3L-TS              | 1.062 (26.97)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 1.500 (38.10) | M28X1-6g0.100R              | M22X1-6g0.100R              |
| 17         | E                  | .104 (2.64)                       | 1.1875-0.1P-0.3L-TS              | 1.187 (30.15)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 1.625 (41.28) | M32X1-6g0.100R              | M25X1-6g0.100R              |
| 19         | F                  | .135 (3.43)                       | 1.2500-0.1P-0.3L-TS              | 1.312 (33.32)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 1.812 (46.02) | M35X1-6g0.100R              | M28X1-6g0.100R              |
| 21         | G                  | .135 (3.43)                       | 1.3750-0.1P-0.3L-TS              | 1.437 (36.50)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 1.938 (49.23) | M38X1-6g0.100R              | M31X1-6g0.100R              |
| 23         | H                  | .135 (3.43)                       | 1.5000-0.1P-0.3L-TS              | 1.562 (39.67)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 2.062 (52.37) | M41X1-6g0.100R              | M34X1-6g0.100R              |
| 25         | J                  | .135 (3.43)                       | 1.6250-0.1P-0.3L-TS              | 1.687 (42.85)                     | 1.243 (31.57)                     | .878 (22.30)                      | .563 (14.30)                      | 2.188 (55.38) | M44X1-6g0.100R              | M37X1-6g0.100R              |

Performance Specifications-Pages 3 and 4.



Contacts, Sealing Plugs, Assembly Tools - Pages 22, 28, and 29.

Contact Arrangements - Pages 20 and 21.

## Panel Cutouts


### Wall Mounted Receptacle

### Jam Nut Receptacle



| Shell Size | A<br>+.010 (.25)<br>-.000 (.00) | B<br>+.000 (.00)<br>-.010 (.25) | H<br>+.010 (.25)<br>-.000 (.00) | R1<br>(TP)    | R2<br>(TP)    | T<br>(Max.) |
|------------|---------------------------------|---------------------------------|---------------------------------|---------------|---------------|-------------|
| 9          | .700 (17.78)                    | .670 (17.02)                    | .626 (15.90)                    | .719 (18.26)  | .594 (15.09)  | .134 (3.40) |
| 11         | .825 (20.96)                    | .771 (19.58)                    | .751 (19.08)                    | .812 (20.62)  | .719 (18.26)  | .134 (3.40) |
| 13         | 1.010 (25.65)                   | .955 (24.26)                    | .876 (22.25)                    | .906 (23.01)  | .812 (20.62)  | .134 (3.40) |
| 15         | 1.135 (28.83)                   | 1.085 (27.56)                   | 1.001 (25.43)                   | .969 (24.61)  | .906 (23.01)  | .134 (3.40) |
| 17         | 1.260 (32.00)                   | 1.210 (30.73)                   | 1.188 (30.18)                   | 1.062 (26.97) | .969 (24.61)  | .134 (3.40) |
| 19         | 1.385 (35.18)                   | 1.335 (33.91)                   | 1.251 (31.78)                   | 1.156 (29.36) | 1.062 (26.97) | .134 (3.40) |
| 21         | 1.510 (38.35)                   | 1.460 (37.08)                   | 1.376 (34.95)                   | 1.250 (31.75) | 1.156 (29.36) | .134 (3.40) |
| 23         | 1.635 (41.53)                   | 1.585 (40.26)                   | 1.511 (38.38)                   | 1.375 (34.92) | 1.250 (31.75) | .160 (4.06) |
| 25         | 1.760 (44.70)                   | 1.710 (43.43)                   | 1.626 (41.30)                   | 1.500 (38.10) | 1.375 (34.92) | .160 (4.06) |


## Polarizing Positions



Front face of receptacle (plug opposite). Insert arrangement does not rotate with main key-keyway. The master key is rotated to provide shell polarization; the minor keys remain fixed.

Angle of Rotation (Degrees)

| Shell Size | Normal | A   | B   | C    | D    |
|------------|--------|-----|-----|------|------|
| 9          | 95°    | 77° |     |      | 113° |
| 11         | 95°    | 81° | 67° | 123° | 109° |
| 13         | 95°    | 75° | 63° | 127° | 115° |
| 15         | 95°    | 74° | 61° | 129° | 116° |
| 17         | 95°    | 77° | 65° | 125° | 113° |
| 19         | 95°    | 77° | 65° | 125° | 113° |
| 21         | 95°    | 77° | 65° | 125° | 113° |
| 23         | 95°    | 80° | 69° | 121° | 110° |
| 25         | 95°    | 80° | 69° | 121° | 110° |




Front face of receptacle (plug opposite). Insert arrangement does not rotate with main key-keyway. The master key is rotated to provide shell polarization; the minor keys remain fixed.

Angle of Rotation (Degrees)


| Shell Size | Normal | A   | B   | C    | D    |
|------------|--------|-----|-----|------|------|
| 8          | 100°   | 82° |     |      | 118° |
| 10         | 100°   | 86° | 72° | 128° | 114° |
| 12         | 100°   | 80° | 68° | 132° | 120° |
| 14         | 100°   | 79° | 66° | 134° | 121° |
| 16         | 100°   | 82° | 70° | 130° | 118° |
| 18         | 100°   | 82° | 70° | 130° | 118° |
| 20         | 100°   | 82° | 70° | 130° | 118° |
| 22         | 100°   | 85° | 74° | 126° | 115° |
| 24         | 100°   | 85° | 74° | 126° | 115° |

Series III

**RECEPTACLE**  
(Front face shown)



**PLUG**  
(Front face shown)



### NOTES

1. All Angles are BSC
2. The insert arrangement does not rotate with main key/keyway
3. All minor keys are rotated to provide shell polarization, the master key remains fixed at twelve o'clock position.
4. Polarization is different from Series I and II.

Key &  
Keyway  
Arrangement  
identification  
Letter

Key Locations

| Shell Size                   | Key & Keyway Arrangement identification Letter | AR° or AP° BSC | BR° or BP° BSC | CR° or CP° BSC | DR° or DP° BSC |
|------------------------------|------------------------------------------------|----------------|----------------|----------------|----------------|
| 9                            | N                                              | 105            | 140            | 215            | 265            |
|                              | A                                              | 102            | 132            | 248            | 320            |
|                              | B                                              | 80             | 118            | 230            | 312            |
|                              | C                                              | 35             | 140            | 205            | 275            |
|                              | D                                              | 64             | 155            | 234            | 304            |
|                              | E                                              | 91             | 131            | 197            | 240            |
| 11<br>and<br>13<br>and<br>15 | N                                              | 95             | 141            | 208            | 236            |
|                              | A                                              | 113            | 156            | 182            | 292            |
|                              | B                                              | 90             | 145            | 195            | 252            |
|                              | C                                              | 53             | 156            | 220            | 255            |
|                              | D                                              | 119            | 146            | 176            | 298            |
|                              | E                                              | 51             | 141            | 184            | 242            |
| 17<br>and<br>19              | N                                              | 80             | 142            | 196            | 293            |
|                              | A                                              | 135            | 170            | 200            | 310            |
|                              | B                                              | 49             | 169            | 200            | 244            |
|                              | C                                              | 66             | 140            | 200            | 257            |
|                              | D                                              | 62             | 145            | 180            | 280            |
|                              | E                                              | 79             | 153            | 197            | 272            |
| 21<br>and<br>23<br>and<br>25 | N                                              | 80             | 142            | 196            | 293            |
|                              | A                                              | 135            | 170            | 200            | 310            |
|                              | B                                              | 49             | 169            | 200            | 244            |
|                              | C                                              | 66             | 140            | 200            | 257            |
| 25                           | D                                              | 62             | 145            | 180            | 280            |
|                              | E                                              | 79             | 153            | 197            | 272            |

# Cannon KJL/KJ/KJA/KJB MIL-DTL-38999 Series I, II, III Connectors

## Contact Arrangements (Engaging View Pin Insert)






\* Socket insert only






\*\* Pin insert only (Not available in socket insert Series I and III)






Indicates layouts are available in all shell styles including MS27499, MS27508, KJ2E and KJ5E  
† Consult factory MS27505E/KJL5E insert availability





|                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |  |  |  |  |  |  |  |  |  |  |
| Series III      | 9-98                                                                              | 9-35                                                                              | -                                                                                 | 11-5                                                                              | 11-98                                                                             | -                                                                                  | 11-35                                                                               | -                                                                                   | -                                                                                   | 13-8                                                                                |
| Series II       | 8-98†                                                                             | 8-35†                                                                             | -                                                                                 | 10-5†                                                                             | 10-98†                                                                            | 10-99†                                                                             | 10-35†                                                                              | 12-3                                                                                | 12-4†                                                                               | 12-8†                                                                               |
| Series I        | 9-98                                                                              | 9-35                                                                              | 11-4                                                                              | 11-5                                                                              | 11-98                                                                             | 11-99                                                                              | 11-35                                                                               | -                                                                                   | 13-4**                                                                              | 13-8                                                                                |
| No. of Contacts | 3 #20                                                                             | 6 #22D                                                                            | 4 #20                                                                             | 5 #20                                                                             | 6 #20                                                                             | 7 #20                                                                              | 13 #22D                                                                             | 3 #16                                                                               | 4 #16                                                                               | 8 #20                                                                               |
| Service Ratings | I                                                                                 | M                                                                                 | I                                                                                 | I                                                                                 | I                                                                                 | I                                                                                  | M                                                                                   | II                                                                                  | I                                                                                   | I                                                                                   |

|                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |  |  |  |  |  |  |  |
| Series III      | 13-98                                                                             | 13-35                                                                             | 15-5                                                                              | 15-15                                                                             | 15-18                                                                               | 15-19                                                                               | 15-35                                                                               |
| Series II       | 12-98†                                                                            | 12-35†                                                                            | 14-5†                                                                             | 14-15†                                                                            | 14-18†                                                                              | -                                                                                   | 14-35†                                                                              |
| Series I        | 13-98                                                                             | 13-35                                                                             | 15-5                                                                              | 15-15                                                                             | 15-18                                                                               | 15-19                                                                               | 15-35                                                                               |
| No. of Contacts | 10 #20                                                                            | 22 #22D                                                                           | 5 #16                                                                             | 14 #20, 1 #16                                                                     | 18 #20                                                                              | 19 #20                                                                              | 37 #22D                                                                             |
| Service Ratings | I                                                                                 | M                                                                                 | II                                                                                | I                                                                                 | I                                                                                   | I                                                                                   | M                                                                                   |

|                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                     |                                                                                     |                                                                                     |
|-----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                 |  |  |  |  |  |  |  |
| Series III      | 15-97                                                                             | 17-6                                                                              | 17-8                                                                              | 17-26                                                                             | 17-35                                                                               | -                                                                                   | -                                                                                   |
| Series II       | 14-97†                                                                            | 16-6                                                                              | 16-8†                                                                             | 16-26†                                                                            | 16-35†                                                                              | 16-42†                                                                              | 16-99†                                                                              |
| Series I        | 15-97                                                                             | 17-6                                                                              | 17-8                                                                              | 17-26                                                                             | 17-35                                                                               | 17-35                                                                               | 17-99**                                                                             |
| No. of Contacts | 8 #20, 4 #16                                                                      | 6 #12                                                                             | 8 #16                                                                             | 26 #20                                                                            | 55 #22D                                                                             | 42 #22                                                                              | 21 #20, 2 #16                                                                       |
| Service Ratings | I                                                                                 | I                                                                                 | II                                                                                | I                                                                                 | M                                                                                   | M                                                                                   | I                                                                                   |

|                 |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |  |  |  |  |  |
| Series III      | -                                                                                   | -                                                                                   | 19-11                                                                               | 19-32                                                                                 | 19-35                                                                                 |
| Series II       | 18-28                                                                               | 18-30                                                                               | 18-11                                                                               | 18-32†                                                                                | 18-35†                                                                                |
| Series I        | 19-28**                                                                             | 19-30**                                                                             | 19-11                                                                               | 19-32                                                                                 | 19-35                                                                                 |
| No. of Contacts | 26 #20, 2 #16                                                                       | 29 #20, 1 #16                                                                       | 11 #16                                                                              | 32 #20                                                                                | 66 #22D                                                                               |
| Service Ratings | I                                                                                   | I                                                                                   | II                                                                                  | I                                                                                     | M                                                                                     |

|                 |                                                                                     |                                                                                     |                                                                                     |                                                                                       |                                                                                       |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |  |  |  |  |  |
| Series III      | 21-11                                                                               | 21-16                                                                               | 21-35                                                                               | 21-39                                                                                 | 21-41                                                                                 |
| Series II       | -                                                                                   | 20-16†                                                                              | 20-35†                                                                              | 20-39†                                                                                | 20-41†                                                                                |
| Series I        | 21-11                                                                               | 21-16                                                                               | 21-35                                                                               | 21-39                                                                                 | 21-41                                                                                 |
| No. of Contacts | 11 #12                                                                              | 16 #16                                                                              | 79 #22D                                                                             | 37 #20, 2 #16                                                                         | 41 - #20                                                                              |
| Service Ratings | I                                                                                   | II                                                                                  | M                                                                                   | I                                                                                     | I                                                                                     |

|                 |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                 |  |  |  |  |
| Series III      | 21-75                                                                               | 23-21                                                                               | -                                                                                    | 23-35                                                                                 |
| Series II       | -                                                                                   | 22-21                                                                               | 22-32                                                                                | 22-35†                                                                                |
| Series I        | 21-75*                                                                              | 23-21                                                                               | 23-32**                                                                              | 23-35                                                                                 |
| No. of Contacts | 4 #8 Twinax                                                                         | 21 #16                                                                              | 32 #20                                                                               | 100 #22D                                                                              |
| Service Ratings | M                                                                                   | II                                                                                  | I                                                                                    | M                                                                                     |


## Contact Arrangements (Engaging View Pin Insert)

\* Socket insert only


\*\* Pin insert only (Not available in socket insert Series I and III)

† Indicates layouts are available in all shell styles including MS27499, MS27508, KJ2E and KJ5E  
• Consult factory for MS27505E/KJL5E insert availability


Series III  
Series II  
Series I  
No. of Contacts  
Service Ratings



23-53  
22-53†  
23-53  
53 #20  
I




23-55  
22-55†  
23-55  
55 #20  
I




25-4  
24-4†  
25-4  
48 #20, 8 #16  
I


Series III  
Series II  
Series I  
No. of Contacts  
Service Ratings




25-8  
-  
25-8\*\*  
8 #8 Twinax  
Twinax




25-19  
-  
25-19  
19 #12  
I



25-20  
-  
25-20\*  
3 #8 Twinax, 13 #16,  
4 #12 Coax, 10 #20  
N / Coax / Twinax




25-24  
24-24†  
25-24  
12 #16, 12 #12  
I




25-29  
24-29†  
25-29  
29 #16  
I


Series III  
Series II  
Series I  
No. of Contacts  
Service Ratings




25-35  
24-35†  
25-35  
128 #22D  
M




25-37  
-  
25-37\*  
37 #16  
II



25-42  
-  
25-42\*  
38 #20, 4 #8 Coax  
I, Coax




25-43  
-  
25-43  
23 #20, 20 #16  
I




25-46  
-  
25-46  
40 #20, 4 #16, 2 #8  
Twinax


Series III  
Series II  
Series I  
No. of Contacts  
Service Rating



25-61  
24-61†  
25-61  
61 #20  
I



25-64  
-  
25-64  
40 #22D, 8 #20  
10 #16, 6 #12  
I



25-66\*  
-  
25-66\*  
53 #22D, 2 #20, 11 #16  
I




# Cannon KJL/KJ/KJA/KJB MIL-DTL-38999 Series I, II, III Connectors

## Contacts-Pin (Series I/II/III)

MIL-C-39029/58

KJL/KJ/KJA



| Contact Size | 1      | Color Bands 2 | 3      | Cannon Part Number | M39029 Military Part Number |
|--------------|--------|---------------|--------|--------------------|-----------------------------|
| 22D          | Orange | Blue          | Black  | 980-0008-878       | M39029/58-360               |
| 20           | Orange | Blue          | Orange | 980-0008-879       | M39029/58-363               |
| 16           | Orange | Blue          | Yellow | 980-0008-880       | M39029/58-364               |
| 12           | Orange | Blue          | Green  | 980-0008-881       | M39029/58-365               |


| Contact Size     | Cannon Part Number | Cable Accomodations |
|------------------|--------------------|---------------------|
| 8 Coax 95 Ohms   | 249-2196-000       | RG-180              |
|                  | 249-2196-001       | RG-174, 179, 316    |
|                  | 249-2196-002       | RG-142              |
| 8 Twinax 75 Ohms | 980-1000-012       | M17/176-00002       |
| 12 Coax          | 980-1000-016       | RG-174, 179, 316    |

## Contacts-Socket (Series II)

MIL-C-39029/57

KJ

Manufacture identification  
Code Area - Typical all contacts



| Contact Size | 1      | Color Bands 2 | 3      | Cannon Part Number | M39029 Military Part Number |
|--------------|--------|---------------|--------|--------------------|-----------------------------|
| 22D          | Orange | Green         | Yellow | 980-0008-874       | M39029/57-354               |
| 20           | Orange | Green         | Violet | 980-0008-875       | M39029/57-357               |
| 16           | Orange | Green         | Gray   | 980-0008-876       | M39029/57-358               |
| 12           | Orange | Green         | White  | 980-0008-877       | M39029/57-359               |

## Contacts-Socket (Series I & III)

MIL-C-39029/56

KJL/KJA



| Contact Size | 1      | Color Bands 2 | 3      | Cannon Part Number | M39029 Military Part Number |
|--------------|--------|---------------|--------|--------------------|-----------------------------|
| 22D          | Orange | Yellow        | Gray   | 980-0008-870       | M39029/56-348               |
| 20           | Orange | Green         | Brown  | 980-0008-871       | M39029/56-351               |
| 16           | Orange | Green         | Red    | 980-0008-872       | M39029/56-352               |
| 12           | Orange | Green         | Orange | 980-0008-873       | M39029/56-353               |

| Contact Size     | Cannon Part Number | Cable Accomodations |
|------------------|--------------------|---------------------|
| 8 Coax 95 Ohms   | 249-2195-000       | RG-180              |
|                  | 249-2195-001       | RG-174, 179, 316    |
|                  | 249-2195-002       | RG-142              |
| 8 Twinax 75 Ohms | 980-1000-013       | M17/176-00002       |
| 12 Coax          | 980-1000-015       | RG-174, 179, 316    |



## Contact Sealing Bushings

**Size 8 Twinax Sealing Bushing** 321-1035-000  
Used with the Twinax contact in Twinax layouts for sealing cable size M17/176-00002

**Size 8 Coax Sealing Bushing** 321-1034-001  
Used with the Coax contact in Twinax layouts for sealing cable size RG-180




Twinax Grommet



Coax Grommet

## Contact Sealing Bushing Sequence into Twinax Grommet


(Bushing only used with Twinax grommet)

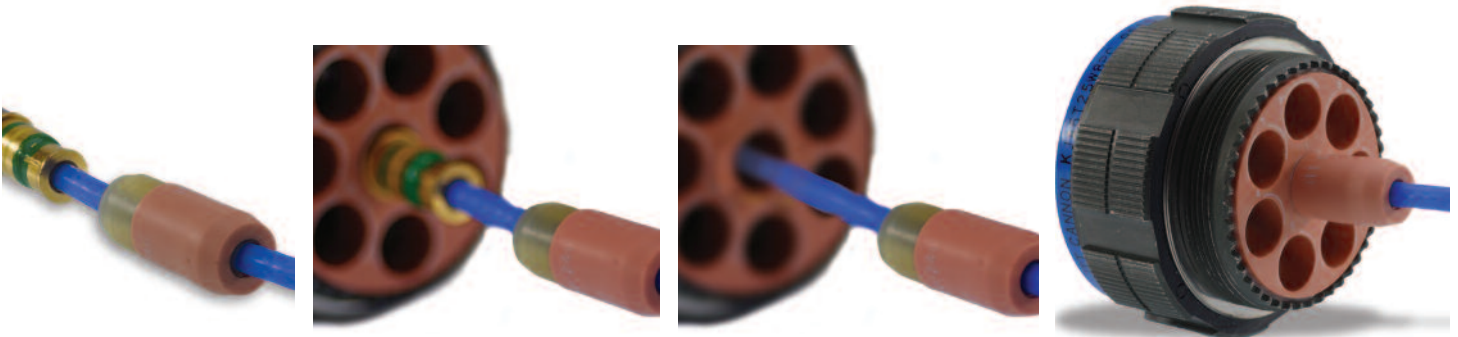

## Contacts-Printed Circuit Board

### PIN PRINTED CIRCUIT CONTACT EXTENSION FROM REAR OF CONNECTOR (MAX / MIN)

| PC CONTACT<br>PART NUMBER | CONTACT<br>SIZE | TAIL DIA.<br>±.001 | MS27466<br>MS27467<br>KJL0 / KJL6 | MS27656<br>MS27468<br>KJL3 / KJL7 | MS27505E<br>KJL5E | MS27472<br>MS27474<br>KJ0 / KJ7 | MS27499E<br>MS27508E<br>KJ2E / KJ5E | MS27513E<br>MS27497 / NO MS<br>KJ2R / KJ3 / KJ5R | MS27473<br>MS27484<br>KJ6 / KJG6 | D38999/20<br>KJA0 | D38999/26<br>KJA6 | D38999/24<br>KJA7 (9-17) | D38999/24<br>KJA7 (19-25) |
|---------------------------|-----------------|--------------------|-----------------------------------|-----------------------------------|-------------------|---------------------------------|-------------------------------------|--------------------------------------------------|----------------------------------|-------------------|-------------------|--------------------------|---------------------------|
| 030-2097-002              | 22D             | 0.020              | 0.261<br>0.189                    | 0.244<br>0.176                    | 0.408<br>0.376    | 0.264<br>0.226                  | 0.408<br>0.376                      | 0.264<br>0.226                                   | 0.264<br>0.226                   | 0.262<br>0.200    | 0.266<br>0.194    | 0.280<br>0.216           | 0.258<br>0.198            |
| 030-2097-006              | 22D             | 0.020              | 0.069<br>N/A                      | 0.052<br>N/A                      | 0.216<br>0.184    | 0.072<br>0.034                  | 0.216<br>0.184                      | 0.072<br>0.034                                   | 0.072<br>0.034                   | 0.070<br>0.008    | 0.074<br>0.002    | 0.088<br>0.024           | 0.066<br>0.006            |
| 030-2097-008              | 22D             | 0.020              | 0.216<br>0.144                    | 0.199<br>0.131                    | 0.363<br>0.331    | 0.219<br>0.181                  | 0.363<br>0.331                      | 0.219<br>0.181                                   | 0.219<br>0.181                   | 0.217<br>0.155    | 0.221<br>0.149    | 0.235<br>0.171           | 0.213<br>0.153            |
| 030-2097-015              | 22D             | 0.020              | 0.293<br>0.221                    | 0.276<br>0.208                    | 0.440<br>0.408    | 0.296<br>0.258                  | 0.440<br>0.408                      | 0.296<br>0.258                                   | 0.296<br>0.258                   | 0.294<br>0.232    | 0.298<br>0.226    | 0.312<br>0.248           | 0.290<br>0.230            |
| 030-1997-006              | 20              | 0.025              | 0.166<br>0.094                    | 0.149<br>0.081                    | 0.313<br>0.281    | 0.169<br>0.131                  | 0.313<br>0.281                      | 0.169<br>0.131                                   | 0.169<br>0.131                   | 0.167<br>0.105    | 0.171<br>0.099    | 0.185<br>0.121           | 0.163<br>0.103            |
| 030-1997-022              | 20              | 0.025              | 0.281<br>0.209                    | 0.264<br>0.196                    | 0.428*<br>0.396*  | 0.284<br>0.246                  | 0.428*<br>0.396*                    | 0.284<br>0.246                                   | 0.284<br>0.246                   | 0.282<br>0.220    | 0.286<br>0.214    | 0.300<br>0.236           | 0.278<br>0.218            |
| 030-1997-030              | 20              | 0.019              | 0.364<br>0.292                    | 0.347<br>0.279                    | 0.511<br>0.479    | 0.367<br>0.329                  | 0.511<br>0.479                      | 0.367<br>0.329                                   | 0.367<br>0.329                   | 0.365<br>0.303    | 0.369<br>0.297    | 0.383<br>0.319           | 0.361<br>0.301            |
| 030-1995-023              | 16              | 0.062              | 0.278<br>0.206                    | 0.261<br>0.193                    | 0.425<br>0.393    | 0.281<br>0.243                  | 0.425<br>0.393                      | 0.281<br>0.243                                   | 0.281<br>0.243                   | 0.279<br>0.217    | 0.283<br>0.211    | 0.297<br>0.233           | 0.275<br>0.215            |
| 030-1995-024              | 16              | 0.062              | 0.118<br>0.046                    | 0.101<br>0.033                    | 0.265<br>0.233    | 0.121<br>0.083                  | 0.265<br>0.233                      | 0.121<br>0.083                                   | 0.121<br>0.083                   | 0.119<br>0.057    | 0.123<br>0.051    | 0.137<br>0.073           | 0.115<br>0.055            |

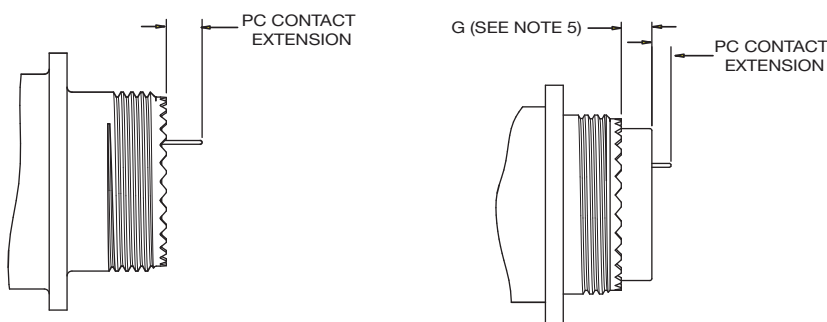

(KJL0/3/6/7 & KJA0/6/7)

(KJL5E, KJ0/2E/2R/3/5E/5R/6/7, & KJG6)

### SOCKET (SERIES II) PRINTED CIRCUIT CONTACT EXTENSION FROM REAR OF CONNECTOR (MAX / MIN)

| PC CONTACT<br>PART NUMBER | CONTACT<br>SIZE | TAIL DIA.<br>±.001 | MS27472<br>MS27474<br>KJ0 / KJ7 | MS27499E<br>MS27508E<br>KJ2E / KJ5E | MS27513E<br>MS27497 / NO MS<br>KJ2R / KJ3 / KJ5R | MS27473<br>MS27484<br>KJ6 / KJG6 |
|---------------------------|-----------------|--------------------|---------------------------------|-------------------------------------|--------------------------------------------------|----------------------------------|
| 031-1186-006              | 22D             | 0.020              | 0.179<br>0.141                  | 0.323<br>0.291                      | 0.179<br>0.141                                   | 0.179<br>0.141                   |
| 031-1186-011              | 22D             | 0.020              | 0.109<br>0.071                  | 0.253<br>0.221                      | 0.109<br>0.071                                   | 0.109<br>0.071                   |
| 031-1186-013              | 22D             | 0.020              | 0.217<br>0.179                  | 0.361<br>0.329                      | 0.217<br>0.179                                   | 0.217<br>0.179                   |
| 031-1186-021              | 22D             | 0.020              | 0.262<br>0.224                  | 0.406<br>0.374                      | 0.262<br>0.224                                   | 0.262<br>0.224                   |
| 031-1124-021              | 20              | 0.025              | 0.247<br>0.209                  | 0.391*<br>0.359*                    | 0.247<br>0.209                                   | 0.247<br>0.209                   |
| 031-1123-007              | 16              | 0.062              | 0.101<br>0.063                  | 0.245<br>0.213                      | 0.101<br>0.063                                   | 0.101<br>0.063                   |

### SOCKET (SERIE I & III) PRINTED CIRCUIT CONTACT EXTENSION FROM REAR OF CONNECTOR (MAX / MIN)

| PC CONTACT<br>PART NUMBER | CONTACT<br>SIZE | TAIL DIA.<br>±.001 | MS27466<br>MS27467<br>KJL0 / KJL6 | MS27656<br>MS27468<br>KJL3 / KJL7 | MS27505E<br>KJL5E | D38999/20<br>KJA0 | D38999/26<br>KJA6 | D38999/24<br>KJA7 (9-17) | D38999/24<br>KJA7 (19-25) |
|---------------------------|-----------------|--------------------|-----------------------------------|-----------------------------------|-------------------|-------------------|-------------------|--------------------------|---------------------------|
| 031-1147-014              | 22D             | 0.021              | 0.244<br>0.172                    | 0.227<br>0.159                    | 0.391*<br>0.359*  | 0.245<br>0.183    | 0.249<br>0.177    | 0.263<br>0.199           | 0.241<br>0.181            |
| 031-1147-039              | 22D             | 0.020              | 0.168<br>0.096                    | 0.151<br>0.083                    | 0.315*<br>0.283*  | 0.169<br>0.107    | 0.173<br>0.101    | 0.187<br>0.123           | 0.165<br>0.105            |
| 031-1147-040              | 22D             | 0.020              | 0.438<br>0.366                    | 0.421<br>0.353                    | 0.585*<br>0.553*  | 0.439<br>0.377    | 0.443<br>0.371    | 0.457<br>0.393           | 0.435<br>0.375            |
| 031-1124-040              | 20              | 0.025              | 0.486<br>0.414                    | 0.469<br>0.401                    | 0.633<br>0.601    | 0.487<br>0.425    | 0.491<br>0.419    | 0.505<br>0.441           | 0.483<br>0.423            |
| 031-1123-020              | 16              | 0.029              | 0.272<br>0.200                    | 0.255<br>0.187                    | 0.419<br>0.387    | 0.273<br>0.211    | 0.277<br>0.205    | 0.291<br>0.227           | 0.269<br>0.209            |

NOTES: UNLESS OTHERWISE SPECIFIED.

1. PC CONTACTS HAVE GOLD PLATING OVER SUITABLE UNDERPLATE PER MIL-C-39029 SPECIFICATION.

2. PC CONTACT EXTENSIONS APPLY TO ITT CANNON CONNECTORS ONLY FOR ALL SHELL SIZES.

3. N/A INDICATES NO EXTENSION.

4. \* INDICATES PC TAIL WITH STEP EXTENDING FROM REAR OF CONNECTOR.

5. G DIM. IS .031 +/- .016 FOR KJL5E AND .120 +/- .030 (SHELL SIZES 8 THRU 22) AND .090 +/- .050 (SHELL SIZE 24) FOR KJ0/2E/2R/3/5E/5R/6/7 & KJG6.

6. FOR OTHER SPECIFIC PC CONTACT DATA, CONSULT ITT EC, SANTA ANA, CA, USA.

### Wire Sizes and Diameters

| Contact Size | Wire size (AWG) | Finished wire outside dimensions |         |
|--------------|-----------------|----------------------------------|---------|
|              |                 | Minimum                          | Maximum |
| 22D          | 28, 26, 24, 22  | 0.030                            | 0.054   |
| 22M*         | 28, 26, 24      | 0.030                            | 0.050   |
| 22*          | 26, 24, 22      | 0.034                            | 0.060   |
| 20           | 24, 22, 20      | 0.040                            | 0.083   |
| 16           | 20, 18, 16      | 0.065                            | 0.109   |
| 12           | 14, 12          | 0.097                            | 0.142   |
| 8 Coax       | RG-180          | 0.136                            | 0.146   |
| 8 Twinax     | M17/176-00002   | 0.124                            | 0.134   |
| 12 Coax      | RG174, 179, 316 | 0.094                            | 0.102   |

\*For reference only


### Recommended Jam Nut Torque Values

| Series II  |             | Series I & III |             |
|------------|-------------|----------------|-------------|
| Shell Size | Inch-Pounds | Shell Size     | Inch-Pounds |
| 8          | 46/50       | 9              | 30/36       |
| 10         | 55/60       | 11             | 40/46       |
| 12         | 70/75       | 13             | 55/60       |
| 14         | 80/85       | 15             | 70/75       |
| 16         | 90/95       | 17             | 80/85       |
| 18         | 100/110     | 19             | 90/95       |
| 20         | 110/120     | 21             | 100/110     |
| 22         | 120/130     | 23             | 110/120     |
| 24         | 140/150     | 25             | 120/130     |

### Coupling Nut Torque Values (Series I, II and III)

| Maximum engagement and disengagement |            | Minimum disengagement |
|--------------------------------------|------------|-----------------------|
| Shell Size                           | Inch Pound | Inch Pound            |
| 8                                    | 8          | 2                     |
| 9                                    | 8          | 2                     |
| 10                                   | 12         | 2                     |
| 11                                   | 12         | 2                     |
| 12                                   | 16         | 2                     |
| 13                                   | 16         | 2                     |
| 14                                   | 20         | 4                     |
| 15                                   | 20         | 3                     |
| 16                                   | 24         | 4                     |
| 17                                   | 24         | 3                     |
| 18                                   | 28         | 5                     |
| 19                                   | 28         | 3                     |
| 20                                   | 32         | 6                     |
| 21                                   | 32         | 5                     |
| 22                                   | 36         | 7                     |
| 23                                   | 36         | 5                     |
| 24                                   | 36         | 7                     |
| 25                                   | 40         | 5                     |

## Backshell - Type E (Straight), Series II only




| Shell Size |               |             |
|------------|---------------|-------------|
| Series II  | A Dia. Max.   | B Dia. Max. |
| 8          | .580 (14.73)  | .328 (8.33) |
| 10         | .705 (17.91)  | .328 (8.33) |
| 12         | .830 (21.08)  | .328 (8.33) |
| 14         | .955 (24.26)  | .328 (8.33) |
| 16         | 1.080 (27.32) | .328 (8.33) |
| 18         | 1.205 (30.61) | .328 (8.33) |
| 20         | .330 (33.78)  | .328 (8.33) |
| 22         | 1.455 (36.96) | .328 (8.33) |
| 24         | 1.555 (39.50) | .270 (6.86) |

### How To Order

| Shell Size | Finishes                            |                                   |                                 |                                   |
|------------|-------------------------------------|-----------------------------------|---------------------------------|-----------------------------------|
|            | A                                   | B                                 | C                               | N                                 |
| Series II  | Cadmium/Nickel-Clear<br>Part Number | Cadmium/Nickel-O.D<br>Part Number | Anodic Non-Cond.<br>Part Number | Electroless Nickel<br>Part Number |
| 8          | 057-0776-000                        | 057-0862-000                      | 057-0819-000                    | 057-0776-002                      |
| 10         | 057-0777-000                        | 057-0863-000                      | 057-0820-000                    | 057-0777-002                      |
| 12         | 057-0778-000                        | 057-0864-000                      | 057-0821-000                    | 057-0778-002                      |
| 14         | 057-0779-000                        | 057-0846-000                      | 057-0822-000                    | 057-0779-002                      |
| 16         | 057-0780-000                        | 057-0847-000                      | 057-0823-000                    | 057-0780-002                      |
| 18         | 057-0781-000                        | 057-0848-000                      | 057-0824-000                    | 057-0781-002                      |
| 20         | 057-0782-000                        | 057-0849-000                      | 057-0825-000                    | 057-0782-002                      |
| 22         | 057-0783-000                        | 057-0850-000                      | 057-0826-000                    | 057-0783-002                      |
| 24         | 057-0784-000                        | 057-0851-000                      | 057-0827-000                    | 057-0784-002                      |

## Backshell - Type F (Cable Clamp)



| Shell Size |           |               |              |              |                          |               |              |  |
|------------|-----------|---------------|--------------|--------------|--------------------------|---------------|--------------|--|
| Series I   | Series II | A Max.        | N Dia. Max.  | X Dia. Min.  | X <sup>1</sup> Dia. Min. | Y Max.        | Z Max.       |  |
| 9          | 8         | .508 (14.73)  | .135 (3.43)  | .234 (5.94)  | .187 (4.75)              | .829 (21.06)  | .813 (20.65) |  |
| 11         | 10        | .705 (17.91)  | .198 (5.03)  | .297 (7.54)  | .187 (4.75)              | .891 (22.63)  | .813 (20.65) |  |
| 13         | 12        | .830 (21.08)  | .322 (7.18)  | .422 (10.72) | .281 (7.14)              | 1.016 (25.81) | .813 (20.65) |  |
| 15         | 14        | .955 (24.26)  | .385 (9.78)  | .547 (12.89) | .325 (8.26)              | 1.141 (28.98) | .813 (20.65) |  |
| 17         | 16        | 1.080 (27.43) | .510 (12.95) | .609 (15.47) | .356 (9.04)              | 1.203 (30.56) | .933 (23.70) |  |
| 19         | 18        | 1.205 (30.61) | .635 (16.13) | .734 (18.64) | .456 (11.58)             | 1.469 (37.31) | .933 (23.70) |  |
| 21         | 20        | 1.330 (33.78) | .635 (16.13) | .734 (18.64) | .519 (13.18)             | 1.469 (37.31) | .933 (23.70) |  |
| 23         | 22        | 1.455 (36.96) | .760 (19.30) | .922 (23.42) | .519 (13.18)             | 1.656 (42.06) | .933 (23.70) |  |
| 25         | 24        | 1.555 (39.50) | .810 (20.57) | .984 (24.99) | .657 (16.69)             | 1.750 (44.45) | .893 (22.68) |  |

### How To Order (MS Version)

**Military Designation**  
MS27506 Type F Straight  
with Cable Clamp

**Finish**  
A - Cad/Nickel (Clear)  
B - Cad/Nickel (O.D)  
F - Nickel (Electroless)

**Shell Size**  
Series I - 9, 11, 13, 15, 17, 19, 21, 23, 25  
Series II - 8, 10, 12, 14, 16, 18, 20, 22, 24

**Adapter**  
Geometry - 2

| Shell Size |           | Finishes       |                    |          |      |          |      |          |      |
|------------|-----------|----------------|--------------------|----------|------|----------|------|----------|------|
| Series I   | Series II | MS Part Number | Cannon Part Number | A Cannon | A MS | B Cannon | B MS | N Cannon | F MS |
| 9          | 8         | 27506*-8-2     | 057-3005-***       | -012     | A    | -013     | B    | -015     | F    |
| 11         | 10        | 27506*-10-2    | 057-3006-***       | -011     | A    | -012     | B    | -014     | F    |
| 13         | 12        | 27506*-12-2    | 057-3007-***       | -012     | A    | -013     | B    | -015     | F    |
| 15         | 14        | 27506*-14-2    | 057-3008-***       | -010     | A    | -011     | B    | -013     | F    |
| 17         | 16        | 27506*-16-2    | 057-3009-***       | -012     | A    | -013     | B    | -015     | F    |
| 19         | 18        | 27506*-18-2    | 057-3010-***       | -013     | A    | -014     | B    | -016     | F    |
| 21         | 20        | 27506*-20-2    | 057-3011-***       | -011     | A    | -013     | B    | -015     | F    |
| 23         | 22        | 27506*-22-2    | 057-3012-***       | -015     | A    | -016     | B    | -018     | F    |
| 25         | 24        | 27506*-24-2    | 057-3013-***       | -013     | A    | -014     | B    | -017     | F    |

\* MS Finish

\*\*\* Cannon Finish

| Shell Size<br>Series III | Military Part Number | Cannon Part Number | Cannon | Military | Cannon | Military |
|--------------------------|----------------------|--------------------|--------|----------|--------|----------|
| 9                        | M85049/ 38-9 **      | 970-6000-***       | -336   | N        | -345   | W        |
| 11                       | M85049/ 38-11 **     | 970-6000-***       | -337   | N        | -346   | W        |
| 13                       | M85049/ 38-13 **     | 970-6000-***       | -338   | N        | -347   | W        |
| 15                       | M85049/ 38-15 **     | 970-6000-***       | -339   | N        | -348   | W        |
| 17                       | M85049/ 38-17 **     | 970-6000-***       | -340   | N        | -349   | W        |
| 19                       | M85049/ 38-19 **     | 970-6000-***       | -341   | N        | -350   | W        |
| 21                       | M85049/ 38-21 **     | 970-6000-***       | -342   | N        | -351   | W        |
| 23                       | M85049/ 38-23 **     | 970-6000-***       | -343   | N        | -352   | W        |
| 25                       | M85049/ 38-25 **     | 970-6000-***       | -344   | N        | -353   | W        |

M85049/

38

9

W

Military Designator

Type

Straight Cable Clamp

38

Shell Size Series III

9,11,13,15,17,19,21,23,25

Finish

Electroless Nickel

OD Cadmium

over electroless nickel

N


W

\*\* Finish  
\*\*\* Cannon Part No.





## Backshell - Type P (Potting Boot)



| Shell Size |           | A Dia. Max.   | B Dia. Max.   |
|------------|-----------|---------------|---------------|
| Series I   | Series II |               |               |
| 9          | 8         | .598 (15.19)  | .434 (11.02)  |
| 11         | 10        | .723 (18.36)  | .548 (13.92)  |
| 13         | 12        | .847 (21.51)  | .673 (17.09)  |
| 15         | 14        | .969 (24.61)  | .798 (20.27)  |
| 17         | 16        | 1.087 (27.61) | .899 (22.83)  |
| 19         | 18        | 1.211 (30.76) | 1.024 (26.01) |
| 21         | 20        | 1.336 (33.93) | 1.141 (29.98) |
| 23         | 22        | 1.461 (37.11) | 1.274 (32.36) |
| 25         | 24        | 1.586 (40.28) | 1.399 (35.53) |

How To Order (MS Version)

MS Designation \_\_\_\_\_  
Shell Size \_\_\_\_\_  
Series I - 9, 11, 13, 15, 17, 19, 21, 23, 25  
Series II - 8, 10, 12, 14, 16, 18, 20, 22, 24  
1 - Straight Cup

MS27486 - 10 - 1

NOTE: When ordering the MS version you must specify both MS numbers for the Potting Boot and the Adapter Ring.

| Shell Size |           | MS27486 Part Number | Cannon Part Number |
|------------|-----------|---------------------|--------------------|
| Series I   | Series II |                     |                    |
| 9          | 8         | 27486--1            | 040-0185-000       |
| 11         | 10        | 27486--1            | 040-0169-000       |
| 13         | 12        | 27486--1            | 040-0170-000       |
| 15         | 14        | 27486--1            | 040-0171-000       |
| 17         | 16        | 27486--1            | 040-0172-000       |
| 19         | 18        | 27486--1            | 040-0173-000       |
| 21         | 20        | 27486--1            | 040-0174-000       |
| 23         | 22        | 27486--1            | 040-0175-000       |
| 25         | 24        | 27486--1            | 040-0176-000       |

\*\* Only even numbered shell size is applicable.

## Potting Boot Adapter Ring

How To Order (MS Version)

Military Designation \_\_\_\_\_  
Finish \_\_\_\_\_  
A - Cad/Nickel (Clear)  
B - Cad/Nickel (O.D)  
F - Nickel (Electroless)  
Shell Size \_\_\_\_\_  
Series I - 9, 11, 13, 15, 17, 19, 21, 23, 25  
Series II - 8, 10, 12, 14, 16, 18, 20, 22, 24

MS27485 - A - 8

NOTE: When ordering the MS version you must specify both MS numbers for the Potting Boot and the Adapter Ring.

| Shell Size<br>Series I    Series II |    | MS27485<br>Part Number | Cannon<br>Part Number | Finishes       |       |                    |             |        |    |
|-------------------------------------|----|------------------------|-----------------------|----------------|-------|--------------------|-------------|--------|----|
|                                     |    |                        |                       | A              |       | B                  |             | N      | F  |
|                                     |    |                        |                       | Cadmium/Nickel | Clear | Cadmium/Nickel-O.D | Electroless | Nickel |    |
| I                                   | II |                        |                       | Cannon         | MS    | Cannon             | MS          | Cannon | MS |
| 9                                   | 8  | 27485-*--              | 237-0887-***          | -000           | A     | -001               | B           | -002   | F  |
| 11                                  | 10 | 27485-*--              | 237-0874-***          | -000           | A     | -001               | B           | -002   | F  |
| 13                                  | 12 | 27485-*--              | 237-0875-***          | -000           | A     | -001               | B           | -002   | F  |
| 15                                  | 14 | 27485-*--              | 237-0876-***          | -000           | A     | -001               | B           | -002   | F  |
| 17                                  | 16 | 27485-*--              | 237-0877-***          | -000           | A     | -001               | B           | -002   | F  |
| 19                                  | 18 | 27485-*--              | 237-0878-***          | -000           | A     | -001               | B           | -002   | F  |
| 21                                  | 20 | 27485-*--              | 237-0879-***          | -000           | A     | -001               | B           | -002   | F  |
| 23                                  | 22 | 27485-*--              | 237-0880-***          | -000           | A     | -001               | B           | -003   | F  |
| 25                                  | 24 | 27485-*--              | 237-0881-***          | -000           | A     | -001               | B           | -003   | F  |

\* MS Finish

\*\* Only even numbered shell size is applicable

\*\*\* Cannon Finish

## Wire Sealing Plugs

| Series III Size | Series I & II Size | Part Number  |              | Color Code |
|-----------------|--------------------|--------------|--------------|------------|
|                 |                    | Cannon       | MS27488      |            |
| 22D             | 22D                | 225-1013-000 | MS27488-22-2 | Black      |
| 20              | 20                 | 225-0070-000 | MS27488-20-2 | Red        |
| 16              | 16                 | 225-0104-000 | MS27488-16-2 | Green      |
| 12              | 12                 | 225-0105-000 | MS27488-12-2 | Orange     |

Wire sealing plugs meet MS27488 standards. The plugs are color coded according to size for easy identification. Wire sealing plugs may be ordered separately.

### Tools - Crimp



M22520/1-01

CBT-530



M22520/2-01



CBT-565

| Contact Size            | Pin Contact Series I/II/III |                               | Socket Contact Series II |                               | Socket Contact Series I & III |                               |
|-------------------------|-----------------------------|-------------------------------|--------------------------|-------------------------------|-------------------------------|-------------------------------|
|                         | Crimp Tool Part Number      | Locator or Turret Part Number | Crimp Tool Part Number   | Locator or Turret Part Number | Crimp Tool Part Number        | Locator or Turret Part Number |
| 22D or 22M*             | M22520/2-01                 | M22520/2-09                   | M22520/2-01              | M22520/2-06                   | M22520/2-01                   | M22520/2-07                   |
| 22*                     | M22520/2-01                 | M22520/2-09                   | M22520/2-01              | M22520/2-06                   | M22520/2-01                   | M22520/2-07                   |
| 20                      | M22520/1-01                 | M22520/1-04 OR TH 187         | M22520/1-01              | M22520/1-04                   | M22520/1-01                   | M22520/1-04                   |
| 16                      | M22520/1-01                 | M22520/1-04 OR TH 187         | M22520/1-01              | M22520/1-04                   | M22520/1-01                   | M22520/1-04                   |
| 12                      | M22520/1-01                 | M22520/1-04                   | M22520/1-01              | M22520/1-04                   | M22520/1-01                   | M22520/1-04                   |
| 8 Coax Inner Conductor  | Crimp Tool                  | Crimp Tool Locator            | Outer Conductor          |                               | Crimp Tool                    | Crimp Tool Locator            |
| RG180                   | M22520/2-01                 | 995-0002-268                  | RG180                    |                               | M22520/5-01                   | M22520/5-39B                  |
| RG 174, 179, 316        | M22520/2-01                 | 995-0002-268                  | RG 174, 179, 316         |                               | M22520/5-01                   | M22520/5-37B                  |
| RG 142                  | M22520/2-01                 | 995-0002-268                  | RG 142                   |                               | M22520/5-01                   | M22520/5-19B                  |
| 12 Coax Inner Conductor | Crimp Tool                  | Crimp Tool Locator            | Outer Conductor          |                               | Crimp Tool                    | Crimp Tool Locator            |
| RG174, 179, 316         | M22520/2-01                 | M22520/2-34                   | RG174, 179, 316          |                               | M22520/31-01                  | M22520/31-02                  |
| 8 Twinax Center Contact | Crimp Tool                  | Crimp Tool Locator            |                          |                               |                               |                               |
|                         | M22520/2-01                 | K709                          |                          |                               |                               |                               |
| Intermediate Contact    | M22520/5-01                 | Y631 Die Closure B            |                          |                               |                               |                               |
| Outer Contact           | M22520/5-01                 | Y631 Die Closure A            |                          |                               |                               |                               |

\* For reference only

### Tools - Plastic



Insertion/Extraction

| Contact Size  | Cannon Description | Cannon Part Number | M81969 Part Number | Superseded Military Part Number | Insertion Color Tip | Extraction Color Tip |
|---------------|--------------------|--------------------|--------------------|---------------------------------|---------------------|----------------------|
| 22D           | CIET-22D-01        | 274-7048-000       | M81969/14-01       | MS27534-22D                     | Green               | White                |
| 22M*          | CIET-22D-01        | 274-7048-000       | M81969/14-01       | MS27534-22D                     | Green               | White                |
| 20            | CIET-20-10         | 274-7001-000       | M81969/14-10       | MS27534-20                      | Red                 | Orange               |
| 16            | CIET-16-03         | 274-7002-000       | M81969/14-03       | MS27534-16                      | Blue                | White                |
| 12            | CIET-12-04         | 274-7003-000       | M81969/14-04       | MS27534-12                      | Yellow              | White                |
| 8 Coax/Twinax | CET8-T             | 323-7004-001       | —                  | —                               | —                   | —                    |
| 12 Coax       | CIET-12-04         | 274-7003-000       | M81969/14-04       | M527534-12                      | Yellow              | White                |

Insertion tool not required for size 8

### Tools - Metal (MS)



Insertion



Extraction

| Contact Size | Insertion           |                        |            | Extraction          |                        |                 |       |
|--------------|---------------------|------------------------|------------|---------------------|------------------------|-----------------|-------|
|              | MS27495 Part Number | ITT CANNON Part Number | Color Band | MS27495 Part Number | ITT CANNON Part Number | Color Band No.1 | No.2  |
| 22D OR 22M*  | MS27495 A22M        | 995-0001-718           | Black      | MS27495 R22M        | 995-0001-719           | Black           | White |
| 22*          | MS27495 A22         | 995-0001-720           | Brown      | MS27495 R22         | 995-0001-721           | Brown           | White |
| 20           | MS27495 A20         | 995-0001-716           | Red        | MS27495 R20         | 995-0001-717           | Red             | White |
| 16           | MS27495 A16         | 995-0001-732           | Blue       | MS27495 R16         | 995-0001-731           | Blue            | White |

Band No. 1 indicates tool size.  
Band No. 2 indicates removal tool.

\* For reference only

## Assembly Instructions

### Wire Stripping


Strip insulation from end of wire to be crimped.  
(See table for proper stripping dimensions.) Do not cut or damage wire strands.



| Wire Size   | A           |
|-------------|-------------|
| 22D or 22M* | .125 (3.18) |
| 20          | .188 (4.77) |
| 16          | .188 (4.77) |
| 12          | .188 (4.77) |

\* For reference only

### Contact Crimping



1. Insert stripped wire into contact crimp pot. Wire must be visible thru inspection hole.



2. Using correct crimp tool and locator, cycle the tool once to be sure the indentors are open. Insert contact and wire into locator. Squeeze tool handles firmly and completely to insure a proper crimp. The tool will not release unless the crimp indentors in the tool head have been fully actuated.



3. Release crimped contact and wire from tool. Be certain the wire is visible thru inspection hole in contact.

### Contact Insertion



1. Remove hardware from plug or receptacle and slip over wire bundle in proper order for reassembly.



2. Using proper plastic or metal insertion tool for corresponding contact, position wire in tip of the tool so that the tool tip butts up against the contact shoulder.



3. Press tool against contact shoulder and, with firm and even pressure, insert wired contact and tool tip into center contact cavity. A slight click may be heard as metal retaining tines snap into place behind contact shoulder.




4. Remove tool and pull back lightly on wire to make sure contact is properly seated. Repeat operation with remainder of contacts to be inserted, beginning with the center cavity and working outward in alternating rows.



5. After all contacts are inserted, fill any empty cavities with wire sealing plugs, Resemble plug or receptacle hardware.

### Contact Extraction



1. Remove hardware from plug or receptacle and slide hardware back along wire bundle.



2. Using plastic or metal extraction tool with proper color code corresponding to contact size, place wire in tool.



3. Insert tool into contact cavity until tool tip bottoms against the contact shoulder, expanding clip retaining tines.



4. Hold wire firmly in tool and extract wired contact and tool. Repeat operation for all contacts to be extracted.



5. Fill any empty wire cavities with wire sealing plugs, and



6. Reassemble plug or receptacle.

## MIL-DTL-38999 Specifications

The following excerpts are some of the parameter requirements of the MIL-DTL-3899 Specification.

| Test Description           | Paragraph Reference                         | Requirements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
|----------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------|----------------------------|---------------------------------------------|----------------------|---------------------------------------------|-----------------------|---------------------------------------------|------|------------|-------------|------|-----|---|---|----|----|---|----|----|---|----|----|---|-------|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|----|----|---|
| Contact Retention          | 4 5 19                                      | <p>After preloading to 3 pounds maximum, the force shall be applied at a rate of approximately 1 pound per second and maintained at full load for 5-10 seconds. No damage to contacts or insert shall result nor shall the contacts be dislocated from their normal position in the connector more than 0.012 inch under the given load. Failure to meet these requirements shall be cause for rejection.</p> <table><tr><td>Contact Size</td><td>22M*</td><td>22D</td><td>22*</td><td>20</td><td>18</td></tr><tr><td>Loads in Pounds ± 10%</td><td>10</td><td>10</td><td>10</td><td>15</td><td>25</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                         | Contact Size                                | 22M*                                        | 22D                        | 22*                                         | 20                   | 18                                          | Loads in Pounds ± 10% | 10                                          | 10   | 10         | 15          | 25   |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Contact Size               | 22M*                                        | 22D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 22*                                         | 20                                          | 18                         |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Loads in Pounds ± 10%      | 10                                          | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10                                          | 15                                          | 25                         |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Coupling Torque            | 4 5 6                                       | <p>For qualification testing, mating halves shall be coupled and uncoupled, measuring the torques necessary. The torques required to couple and uncouple mating connector halves shall fall within the limits specifications as follows:</p> <table><tr><th>Shell Size</th><th>Torque Max.</th><th>Min.</th><th>Shell Size</th><th>Torque Max.</th><th>Min.</th><th>Shell Size</th><th>Torque Max.</th><th>Min.</th><th>Shell Size</th><th>Torque Max.</th><th>Min.</th></tr><tr><td>8/9</td><td>8</td><td>2</td><td>14</td><td>20</td><td>4</td><td>18</td><td>28</td><td>5</td><td>22</td><td>36</td><td>7</td></tr><tr><td>10/11</td><td>12</td><td>2</td><td>15</td><td>20</td><td>3</td><td>19</td><td>28</td><td>3</td><td>23</td><td>36</td><td>5</td></tr><tr><td>12</td><td>16</td><td>2</td><td>16</td><td>24</td><td>4</td><td>20</td><td>32</td><td>6</td><td>24</td><td>36</td><td>7</td></tr><tr><td>13</td><td>16</td><td>2</td><td>17</td><td>24</td><td>3</td><td>21</td><td>32</td><td>5</td><td>25</td><td>40</td><td>5</td></tr></table> | Shell Size                                  | Torque Max.                                 | Min.                       | Shell Size                                  | Torque Max.          | Min.                                        | Shell Size            | Torque Max.                                 | Min. | Shell Size | Torque Max. | Min. | 8/9 | 8 | 2 | 14 | 20 | 4 | 18 | 28 | 5 | 22 | 36 | 7 | 10/11 | 12 | 2 | 15 | 20 | 3 | 19 | 28 | 3 | 23 | 36 | 5 | 12 | 16 | 2 | 16 | 24 | 4 | 20 | 32 | 6 | 24 | 36 | 7 | 13 | 16 | 2 | 17 | 24 | 3 | 21 | 32 | 5 | 25 | 40 | 5 |
| Shell Size                 | Torque Max.                                 | Min.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Shell Size                                  | Torque Max.                                 | Min.                       | Shell Size                                  | Torque Max.          | Min.                                        | Shell Size            | Torque Max.                                 | Min. |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| 8/9                        | 8                                           | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 14                                          | 20                                          | 4                          | 18                                          | 28                   | 5                                           | 22                    | 36                                          | 7    |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| 10/11                      | 12                                          | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 15                                          | 20                                          | 3                          | 19                                          | 28                   | 3                                           | 23                    | 36                                          | 5    |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| 12                         | 16                                          | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 16                                          | 24                                          | 4                          | 20                                          | 32                   | 6                                           | 24                    | 36                                          | 7    |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| 13                         | 16                                          | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 17                                          | 24                                          | 3                          | 21                                          | 32                   | 5                                           | 25                    | 40                                          | 5    |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Durability                 | 4 5 7                                       | Connector halves shall be mated and unmated 250 times for Series II with ground fingers and 500 times for Series I and III at a rate not exceeding 300 cycles per hour. The test may be performed by hand or by mechanical means, but the coupling ring shall be operated as in normal service. Failure to complete this test because of mechanical malfunction shall be cause for rejection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Insulation Resistance      | 4 5 9                                       | An insulation resistance test shall be performed on unmated connectors in accordance with MIL-STD-202, Method 302, Test condition B. Measurement shall be made between three pairs of adjacent contacts and the shell. Failure to meet the minimum requirement of 50,000 megohms for Classes E, P, F, R, and T shall be cause for rejection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Vibration                  | 4 5 22                                      | Wired, mated connectors shall be subjected to the vibration test of MIL-STD-202, Method 214, Test Condition II, except that the duration shall be one hour in each plane. Receptacles shall be mounted on the vibration fixture by normal means. All contacts shall be wired in a series circuit and 100-500 millamperes of current shall be allowed to flow through the series circuit during vibration. Suitable means shall be employed to monitor the current flow and to indicate any discontinuity of more than 1 microsecond. The wire bundle shall be damped to the nonvibrating points at least 8 inches from the rear of the connector. Current discontinuity of 1 microsecond or more, disengagement of the mated connectors, evidence of cracking, breaking, or loosening of parts shall be cause for rejection.                                                                                                                                                                                                                                 |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Shock                      | 4 5 23                                      | Wired mated connectors shall be subjected to one shock in each direction in each of three mutually perpendicular axes. The pulse shall be approximate half sine wave of 300g ± 15% magnitude with a duration of 3 ± 1 milliseconds. Receptacles shall be mounted on a shock fixture by normal means. All contacts shall be wired in a series circuit and 100-150 ma. of current shall flow through the series circuit during shock. Suitable means shall be employed to monitor the current flow and to indicate any discontinuity of more than 1 microsecond. The wire bundle shall be clamped to fixed points at least 8 inches from the rear of the connector. Current discontinuity of 1 microsecond or more, disengagement of the mated connectors, evidence of cracking, breaking, or loosening of parts shall be cause for rejection.                                                                                                                                                                                                                 |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Thermal Shock              | 4 5 4                                       | <p>Unmated receptacles shall be subjected to 10 cycles of thermal shock in the following manner:</p> <p>Step a The receptacle shall be suspended for 10 + 1 - 0 minutes in the center of a cold water bath with a volume of approximately one cubic foot. No dimension of the bath shall be less than 10 inches. The water temperature shall not exceed 4°C (39.20°F)</p> <p>Step b The receptacle shall be suspended for 10 - 1 - 0 minutes in the center of a hot water bath with a volume of approximately one cubic foot. No dimension of the bath shall be less than 10 inches. The water temperature shall be not less than 94°C (201°F).</p> <p>The time of transfer from one bath to the other shall not exceed 5 seconds. At the end of the tenth cycle, the receptacle shall have the excess moisture shaken off and shall then be dried in a forced air oven at 66±5°C for 15 ± 1 minutes. Any evidence of damage resulting from this test shall be cause for rejection.</p>                                                                      |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Altitude Immersion         | 4 5 8                                       | Mated connectors shall be placed in a container of water at approximately 20°C and placed in an altitude chamber. All wire ends shall be located within the chamber and exposed to the chamber atmosphere, but not submerged. The exposed wire ends shall not be sealed. A quantity of salt, 5 percent by weight, shall be added to make the water conductive. The chamber pressure shall then be reduced to approximately one inch of mercury and maintained for thirty minutes. The chamber pressure shall then be slowly returned to atmospheric. This shall be considered one cycle. Two additional cycles shall be performed. At the end of the last cycle, while the mated connectors are still submerged, the Insulation Resistance Test (room temperature), and the High Potential Test (sea level voltages) shall be performed upon the same circuits. Failure to meet an insulation resistance minimum of 2,000 megohms or any evidence of dielectric breakdown or -flashover shall be cause for rejection.                                        |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Solvent Immersion          | 4 5 29                                      | Unmated connectors shall be immersed fully in the applicable fluid specified below for 20 hours. After removal from the fluid, each connector shall remain for one hour in free air at room temperature.<br>a.) Jet fuel JP-4 to MIL-J-5624    b.) Aircraft lubricating oil to MIL-L-9236                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Corrosion                  | 4 5 12                                      | Unmated connectors and individual contact samples shall be subjected to the soft spray of MIL-STD-202, Method 101, Test Condition 8 (tin plated, Class Y receptacles-24 hours). Immediately after exposure, the surfaces of the specimens shall be thoroughly washed in tap water and dried in a circulatory oven at a temperature of 38 ±3°C (100°F) for a period of approximately 12 hours. Any exposure of basis metal as a result of this test, shall be cause for rejection.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Dynamic Salt Spray         | 4 5 12 2                                    | (Series I and 11, finish B; Series III, class W). The wired assembled plugs and receptacles shall be mated and unmated 50 cycles at a rate of 300 cycles per hour maximum. The mating and unmating shall be accomplished so that the plug and receptacle are completely separated during each cycle. The connectors shall then be subjected to the salt spray test in accordance with method 1001 of MIL-STD- 1344. The connectors shall be tested for 452 hours mated followed by 48 hours unmated. After the salt spray exposure the remaining number of durability cycles specified in 4.7.7 shall be completed.                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                             |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Temperature Durability     | 4 5 33                                      | <p>Wired rated connectors shall be subjected to the indicated ambient temperature for a period of 1,000 hours</p> <table><tr><td>Series I and II (finish A)</td><td>150<sup>+3°</sup><sub>-0°C</sub> (302° F)</td><td>Series I and II (finish B)</td><td>175<sup>+3°</sup><sub>-0°C</sub> (347° F)</td></tr><tr><td>Series III (class W)</td><td>175<sup>+3°</sup><sub>-0°C</sub> (347° F)</td><td>All other finishes</td><td>200<sup>+3°</sup><sub>-0°C</sub> (392° F)</td></tr></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Series I and II (finish A)                  | 150 <sup>+3°</sup> <sub>-0°C</sub> (302° F) | Series I and II (finish B) | 175 <sup>+3°</sup> <sub>-0°C</sub> (347° F) | Series III (class W) | 175 <sup>+3°</sup> <sub>-0°C</sub> (347° F) | All other finishes    | 200 <sup>+3°</sup> <sub>-0°C</sub> (392° F) |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Series I and II (finish A) | 150 <sup>+3°</sup> <sub>-0°C</sub> (302° F) | Series I and II (finish B)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 175 <sup>+3°</sup> <sub>-0°C</sub> (347° F) |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |
| Series III (class W)       | 175 <sup>+3°</sup> <sub>-0°C</sub> (347° F) | All other finishes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 <sup>+3°</sup> <sub>-0°C</sub> (392° F) |                                             |                            |                                             |                      |                                             |                       |                                             |      |            |             |      |     |   |   |    |    |   |    |    |   |    |    |   |       |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |    |    |   |

\* For reference only

# Product Safety and Warranty

## 1. MATERIAL CONTENT AND PHYSICAL FORM

Electrical connectors do not usually contain hazardous materials.

Electrical connectors and individual components do not release or otherwise result in exposure to hazardous chemicals under normal conditions of use and fall under the definition of "Article," under the Hazard Communication Standard, 29 CFR 1910.1200, and are not considered hazardous materials.

Solder and fluxes can be hazardous if inhaled or absorbed through the skin and should only be used as recommended by the manufacturer. Please consult your solder and flux manufacturer for more specific application recommendations.

## 2. FIRE CHARACTERISTICS AND ELECTRIC SHOCK HAZARD

There is no fire hazard when the connector is correctly wired and used within the specified parameters. Incorrect wiring or assembly of the connector or careless use of metal tools or conductive fluids, or transit damage to any of the component parts may cause electric shock or burns. Live circuits must not be broken by separating mated connectors as this may cause arcing, ionization and burning. Heat dissipation is greater at maximum resistance in a circuit. Hot spots may occur when resistance is raised locally by damage, e.g. cracked or deformed contacts, broken strands of wire. Local overheating may also result from the use of the incorrect application tools or from poor quality soldering or slack screw terminals. Overheating may occur if the ratings in the product Data Sheet/Catalog are exceeded and can cause breakdown of insulation and hence electric shock. If heating is allowed to continue it intensifies by further increasing the local resistance through loss of temper of spring contacts, formation of oxide film on contacts and wires and leakage currents through carbonization of insulation and tracking paths. Fire can then result in the presence of combustible materials and this may release noxious fumes. Overheating may not be visually apparent. Burns may result from touching overheated components.

## 3. HANDLING

Care must be taken to avoid damage to any component parts of electrical connectors during installation and use. Although there are normally no sharp edges, care must be taken when handling certain components to avoid injury to fingers. Always wear safety glasses to avoid potential injury to eyes during cleaning, soldering, fiber preparation, etc.

Electrical connectors may be damaged in transit to the customers, and damage may result in creation of hazards. Products should therefore be examined prior to installation/use and rejected if found to be damaged. Proper lifting techniques shall be used for handling shipping cartons.

## 4. DISPOSAL

Please recycle, reclaim or dispose of connectors and individual components in accordance with local, state and federal laws. Incineration of certain materials may release noxious or even toxic fumes.

## 5. APPLICATION

Connectors with exposed contacts should not be selected for use on the current supply side of an electrical circuit, because an electric shock could result from touching exposed contacts on an unmated connector. Voltages in excess of 30 V ac or 42.5 V dc are potentially hazardous and care should be taken to ensure that such voltages cannot be transmitted in any way to exposed metal parts of the connector body. The connector and wiring should be checked, before making live, to have no damage to metal parts or insulators, no solder blobs, loose strands, conducting lubricants, swarf, or any other undesired conducting particles. Circuit resistance and continuity check should be made to make certain that there are no high resistance joints or spurious conducting paths. Always use the specified application tools, cleaning materials and assembly instructions documented in the Data Sheet/Catalog. Do not permit untrained personnel to wire, assemble or tamper with connectors. For operation voltage please see appropriate national regulations.

## IMPORTANT GENERAL INFORMATION

(i) **Air and creepage paths/Operating voltage.** The admissible operating voltages depend on the individual applications and the valid national and other applicable safety regulations. For this reason the air and creepage path data are only reference values. Observe reduction of air and creepage paths due to PC board and/or harnessing.

### (ii) Temperature

All information given are temperature limits. The operation temperature depends on the individual application.

### (iii) Pressure

All pressure information given are differential pressure limits. The specific differential pressure limits, across the connector interface, are documented in the Data Safety/catalog

## (iv) Other important information

Cannon continuously endeavors to improve their products. Therefore, Cannon products may deviate from the description, technical data and shape as shown in this catalog and data sheets.

Commodities in this catalog may be controlled for export or re-export under the Export Administration Regulations (EAR), Nuclear Regulatory Commission (NRC) Regulations, or by the International Traffic in Arms Regulations (ITAR) when specifically designed, modified or configured for military use.

ITT Corporation Interconnect Solutions Division, ("ITT") manufactures high quality products. However, these products are intended to be used in accordance with the specifications in this publication. Any use or application that deviates from the stated operating specifications is not recommended and may be unsafe. No information and data contained in this publication shall be construed to create any liability on the part of ITT.

## Product Warranty

A limited product warranty applies to ITT products. Please refer to [www.ittcannon.com](http://www.ittcannon.com) (General Terms and Conditions of Sale) for the complete text of ITT's applicable Terms and Conditions of Sale, including warranty.

This publication is not to be construed as an offer. It is intended merely as an invitation to make an offer. ITT does not assume liability for any patent infringement or violation of other rights claimed by third parties which may result from its use.

With prior written consent, reprinting this publication without any modifications is generally permitted.

"ITT", the Engineered Blocks Logo and "Engineered for life" are registered trademarks of ITT Corporation. All other trademarks or registered trademarks are property of their respective owners. All dates subject to change without notice.





## Circular/Filter/Hermetic/Fiber Optic Connectors

As a world leader in circular, filter, and hermetic connectors, ITT can leverage its design and manufacturing expertise to fit virtually any application. Our expertise includes fast positive mating for a wide range of military applications, as well as numerous sizes and contact configurations for various harsh environments. Our wide variety of fiber optic products include hybrid contacts, multi-channel, rack and panel, and hi-rel assemblies, including MIL and ARINC standard solutions. ITT can meet numerous specs, including NATO and MIL standards.


[www.ittcannon.com/circulars](http://www.ittcannon.com/circulars) • [www.ittcannon.com/filter](http://www.ittcannon.com/filter) • [www.ittcannon.com/hermetics](http://www.ittcannon.com/hermetics) • [www.ittcannon.com/fiberoptics](http://www.ittcannon.com/fiberoptics)



## D-Subminiature Connectors

Cannon invented D-sub connectors in 1952. Our family of D-Subs now includes combinations of signal, power and RF, as well as severe service sealed connectors. Cannon D-Subs are available with an extensive line of backshells and accessories and are one of the most economical shielded connector solutions available. ITT D-Sub connectors are qualified to the MIL-DTL-24308 specification.

[www.ittcannon.com/dsubs](http://www.ittcannon.com/dsubs)

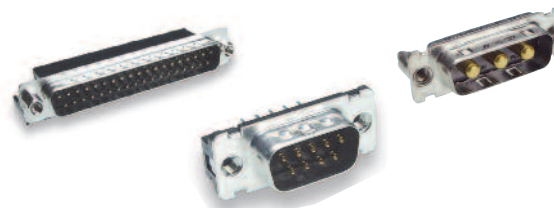

## Microminiature Connectors

Developed first by Cannon in the 1960's, Interconnect Solutions microminiature connectors offer high performance and reliability with exceptional versatility. Available in rectangular, circular, and strip configurations for countless applications, many of our connectors meet or exceed applicable requirements of the MIL-DTL-83513 specification.

[www.ittcannon.com/micro](http://www.ittcannon.com/micro)



## Rack and Panel Connectors

Initially pioneered by Cannon during the 1930s, Interconnect Solutions is the world leader in rack and panel connectors, offering unmatched variety of shell configurations and insert arrangements, materials, plating, and contact options. Many of our standard and custom designs meet the stringent requirements of ARINC 600, ARINC 404 (MIL-C-81659), and MIL-DTL-83733 standards.

[www.ittcannon.com/rackandpanel](http://www.ittcannon.com/rackandpanel)



## RF Connectors

ITT Interconnect Solutions has been providing interconnect products to the Microwave and RF industry since 1963 (formerly The Sealelectro Corporation). The RF 50 & 75 Ohm product lines cover UHF band through Ku band requirements. These connectors and cable assemblies are available with a thread type, snap type, bayonet type or slide on coupling method. The frequencies range from DC to 18+ GHz.

[www.ittcannon.com/RF50](http://www.ittcannon.com/RF50) • [www.ittcannon.com/RF75](http://www.ittcannon.com/RF75)



## Transportation

The ITT ICS interconnect range includes sealed circular and rectangular connectors in metal or plastic shells. These configurations include board to cable or cable to cable/ bulkhead applications. Both signal and power contacts can be combined in various layouts. All product lines within the Transportation segment offer very low contact resistance providing maximum signal integrity.

[www.ittcannon.com/transportation](http://www.ittcannon.com/transportation)



ITT Interconnect Solutions is an international manufacturer and supplier of connectors including circular, rectangular, fiber optic, RF, power and high voltage, audio, PCMCIA, Compact Flash Card, enclosures, cable assemblies, and application specific custom solutions. The Interconnect Solutions portfolio includes the brands Cannon, VEAM, and BIW. As a worldwide leader in connector technology for nearly a century, ITT offers one of the broadest product offerings, six sigma manufacturing capability, Value Based Product Development with exceptional engineering capability, and an extensive sales, distribution, and customer support network.







## Global Design & Manufacturing and Customer Support

### North America

#### **MEXICO - Cannon, VEAM**

Av. Libre Comercio s/n-  
entre Calzada Industrial  
Nuevo Nogales y Calzada del Raquet Club,  
Parque Industrial Nuevo Nogales  
phone: +52.631.3110050  
fax: +52.631.3110060

#### **USA - Cannon**

666 East Dyer Road  
Santa Ana, CA 92705  
toll free: 1.800.854.3028  
phone: +1.714.557.4700  
fax: +1.714.628.2142

#### **USA - BIW**

500 Tesconi Circle  
Santa Rosa, CA 95401  
phone: +1.707.523.2300  
fax: +1.707.523.3567

#### **USA - VEAM**

100 New Wood Road  
Watertown, CT 06795  
phone: +1.860.274.9681  
fax: +1.860.274.4963

### Europe & Middle East

#### **FRANCE - Cannon, VEAM**

15, Boulevard Robert Thiboust  
Serris, France 77700  
phone: +33.1.60.04.93.93  
fax: +33.1.60.04.93.90

#### **GERMANY - Cannon, VEAM**

Cannonstrasse 1  
Weinstadt, 71384  
phone: +49.7151.699.0  
fax: +49.7151.699.217

#### **ITALY - VEAM**

Corso Europa 41/43  
Lainate (MI), Italy 20020  
phone: +39.02938721  
fax: +39.0293872300

#### **LEBANON - BIW**

P.O. Box 199  
Jounieh  
Lebanon  
phone: +961.9.911.560  
fax: +961.9.912.126

#### **UK - Cannon, VEAM**

Jays Close, Viabes Estate  
Basingstoke, RG22 4BA  
phone: +44.1256.311200  
fax: +44.1256.323356

### Asia

#### **CHINA - Cannon, VEAM**

Tuopandun Industrial Area, Jinda Cheng,  
Xiner Village, Shajing Town,  
Baoan District, Shenzhen City,  
Guangdong, China 518125  
phone: +86.755.2726.7238  
fax: +86.755.2726.7515

#### **HONG KONG - Cannon, VEAM**

Units 2405-6, 24/F, ING Tower  
308 Des Voeux Road  
Central  
Hong Kong  
phone: +852.2732.2720  
fax: +852.2732.2919

#### **INDIA - Cannon, VEAM**

ITT Corporation India Pvt Ltd  
2nd Fl Prama House  
21 Cama Industrial Estate  
Walbhat Road, Goregaon (E),  
Mumbai  
phone: +91 22 67843000  
fax: +91 22 26783033

#### **JAPAN - Cannon, VEAM**

11-3, 5 Chome, Hibarigaoka, Zama-shi  
Kanagawa, Japan 228-0003  
phone: +81.462.57.2010  
fax: +81.462.57.1680

#### **SINGAPORE - Cannon, VEAM**

10 Jalan Kilang #06-01 Singapore  
159410  
phone: +65.62763693 ext 232  
fax: +65.62763685



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.