

1


2

3

4

FCI PART NO.	POWER TYPE	LENGTH "X"
10083511-Z0050YYLF	24V	500+25/-0
10083511-Z0100YYLF	24V	1000±15
10083511-Z0300YYLF	24V	3000±25
10083511-Z0500YYLF	24V	5000±25

LENGTH "X"

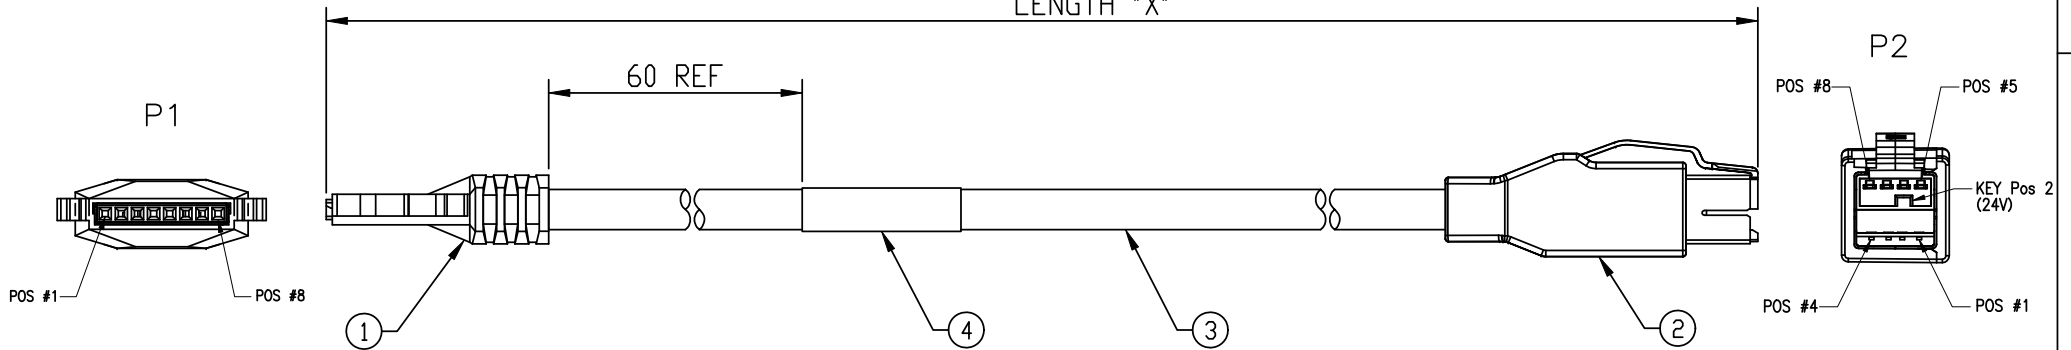

PIN ASSIGNMENT

P1	SIGNAL NAME	WIRE COLOR	WIRE AWG	P2
6	VBUS (+5V)	RED	20	1
5	DATA -	WHITE	28	2
4	DATA +	GREEN	28	3
3	GND	BLACK	20	4
1	24V RETURN	BLUE	20	5
2	+24V	BROWN	20	6
7	+24V	ORANGE	20	7
8	24V RETURN	YELLOW	20	8
SHELL	FRAME GND	BRAID		SHELL

Mark with
10075076001
REV. prai_revision
in area indicated
by X....

rev	ecn no	dr	date
A	N08-0120	ST	6/18/2008

TOLERANCES UNLESS OTHERWISE SPECIFIED

LINEAR				
ANGULAR	0°	±2°		

Material			Spec ref		spec_ref				
Mat code			surface		tolerance		projection		
Heattreat			ISO 1302		ISO 406 ISO 1101				
Plating/Finish									
Dr Sunny Tsai		11/7/2007				size		Scale	
Eng Sunny Tsai		11/7/2007	Product family			CABLE ASS'Y		A3 -	
Chr Jackson Wang		11/7/2007	Model Name			ECN			
Appr Jackson Wang		11/7/2007	Model Revision			REL Level			
		title				CABLE: USB+POWER(24V) TO 1X8 LATCH-N-LOK (ROHS)		dwg no	
								10083511	
Pro/E file		catalog no				CUSTOMER DWG		sheet 1 of 2	

REV F - 2006-04-17

2

3PDM: Rev:A

STATUS: Released

Printed: Jul 10, 2009



1

2

3

4

FCI PART NO. SEE SHEET 1

NOTES:

1. USB+POWER MATES WITH FCI PART NUMBER: 55917-6XXLF.
1x8 LATCH-N-LOK MATES WITH FCI PART NUMBER: 69913-XXXLF.

2. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE:
=< 1 METER= ±15.0mm
> 1 METER TO 10 METER= ±2% OF L1 OR L2
> 10 METER= +0%/-4% OF L1 OR L2

3. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

10083511 - Z X X X X Y Y LF

LF: LEAD FREE

NOT APPLICABLE TO THIS ASSEMBLY

NOT APPLICABLE TO THIS ASSEMBLY

LENGTH (METERS & CENTIMETERS)
0100: 1 METERS 00 CENTIMETERS

WIRE GAGE

Z: MULTIPLE WIRE GAGE

4. UNLESS OTHERWISE SPECIFIED LABEL POSITION SHALL BE APPROXIMATELY
60mm FROM REAR OF CONNECTOR.

5. UNLESS OTHERWISE SPECIFIED STANDARD LABEL SHALL BE BRADY LABEL
P/N THT-10-427-30.

LABEL DETAILS:

FCI	----	MANUFACTURER CODE OR NAME
10083511-ZXXXXYYLF	----	FCI P/N
REV.A	----	REVISION
WWYY	----	DATE CODE WWYY FORMAT
MADE IN CHINA	----	COUNTRY ORIGIN

6. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY
AS DEFINED IN WIRING LIST.

7. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE
100% HI-POT TESTED: DC 300V/10ms

Mark with
10075076001
REV. proj_revision
in area indicated
by X....

rev	ecn no	dr	date
-	See sheet 1	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR			
ANGULAR	0°	±2°	

8. OTHER ELECTRICAL SPECIFICATIONS:

DIELECTRIC RESISTANCE: 50M Ohms MIN.

CONNECTION RESISTANCE: 0.8 Ohms MAX. (-Z0050YYLF, 0.5MR LENGTH)
1.2 Ohms MAX. (-Z0100YYLF, 1.0MR LENGTH)
1.5 Ohms MAX. (-Z0300YYLF, 3.0MR LENGTH)
1.8 Ohms MAX. (-Z0500YYLF, 5.0MR LENGTH)

9. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.

10. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008.

11. CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY
NOT SHOWN ALL PART DETAIL, REFERENCE CONNECTOR ASSEMBLY DRAWINGS
FOR COMPLETE DETAILS.

12. PACKAGE: EACH CABLE ASSEMBLY IN CLEAR ZIP-LOCK BPLY BAG,
THEN BULK PACKED IN A BOX.

13. MATERIAL:

4	1	EA	ADHESIVE LABEL.
3	AR	MM	USB+POWER CABLE: 28AWG*1P+20AWG*6C+SHIELD.
2	1	EA	USB+POWER PLUG KIT (24V) TYPE A, KEY POSITION 2, FCI P/N: 74233-202LF.
1	1	EA	1X8 LATCH-N-LOK 360° SHIELDED PLUG CONNECTOR KIT, PEBBLE GRAY, FCI P/N: 74903-709LF.
ITEM	Q'TY	UNIT	DESCRIPTION

Material				Spec ref		spec_ref		
Mat code				surface ISO 1302	tolerance ✓ ISO 406 ISO 1101	projection 	MM 	
Heattreat								
Plating/Finish								
Dr	Sunny Tsai	11/7/2007				size	Scale	
Eng	Sunny Tsai	11/7/2007	Product family			CABLE ASSY	A3	-
Chr	Jackson Wang	11/7/2007	Model Name			ECN		
Appr	Jackson Wang	11/7/2007	Model Revision			REL Level		
		title				dwg no		Rev.
		CABLE :USB+POWER(24V) TO 1X8 LATCH-N-LOK (ROHS)				10083511		A
Pro/E file		catalog no				CUSTOMER DWG		sheet 2 of 2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.