


MIO-5290

Intel® Core™ i7 / i3, 3.5" MI/O-Compact SBC,
DDR3/DDR3L, VGA, DP/HDMI, 48-bit LVDS, 2GbE,
2 x Mini PCIe, mSATA, iManager, MIOe

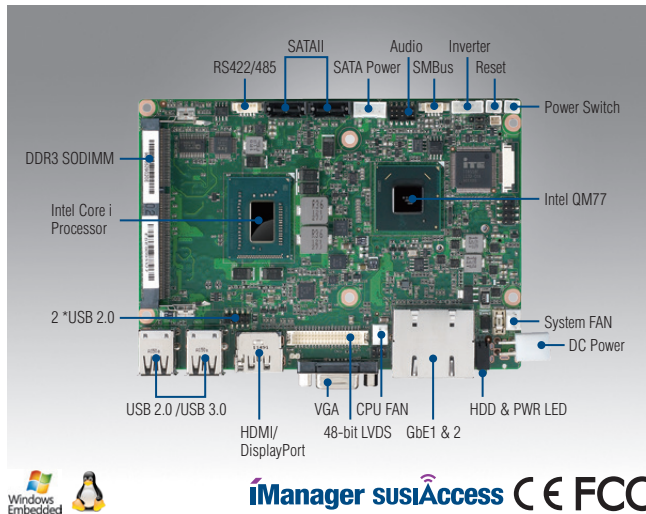

iManager susiAccess CE FCC

Features

- Intel® Core™ i7, i3 and Celeron processors + Intel QM77 PCH, 1 x DDR3/DDR3L SO-DIMM support up to 8 GB
- DirectX11, OpenGL3.1, OpenCL1.1, 3 independent display: VGA or LVDS + DisplayPort + DisplayPort (from MIOe)
- Supports Intel® AMT8.0, USB 3.0, TPM1.2
- Flexible design using integrated multiple I/O: MIOe to approach vertical applications & keep domain knowhow
- 2 GbE support, HD Audio, Rich I/O interface with 2 COM, 2 SATA, SMBus, 8-bit GPIO, Half-size Mini PCIe, Full-size Mini PCIe & 2 USB 3.0
- Supports iManager, SUSIAccess and Embedded Software APIs

Software APIs:



Utilities:




Specifications

Processor System	CPU	Celeron 1047UE	ULV Core i3 3217UE	ULV Core i7 3517UE	LV Core i7 3555LE
	Frequency	1.4GHz (Dual-Core)	1.6GHz (Dual-Core)	1.7GHz (Dual-Core)	2.5GHz (Dual-Core)
Memory	L3 Cache	2MB	3MB	4MB	4MB
	System Chipset	Intel QM77			
Display	BIOS	AMI EFI 64Mbit			
	Technology	DDR3 1600MHz, DDR3L 1333 MHz			
Ethernet	Max. Capacity	8 GB			
	Socket	1 x 204-pin SODIMM			
Audio	Controller	Intel HD Graphics 4000 / Intel HD Graphics (Celeron)			
	Graphic Engine	DirectX11, OpenGL 3.1, and OpenCL 1.1			
HDMI / DisplayPort*	VGA	Hardware decode acceleration: AVC/H.264, MPEG-2, VC-1			
	LVDS	Integrated 340.4MHz RAMDAC, Max resolution up to 2048 x 1536 at 75Hz			
3 Independent Display	LVDS	LVDS with 3.3V, 5V and 12V on LCD VDD power, 5V and 12V support on LVDS inverter			
	HDMI / DisplayPort*	Dual channel 24-bit LVDS, max resolution up to 2560 x 1600 at 60Hz			
Speed	Max resolution up to 2560 x 1600 at 60Hz on DisplayPort, Max resolution up to 1920 x 1200 at 60Hz on HDMI				
	3 Independent Display	VGA + Displayport (coastline) + Displayport (MIOe) or LVDS + Displayport (coastline) + DisplayPort (MIOe)			
Controller	Speed	10/100/1000Mbps			
	Controller	GbE1: Intel 82579LM, GbE2: Intel 82583V			
Connector	Connector	2 RJ45 on Rear I/O			
Chipset	Chipset	Realtek ALC892, High Definition Audio (HD), Line-in, Line out, Mic-in			
	Amplifier	Optional via MIOe			
WatchDog Timer	Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds				
	Storage	2, up to 6.0 Gb/s (600 MB/s)			
mSATA	Supports either mSATA or full size miniPCIe, selected by BIOS, default support miniPCIe				
	Ethernet	2 (10/100/1000Mbps)			
Rear I/O	VGA	1			
	HDMI / DisplayPort	1			
USB 2.0	USB 2.0	2 x USB 2.0			
	USB 3.0	2 x USB 3.0			
LED	LED	Power, HDD			
	DC Jack	Only on MIO-5290U-S6A1E/MIO-5290U-S7A1E			
Internal I/O	USB	2 x USB 2.0			
	Serial	RS-232 from COM1, RS-232/422/485 from COM2 with auto flow control (ESD protection for RS-232: Air gap ±15kV, Contact ±8kV)			
I²C	I²C	1 (Shares with SMBus pin)			
	SMBus	1			
GPIO	GPIO	8-bit general purpose input/output			
	Mini PCIe	1 x Full-size			
Expansion	MIOe	1 x Half-size			
	Displayport, SMBus, 1 x USB2.0, 1 x USB3.0, LPC, 4 x PCIe x1, line out, 5 Vsb/12 Vsb power, Power On Reset				
Power Type	Power Type	Single 12V DC power input			
	Power Supply Voltage	Supports single 12V input, ± 10%			
Power Consumption (Typical)	MIO-5290U-S6A1E: w/DDR3: 1.615 A @ 12 V (19.38 W), w/DDR3L: 1.507 A @ 12 V (18.08 W)				
	MIO-5290U-S7A1E: w/DDR3: 2.023 A @ 12 V (24.28 W), w/DDR3L: 1.965 A @ 12 V (23.5 W)				
Power Consumption (Max, test in HCT)	MIO-5290L-U5A1E: w/DDR3: 2.356 A @ 12 V (28.27 W), w/DDR3L: 2.309 A @ 12 V (27.7 W)				
	MIO-5290U-S4A1E: w/DDR3: 1.18 A @ 12 V (14.16 W), w/DDR3L: 1.1 A @ 12 V (13.2 W)				
Power Consumption (Max, test in HCT)	MIO-5290U-S6A1E: w/DDR3: 2.024 A @ 12 V (24.29 W), w/DDR3L: 1.84 A @ 12 V (22.08 W)				
	MIO-5290U-S7A1E: w/DDR3: 2.412 A @ 12 V (28.94 W), w/DDR3L: 2.3 A @ 12 V (27.6 W)				
Power Consumption (Max, test in HCT)	MIO-5290L-U5A1E: w/DDR3: 2.896 A @ 12 V (34.75 W), w/DDR3L: 2.708 A @ 12 V (32.5 W)				
	MIO-5290U-S4A1E: w/DDR3: 1.68 A @ 12 V (20.16 W), w/DDR3L: 1.49 A @ 12 V (17.88 W)				
Power Management	Power Management	ACPI			
	Battery	Lithium 3 V / 210 mAh			
Environment	Operational	0 ~ 60° C (32 ~ 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)			
	Non-Operational	-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing			
Physical Characteristics	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"			
	Weight	0.84 kg (1.72lb), weight of total package			
Height	Top Side: 37 mm (MIO-5290U series), 47.7 mm (MIO-5290L series); Bottom Side: 9 mm; PCB: 1.6mm				

* In order to have optimize compatibility on HDMI, DisplayPort is not under best configuration. If any compatibility issue occur on DP, please help to contact with technical service.

Block Diagram

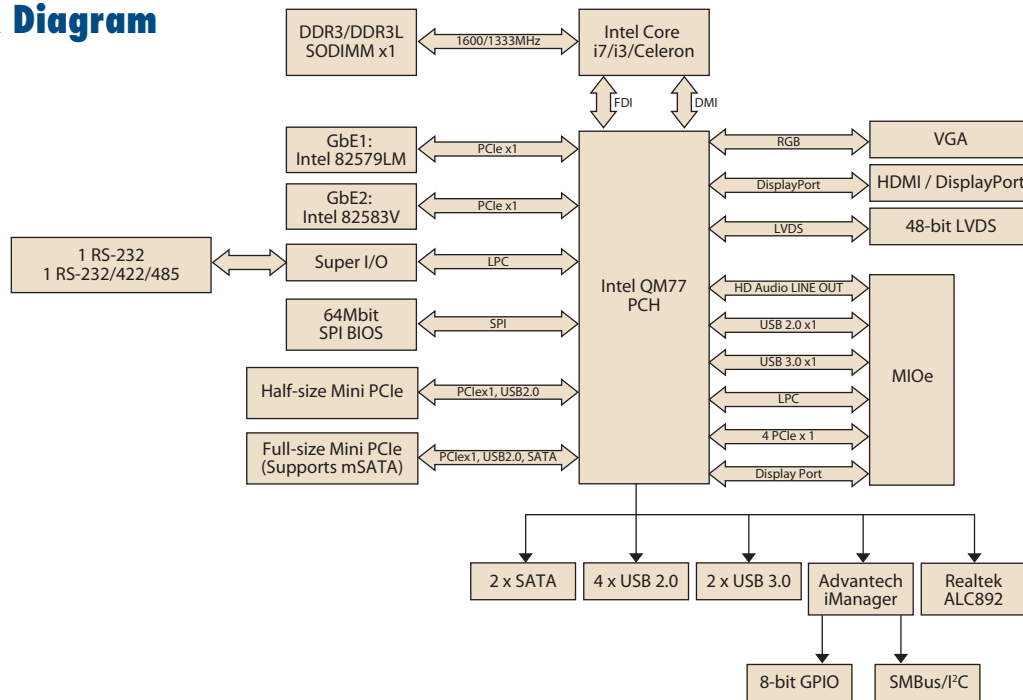

Ordering Information

Part No.	CPU	L3 Cache	LVDS	VGA	HDMI/DP	GbE	HD Audio	RS-232/422/485	RS-232	USB 3.0	USB 2.0	SATA	Half-size Mini PCIe	Full-size Mini PCIe ¹	MIOe	Power connector	Thermal Solution ²	Operation Temp.
MIO-5290U-S6A1E	Intel Core i3 ULV 1.6GHz 3217UE DC, 17W	3MB	48-bit	Yes	Yes	2	Yes	1	1	2	4	2	1	1	Yes	DC Jack	Active	0 ~ 60° C
MIO-5290U-S7A1E	Intel Core i7 ULV 1.7GHz 3517UE DC, 17W	4MB	48-bit	Yes	Yes	2	Yes	1	1	2	4	2	1	1	Yes	DC Jack	Active	0 ~ 60° C
MIO-5290L-U5A1E	Intel Core i7 LV 2.5GHz 3555LE DC, 25W	4MB	48-bit	Yes	Yes	2	Yes	1	1	2	4	2	1	1	Yes	2x2 pin	Active	0 ~ 60° C
MIO-5290U-S4A1E	Intel Celeron 1.40 GHz 1047UE DC, 17W	2MB	48-bit	Yes	Yes	2	Yes	1	1	2	4	2	1	1	Yes	2x2 pin	Active	0 ~ 60° C

¹ Full-size Mini PCIe supports mSATA

² Active = with fan

Packing List

Part No.	Description	Quantity
	MIO-5290 SBC	1
2006529000	Startup Manual	1
1700006291	M Cable SATA 7P/SATA 7P 30cm C=R 180/90	1
1700018785	SATA 35cm power cable	1
1700019435	COM RS-485 D-SUB 9P (M)/1*5P 1.25 25cm cable	1
1701200220	COM RS-232 Cable 2*10P-2.0/D-SUB 9P (M)*2 22CM	1
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1
1960057431N001	Cooler for MIO-5290L series only (Height: 47.7mm)	1
1960057432N001	Cooler for MIO-5290U series only (Height: 37mm)	1

Optional Accessories

Part No.	Description
1960058000N001	Heat spreader for MIO-5290
1700006291	SATA cable 7P/ 7P 30cm C=R 180/90
1703100260	Internal USB cable
1757003934	Adaptor 100-240V 60W 12V 5A W/O PFC

Embedded OS/API

Embedded OS/API	Part No.	Description
Windows Embedded Standard	2070011449	WES2009 MIO-5290 ENG
Windows Embedded Standard 7	2070011453/2070011452	WES7E 32/64bit MIO-5290 ENG/GER/JPN/CH
VxWorks		6.9.2
QNX		6.5
Linux		CentOS 6.3/Ubuntu 12.04
Software API		iManager 2.0

Rear I/O View



MIO-5290U-S6A1E
MIO-5290U-S7A1E



MIO-5290L-U5A1E
MIO-5290U-S4A1E



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.