


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.1

Technical Data Sheet		Rosenberger													
RPC-2.92	Straight Jack PCB Economic Solderless Connector	02K721-40MS3													
 5.66 7.16 9.9 10.27 1.8 max. 2.5* 1/4-36 UNS-2A 5 3 Z 20:1 0.1-0.08 1.31 Screw DIN7985 UNF 0-80 x 3/16 (2x) *Optional screws for thicker PCB's available															
All dimensions are in mm; tolerances according to ISO 2768 m-H															
Interface		According to IEC 61169-35 Mechanically compatible with RPC-3.50 and SMA													
Documents		PCB layout B 594A													
Material and plating		<table><tr><td>Connector parts</td><td>Material</td><td>Plating</td></tr><tr><td>Center contact</td><td>CuBe</td><td>Gold, min. 1.27 µm, over chemical nickel</td></tr><tr><td>Outer contact</td><td>Stainless steel</td><td>Passivated</td></tr><tr><td>Dielectric</td><td>PTFE</td><td></td></tr></table>		Connector parts	Material	Plating	Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel	Outer contact	Stainless steel	Passivated	Dielectric	PTFE	
Connector parts	Material	Plating													
Center contact	CuBe	Gold, min. 1.27 µm, over chemical nickel													
Outer contact	Stainless steel	Passivated													
Dielectric	PTFE														
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 1 / 2												

RF_35/05.10/6.1 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger																							
RPC-2.92		Straight Jack PCB Economic Solderless Connector		02K721-40MS3																							
Electrical data <table><tr><td>Impedance</td><td>50 Ω</td></tr><tr><td>Frequency</td><td>DC to 40 GHz</td></tr><tr><td>Return loss</td><td>≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz</td></tr><tr><td>Insertion loss</td><td>≤ 0.04 x √f(GHz) dB</td></tr><tr><td>Insulation resistance</td><td>≥ 5 GΩ</td></tr><tr><td>Center contact resistance</td><td>≤ 3.0 mΩ</td></tr><tr><td>Outer contact resistance</td><td>≤ 2.0 mΩ</td></tr><tr><td>Test voltage</td><td>750 V rms</td></tr><tr><td>Working voltage</td><td>250 V rms</td></tr><tr><td>RF-leakage</td><td>≥ 100 dB up to 1 GHz</td></tr></table> - Connector only, VSWR in application depends decisive on PCB layout -								Impedance	50 Ω	Frequency	DC to 40 GHz	Return loss	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz	Insertion loss	≤ 0.04 x √f(GHz) dB	Insulation resistance	≥ 5 GΩ	Center contact resistance	≤ 3.0 mΩ	Outer contact resistance	≤ 2.0 mΩ	Test voltage	750 V rms	Working voltage	250 V rms	RF-leakage	≥ 100 dB up to 1 GHz
Impedance	50 Ω																										
Frequency	DC to 40 GHz																										
Return loss	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz																										
Insertion loss	≤ 0.04 x √f(GHz) dB																										
Insulation resistance	≥ 5 GΩ																										
Center contact resistance	≤ 3.0 mΩ																										
Outer contact resistance	≤ 2.0 mΩ																										
Test voltage	750 V rms																										
Working voltage	250 V rms																										
RF-leakage	≥ 100 dB up to 1 GHz																										
Mechanical data <table><tr><td>Mating cycles</td><td>≥ 500</td></tr><tr><td>Mating force PCB side</td><td>≤ 23 N</td></tr><tr><td>Center contact captivation</td><td>≥ 20 N</td></tr><tr><td>Coupling test torque</td><td>1.70 Nm</td></tr><tr><td>Recommended torque</td><td>0.80 Nm to 1.10 Nm</td></tr></table>								Mating cycles	≥ 500	Mating force PCB side	≤ 23 N	Center contact captivation	≥ 20 N	Coupling test torque	1.70 Nm	Recommended torque	0.80 Nm to 1.10 Nm										
Mating cycles	≥ 500																										
Mating force PCB side	≤ 23 N																										
Center contact captivation	≥ 20 N																										
Coupling test torque	1.70 Nm																										
Recommended torque	0.80 Nm to 1.10 Nm																										
Environmental data <table><tr><td>Storage temperature range</td><td>-40°C to +85°C</td></tr><tr><td>Operating temperature range</td><td>-0°C to +85°C</td></tr><tr><td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr><tr><td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr><tr><td>Vibration</td><td>MIL-STD-202, Method 204, Condition D</td></tr><tr><td>Shock</td><td>MIL-STD-202, Method 213, Condition I</td></tr><tr><td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr><tr><td>RoHS</td><td>compliant</td></tr></table>								Storage temperature range	-40°C to +85°C	Operating temperature range	-0°C to +85°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Corrosion	MIL-STD-202, Method 101, Condition B	Vibration	MIL-STD-202, Method 204, Condition D	Shock	MIL-STD-202, Method 213, Condition I	Moisture resistance	MIL-STD-202, Method 106	RoHS	compliant				
Storage temperature range	-40°C to +85°C																										
Operating temperature range	-0°C to +85°C																										
Thermal shock	MIL-STD-202, Method 107, Condition B																										
Corrosion	MIL-STD-202, Method 101, Condition B																										
Vibration	MIL-STD-202, Method 204, Condition D																										
Shock	MIL-STD-202, Method 213, Condition I																										
Moisture resistance	MIL-STD-202, Method 106																										
RoHS	compliant																										
Accessories Available Screws DIN 7985-H-A2 UNF 0-80 (cylinder head screw) for different PCB thickness. <table><tr><td>3/16" length = Standard (already included with the connector)</td><td>DIN7985-H-A2 UNF 0-80x3/16</td></tr><tr><td>1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)</td><td>DIN7985-H-A2 UNF 0-80x1/4</td></tr><tr><td>5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)</td><td>DIN7985-H-A2 UNF 0-80x5/16</td></tr><tr><td>3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)</td><td>DIN7985-H-A2 UNF 0-80x3/8</td></tr><tr><td>7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)</td><td>DIN7985-H-A2 UNF 0-80x7/16</td></tr></table>								3/16" length = Standard (already included with the connector)	DIN7985-H-A2 UNF 0-80x3/16	1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)	DIN7985-H-A2 UNF 0-80x1/4	5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)	DIN7985-H-A2 UNF 0-80x5/16	3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)	DIN7985-H-A2 UNF 0-80x3/8	7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)	DIN7985-H-A2 UNF 0-80x7/16										
3/16" length = Standard (already included with the connector)	DIN7985-H-A2 UNF 0-80x3/16																										
1/4" length = Optional (PCB thickness min. 1.8 mm to max. 4.2 mm)	DIN7985-H-A2 UNF 0-80x1/4																										
5/16" length = Optional (PCB thickness min. 3.2 mm to max. 5.7 mm)	DIN7985-H-A2 UNF 0-80x5/16																										
3/8" length = Optional (PCB thickness min. 4.8 mm to max. 7.5 mm)	DIN7985-H-A2 UNF 0-80x3/8																										
7/16" length = Optional (PCB thickness min. 6.4 mm to max. 8.9 mm)	DIN7985-H-A2 UNF 0-80x7/16																										
Tooling N/A																											
Weight 2.2 g/pce																											
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.																											
<table><tr><td>Draft</td><td>Date</td><td>Approved</td><td>Date</td></tr><tr><td>F. Reiner</td><td>16.02.16</td><td>M. Moder</td><td>26.03.17</td></tr></table>				Draft	Date	Approved	Date	F. Reiner	16.02.16	M. Moder	26.03.17	<table><tr><td>Rev.</td><td>Engineering change number</td><td>Name</td><td>Date</td></tr><tr><td>a00</td><td>18-s133</td><td>M.Ruf</td><td>26.03.18</td></tr></table>				Rev.	Engineering change number	Name	Date	a00	18-s133	M.Ruf	26.03.18				
Draft	Date	Approved	Date																								
F. Reiner	16.02.16	M. Moder	26.03.17																								
Rev.	Engineering change number	Name	Date																								
a00	18-s133	M.Ruf	26.03.18																								
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 2 / 2																					

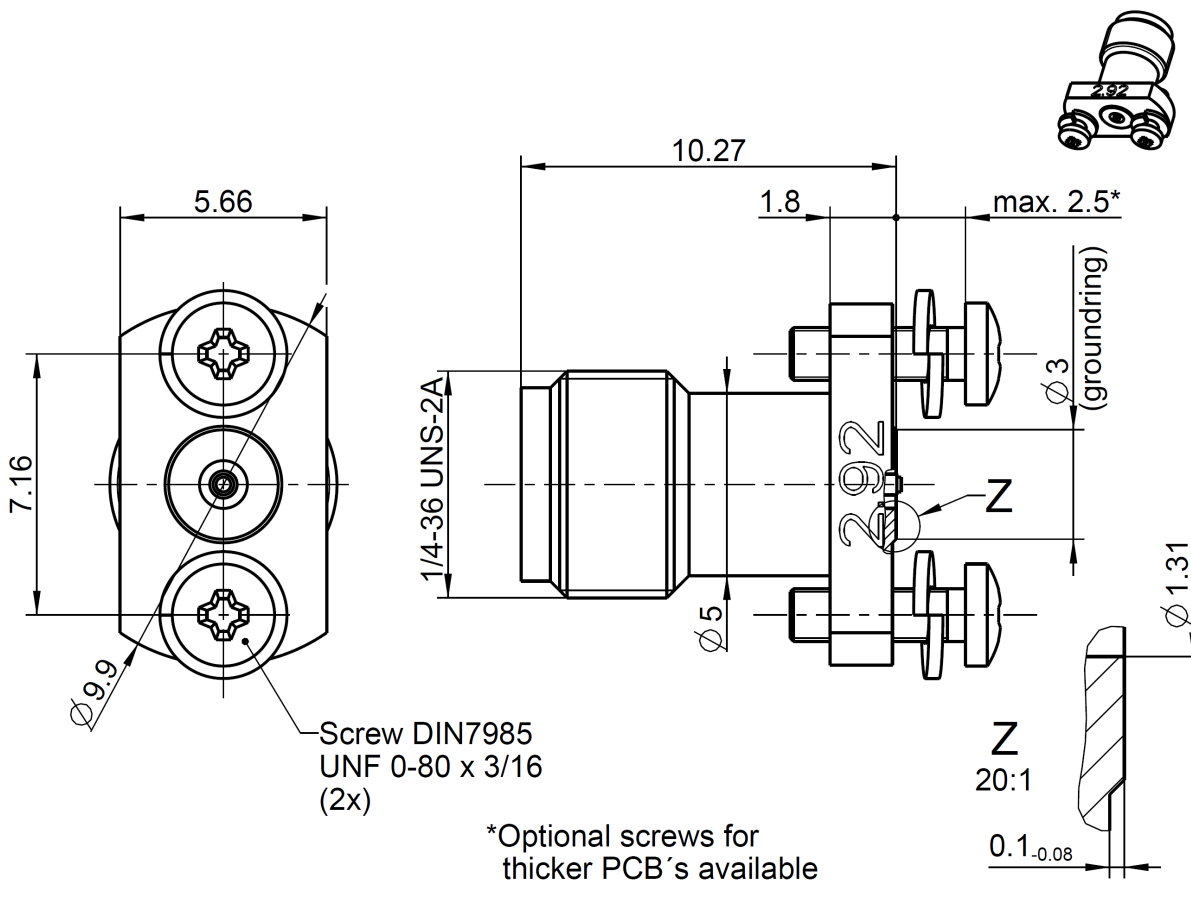

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.