

DO NOT
SCALE FROM
THIS PRINT

NOTES:

1. $\varnothing$ REPRESENTS A CRITICAL DIMENSION.
2. PARTS MAY BE CUT TO POSITION.
3. MAXIMUM CUT FLASH: .010[0.25].
4. MINIMUM PUSHOUT FORCE: 1.0 LB.
5. TERMINALS TO BE SHEARED TO MEET DIMENSION SPECIFICATION.
6. LAYER PACKAGE 2 - 4 POSITIONS AND TUBE 5 - 50 POSITIONS.
7. MAXIMUM BURR ALLOWANCE: .003[0.08].
8. DUE TO THE HIGH AMOUNT OF INSERTION FORCE NEEDED, THE -EC OPTION IS NOT COMPATIBLE WITH AUTO PLACEMENT. SAMTEC RECOMMENDS MANUAL PLACEMENT FOR ALL ASSEMBLIES WITH THE -EC OPTION.
9. MAXIMUM HEIGHT VARIATION BETWEEN ROWS: .005[0.13].

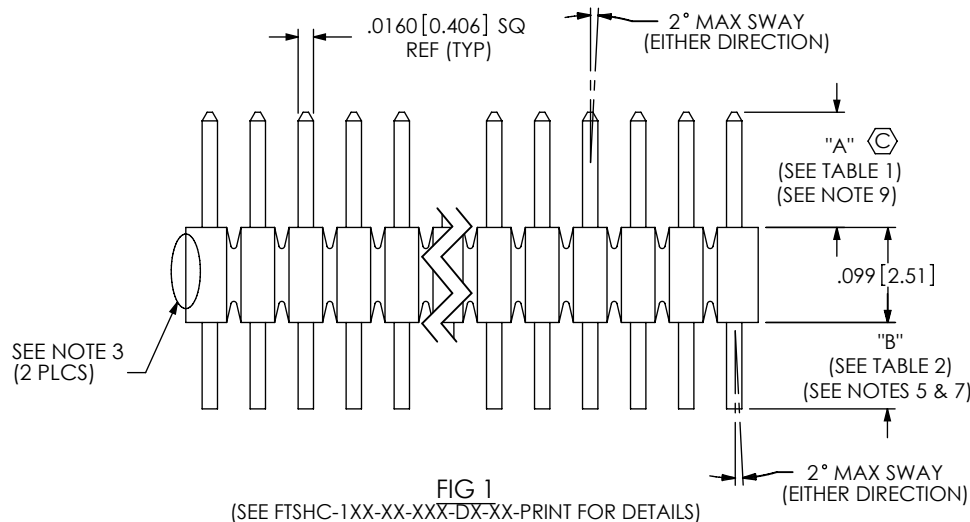
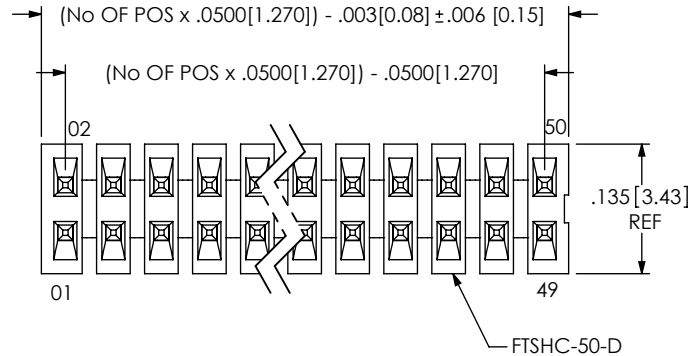
FIG 1
(SEE FTSHC-1XX-XX-XXX-DX-XX-PRINT FOR DETAILS)

TABLE 1

LEAD STYLE	"A"	TERMINAL	"C" REF
-01	.120 [3.05]	T-1S15-02-XX	.350 [8.89]
-02	.075 [1.91]	T-1S15-02-XX	.350 [8.89]
-03	.065 [1.65]	T-1S15-04-XX	.450 [11.43]
-04	.150 [3.81]	T-1S15-04-XX	.450 [11.43]

TABLE 2

OPTIONS	"B"
NONE	.09 [2.3]
-ES, -EC	.09 [2.3]
-EJ, -EJ-K	.11 [2.7]
-EP	.09 [2.3]
-EL	.09 [2.3]
-K	.09 [2.3]
-LC, -K-LC	.12 [3.0]

FTSH-1XX-XX-XXX-D-XX

No OF POSITIONS
-02 THRU -50
(PER ROW)

LEAD STYLE

-01: .120 [3.05]
-02: .075 [1.91]
-03: .065 [1.65]
-04: .150 [3.81]

PLATING SPECIFICATION

-G: 10μ" GOLD IN CONTACT AREA,
3μ" GOLD ON TAIL
-F: 3μ" FLASH SELECTIVE GOLD IN CONTACT
AREA, MATTE TIN ON TAIL
-L: 10μ" LIGHT SELECTIVE GOLD IN CONTACT
AREA, MATTE TIN ON TAIL
-S: 30μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL
-H: 30μ" HEAVY GOLD IN CONTACT AREA,
3μ" GOLD ON TAIL
-FM: 3μ" FLASH SELECTIVE GOLD IN CONTACT
AREA, MATTE TIN ON TAIL
-LM: 10μ" LIGHT SELECTIVE GOLD IN CONTACT
AREA, MATTE TIN TAIL
-SM: 30μ" HEAVY SELECTIVE GOLD IN CONTACT
AREA, MATTE TIN ON TAIL
-TL: 10μ" LIGHT GOLD IN CONTACT AREA,
TIN/LEAD (90%/10 +/-5%) ON TAIL

ROW SPECIFICATION



-D: DOUBLE ROW

(USE **FTSHC-1XX-XX-XXX-D UNLESS **OPTION** IS SPECIFIED ABOVE. WHEN OPTION IS SPECIFIED, BUILD PER PRINT USING BODY SPECIFIED FOR REQUIRED **OPTION**)

** = SEE FTSHC-1XX-XX-XXX-DX-XX PRINT FOR DETAILS

OPTIONS

- ES: END SHROUDS (SEE FIG 2, SHT 2)
(MOLDED 5 POS MIN; -02 & -03 LEAD STYLE ONLY)
(MUST USE FTSH-XX-ES-XX-X)
(SNAP SHROUDS 9 POS MIN; -02 & -03 LEAD STYLE ONLY)
(MUST USE FTSH-50-D)
-EJ: EJECTOR SHROUDS: (SEE FIG 3, SHT 2)
(10 POS MIN; -01 LEAD STYLE ONLY)
(MUST USE FTSH-50-D)
-EC: LOCKING CLIP (SEE FIG 4, SHT 2; SEE NOTE 8)
(9 POS MIN; -02 & -03 LEAD STYLES ONLY)
(MUST USE FTSH-50-D)
-EP: GUIDE POST (SEE FIG 5, SHT 2)
(9 POS MIN; -02 & -03 LEAD STYLES ONLY)
(USE ONLY WHEN MATING WITH CLP)
(MUST USE FTSH-50-D)
-EL: BOARD LOCKS (SEE FIG 6, SHT 2)
(9 POS MIN; -02 & -03 LEAD STYLES ONLY)
(USE ONLY WHEN MATING WITH CLP)
(MUST USE FTSH-50-D)
-K: KEYING OPTION FOR MATING WITH FFSD
(05 THRU 25 ONLY)
(POSITION 13, 17, 20 & 25 AVAILABLE WITH -EJ OPTION)
(LEAD STYLE -01 ONLY, SEE FIG 7, SHT 3)
(MUST USE FTSH-XX-CN-XX)
-LC: LOCKING CLIP: (SEE FIG 8, SHT 3)
(5 POS MIN, ONLY AVAILABLE IN -01 LEAD STYLE)
(IN COMBINATION WITH -K, USE FTSH-XX-CN-XX,
10 POSITION MINIMUM, ONLY AVAILABLE IN
-01 LEAD STYLE)
(MUST USE FTSH-50-D)
(SINGLE MATING CYCLE ONLY)
(MUST BE MATED TO SAMTEC FFSD SERIES)

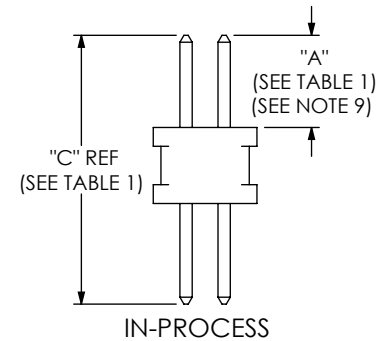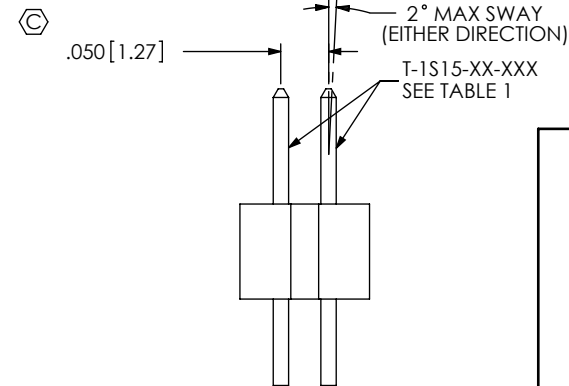UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
.XX: ±.01 [.3] 1°
.XXX: ±.005 [.13]
.XXXX: ±.0010 [.025]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING
INSULATOR: LCD UL 94-V0
TERMINAL: PHOSPHOR BRONZE

SHEET SCALE: 5:1

DESCRIPTION:
.050 x .050 CL THROUGH HOLE TERMINAL STRIP

DWG. NO.

FTSH-1XX-XX-XXX-D-XX

BY: J. FERRY

02/27/1996

SHEET 1 OF 3

F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-D-XX-MKT.SLDDRW

REVISION BQ

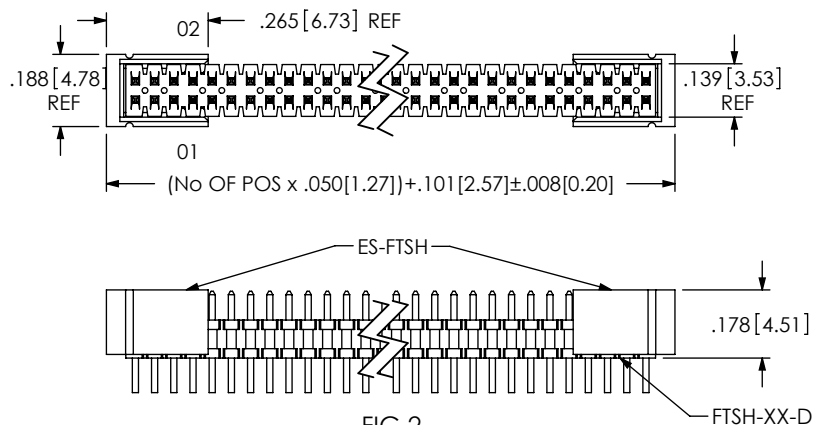


FIG 2
-ES OPTION
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
(-02 OR -03 LEAD STYLE ONLY)
(9 POS MIN FOR SNAP SHROUDS)
(5 POS MIN FOR MOLDED SHROUDS)

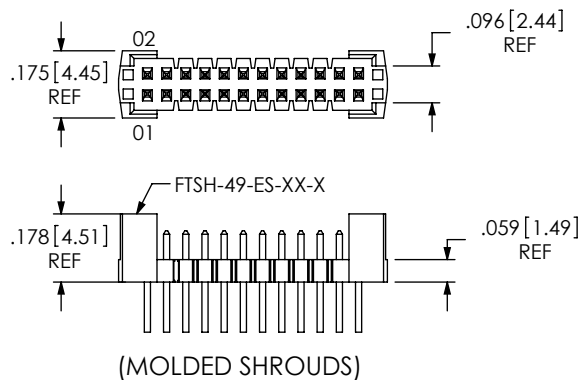


FIG 3
-EJ OPTION
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
(-01 LEAD STYLE ONLY)

USE SUB-FTSH-EJEHA
(2 REQ'D PER ASSEMBLY
EACH USES 1 EHA-02,
1 FTSH-EJ)

POST SIDE OF CONNECTOR

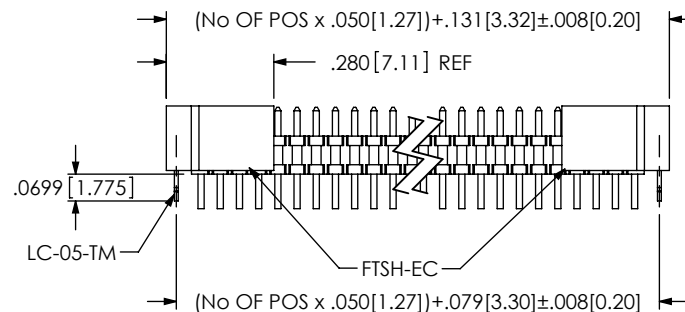
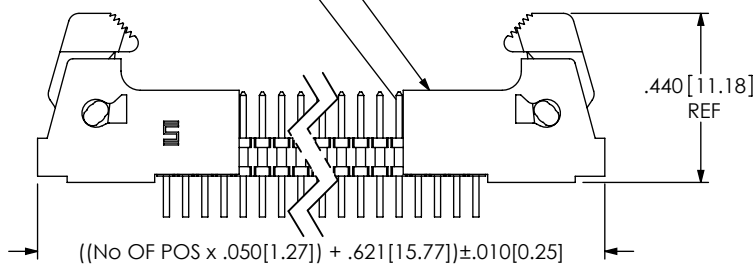


FIG 4
-EC OPTION
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 2)

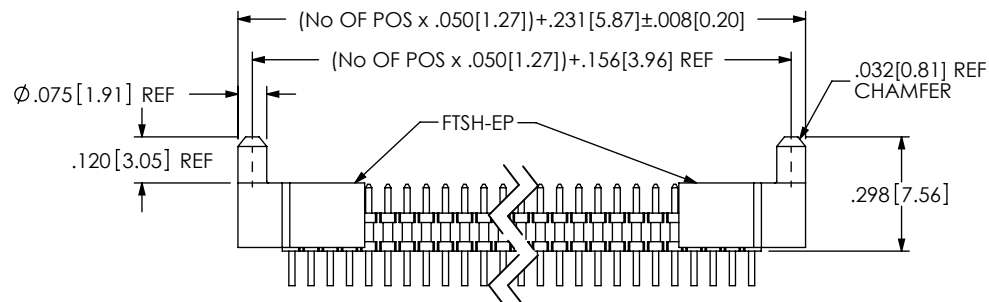


FIG 5
-EP OPTION
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 2)
(USE ONLY WHEN MATING WITH CLP)


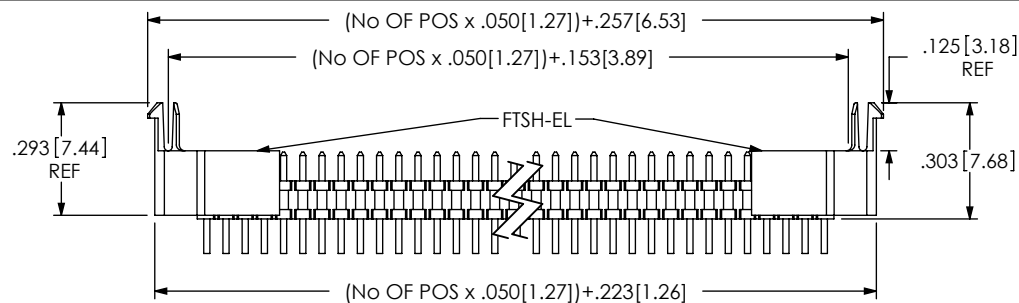


FIG 6
-EL OPTION
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 2)
(USE ONLY WHEN MATING WITH CLP)



F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-D-XX-MKT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
.050 x .050 CL THROUGH HOLE TERMINAL STRIP

DWG. NO.
FTSH-1XX-XX-XXX-D-XX

BY: J. FERRY 02/27/1996 SHEET 2 OF 3

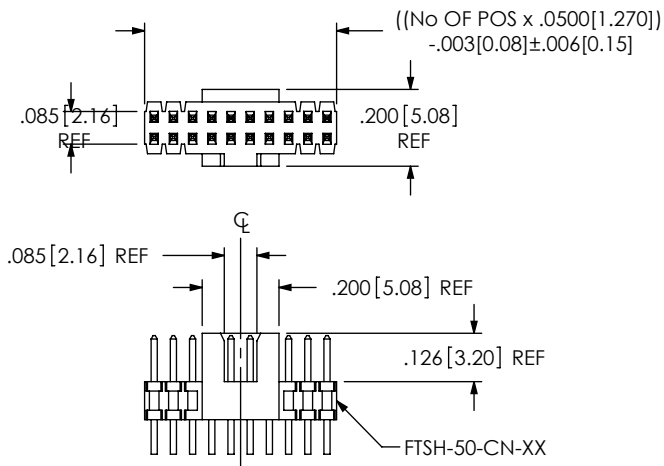


FIG 7
-K OPTION
(LEAD STYLE -01)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
(POSITION 13, 17, 20 & 25 AVAILABLE WITH -K & -EJ OPTION)

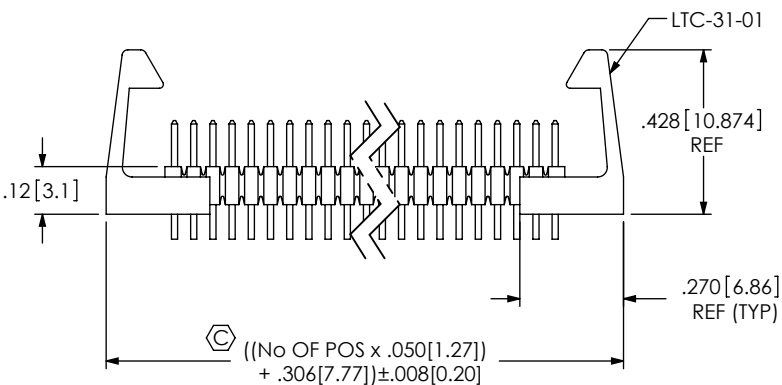


FIG 8
-LC OPTION
(LEAD STYLE -01)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

TABLE 3 (SEE NOTE 6)			
LEAD STYLE	OPTION(S)	PACKAGING TUBE	TUBE PLUG
-01, -02, -03	NONE	PT-1-24-01-43	TP-24
-04	NONE	PT-1-24-11-09	TP-09
ALL	-EJ, -EJ-K, -LC, -K-LC	PT-1-24-05-09	TP-07
ALL	-EC, -EC-K	PT-1-24-01-38	TP-24
ALL	-EL, -EP, -EL-K, -EP-K	PT-1-24-03-09	TP-09
ALL	-K	PT-1-24-11-09	TP-09
ALL	-ES, -ES-K	PT-1-24-01-55	TP-24









FIG 9
TUBE VIEWS

F:\DWG\MISC\MKTG\FTSH-1XX-XX-XXX-D-XX-MKT.SLDDRW

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. DO NOT SCALE DRAWING SHEET SCALE: 2:1		
	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322	
	DESCRIPTION: .050 x .050 CL THROUGH HOLE TERMINAL STRIP	
	DWG. NO. FTSH-1XX-XX-XXX-D-XX	
BY: J. FERRY 02/27/1996		SHEET 3 OF 3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.